

NOVABLAST



PAINT SPRAY HOSES


1 WIRE & 2 WIRE

 INFO@NOVABLAST.COM

 WWW.NOVABLAST.COM

NOVABLAST

1 WIRE HOSES

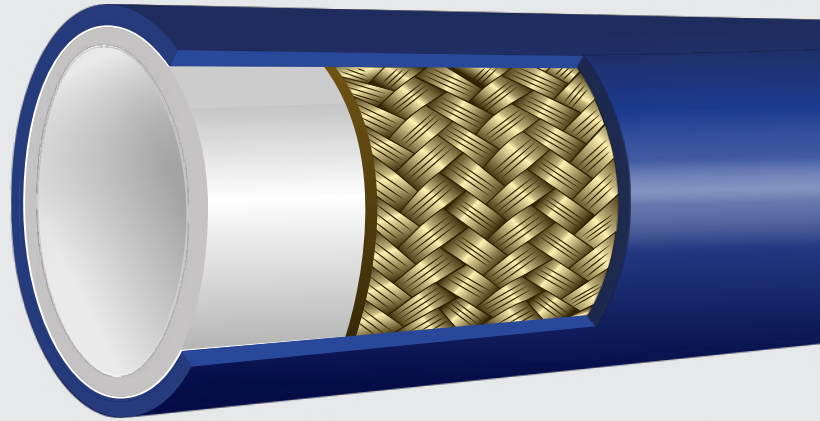

DESCRIPTION

Airless paint spray systems for 100 to 350 Bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids. Due to low permeation value of polyamide, the hose is also suitable for industrial gases.

SPECIFICATIONS

Core: Polyamide

Reinforcement: Single braid of steel wire.

Cover: Polyurethane, blue Color, pin pricking (optional).

Temperature range: Continuous -40°C to +100°C.


Not to exceed +70°C for air and water based fluids.

Fittings: Female NPSM fitting MS material.

ITEM NUMBER	LENGTH	INNER DIAMETER	WORKING PRESSURE	BURST PRESSURE
80700500	1 M	¼"	400 BAR	1300 BAR
80701000	5 M	¼"	400 BAR	1300 BAR
80701500	7,5 M	¼"	400 BAR	1300 BAR
80702000	10 M	¼"	400 BAR	1300 BAR
80702500	15 M	¼"	400 BAR	1300 BAR
80703000	20 M	¼"	400 BAR	1300 BAR
80703500	25 M	¼"	400 BAR	1300 BAR
80704000	30 M	¼"	400 BAR	1300 BAR
80700000	210 M (BULK on REEL)	¼"	400 BAR	1300 BAR
80710500	1 M	⅜"	300 BAR	1000 BAR
80711000	5 M	⅜"	300 BAR	1000 BAR
80711500	7,5 M	⅜"	300 BAR	1000 BAR
80712000	10 M	⅜"	300 BAR	1000 BAR
80712500	15 M	⅜"	300 BAR	1000 BAR
80713000	20 M	⅜"	300 BAR	1000 BAR
80713500	25 M	⅜"	300 BAR	1000 BAR
80714000	30 M	⅜"	300 BAR	1000 BAR
80710000	210 M (BULK ON REEL)	⅜"	300 BAR	1000 BAR

NOVABLAST

2 WIRE HOSES

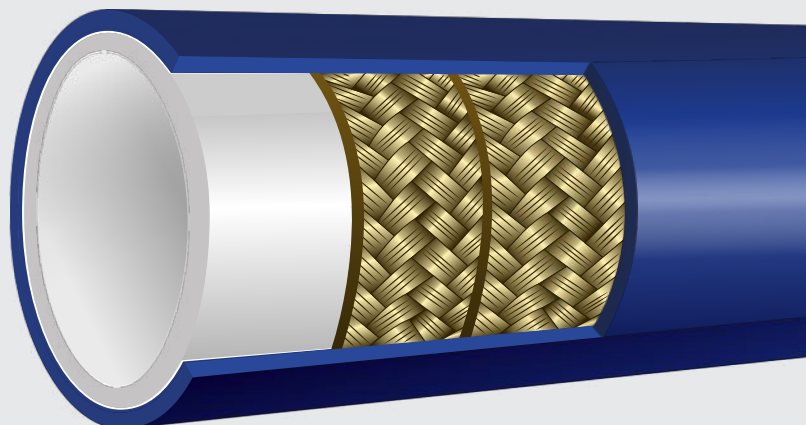

DESCRIPTION

High pressure airless paint spray systems for 150 to 450 Bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids. Due to low permeation value of polyamide, the hose is also suitable for industrial gases.

SPECIFICATIONS

Core: Polyamide

Reinforcement: Double braids of steel wire.

Cover: Polyurethane, blue Color, pin pricking (Optional).

Temperature range: Continuous -40°C to +100°C.

Not to exceed +70°C for Air and Water based fluids.

Fittings: Female NPSM fitting MS material.

ITEM NUMBER	LENGTH	INNER DIAMETER	WORKING PRESSURE	BURST PRESSURE
80705500	1 M	¼"	483 BAR	1930 BAR
80706000	5 M	¼"	483 BAR	1930 BAR
80706500	7,5 M	¼"	483 BAR	1930 BAR
80707000	10 M	¼"	483 BAR	1930 BAR
80707500	15 M	¼"	483 BAR	1930 BAR
80708000	20 M	¼"	483 BAR	1930 BAR
80708500	25 M	¼"	483 BAR	1930 BAR
80709000	30 M	¼"	483 BAR	1930 BAR
80705000	210 M (BULK ON REEL)	¼"	483 BAR	1930 BAR
80715500	1 M	⅜"	450 BAR	1380 BAR
80716000	5 M	⅜"	450 BAR	1380 BAR
80716500	7,5 M	⅜"	450 BAR	1380 BAR
80717000	10 M	⅜"	450 BAR	1380 BAR
80717500	15 M	⅜"	450 BAR	1380 BAR
80718000	20 M	⅜"	450 BAR	1380 BAR
80718500	25 M	⅜"	450 BAR	1380 BAR
80719000	30 M	⅜"	450 BAR	1380 BAR
80715000	210 M (BULK ON REEL)	⅜"	450 BAR	1380 BAR