
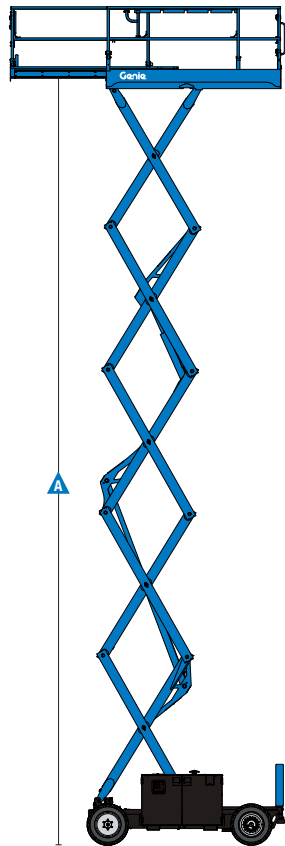



# Self-Propelled Scissor Lifts

GS™ -2669 RT, GS-3369 RT, GS-4069 RT

## Specifications



| Models                                | GS-2669 RT  |        | GS-3369 RT  |        | GS-4069 RT |        |
|---------------------------------------|-------------|--------|-------------|--------|------------|--------|
| Measurements                          | US          | Metric | US          | Metric | US         | Metric |
| Working height maximum <sup>1</sup>   | 32 ft       | 10 m   | 39 ft       | 11.9 m | 46 ft      | 14.3 m |
| <b>A</b> Platform height maximum      | 26 ft 2 in  | 8.0 m  | 32 ft 8 in  | 9.96 m | 40 ft 3 in | 12.3 m |
| <b>B</b> Platform height - stowed     | 4 ft 10 in  | 1.47 m | 4 ft 10 in  | 1.47 m | 5 ft 5 in  | 1.65 m |
| <b>C</b> Platform length - outside    | 9 ft 2in    | 2.79 m | 9 ft 2in    | 2.79 m | 9 ft 2in   | 2.79 m |
| extended                              | 14 ft 2 in  | 4.32 m | 14 ft 2 in  | 4.32 m | 14 ft 2 in | 4.32 m |
| Slide-out platform extension deck     | 5 ft        | 1.52 m | 5 ft        | 1.52 m | 5 ft       | 1.52 m |
| <b>D</b> Platform width - outside     | 5 ft 3 in   | 1.6 m  | 5 ft 3 in   | 1.6 m  | 5 ft 3 in  | 1.6 m  |
| Toeboard height                       | 6 in        | 0.15 m | 6 in        | 0.15 m | 6 in       | 0.15 m |
| <b>E</b> Height - stowed <sup>2</sup> | 8 ft 6 in   | 2.59 m | 8 ft 6 in   | 2.59 m | 9 ft       | 2.74 m |
| rails lowered                         | 6 ft 3.5 in | 1.92 m | 6 ft 3.5 in | 1.92 m | 6 ft 10 in | 2.08 m |
| <b>A</b> Length - stowed              | 10 ft 3 in  | 3.12 m | 10 ft 3 in  | 3.12 m | 10 ft 3 in | 3.12 m |
| platform extended                     | 14 ft 9 in  | 4.5 m  | 14 ft 9 in  | 4.5 m  | 14 ft 9 in | 4.5 m  |
| with outriggers                       | 12 ft 4 in  | 3.76 m | 12 ft 4 in  | 3.76 m | 12 ft 4 in | 3.76 m |
| <b>G</b> Width                        | 5 ft 9 in   | 1.75 m | 5 ft 9 in   | 1.75 m | 5 ft 9 in  | 1.75 m |
| <b>H</b> Wheelbase                    | 7 ft 6 in   | 2.29 m | 7 ft 6 in   | 2.29 m | 7 ft 6 in  | 2.29 m |
| <b>I</b> Ground clearance - center    | 9.5 in      | 0.24 m | 9.5 in      | 0.24 m | 9.5 in     | 0.24 m |

## Productivity

|                                    |                   |            |             |            |              |            |
|------------------------------------|-------------------|------------|-------------|------------|--------------|------------|
| Maximum platform occupancy         | 4                 |            | 4           |            | 3            |            |
| Lift capacity                      | 1,500 lbs         | 680 kg     | 1,000 lbs   | 454 kg     | 800 lbs      | 363 kg     |
| Extension deck capacity            | 300 lbs           | 136 kg     | 300 lbs     | 136 kg     | 300 lbs      | 136 kg     |
| Drive height                       | full height       |            | full height |            | full height  |            |
| Drive speed - stowed               | 3.5 mph           | 5.6 km/h   | 3.5 mph     | 5.6 km/h   | 3.5 mph      | 5.6 km/h   |
| Drive speed - raised               | 0.3 mph           | 0.5 km/h   | 0.3 mph     | 0.5 km/h   | 0.3 mph      | 0.5 km/h   |
| Gradeability - stowed <sup>3</sup> | 40%               |            | 35%         |            | 35%          |            |
| Maximum outrigger leveling:        | front/back uphill |            | 5.3° / 4.2° |            | side to side |            |
|                                    |                   |            | 11.7°       |            |              |            |
| Turning radius - inside            | 83 in             | 2.11 m     | 83 in       | 2.11 m     | 83 in        | 2.11 m     |
| Turning radius - outside           | 181.2 in          | 4.6 m      | 181.2 in    | 4.6 m      | 181.2 in     | 4.6 m      |
| Raise/lower speed                  | 34 / 31 sec       |            | 39 / 29 sec |            | 61 / 28 sec  |            |
| Controls                           | proportional      |            |             |            |              |            |
| Drive                              | four wheel        |            |             |            |              |            |
| Tires - rough terrain              | 12 x26 in         | 30 x 66 cm | 12 x 26 in  | 30 x 66 cm | 12 x 26 in   | 30 x 66 cm |

## Power

|                           |  |        |        |        |        |        |
|---------------------------|--|--------|--------|--------|--------|--------|
| Power source              | PSI (GM) .998L gas/LPG<br>Kubota D-1105 Tier 4f diesel 24.8 hp |        |        |        |        |        |
| Fuel tank capacity        | 10 gal   | 37.9 L | 10 gal | 37.9 L | 10 gal | 37.9 L |
| Hydraulic system capacity | 18 gal   | 68.1 L | 18 gal | 68.1 L | 18 gal | 68.1 L |

## Weight<sup>4</sup> / Floor Loading<sup>5</sup>

|                         |           |          |           |          |            |           |
|-------------------------|-----------|----------|-----------|----------|------------|-----------|
| Weight - ANSI, CSA      | 7,295 lbs | 3,309 kg | 7,895 lbs | 3,490 kg | 10,245 lbs | 4,647 kg  |
| - with outriggers       | 8,160 lbs | 4,066 kg | 8,560 lbs | 3,882 kg | 11,110 lbs | 5,039 kg  |
| Tire load, maximum      | 2,891 lb  | 1,311 kg | 3,058 lb  | 1,387 kg | 3,816 lb   | 1,731 kg  |
| Tire contact pressure   | 71.9 psi  | 496 kPa  | 76.1 ps   | 524 kPa  | 94.9 psi   | 654 kPa   |
| Occupied floor pressure | 173 psf   | 8.3 kPa  | 172 psf   | 8.22 kPa | 214 psf    | 10.25 kPa |

## Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.

<sup>3</sup> Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

<sup>4</sup> Weight varies depending on options and country standards.

<sup>5</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

### Features

#### Standard Features

##### Measurements

###### GS-2669 RT

- 32 ft 2 in (10 m) working height
- Up to 1,500 lbs (680 kg) lift capacity

###### GS-3369 RT

- 39 ft (11.96 m) working height
- Up to 1,000 lbs (454 kg) lift capacity

###### GS-4069 RT

- 46 ft 3 in (14.3 m) working height
- Up to 800 lbs (363 kg) lift capacity

##### Productivity

- Drive at full height
- 110 x 63 in (2.79 x 1.6m) steel frame platform with replaceable aluminum diamond plate deck
- 60 in (1.52 m) extension deck
- Folding rails
- Proportional lift and drive
- AC power to platform
- Full height swing gate
- 4WD
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Swing-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Motion alarm

##### Power

- 24.8 hp Kubota Tier 4f D1105 diesel

#### Options & Accessories

##### Productivity

- Automatic leveling hydraulic outriggers
- Air line to platform
- Foam filled non-marking rough terrain tires 12 x 26 in (30 x 66 cm)
- Biodegradable hydraulic oil
- High float foam filled tires (GS-2669, GS-3369 ANSI only)
- Dual flashing LED beacons
- Platform control guard

##### Power Options

- AC, 3000 Watt generator (110 V/60 Hz) or (240 V/50 Hz), (includes hydraulic oil cooler)
- Cold weather package
- PSI (GM) .998L dual fuel with LPG tank



#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By: