

# VIBIA



VIBIA

Recommended sales prices - VAT  
not included in this price list updates  
models and finishes in production,  
which may differ from photographs  
published in catalogue.








# Index

- Africa  
326
- Algorithm Grid  
70
- Algorithm Free  
80
- Alpha  
498
- Array  
130
- Balance  
302
- Bamboo  
282
- Bigger  
240
- Bind  
428
- Bind Solo  
446
- Break  
250
- Break Plus  
252
- Brisa  
266
- Circle  
190
- Circus  
10
- Circus Solo  
28
- Class  
184
- Cosmos  
174
- Dama  
186
- Dots  
268
- Dots Glass  
272
- Dots Outdoor  
274
- Duo  
286
- Duo Petra  
290
- Empty  
254
- Flamingo  
96
- Flamingo Mini  
100
- Flat  
358
- Funnel  
142
- Ghost  
298
- Guise  
152
- Halo  
158
- Halo Jewel  
168
- I.Cono  
68
- Jazz  
94
- June  
280
- Knit  
488
- Kontorno  
422
- Lily  
342
- Line  
200
- Match  
500
- Mayfair  
318
- Mayfair Mini  
316
- Meridiano  
278
- Musa  
486
- North  
330
- Offset  
112
- Origami  
260
- Out  
256
- Palma  
232
- Palo Alto  
264
- Pin  
104
- Plusminus  
386
- Plusminus Solo  
414
- Puck  
304
- Puck Wall Art  
308
- Rhythm Horizontal  
144
- Rhythm Vertical  
149
- Set  
496
- Skan  
40
- Slim  
84
- Spa  
370
- Sticks  
464
- Sticks Solo  
476
- Structural  
178
- Suite  
376
- Tempo  
346
- Top  
92
- Tube Free  
380
- Up  
258
- Warm  
294
- Wind  
246
- Wireflow  
48
- Wireflow Chandelier  
64
- Wireflow Free  
58
- Wireflow Lineal  
54
- 
- Item coding  
8
- Light source  
503
- Glossary  
504
- Lighting control systems  
505

# Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

## Reference

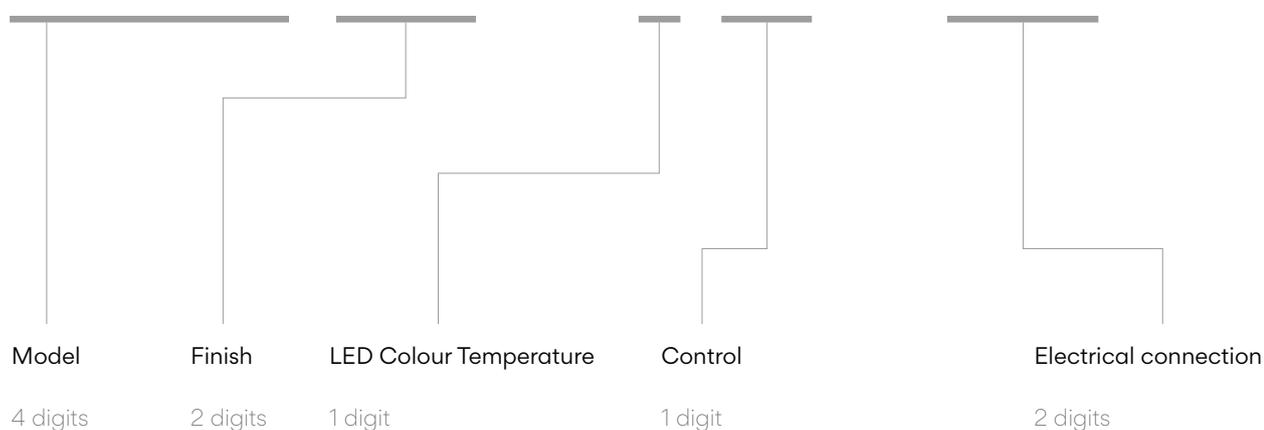

Model  
4 digits

Finish  
2 digits

LED Colour Temperature  
1 digit

Control  
1 digit

Electrical connection  
2 digits

- 0 Without LED
- 1 2700 K
- 2 3000 K
- 3 3500 K
- 4 4000 K
- 7 2200 K
- 8 Tunable White
- 9 Tunable Red
- A Infinite Colour (TW + RGB)
- F Dim-To-Warm

- 0 On/ Off
- 1 DALI-2
- 2 0-10V
- 3 1-10V
- 4 TRIAC
- 5 Push
- 6 Sensor
- 7 Lutron
- 8 Push 2
- A Push; 1-10V; DALI-2
- B Push; 1-10V
- C 1-10V; DALI-2
- D Push; DALI-2
- E Casambi PTP; On/ Off
- F Simultaneous line Push 1-10V; DALI-2; Casambi
- G DALI; Casambi; ProtoPixel
- M Without driver
- W Wiz
- Y ProtoPixel
- Z Casambi \*

- 1 Surface
- 2 Built-in
- 3 Remote
- 4 Bolt-down

- | Type | Model     |
|------|-----------|
| 0    | Basic     |
| 1    | Micro     |
| 2    | XXS       |
| 3    | XS        |
| 4    | S         |
| 5    | M         |
| 6    | L         |
| 8    | Free Wire |
| 9    | Mud kit   |

\* Casambi refers to wireless dimming solutions. Ask for more information.



# Circus

Design by Antoni Arola

Circus is defined by its minimalist structure and signature conductive bar, delicately balanced by opposing elements to create a festival of light. A creative toolkit full of possibilities to explore and enjoy that offers total freedom of composition, multiple components and a myriad of diffuse and accented lighting effects.

## Pendant Ceiling - Volumetric Diffuser

### PENDANT



### DIRECT TO TRACK



### 0162

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)

### LED Colour Temperature

#### Static White

/1 \_ 2700 K - 759 lm

**F** >

/2 \_ 3000 K - 794 lm

/3 \_ 3500 K - 822 lm

**E** >

#### Tunable White

/8 \_ (1800 K - 4000 K)  
452 lm - 709 lm

#### Tunable Red

/9 \_ (Red - 2700 K)  
172 lm - 468 lm

**F** >

CRI >90

### Control

0162 \_\_ / \_\_

\_\_ / \_1 Static White + DALI-2

\_\_ / \_Y Static White + ProtoPixel\* (P2P)


\_\_ / \_Z Static White + Casambi (P2P)

\_\_ / 8Y Tunable White + ProtoPixel\* (P2P)

\_\_ / 8Z Tunable White + Casambi (P2P)

\_\_ / 9Y Tunable Red + ProtoPixel\* (P2P)

\_\_ / 9Z Tunable Red + Casambi (P2P)

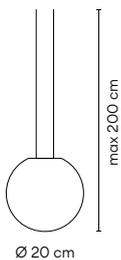

### Materials

Sphere: PE- Polyethylene.  
Top cover: Aluminum. Track adapter: PC- Polycarbonate.

### Light Source and electronics

**2700 K - 3000 K - 3500K:**

1 x LED 6,7 W 400 mA

**Tunable White:**

1 x LED 6,7 W 385 mA

**Tunable Red:**

1 x LED PLATE 7,7 W 400 mA

### Packaging

1 Box 0,26 x 0,26 x 0,26 m

Vol 0,0175 m<sup>3</sup>

Gross weight 1,16 Kg Net weight 0,53 Kg

### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Extra cable length.



### 0164

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 759 lm  
[F] →  
/2 \_ 3000 K - 794 lm  
/3 \_ 3500 K - 822 lm  
[E] →

**Tunable White**  
/8 \_ (1800 K - 4 000 K)  
452 lm - 709 lm

**Tunable Red**  
/9 \_ (Red - 2700 K)  
172 lm - 468 lm  
[F] →  
CRI >90

**Control**

**0164** \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)
- \_ \_ / 9Y Tunable Red + ProtoPixel\* (P2P)
- \_ \_ / 9Z Tunable Red + Casambi (P2P)



Ø 20 cm

**Materials**

Sphere: PE- Polyethylene. Top cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**

1 x LED 6,7 W 400 mA

**Tunable White:**

1 x LED 6,7 W 385 mA

**Tunable Red:**

1 x LED PLATE 7,7 W 400 mA

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m


Vol 0,0175 m<sup>3</sup>

Gross weight 1,16 Kg Net weight 0,53 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



### 0167

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 2588 lm  
/2 \_ 3000 K - 2706 lm  
/3 \_ 3500 K - 2804 lm


**Tunable White**  
/8 \_ (1800 K - 4000 K)  
1403 lm - 2615 lm  
[E] →

**Tunable Red**  
/9 \_ (Red - 2700 K)  
339 lm - 1582 lm  
[F] →  
CRI >90

**Control**

**0167** \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)
- \_ \_ / 9Y Tunable Red + ProtoPixel\* (P2P)
- \_ \_ / 9Z Tunable Red + Casambi (P2P)

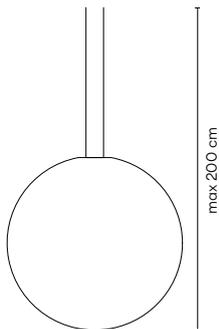

Ø 45 cm

max 200 cm

**Materials**

Sphere: PE- Polyethylene. Top cover: Aluminum.  
Track adapter: PC- Polycarbonate .

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**

1 x LED 19,6 W 600 mA

**Casambi:**

1 x LED 15,7 W 485 mA

**Tunable White:**

1 x LED 17,7 W 525 mA

**Tunable Red:**

1 x LED PLATE 15,7 W 500 mA

**Packaging**

1 Box 0,55 x 0,55 x 0,65 m

Vol 0,1966 m<sup>3</sup>

Gross weight 4,6 Kg Net weight 2,35 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Static White + Casambi; ProtoPixel -18% Flux.


Extra cable length.



## Pendant Ceiling - Hidden Diffuser

## PENDANT

0155

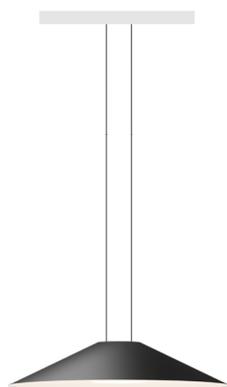

Ø 40 cm

## DIRECT TO TRACK

0157



Ø 40 cm

## 0155

## Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

## LED Colour Temperature

## Static White

- /1 \_ 2700 K - 1763 lm
- /2 \_ 3000 K - 1843 lm
- /3 \_ 3500 K - 1910 lm

## Tunable White

- /8 \_ (1800 K - 4000 K)  
1340 lm - 2501 lm

## Tunable Red



- /9 \_ (Red - 2700 K)  
339,6 lm - 1582 lm

CR I >90

## Control

0155 \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White +  
ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White +  
Casambi (P2P)
- \_ \_ / 8Y Tunable White +  
ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White +  
Casambi (P2P)
- \_ \_ / 9Y Tunable Red +  
ProtoPixel\* (P2P)
- \_ \_ / 9Z Tunable Red +  
Casambi (P2P)



Ø 40 cm

## Materials

Shade: Aluminum. Top cover: Aluminum.  
Diffuser: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate.

## Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED PLATE 12,8 W 400 mA

**Tunable White:**  
1 x LED 16,8 W 500 mA

**Tunable Red:**  
1 x LED PLATE 15,7 W 500 mA

## Packaging


1 Box 0,480 x 0,480 x 0,115 m  
Vol 0,0265 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 0,92 Kg

## Notes

ProtoPixel products are compatible with  
all other DALI-2 products via a designated  
gateway (please consult us).

\*Available from January 2025.


Extra cable length.





0157

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)



**LED Colour Temperature**

- Static White**
- /1 2700 K - 1763 lm
  - /2 3000 K - 1843 lm
  - /3 3500 K - 1910 lm

- Tunable White**
- /8 (1800 K - 4000 K) 1340 lm - 2501 lm

- Tunable Red**
- /9 (Red - 2700 K) 339,6 lm - 1582 lm
- CRI >90

**Control**

- 0157 \_\_ / \_\_
- 
- \_\_ / \_\_ 1 Static White + DALI-2
  - \_\_ / \_\_ Y Static White + ProtoPixel\* (P2P)
  - \_\_ / \_\_ Z Static White + Casambi (P2P)
- 
- \_\_ / 8Y Tunable White + ProtoPixel\* (P2P)
  - \_\_ / 8Z Tunable White + Casambi (P2P)
- 
- \_\_ / 9Y Tunable Red + ProtoPixel\* (P2P)
  - \_\_ / 9Z Tunable Red + Casambi (P2P)

**Materials**

Shade: Aluminum. Top cover: PC- Polycarbonate.  
 Diffuser: PC- Polycarbonate.  
 Track adapter: PC- Polycarbonate.

**Light Source and electronics**

- 2700 K - 3000 K - 3500K:**  
 1 x LED PLATE 12,8 W 400 mA
- Tunable White:**  
 1 x LED 16,8 W 500 mA
- Tunable Red:**  
 1 x LED 15,7 W 500 mA

**Packaging**

1 Box 0,480 x 0,480 x 0,115 m  
 Vol 0,0265 m<sup>3</sup>  
 Gross weight 2,5 Kg Net weight 0,92 Kg

**Notes**


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.



Pendant Ceiling - Accent Spotlight

PENDANT

- 0140 Narrow
- 0141 Medium
- 0142 Wide

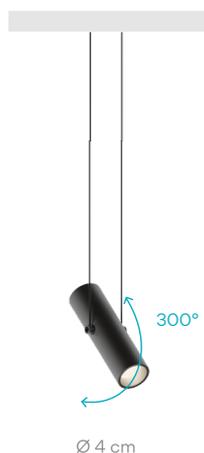

SPOTS

Only in pendant tracks

- 0130 Narrow
- 0131 Medium
- 0132 Wide



SIDE-SPOTS

Only in ceiling tracks

- 0135 Narrow
- 0136 Medium
- 0137 Wide



- 0140  
Narrow
- 0141  
Medium
- 0142  
Wide

0140 Narrow

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1 \_ 2700 K - 680 lm
- /2 \_ 3000 K - 711 lm
- /3 \_ 3500 K - 737 lm

☐ F >90

Control

0140 \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging



1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Extra cable length.

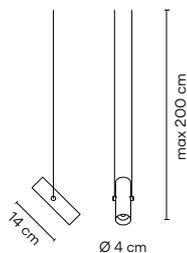

### O141 Medium

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 680 lm
  - /2 \_ 3000 K - 711 lm
  - /3 \_ 3500 K - 737 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
308 lm - 504 lm



- Tunable Red**
- /F \_ (Red - 2700 K)  
147 lm - 535 lm



CRI >90

**Control**

**O141** \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)
- \_ \_ / 9Y Tunable Red + ProtoPixel\* (P2P)
- \_ \_ / 9Z Tunable Red + Casambi (P2P)

**Materials**

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

**Light Source and electronics**

- 2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA
- Tunable White:**  
1 x LED 5,5 W 150 mA
- Tunable Red:**  
1 x LED PLATE 7 W 460 mA

**Packaging**

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,89 Kg Net weight 0,59 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.  
Extra cable length.



### O142 Wide

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 680 lm
  - /2 \_ 3000 K - 711 lm
  - /3 \_ 3500 K - 737 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
308 lm - 504 lm



CRI >90

**Control**

**O142** \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)

**Materials**

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

**Light Source and electronics**

- 2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA
- Tunable White:**  
1 x LED 5,5 W 150 mA


**Packaging**

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,89 Kg Net weight 0,59 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.  
Extra cable length.

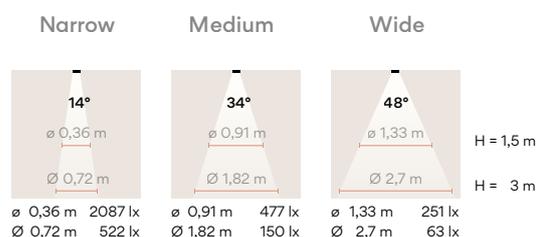

**0130**  
Narrow  
**0131**  
Medium  
**0132**  
Wide

**0130 Narrow**

Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 680 lm
- /2** \_ 3000 K - 711 lm
- /3** \_ 3500 K - 737 lm



CRI >90

Control

**0130** \_ \_ / \_ \_

- \_ \_ / \_ **1** Static White + DALI-2
- \_ \_ / \_ **Y** Static White +  
ProtoPixel\* (P2P)
- \_ \_ / \_ **Z** Static White +  
Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA


Packaging

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,44 Kg Net weight 0,14 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



### O131 Medium

- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

**Static White**  
 /1 \_ 2700 K - 680 lm  
 /2 \_ 3000 K - 711 lm  
 /3 \_ 3500 K - 737 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 308 lm - 504 lm

**Tunable Red**  
 /9 \_ (Red - 2700 K)  
 147 lm - 535 lm

CRI >90

#### Control

O131 \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)
- \_ \_ / 9Y Tunable Red + ProtoPixel\* (P2P)
- \_ \_ / 9Z Tunable Red + Casambi (P2P)

#### Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
 Track adapter: PC- Polycarbonate. Lens: PMMA.

#### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
 1 x LED 7,2 W 400 mA

**Tunable White:**  
 1 x LED 5,5 W 150 mA

**Tunable Red:**  
 1 x LED PLATE 7W 460mA

#### Packaging

1 Box 0,15 x 0,15 x 0,075 m  
 Vol 0,0017 m<sup>3</sup>  
 Gross weight 0,44 Kg Net weight 0,14 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.



### O132 Wide

- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

**Static White**  
 /1 \_ 2700 K - 680 lm  
 /2 \_ 3000 K - 711 lm  
 /3 \_ 3500 K - 737 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 308 lm - 504 lm

CRI >90

#### Control

O132 \_ \_ / \_ \_

- \_ \_ / \_ 1 Static White + DALI-2
- \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
- \_ \_ / \_ Z Static White + Casambi (P2P)
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
- \_ \_ / 8Z Tunable White + Casambi (P2P)

#### Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
 Track adapter: PC- Polycarbonate. Lens: PMMA.

#### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
 1 x LED 7,2 W 400 mA

**Tunable White:**  
 1 x LED 5,5 W 150 mA

#### Packaging

1 Box 0,15 x 0,15 x 0,075 m  
 Vol 0,0017 m<sup>3</sup>  
 Gross weight 0,44 Kg Net weight 0,14 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.



**0135**


Narrow

**0136**

Medium

**0137**

Wide

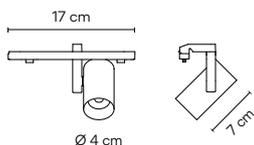**0135 Narrow**

## Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

## LED Colour Temperature

- /1** \_ 2700 K - 680 lm
- /2** \_ 3000 K - 711 lm
- /3** \_ 3500 K - 737 lm

 F

CRI &gt;90

## Control

**0135** \_ \_ / \_ \_

- \_ \_ / \_ **1** Static White + DALI-2
- \_ \_ / \_ **Y** Static White +  
ProtoPixel\* (P2P)
- \_ \_ / \_ **Z** Static White +  
Casambi (P2P)

## Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

## Light Source and electronics

1 x LED 7,2 W 400 mA

## Packaging

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,44 Kg Net weight 0,14 Kg

## Notes

\*Available from January 2025.

 LED  IP20  CE  UK  ENEC 
**0136 Medium**

## Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

## LED Colour Temperature

- Static White**
- /1** \_ 2700 K - 680 lm
- /2** \_ 3000 K - 711 lm
- /3** \_ 3500 K - 737 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm

 F
**Tunable Red**

- /9** \_ (Red - 2700 K)  
147 lm - 535 lm

 G

CRI &gt;90

## Control

**0136** \_ \_ / \_ \_

- \_ \_ / \_ **1** Static White + DALI-2
- \_ \_ / \_ **Y** Static White +  
ProtoPixel\* (P2P)
- \_ \_ / \_ **Z** Static White +  
Casambi (P2P)
- \_ \_ / **8Y** Tunable White +  
ProtoPixel\* (P2P)
- \_ \_ / **8Z** Tunable White +  
Casambi (P2P)
- \_ \_ / **9Y** Tunable Red +  
ProtoPixel\* (P2P)
- \_ \_ / **9Z** Tunable Red +  
Casambi (P2P)

## Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

## Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA

**Tunable White:**  
1 x LED 5,5 W 150 mA

**Tunable Red:**  
1 x LED 7 W 460mA

## Packaging

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,44 Kg Net weight 0,14 Kg

## Notes

ProtoPixel products are compatible with  
all other DALI-2 products via a designated  
gateway (please consult us).

\*Available from January 2025.

 LED  IP20  CE  UK  ENEC

### O137 Wide

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 2700 K - 680 lm
  - /2 3000 K - 711 lm
  - /3 3500 K - 737 lm

- Tunable White**
- /8 (1800 K - 4000 K)  
308 lm - 504 lm

☞  
CRI >90

**Control**

- O137 \_ \_ / \_ \_**
- \_ \_ / \_ 1 Static White + DALI-2
  - \_ \_ / \_ Y Static White + ProtoPixel\* (P2P)
  - \_ \_ / \_ Z Static White + Casambi (P2P)
- 
- \_ \_ / 8Y Tunable White + ProtoPixel\* (P2P)
  - \_ \_ / 8Z Tunable White + Casambi (P2P)

**Materials**

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

**Packaging**

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,44 Kg Net weight 0,14 Kg



**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA  
**Tunable White:**  
1 x LED 5,5 W 150 mA

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

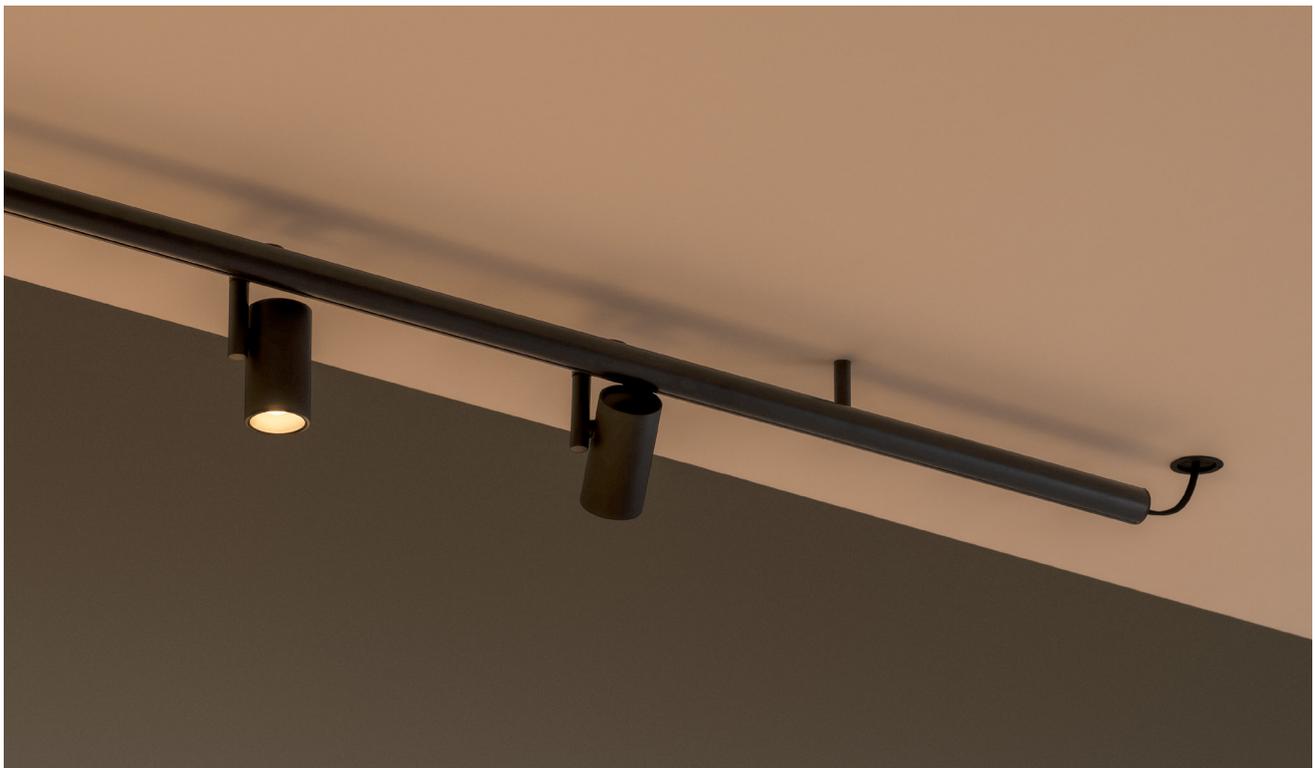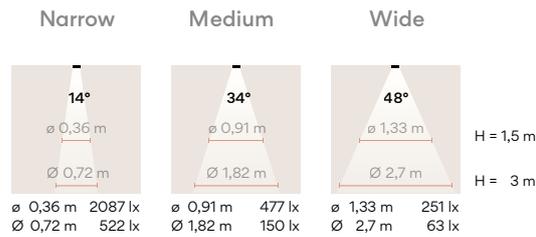

Pendant Ceiling - Accent Downlight

0151 Narrow  
0152 Medium  
0153 Wide



Ø 4 cm

0151  
Narrow  
0152  
Medium  
0153  
Wide

0151 Narrow

Finishes

- 11/ \_\_ Black  
(NCS S 8500-N)
- 24/ \_\_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1 \_ 2700 K - 680 lm
  - /2 \_ 3000 K - 711 lm
  - /3 \_ 3500 K - 737 lm

☐ F >

CRI >90

Control

0151 \_\_ / \_\_

- 
- \_\_ / \_ 1 Static White + DALI-2
  - \_\_ / \_ Y Static White +  
ProtoPixel\* (P2P)
  - \_\_ / \_ Z Static White +  
Casambi (P2P)
- 



Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m  
Vol 0,0017 m<sup>3</sup>  
Gross weight 0,41 Kg Net weight 0,11 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



**O152 Medium**

- Finishes**  
 ● 11/ \_\_ Black (NCS S 8500-N)  
 ● 24/ \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 680 lm  
 /2 \_ 3000 K - 711 lm  
 /3 \_ 3500 K - 737 lm  
**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 308 lm - 504 lm  
 F   
**Tunable Red**  
 /9 \_ (Red - 2700 K)  
 147 lm - 535 lm  
 G   
 CRI >90

- Control**  
**O152** \_\_ / \_\_  
 \_\_ / \_ 1 Static White + DALI-2  
 \_\_ / \_ Y Static White + ProtoPixel\* (P2P)  
 \_\_ / \_ Z Static White + Casambi (P2P)  
 \_\_ / 8Y Tunable White + ProtoPixel\* (P2P)  
 \_\_ / 8Z Tunable White + Casambi (P2P)  
 \_\_ / 9Y Tunable Red + ProtoPixel\* (P2P)  
 \_\_ / 9Z Tunable Red + Casambi (P2P)

**Materials**

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
 Track adapter: PC- Polycarbonate. Lens: PMMA.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 7,2 W 400 mA  
**Tunable White:**  
 1 x LED 5,5 W 150 mA  
**Tunable Red:**  
 1 x LED PLATE 7 W 460mA

**Packaging**

1 Box 0,15 x 0,15 x 0,075 m  
 Vol 0,0017 m<sup>3</sup>  
 Gross weight 0,41 Kg Net weight 0,11 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.



**O153 Wide**

- Finishes**  
 ● 11/ \_\_ Black (NCS S 8500-N)  
 ● 24/ \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 680 lm  
 /2 \_ 3000 K - 711 lm  
 /3 \_ 3500 K - 737 lm  
**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 308 lm - 504 lm  
 F   
 CRI >90

- Control**  
**O153** \_\_ / \_\_  
 \_\_ / \_ 1 Static White + DALI-2  
 \_\_ / \_ Y Static White + ProtoPixel\* (P2P)  
 \_\_ / \_ Z Static White + Casambi (P2P)  
 \_\_ / 8Y Tunable White + ProtoPixel\* (P2P)  
 \_\_ / 8Z Tunable White + Casambi (P2P)

**Materials**

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
 Track adapter: PC- Polycarbonate. Lens: PMMA.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 7,2 W 400 mA  
**Tunable White:**  
 1 x LED 5,5 W 150 mA

**Packaging**


1 Box 0,15 x 0,15 x 0,075 m  
 Vol 0,0017 m<sup>3</sup>  
 Gross weight 0,41 Kg Net weight 0,11 Kg

**Notes**


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.



Pendant Ceiling - Light Reflector

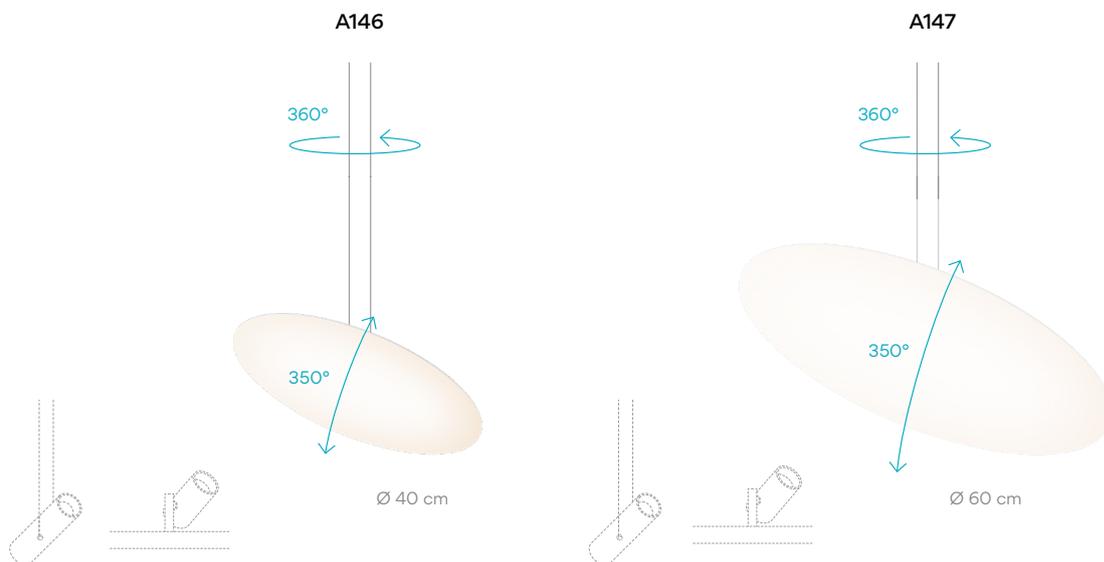

**A146**

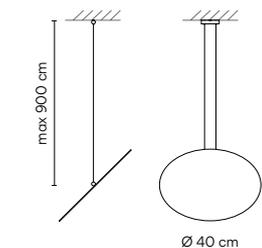


Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

Materials  
 Body: Aluminum.

Control  
**A146 11 / OM**

Packaging  
 1 Box 0,48 x 0,48 x 0,12 m  
 Vol 0,00276 m<sup>3</sup>  
 Gross weight 1,5 Kg  
 Net weight 0,74 Kg

**A147**

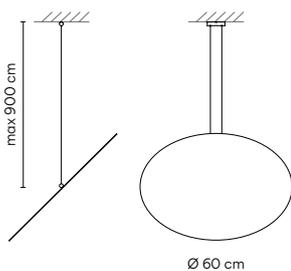

Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)


Materials  
 Body: Aluminum.

Control  
**A147 11 / OM**

Packaging  
 1 Box 0,68 x 0,68 x 0,12 m  
 Vol 0,00555 m<sup>3</sup>  
 Gross weight 2,5 Kg  
 Net weight 1,56 Kg

MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust

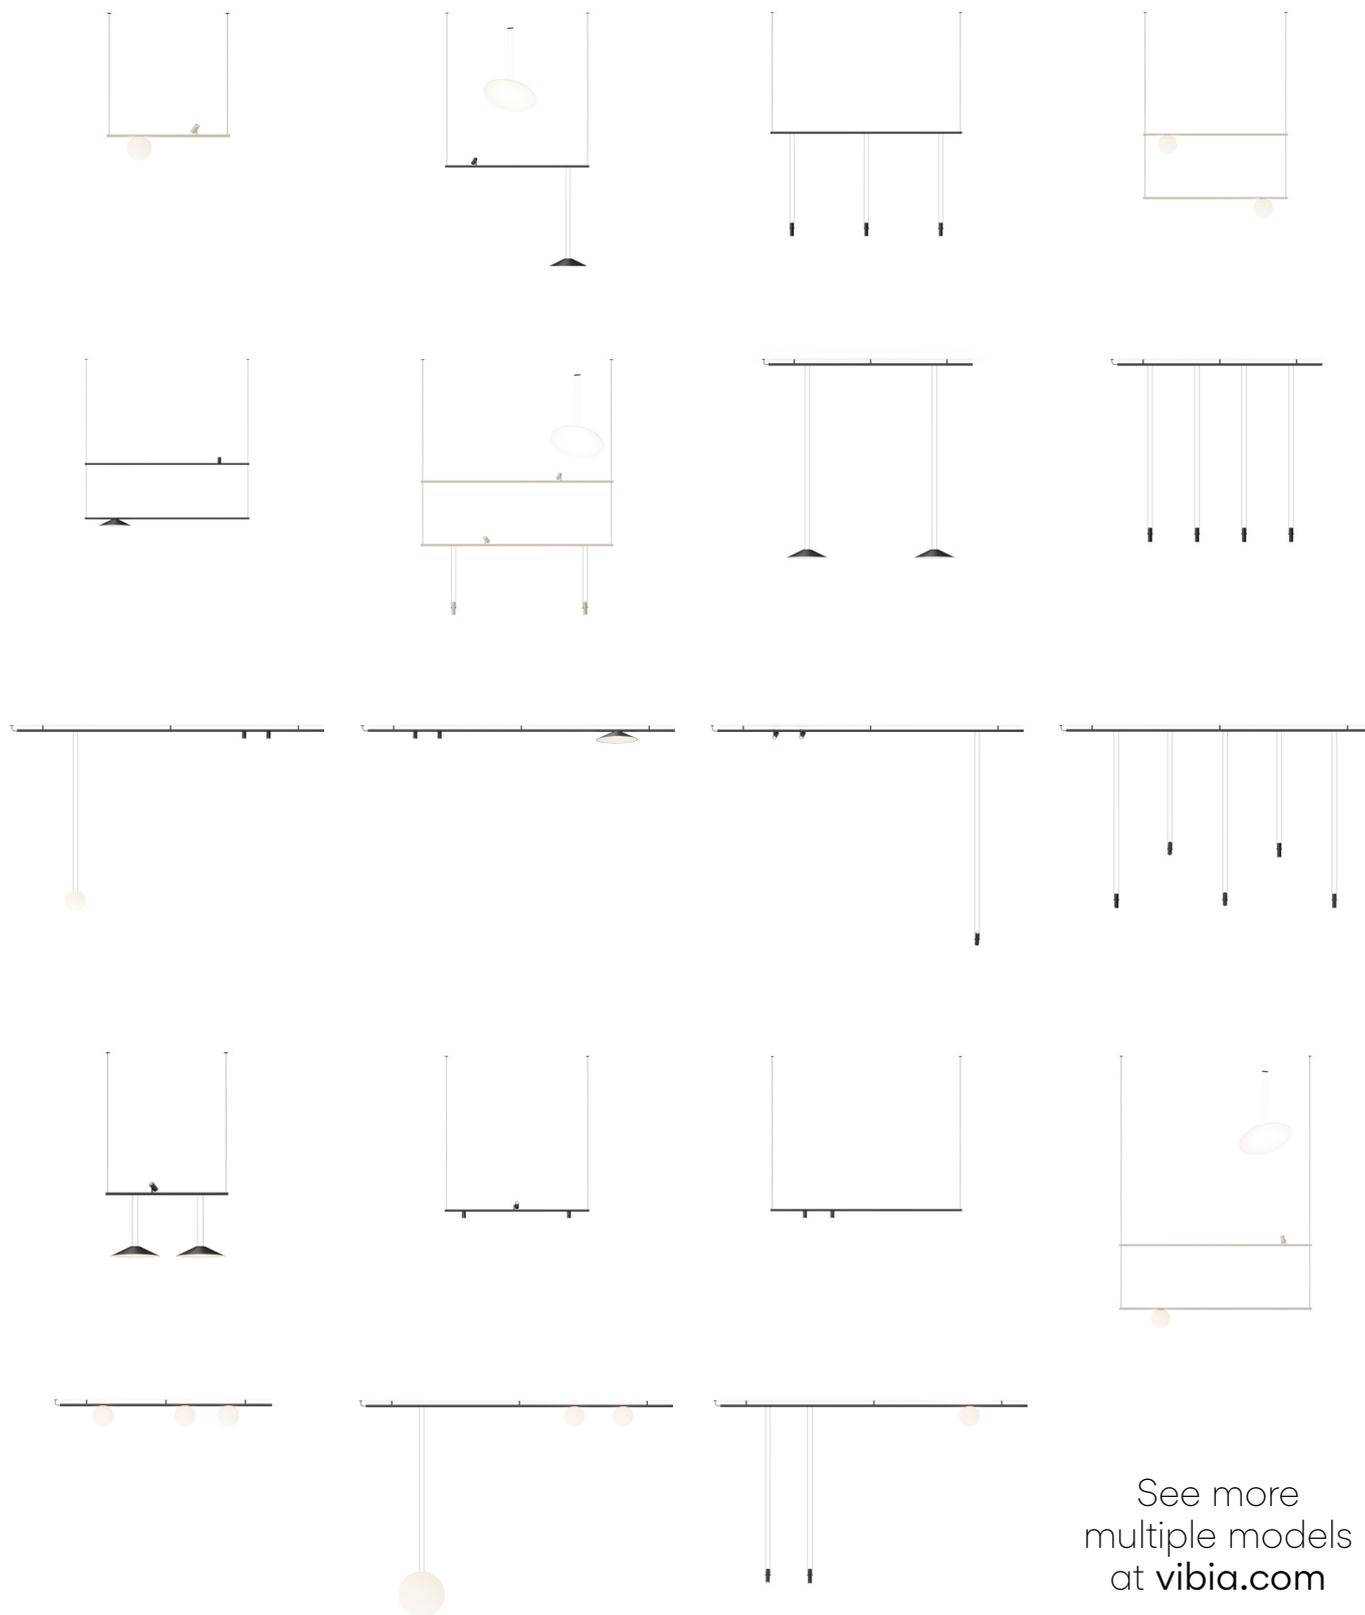

See more  
multiple models  
at [vibia.com](http://vibia.com)

# Tracks

## Ceiling Tracks

**A352** 210 cm

**A355** 300 cm



Ceiling Tracks 210 cm

Ceiling Tracks 300 cm

A352 \_\_ / OM \_\_

A355 \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

### Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

### Surface Materials

Track: Aluminum. Top cover: PVC.



### Packaging A352

1 Box  
0,125 x 0,125 x 2,25 m  
Vol 0,0351 m<sup>3</sup>  
Gross weight 3,87 Kg  
Net weight 1,62 Kg

### Packaging A355

1 Box  
0,125 x 0,125 x 3,25 m  
Vol 0,0508 m<sup>3</sup>  
Gross weight 5,42 Kg  
Net weight 2,17 Kg

### Accessories included with the Ceiling tracks

### Select Electrical connection



Built-in Remote



Surface Built-in XS Remote Micro  
Ø 6,5 cm 25 x 3 x 2 cm 25 x 3 x 2 cm  
33 x 6 cm

\_10 Surface  
\_23 Built-in XS  
\_31 Remote Micro

# Pendant Single Tracks

**A358** (H 3m)  
**A359** (H 9m)

110 cm



Height 3 m 110 cm

**A358** \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

Height 9 m 110 cm

**A359** \_\_ / OM \_\_


\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

**A364** (H 3m)  
**A365** (H 9m)

150 cm

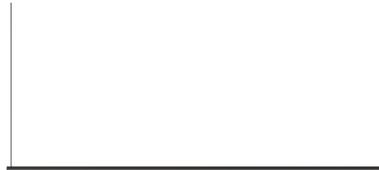

Height 3 m 150 cm

**A364** \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

Height 9 m 150 cm

**A365** \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

**A370** (H 3m)  
**A371** (H 9m)

200 cm



Height 3 m 200 cm

**A370** \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

Height 9 m 200 cm

**A371** \_\_ / OM \_\_

\_\_ / OM \_10

\_\_ / OM \_23

\_\_ / OM \_31

## Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

## Materials

Track: Aluminum.  
Top cover: PVC.  
Ceiling supports: PC- Polycarbonate.



## Packaging A358 - A359

1 Box  
0,125 x 0,125 x 1,25 m  
Vol 0,0195 m<sup>3</sup>  
Gross weight 2,34 kg  
Net weight 1,09 kg

## Packaging A364 - A365

1 Box  
0,125 x 0,125 x 1,6 m  
Vol 0,025 m<sup>3</sup>  
Gross weight 2,94 Kg  
Net weight 1,34 Kg

## Packaging A370 - A371

1 Box  
0,125 x 0,125 x 2,25 m  
Vol 0,0351 m<sup>3</sup>  
Gross weight 3,89 Kg  
Net weight 1,64 Kg

## Accessories included with the Ceiling tracks



Surface

Built-in

Remote

## Select Electrical connection



Surface

Built-in XS

Remote Micro

Ø 6,5 cm  
33 x 6 cm

25 x 3 x 2 cm

25 x 3 x 2 cm

**\_10** Surface  
**\_23** Built-in XS  
**\_31** Remote  
Micro

## Counterweight

Only for pendant track.  
1 counterweight required for 3 or 4 spots  
and 2 counterweights required for 5 spots.

**A160** \_\_ / OM


## Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

# Pendant Double Tracks

**A376** (H 3m)  
**A377** (H 9m)

110 cm

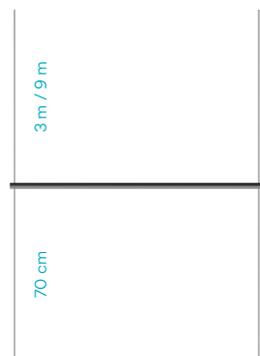

**A382** (H 3m)  
**A383** (H 9m)

150 cm



**A388** (H 3m)  
**A389** (H 9m)

200 cm



Height 3 m 110 cm

A376 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

Height 3 m 150 cm

A382 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

Height 3 m 200 cm

A388 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

Height 9 m 110 cm

A377 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

Height 9 m 150 cm

A383 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

Height 9 m 200 cm

A389 \_\_ / OM \_\_

\_\_ / OM 10  
\_\_ / OM 23  
\_\_ / OM 31

## Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

## Materials

Track: Aluminum.  
Top cover: PVC.  
Ceiling supports: PC- Polycarbonate.



## Packaging A376 - A377

1 Box  
0,125 x 0,125 x 1,25 m  
Vol 0,0195 m<sup>3</sup>  
Gross weight 3,34 Kg  
Net weight 1,99 Kg

## Packaging A382 - A383

1 Box  
0,125 x 0,125 x 1,6 m  
Vol 0,025 m<sup>3</sup>  
Gross weight 4,09 Kg  
Net weight 2,49 Kg

## Packaging A388 - A389

1 Box  
0,125 x 0,125 x 2,25 m  
Vol 0,0351 m<sup>3</sup>  
Gross weight 5,49 Kg  
Net weight 3,09 Kg

## Accessories included with the Ceiling tracks



Surface Built-in Remote

## Select Electrical connection



Surface Built-in XS Remote Micro  
Ø 6,5 cm 25 x 3 x 2 cm 25 x 3 x 2 cm  
33 x 6 cm

\_\_10 Surface  
\_\_23 Built-in XS  
\_\_31 Remote Micro

## Counterweight

Only for pendant track.  
1 counterweight required for 3 or 4 spots  
and 2 counterweights required for 5 spots.

A160 \_\_ / OM

## Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

# Electrical connection options

## Driver for pendant

### Control

A394 \_ / \_ \_ \_ \_

- \_ / OG \_10 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 30W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 30W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 30W + Casambi Simultaneous line + Remote Micro

A395 \_ / \_ \_ \_ \_

- \_ / OG \_10 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 48W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 48W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 48W + Casambi Simultaneous line + Remote Micro

A396 \_ / \_ \_ \_ \_

- \_ / OG \_10 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 84W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 84W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 84W + Casambi Simultaneous line + Remote Micro

## Driver for ceiling

### Control

A397 \_ / \_ \_ \_ \_

- \_ / OG \_10 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 30W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 30W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 30W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 30W + Casambi Simultaneous line + Remote Micro

A398 \_ / \_ \_ \_ \_

- \_ / OG \_10 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 48W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 48W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 48W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 48W + Casambi Simultaneous line + Remote Micro

A399 \_ / \_ \_ \_ \_

- \_ / OG \_10 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Surface
- 80 / OG \_23 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Built-in XS
- 80 / OG \_31 84W + DALI-2, Casambi (P2P), ProtoPixel\* (P2P) + Remote Micro

---

- \_ / OZ \_10 84W + Casambi Simultaneous line + Surface
- 80 / OZ \_23 84W + Casambi Simultaneous line + Built-in XS
- 80 / OZ \_31 84W + Casambi Simultaneous line + Remote Micro

### Finishes

- 11/ O \_ Black (NCS S 8500-N)
- 24/ O \_ Beige M1 (NCS S 2005-Y50R)
- 80/ O \_ Without finish for Built-in and Remote.

### Materials

Aluminum + PC-Polycarbonate.  
(Surface version only)



### Electrical connection

Driver Constant Voltage 48V  
220~240V 50/60Hz

### Notes

\*Available from January 2025.

### Packaging

1 Box 0,12 x 0,10 x 0,37 m  
Vol 0,0044 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,53 Kg

### Included tracks electrical connections



Pendant Ceiling Pendant  
Built-in Remote

### Select Electrical connection



Ceiling Surface  
Pendant Surface  
Ceiling Pendant  
Ceiling Remote Micro

Ø 6,5 cm  
33 x 6 cm    Ø 6,5 cm  
33 x 6 cm    25 x 3 x 2 cm    25 x 3 x 2 cm

\_10 Surface  
\_23 Built-in XS  
\_31 Remote Micro

# Circus Solo

Design by Antoni Arola

The Circus system incorporates a range of independent elements that can be surface mounted to the ceiling, including spots, downlights and general lighting fixtures. This line allows professionals to create harmonic compositions and subtle atmospheres that break with the standards.

## Pendant - Volumetric Diffuser

### SURFACE BUILT-IN

0185



Ø 20 cm


0187



Ø 45 cm

### SURFACE BUILT-IN REMOTE

0193

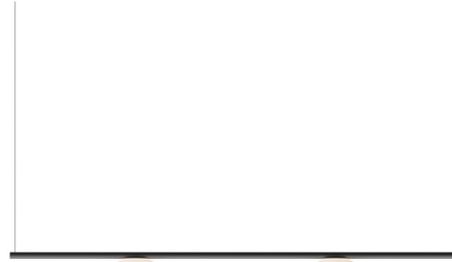

Ø 20 cm

150 cm

0185

#### Finishes

- 11/ \_ Black (NCS S 8500-N)
- 24/ \_ Beige M1 (NCS S 2005-Y50R)

#### LED Colour Temperature

##### Static White

/1 \_ 2700 K - 759 lm

F

/2 \_ 3000 K - 794 lm

/3 \_ 3500 K - 822 lm

E

##### Tunable White

/8 \_ (1800 K - 4000 K)

452 lm - 709 lm

##### Tunable Red

/9 \_ (Red - 2700 K)

172 lm - 468 lm

F

CRI >90

#### Control


0185 \_ \_ / \_ \_

\_ \_ / \_ D Static White + Push, DALI-2

\_ \_ / \_ Z Static White + Casambi

\_ \_ / 8Z Tunable White + Casambi

\_ \_ / 9Z Tunable Red + Casambi

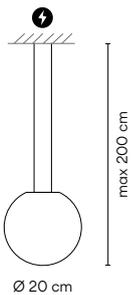

#### Select Electrical connection



Surface

Built-in XS

\_10 Surface  
\_23 Built-in XS

#### Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.  
Canopy (Surface): Aluminum.  
Canopy (Built-in): ABS + PC- Polycarbonate.

#### Light Source and electronics

**2700 K - 3000 K - 3500K:**

1 x LED 6,7 W 400 mA

Constant Current 400 mA

220-240V 50/60Hz

**Tunable White:**

1 x LED 6,7 W 385 mA

Constant Voltage 48V

220-240V 50/60Hz

**Tunable Red:**

1 x LED PLATE 7,7 W 400 mA

Constant Voltage 48V

220-240V 50/60Hz

#### Packaging

1 Box 0,32 x 0,32 x 0,5 m

Vol 0,0512 m<sup>3</sup>

Gross weight 1,96 Kg Net weight 1,03 Kg

#### Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

#### Surface

LED IP20 CE UK ENEC

#### Built-in

LED IP20 CE UK ENEC

1160 | 10 | /1A | 18 |  
Model | Finish | LED Colour Temperature | Control |  
Electrical connection  
Only for Pendant



0187

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**

- /1\_ 2700 K - 2588 lm
- /2\_ 3000 K - 2706 lm
- /3\_ 3500 K - 2804 lm

**Tunable White**

- /8\_ (1800 K - 4000 K) 1403 lm - 2615 lm

**Tunable Red**

- /9\_ (Red - 2700 K) 339 lm - 1582 lm

CRI >90

**Control**

**0187** \_ \_ / \_ \_

---

\_ \_ / \_ **D** Static White + Push, DALI-2

---


\_ \_ / \_ **Z** Static White + Casambi

---

\_ \_ / **8Z** Tunable White + Casambi

---

\_ \_ / **9Z** Tunable Red + Casambi

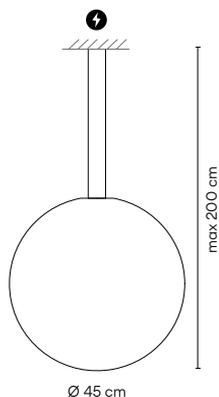

**Select Electrical connection**



**Materials**

Sphere: PE- Polyethylene. Top cover: Aluminum.  
 Canopy (Surface): Aluminum.  
 Canopy (Built-in): ABS + PC- Polycarbonate.

**Packaging**

1 Box 0,55 x 0,55 x 0,65 m  
 Vol 0,1966 m<sup>3</sup>  
 Gross weight 5,1 Kg Net weight 2,85 Kg

**Light Source and electronics**

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
 Extra cable length.

**2700 K - 3000 K- 3500K:**  
 1 x LED 19,6 W 600 mA  
 Constant Current 600 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED 17,7 W 525 mA  
 Constant Voltage 48V  
 220~240V 50/60Hz

**Tunable Red:**  
 1 x LED PLATE 15,7 W 500 mA  
 Constant Voltage 48V  
 220~240V 50/60Hz



0193

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1\_ 2700 K - 1518 lm
- /2\_ 3000 K - 1588 lm
- /3\_ 3500 K - 1644 lm

CRI >90

**Control**


**0193** \_ \_ / \_ \_

---


\_ \_ / \_ **D** Static White + Push, DALI-2

---

\_ \_ / \_ **Z** Static White + Casambi

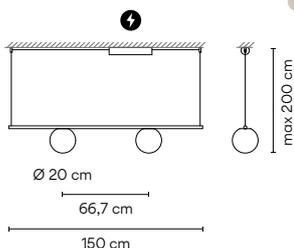

**Select Electrical connection**

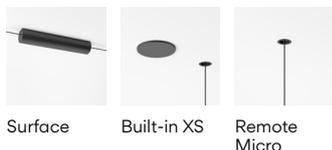

**Materials**

Sphere: PE- Polyethylene.  
 Top cover: Aluminum. Structure: Aluminum.  
 Canopy (Surface): Aluminum + Polycarbonate.  
 Canopy (Built-in): ABS + PC- Polycarbonate.

**Packaging**

1 Box 1,82 x 0,30 x 0,30 m  
 Vol 0,164 m<sup>3</sup>  
 Gross weight 3,5 Kg Net weight 2,22 Kg

**Light Source and electronics**

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
 Extra cable length.


2 x LED 6,7 W 400 mA  
 Constant Current 400 mA  
 220~240V 50/60Hz



## Pendant - Hidden Diffuser (Screened)

SURFACE BUILT-IN


0182

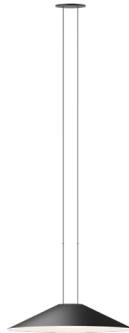

Ø 40 cm

SURFACE BUILT-IN REMOTE



0196

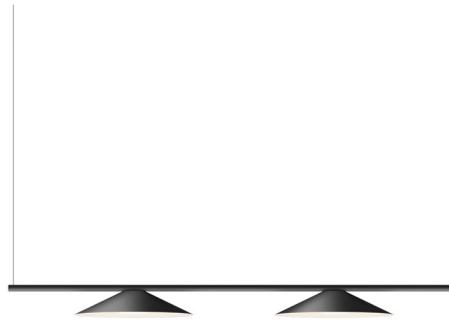

Ø 40 cm

150 cm

0182



Ø 40 cm

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

**Static White**

/1 \_ 2700 K - 1763 lm

/2 \_ 3000 K - 1843 lm

/3 \_ 3500 K - 1910 lm

E  D

**Tunable White**

/8 \_ (1800 K - 4000 K) 1340 lm - 2501 lm

D

**Tunable Red**

/9 \_ (Red - 2700 K) 339,6 lm - 1582 lm

F

CRI >90

Control

0182 \_ \_ / \_ \_

\_ \_ / \_ \_ D Static White + Push, DALI-2

\_ \_ / \_ \_ Z Static White + Casambi

\_ \_ / 8Z Tunable White + Casambi

\_ \_ / 9Z Tunable Red + Casambi

⚡ Select Electrical connection



Surface



Built-in XS

\_10 Surface  
\_23 Built-in XS

Materials

Shade: Aluminum. Top cover: Aluminum.  
 Diffuser: PC- Polycarbonate. Canopy (Surface): Aluminum.  
 Canopy (Built-in): ABS + PC- Polycarbonate .

Light Source and electronics

**2700 K - 3000 K - 3500K:**

1 x LED 12,8 W 400 mA  
 Constant Current 400 mA  
 220-240V 50/60Hz

**Tunable White:**

1 x LED 16,8 W 500 mA  
 Constant Voltage 48V  
 220-240V 50/60Hz

**Tunable Red:**

1 x LED PLATE 15,7 W 500 mA  
 Constant Voltage 48V  
 220-240V 50/60Hz

Packaging

1 Box 0,480 x 0,480 x 0,115 m  
 Vol 0,0265 m<sup>3</sup>  
 Gross weight 3 Kg Net weight 1,42 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
 Extra cable length.

Surface

LED  IP20  CE  UK  ENEC

Built-in XS

LED  IP20  CE  UK  ENEC

0196


- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

- LED Colour Temperature**
- /1 \_ 2700 K - 3104 lm
  - /2 \_ 3000 K - 3244 lm
  - /3 \_ 3500 K - 3362 lm
- CRI >90

**Control**

**0196** \_ \_ / \_ \_

- \_ \_ / \_ **D** Static White +  
Push, DALI-2
- \_ \_ / \_ **Z** Static White +  
Casambi

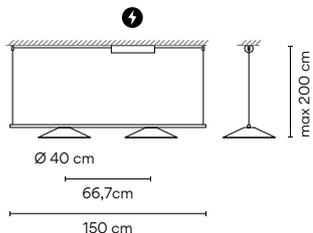

**Select Electrical connection**



Surface      Built-in XS      Remote  
Micro

\_10 Surface  
\_23 Built-in XS  
\_31 Remote  
Micro

**Materials**

Shade: Aluminum. Top cover: Aluminum.  
Diffuser: PC- Polycarbonate. Structure: Aluminum.  
Canopy (Surface): Aluminum + Polycarbonate.  
Canopy (Built-in): ABS + PC- Polycarbonate

**Light Source and electronics**

2 x LED 11,1 W 350 mA  
Constant Current 700 mA  
220~240V 50/60Hz

**Packaging**

1 Box 1,60 x 0,48 x 0,13 m  
Vol 0,100 m<sup>3</sup>  
Gross weight 5,60 Kg Net weight 3,10 Kg


**Notes**

DALI-2 products are compatible  
(via a designated gateway) with all  
ProtoPixel dynamic-light solution products.  
Extra cable length.



## Pendant - Accent Spotlight

### SURFACE BUILT-IN

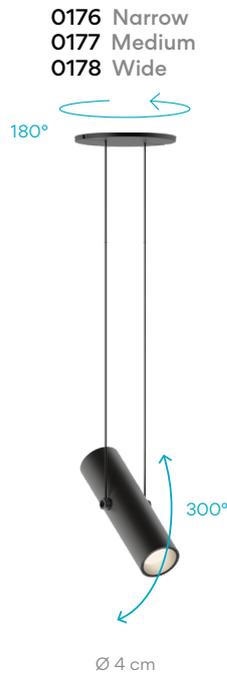

0176  
Narrow  
0177  
Medium  
0178  
Wide

#### 0176 Narrow

##### Finishes

- 11/ \_\_ Black  
(NCS S 8500-N)
- 24/ \_\_ Beige M1  
(NCS S 2005-Y50R)

##### LED Colour Temperature

- /1\_ 2700 K - 680 lm
- /2\_ 3000 K - 711 lm
- /3\_ 3500 K - 737 lm




CRI >90

##### Control

0176 \_\_ / \_\_

\_\_ / \_ D Static White +  
Push, DALI-2

\_\_ / \_ Z Static White +  
Casambi

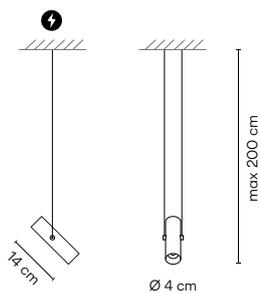

#### Select Electrical connection



Surface

Built-in XS

\_10 Surface  
\_23 Built-in XS

#### Materials

Body: Zinc Alloy.  
Snoot and cover: PC- Polycarbonate.  
Canopy (Surface): Aluminum.  
Canopy (Built-in): ABS + PC- Polycarbonate.

#### Light Source and electronics

1 x LED 7,2 W 400 mA  
Constant Current 400 mA  
220~240V 50/60Hz

#### Packaging

1 Box 0,30 x 0,15 x 0,075 m  
Vol 0,0034 m<sup>3</sup>  
Gross weight 1,39 Kg Net weight 1,09 Kg

#### Notes

DALI-2 products are compatible  
(via a designated gateway) with all  
ProtoPixel dynamic-light solution products.  
Extra cable length.

#### Surface

LED IP20 CE ENEC ENEC

#### Built-in XS

LED IP20 CE ENEC ENEC

**0177 Medium**

Finishes

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1\_ 2700 K - 680 lm
  - /2\_ 3000 K - 711 lm
  - /3\_ 3500 K - 737 lm

- Tunable White**
- /8\_ (1800 K - 4000 K)  
308 lm - 504 lm

- Tunable Red**
- /9\_ (Red - 2700 K)  
147 lm - 535 lm



CRI >90

Control

**0177** \_ \_ / \_ \_

\_ \_ / \_ **D** Static White +  
Push, DALI-2

\_ \_ / \_ **Z** Static White +  
Casambi

\_ \_ / **8Z** Tunable White +  
Casambi

\_ \_ / **9Z** Tunable Red +  
Casambi

Select Electrical connection



Surface

Built-in XS

**\_10** Surface  
**\_23** Built-in XS

Materials

Body: Zinc Alloy.  
Snoot and cover: PC- Polycarbonate.  
Canopy (Surface): Aluminum.  
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

**2700 K - 3000 K - 3500K:**

1 x LED 7,2 W 400 mA  
Constant Current 400 mA  
220-240V 50/60Hz

**Tunable White:**

1 x LED 5,5 W 150 mA  
Constant Voltage 48V  
220-240V 50/60Hz

**Tunable Red:**

1 x LED PLATE 7 W 460 mA  
Constant Voltage 48V  
220-240V 50/60Hz

Packaging


1 Box 0,30 x 0,15 x 0,075 m  
Vol 0,0034 m<sup>3</sup>  
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Extra cable length.

Surface



Built-in XS



**0178 Wide**

Finishes

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1\_ 2700 K - 680 lm
  - /2\_ 3000 K - 711 lm
  - /3\_ 3500 K - 737 lm

- Tunable White**
- /8\_ (1800 K - 4000 K)  
308 lm - 504 lm



CRI >90

Control

**0178** \_ \_ / \_ \_

\_ \_ / \_ **D** Static White +  
Push, DALI-2

\_ \_ / \_ **Z** Static White +  
Casambi

\_ \_ / **8Z** Tunable White +  
Casambi

Select Electrical connection



Surface

Built-in XS

**\_10** Surface  
**\_23** Built-in XS

**Materials**

Body: Zinc Alloy.  
 Snoot and cover: PC- Polycarbonate.  
 Canopy (Surface): Aluminum.  
 Canopy (Built-in): ABS + PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 7,2 W 400 mA  
 Constant Current 400 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 5,5 W 150 mA  
 Constant Voltage 48V  
 220-240V 50/60Hz

**Packaging**

1 Box 0,30 x 0,15 x 0,075 m  
 Vol 0,0034 m<sup>3</sup>  
 Gross weight 1,39 Kg Net weight 1,09 Kg

**Notes**


DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
 Extra cable length.

**Surface**

LED IP20 CE UK ENE

**Built-in XS**

LED IP20 CE UK ENE

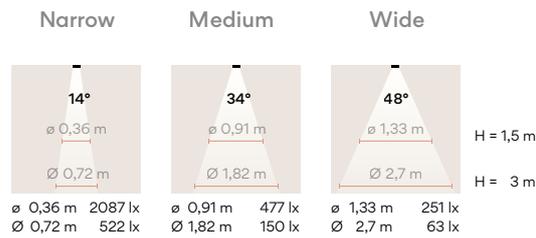

Ceiling - Accent Spotlight

SPOTS (REMOTE / BUILT-IN)

- 0171 Narrow
- 0172 Medium
- 0173 Wide



- 0171  
Narrow
- 0172  
Medium
- 0173  
Wide

0171 Narrow

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1 \_ 2700 K - 680 lm
- /2 \_ 3000 K - 711 lm
- /3 \_ 3500 K - 737 lm




CRI >90

Control

0171 \_ \_ / \_ \_

- \_ \_ / \_ O On/Off
- \_ \_ / \_ D Push, DALI-2
- \_ \_ / \_ M Without driver
- \_ \_ / \_ Z Casambi

BUILT-IN

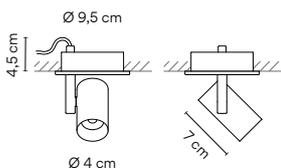


Select Electrical connection



Built-in XS  
Remote Micro

\_23 Built-in XS  
\_31 Remote Micro

REMOTE

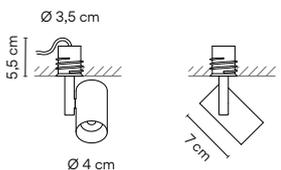

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Ceiling Base: Aluminum. Installation frame (Built-in): POM.  
Installation frame (Remote): Aluminum.

Light Source and electronics

1 x LED 7,2 W 400 mA  
Constant Current 400 mA  
220-240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m  
Vol 0,0038 m<sup>3</sup>  
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



### 0172 Medium

- Finishes**
- **11/ \_\_ Black**  
(NCS S 8500-N)
  - **24/ \_\_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 680 lm
  - /2 \_ 3000 K - 711 lm
  - /3 \_ 3500 K - 737 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
308 lm - 504 lm



- Tunable Red**
- /9 \_ (Red - 2700 K)  
147 lm - 535 lm



CRI >90

**Control**

**0172 \_\_ / \_\_**

\_\_ / \_\_ **O** Static White +  
On/Off

\_\_ / \_\_ **D** Static White +  
Push, DALI-2

\_\_ / \_\_ **M** Static White +  
Without driver

\_\_ / \_\_ **Z** Static White +  
Casambi

\_\_ / **8Z** Tunable White +  
Casambi

\_\_ / **9Z** Tunable Red +  
Casambi

**Select Electrical connection**



Built-in XS



Remote  
Micro

**\_23** Built-in XS  
**\_31** Remote  
Micro

**Materials**

Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Ceiling Base: Aluminum. Installation frame (Built-in): POM.  
Installation frame (Remote): Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA  
Constant Current 400 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Voltage 48V  
220~240V 50/60Hz

**Tunable Red:**  
1 x LED PLATE 7 W 460 mA  
Constant Voltage 48V  
220~240V 50/60Hz

**Packaging**

1 Box 0,15 x 0,15 x 0,15 m  
Vol 0,0038 m<sup>3</sup>  
Gross weight 0,71 Kg Net weight 0,41 Kg

**Notes**

DALI-2 products are compatible  
(via a designated gateway) with all  
ProtoPixel dynamic-light solution products.  
Visit [vibia.com](http://vibia.com) to group several pieces with  
just one electrical point.



**0173 Wide**

- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 680 lm  
/2 \_ 3000 K - 711 lm  
/3 \_ 3500 K - 737 lm

**Tunable White**  
/8 \_ (1800 K - 4000 K)  
308 lm - 504 lm

**F**

CRI >90

- Control**
- 0173** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** Static White +  
+ On/Off
- \_ \_ / \_ **D** Static White +  
Push, DALI-2
- \_ \_ / \_ **M** Static White +  
Without driver
- \_ \_ / \_ **Z** Static White +  
Casambi
- 
- \_ \_ / **8Z** Tunable White +  
Casambi

**Select Electrical connection**



Built-in XS    Remote  
Micro

**\_23** Built-in XS  
**\_31** Remote  
Micro

**Materials**  
Body: Aluminum. Snoot and cover: PC- Polycarbonate.  
Ceiling Base: Aluminum. Installation frame (Built-in): POM.  
Installation frame (Remote): Aluminum.


**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 7,2 W 400 mA  
Constant Current 400 mA  
220~240V 50/60Hz


**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Voltage 48V  
220~240V 50/60Hz

**Packaging**  
1 Box 0,15 x 0,15 x 0,15 m  
Vol 0,0038 m<sup>3</sup>  
Gross weight 0,71 Kg Net weight 0,41 Kg

**Notes**  
DALI-2 products are compatible  
(via a designated gateway) with all  
ProtoPixel dynamic-light solution products.  
Visit [vibia.com](http://vibia.com) to group several pieces with  
just one electrical point.

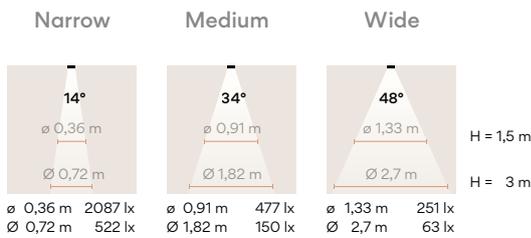

Light reflector- go to **page 22**

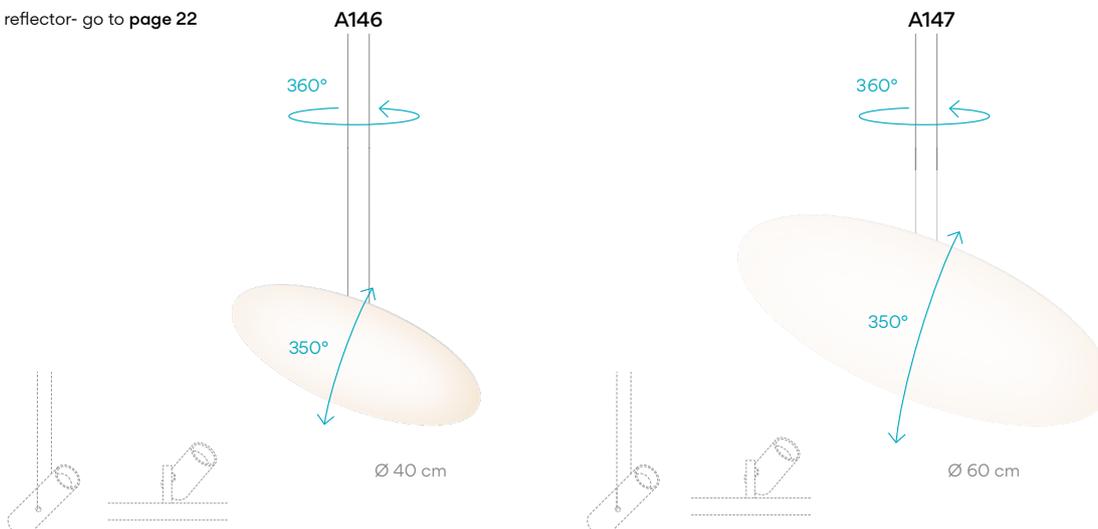

⚡ Select Electrical connection

For Ref. 0176, 0177, 0178, 0182, 0185, 0187

**Drop ceiling**

\_23  
Built-in XS



Ø 8 cm  
height 8,5 cm

match with  
fixture finish.

**Regular ceiling**

\_10  
Surface



Ø 6,5 cm  
height 17 cm

match with  
fixture finish.

For Ref. 0193, 0196

**Drop ceiling**

\_31  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster  
ceilings.  
Black finish.

\_23  
Built-in XS



Ø 8 cm  
height 8,5 cm

match with  
fixture finish.

**Regular ceiling**

\_10  
Surface



Ø 6,5 cm  
Length 33 cm

match with  
fixture finish.

For Ref. 0171, 0172, 0173

**Drop ceiling**

\_31  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster  
ceilings.  
Black finish.


\_23  
Built-in XS




Ø 8,3 cm  
height 8,5 cm

match with  
fixture finish.

**Remote**



**Built-in**




# Skán

Design by Lievore, Altherr, Molina

Skán is a sleek and unadorned fixture. It combines lean lines with soothing purity of form, adding a minimalist sensibility to any space.

1160	10	/1A
Model	Finish	Control
LED Colour Temperature		


## Floor

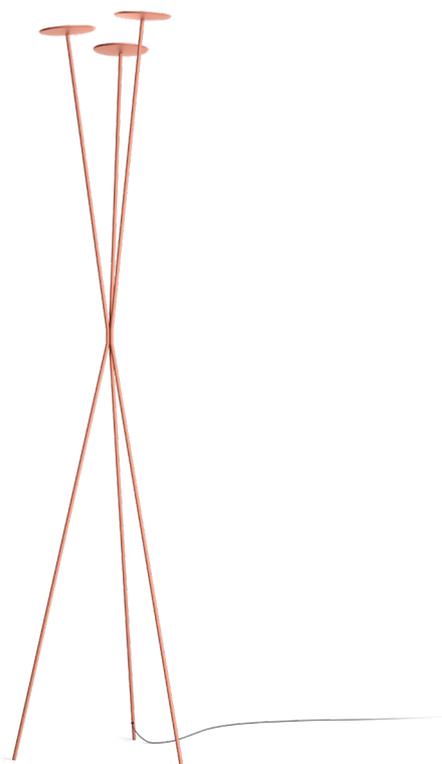

**0260**

43 x 37,5 x 198 cm

### 0260



#### Finishes

- **10/** \_ \_ White (NCS S 0300-N)
- **11/** \_ \_ Black (NCS S 8500-N)
- **37/** \_ \_ Terra Red (NCS S4040-Y70R)

#### Finish customization

(Available options: Vibia colour palette.)

Minimum quantity 10 units. Price + 10%

#### Materials

Head: Aluminum. Diffuser: PMMA.  
Vertical tube: Steel.

#### Light Source and electronics

3 x LED 9,2 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

#### LED Colour Temperature

**/1\_** 2700 K - 4430,16 lm



**/2\_** 3000 K - 3792,73 lm



**/3\_** 3500 K - 4799,9 lm



CRI >90


#### Control

**0260** \_ \_ / \_ 5 Push

#### Packaging

1 Box 2,11 x 0,60 x 0,60 m  
Vol 0,7596 m<sup>3</sup>  
Gross weight 5,4 Kg Net weight 2,5 Kg



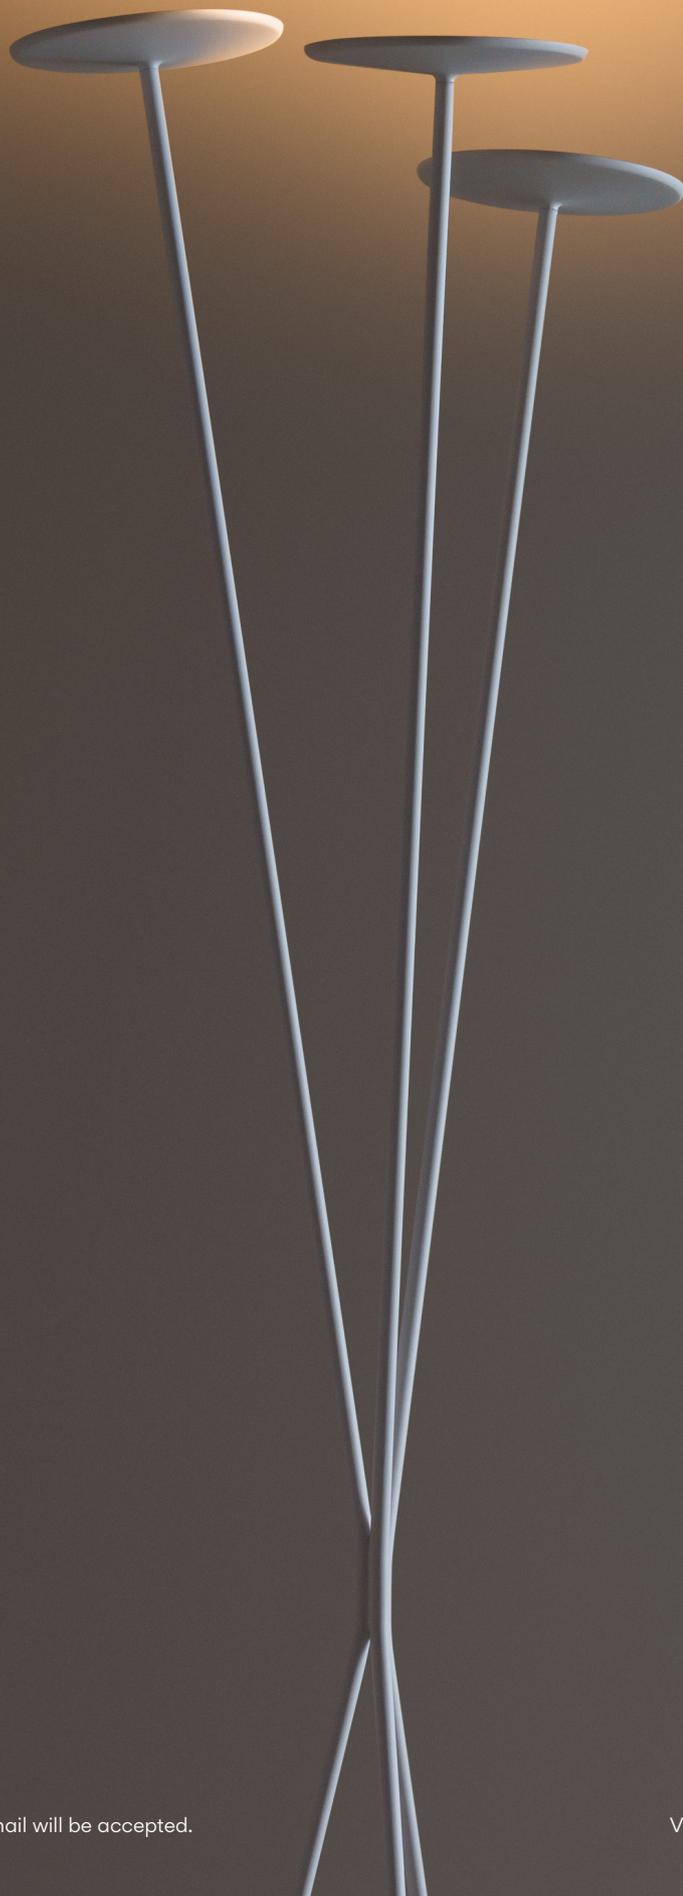

---

Pendant


INDIVIDUAL MODEL

0270








Ø 30 cm

0275

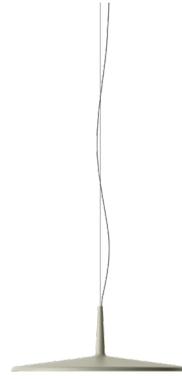


Ø 60 cm

MULTIPLE MODELS

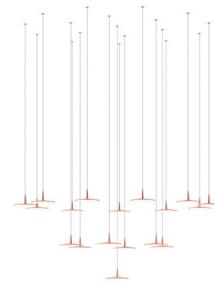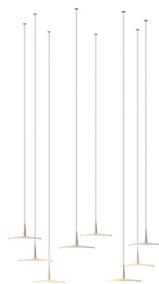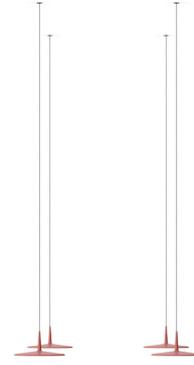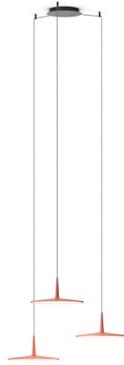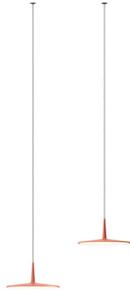

INDIVIDUAL MODEL

0270

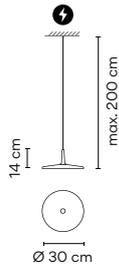


- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 \_ 2700 K - 1269 lm CRI >90
  - /2 \_ 3000 K - 1123 lm CRI >80
  - /3 \_ 3500 K - 1374 lm CRI >90

- Control**
- 0270 \_\_ / \_\_
- \_\_ / \_ 1 DALI-2
  - \_\_ / \_ 2 0-10V
  - \_\_ / \_ B Push; 1-10V
  - \_\_ / \_ Z Casambi

Select Electrical connection

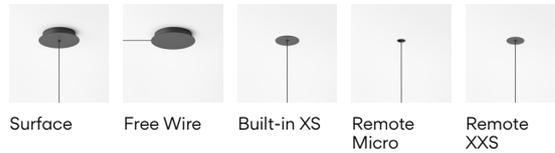

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Shade: Aluminum. Diffuser: PMMA.  
 Canopy: Steel.


**Light Source and electronics**  
 1 x LED 9,3 W 350 mA  
 Constant Current 350 mA  
 110-277V 50/60Hz

**Packaging**  
 1 Box 0,29 x 0,38 x 0,38 m  
 Vol 0,0418 m³  
 Gross weight 2,6 Kg Net weight 1,4 Kg

**Notes**  
 Extra cable length.



0275

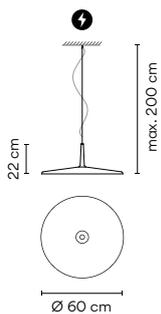

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1 \_ 2700 K - 1269 lm CRI >90
  - /2 \_ 3000 K - 1575 lm CRI >80
  - /3 \_ 3500 K - 1375 lm CRI >90

- Control**
- 0275 \_\_ / \_\_
- \_\_ / \_ 1 DALI-2
  - \_\_ / \_ B Push; 1-10V
  - \_\_ / \_ Z Casambi

Select Electrical connection



- \_10 Surface
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Body: Aluminum. Diffuser: PMMA.  
 Canopy Plate: Steel.

**Light Source and electronics**  
 1 x LED 13,9 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz


**Packaging**  
 1 Box 0,42 x 0,71 x 0,66 m  
 Vol 0,2000 m³  
 Gross weight 7 Kg Net weight 4,4 Kg

**Notes**  
 Extra cable length.




MULTIPLE MODELS


Select your model at [vibia.com](http://vibia.com) and adjust



2 x 0270



2 x 0270



3 x 0270



3 x 0270



4 x 0270




4 x 027



5 x 027




7 x 0270



8 x 0270




8 x 027



9 x 0270



18 x 0270



16 x 0270



4 x 0270



8 x 027



9 x 0270



9 x 0270



16 x 0270

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

- 10/ \_\_ White  
(NCS S 0300-N)
- 11/ \_\_ Black  
(NCS S 8500-N)
- 24/ \_\_ Beige M1  
(NCS S 2005-Y50R)
- 37/ \_\_ Terra Red  
(NCS S4040-Y70R)
- 42/ \_\_ Blue M1  
(NCS S 5010-B10G)
- 47/ \_\_ Green L1  
(NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature

- /1 \_ 2700 K
- CRI >90
- /2 \_ 3000 K
- CRI >80
- /3 \_ 3500 K
- CRI >90

Control

Model \_\_ / \_\_  
 \_\_\_ / \_1 DALI-2  
 \_\_\_ / \_2 0-10V  
 \_\_\_ / \_B Push; 1-10V  
 \_\_\_ / \_Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0270

Drop ceiling

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p><b>_10</b> Surface</p>  <p>Ø 17,3 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 wires</p> <p>Ø 22 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 8 wires</p> <p>Ø 40 cm</p>
--	--	--	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 0275


Drop ceiling

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

Regular ceiling

<p><b>_10</b> Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
---

Remote



Built-in



Materials

Body: Aluminum. Diffuser: PMMA.  
Canopy Plate: Steel.


Notes

Additional cable length  
from 2 m. 16,00 €/m



MULTIPLE MODELS

0280

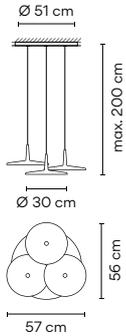

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options:  
 Vibia colour palette  
 Minimum quantity  
 10 units. Price + 10%)

- LED Colour Temperature**
- /1 \_ 2700 K - 3123 lm  
CRI >90
  - /2 \_ 3000 K - 3369 lm  
CRI >80
  - /3 \_ 3500 K - 4124,7 lm  
CRI >90
- E

- Control**
- 0280 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- 
- \_\_ / \_ Z Casambi

**Materials**  
 Body: Aluminum. Diffuser: PMMA.  
 Canopy Plate: Steel.

**Light Source and electronics**  
 3 x LED 9,3 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz


**Packaging**  
 2 Boxes  
 Total Vol 0,2226 m<sup>3</sup>  
 Gross weight 13,7 Kg Net weight 9,2 Kg

**Notes**  
 Surface.  
 Extra cable length.

**UNTIL STOCK RUNS OUT**



0282

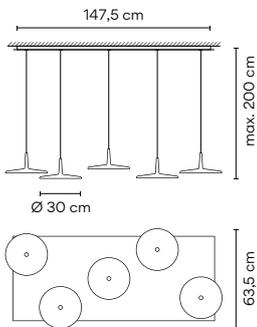

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options:  
 Vibia colour palette  
 Minimum quantity  
 10 units. Price + 10%)

- LED Colour Temperature**
- /1 \_ 2700 K - 5205 lm  
CRI >90
  - /2 \_ 3000 K - 5615 lm  
CRI >80
  - /3 \_ 3500 K - 6874,5 lm  
CRI >90
- E

- Control**
- 0282 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- 
- \_\_ / \_ Z Casambi

**Materials**  
 Body: Aluminum. Diffuser: PMMA.  
 Canopy Plate: Steel.

**Light Source and electronics**  
 5 x LED 9,3 W 350mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3290 m<sup>3</sup>  
 Gross weight 36,9 Kg Net weight 29 Kg

**Notes**  
 Surface.  
 Extra cable length.

**UNTIL STOCK RUNS OUT**





# Wireflow


Design by Arik Levy

Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.


---

## Pendant


4 LEDs

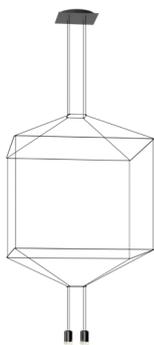


**0309**  
100 x 100 cm

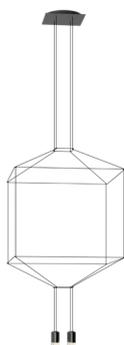

**0310**  
80 x 80 cm




**0311**  
64 x 64 cm




**0312**  
50 x 50 cm


8 LEDs

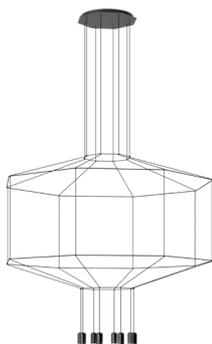


**0299**  
150 x 150 cm

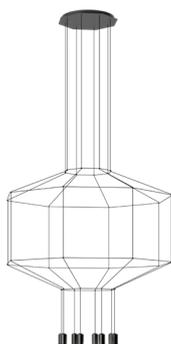


**0300**  
120 x 120 cm

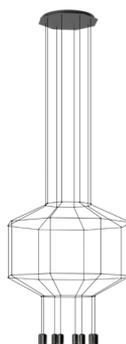

**0301**  
89 x 89 cm

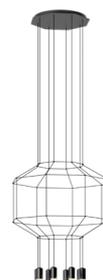


**0302**  
70 x 70 cm



**0303**  
55 x 55 cm


Personalise your own Wireflow composition quick and easy at [vibia.com](http://vibia.com)

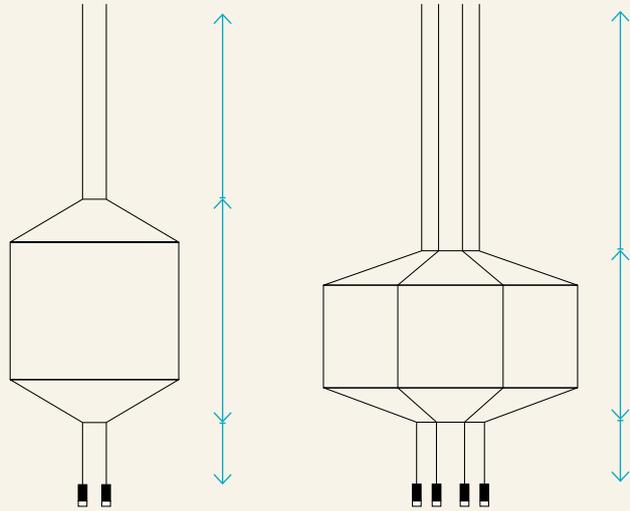

Pressed-glass diffuser.



**0299**

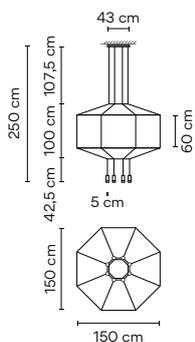

**Finishes**  
 ● **04/** \_\_ Black (RAL 9005)

**LED Colour Temperature**  
 /1 \_ 2700 K - 3880 lm  
 [D]  
 /2 \_ 3000 K - 3880 lm  
 /3 \_ 3500 K - 4002,4 lm  
 [E]  
 CRI >90

**Control**  
**0299** \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: Pressed-glass.  
 Horizontal rods and Canopy: Steel.  
 Body: Aluminum.


**Light Source and electronics**  
 8 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3245 m<sup>3</sup>  
 Gross weight 20,6 Kg Net weight 9,6 Kg

**Notes**  
 Pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply.



0300

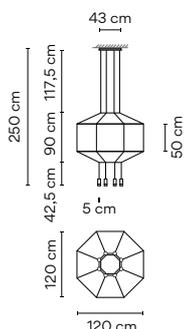


<b>Finishes</b> ● <b>04/</b> __ Black (RAL 9005)	<b>LED Colour Temperature</b> /1 _ 2700 K - 3880 lm <input type="checkbox"/>	<b>Control</b> <b>0300</b> __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	/2 _ 3000 K - 3880 lm <input type="checkbox"/>	
	/3 _ 3500 K - 4002,4 lm <input type="checkbox"/>	
	CRI >90	

<b>Materials</b> Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	<b>Packaging</b> 2 Boxes Total Vol 0,3246 m <sup>3</sup> Gross weight 19,95 Kg Net weight 8,95 Kg
<b>Light Source and electronics</b> 8 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	<b>Notes</b> Pressed-glass diffuser. <b>Configuration layout at vibia.com</b> Min. quantity, upcharge and extra lead time apply.



0301

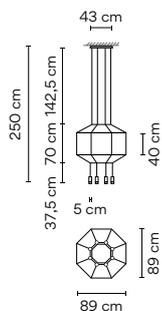


<b>Finishes</b> ● <b>04/</b> __ Black (RAL 9005)	<b>LED Colour Temperature</b> /1 _ 2700 K - 3880 lm <input type="checkbox"/>	<b>Control</b> <b>0301</b> __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	/2 _ 3000 K - 3880 lm <input type="checkbox"/>	
	/3 _ 3500 K - 4002,4 lm <input type="checkbox"/>	
	CRI >90	

<b>Materials</b> Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	<b>Packaging</b> 2 Boxes Total Vol 0,2100 m <sup>3</sup> Gross weight 17,75 Kg Net weight 8,75 Kg
<b>Light Source and electronics</b> 8 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	<b>Notes</b> Pressed-glass diffuser. <b>Configuration layout at vibia.com</b> Min. quantity, upcharge and extra lead time apply.



0302

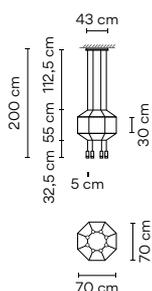


<b>Finishes</b> ● <b>04/</b> __ Black (RAL 9005)	<b>LED Colour Temperature</b> /1 _ 2700 K - 3880 lm <input type="checkbox"/>	<b>Control</b> <b>0302</b> __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	/2 _ 3000 K - 3880 lm <input type="checkbox"/>	
	/3 _ 3500 K - 4002,4 lm <input type="checkbox"/>	
	CRI >90	

<b>Materials</b> Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	<b>Packaging</b> 2 Boxes Total Vol 0,1558 m <sup>3</sup> Gross weight 14,6 Kg Net weight 8,6 Kg
<b>Light Source and electronics</b> 8 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	<b>Notes</b> Pressed-glass diffuser. <b>Configuration layout at vibia.com</b> Min. quantity, upcharge and extra lead time apply.



**0303**

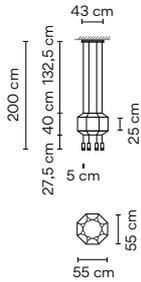

Finishes  
 ● **04/** \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 3880 lm  
 **D**  
 /2 \_ 3000 K - 3880 lm  
 /3 \_ 3500 K - 4002,4 lm  
 **E**  
 CRI >90

Control  
**0303** \_\_ / \_\_

\_\_ / \_\_ **A** Push; 1-10V; DALI-2  
 \_\_ / \_\_ **Z** Casambi

Materials  
 Diffuser: Pressed-glass.  
 Horizontal rods and Canopy: Steel.  
 Body: Aluminum.


Light Source and electronics  
 8 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,1558 m<sup>3</sup>  
 Gross weight 13 Kg Net weight 8,5 Kg

Notes  
 Pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply.



**0309**

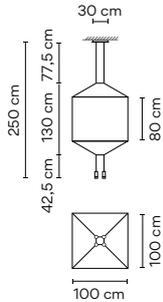

Finishes  
 ● **04/** \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 1940 lm  
 **D**  
 /2 \_ 3000 K - 1940 lm  
 /3 \_ 3500 K - 2001,2 lm  
 **E**  
 CRI >90

Control  
**0309** \_\_ / \_\_

\_\_ / \_\_ **A** Push; 1-10V; DALI-2  
 \_\_ / \_\_ **Z** Casambi

Materials  
 Diffuser: Pressed-glass.  
 Horizontal rods and Canopy: Steel.  
 Body: Aluminum.


Light Source and electronics  
 4 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,2100 m<sup>3</sup>  
 Gross weight 12,3 Kg Net weight 5,3 Kg

Notes  
 Pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply.



**0310**

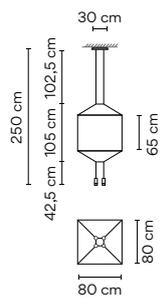

Finishes  
 ● **04/** \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 1940 lm  
 **D**  
 /2 \_ 3000 K - 1940 lm  
 /3 \_ 3500 K - 2001,2 lm  
 **E**  
 CRI >90

Control  
**0310** \_\_ / \_\_

\_\_ / \_\_ **A** Push; 1-10V; DALI-2  
 \_\_ / \_\_ **Z** Casambi


Materials  
 Diffuser: Pressed-glass.  
 Horizontal rods and Canopy: Steel.  
 Body: Aluminum.


Light Source and electronics  
 4 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,2100 m<sup>3</sup>  
 Gross weight 11,8 Kg Net weight 4,8 Kg

Notes  
 Pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply.

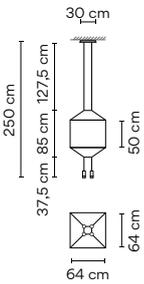

<b>0311</b> 	<b>Finishes</b> ● <b>04/</b> __ Black (RAL 9005)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1940 lm <input type="checkbox"/> <b>D</b> /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm <input type="checkbox"/> <b>E</b> CRI >90	<b>Control</b> <b>0311</b> __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	<b>Materials</b> Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	<b>Packaging</b> 2 Boxes Total Vol 0,1558 m <sup>3</sup> Gross weight 8,7 Kg Net weight 4,7 Kg	<b>Notes</b> Pressed-glass diffuser. <b>Configuration layout at vibia.com</b> Min. quantity, upcharge and extra lead time apply.

<b>0312</b> 	<b>Finishes</b> ● <b>04/</b> __ Black (RAL 9005)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1940 lm <input type="checkbox"/> <b>D</b> /2 _ 3000 K - 1940 lm /3 _ 3500 K - 2001,2 lm <input type="checkbox"/> <b>E</b> CRI >90	<b>Control</b> <b>0312</b> __ / __ __ / __ A Push; 1-10V; DALI-2 __ / __ Z Casambi
	<b>Materials</b> Diffuser: Pressed-glass. Horizontal rods and Canopy: Steel. Body: Aluminum.	<b>Packaging</b> 2 Boxes Total Vol 0,1558 m <sup>3</sup> Gross weight 8,6 Kg Net weight 4,6 Kg	<b>Notes</b> Pressed-glass diffuser. <b>Configuration layout at vibia.com</b> Min. quantity, upcharge and extra lead time apply.



# Wireflow Lineal

Design by Arik Levy

Wireflow Lineal's ultra-minimalist design is balanced by a distinctive, precipitous presence that adds an intriguing accent to any room. Ideal for illuminating large spaces with high ceilings, its lean profile traces a formal silhouette in an open space with meticulous precision.


---

## Pendant

2 LEDs

**0320**


57 cm x max. 200 cm



6 LEDs

**0338**


145 cm x max. 200 cm

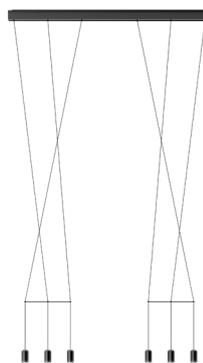

10 LEDs

**0330**


275 cm x max. 200 cm

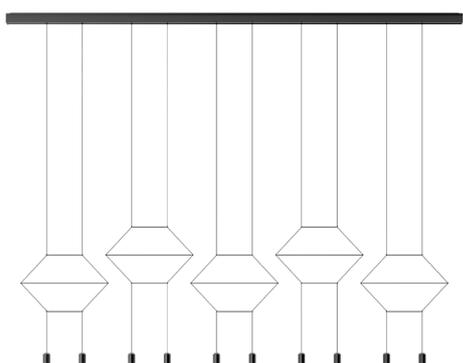

6 LEDs

**0325**


155 cm x max. 200 cm

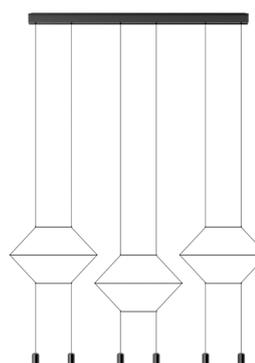


Personalise your own Wireflow Lineal composition quick and easy at [vibia.com](http://vibia.com)



Without pressed-glass diffuser.

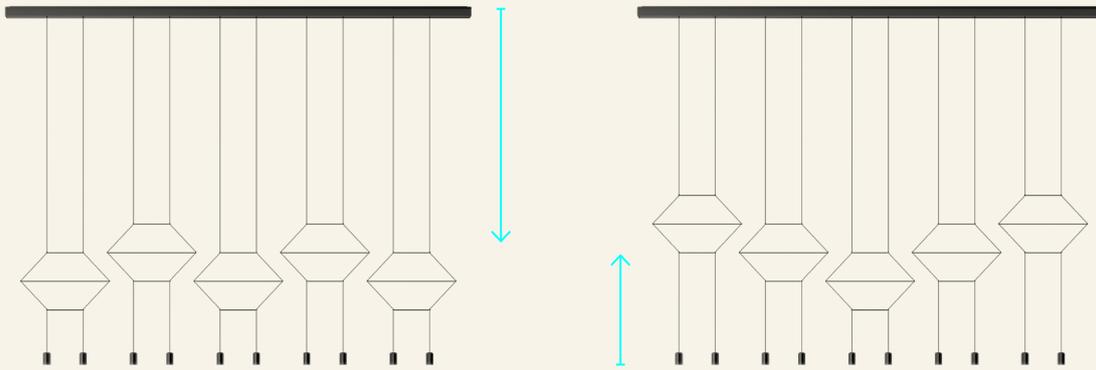

### 0320



**Finishes**  
 ● 04/ \_\_ Black (RAL 9005)

**LED Colour Temperature**  
 /1 \_ 2700 K - 970 lm  
 [D]  
 /2 \_ 3000 K - 970 lm  
 /3 \_ 3500 K - 1000,6 lm  
 [E]  
 CRI >90

**Control**  
 0320 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Horizontal rods: Steel.  
 Body and canopy: Aluminum.


**Light Source and electronics**  
 2 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,20 x 0,075 x 0,70 m  
 Vol 0,0150 m<sup>3</sup>  
 Gross weight 5,1 Kg Net weight 2,6 Kg

**Notes**  
 Linear canopy



0325



Finishes  
 ● 04/ \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1\_ 2700 K - 2910 lm  
 [D]  
 /2\_ 3000 K - 2910 lm  
 /3\_ 3500 K - 3001,8 lm  
 [E]  
 CRI >90

Control  
 0325 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_B Push; 1-10V  
 \_\_ / \_Z Casambi


Materials  
 Diffuser: PC- Polycarbonate.  
 Horizontal rods: Steel.  
 Body and canopy: Aluminum.

Light Source and electronics  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,20 x 0,075 x 2,30 m  
 Vol 0,0345 m<sup>3</sup>  
 Gross weight 8 Kg Net weight 4,5 Kg

Notes  
 Linear canopy  
 [LED] [IP20] [CE] [UK] [EAC] [E] [Bi-volt]

0330

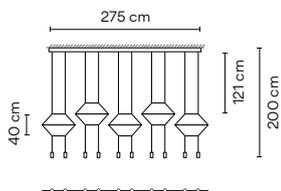

Finishes  
 ● 04/ \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1\_ 2700 K - 4850 lm  
 [D]  
 /2\_ 3000 K - 4850 lm  
 /3\_ 3500 K - 5003 lm  
 [E]  
 CRI >90

Control  
 0330 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_B Push; 1-10V  
 \_\_ / \_Z Casambi


Materials  
 Diffuser: PC- Polycarbonate.  
 Horizontal rods: Steel.  
 Body and canopy: Aluminum.

Light Source and electronics  
 10 x LED 4,5 W 700 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

Packaging  
 1 Box 0,20 x 0,075 x 3,30 m  
 Vol 0,0495 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes  
 Linear canopy  
 [LED] [IP20] [CE] [UK] [EAC] [E]

0338



Finishes  
 ● 04/ \_\_ Black (RAL 9005)

LED Colour Temperature  
 /1\_ 2700 K - 2910 lm  
 [D]  
 /2\_ 3000 K - 2910 lm  
 /3\_ 3500 K - 3001,8 lm  
 [E]  
 CRI >90

Control  
 0338 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_B Push; 1-10V  
 \_\_ / \_Z Casambi

Materials  
 Diffuser: PC- Polycarbonate.  
 Horizontal rods: Steel.  
 Body and canopy: Aluminum.

Light Source and electronics  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,20 x 0,075 x 3,30 m  
 Vol 0,0495 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 5,0 Kg

Notes  
 Linear canopy  
 [LED] [IP20] [CE] [UK] [EAC] [E] [Bi-volt]




# Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment. Its cables can be directed to form unexpected visual rhythms across a wall or ceiling, or to branch out from a central point and delineate specific activity zones within a space. Free offers maximum versatility in both form and function.

---

## Pendant

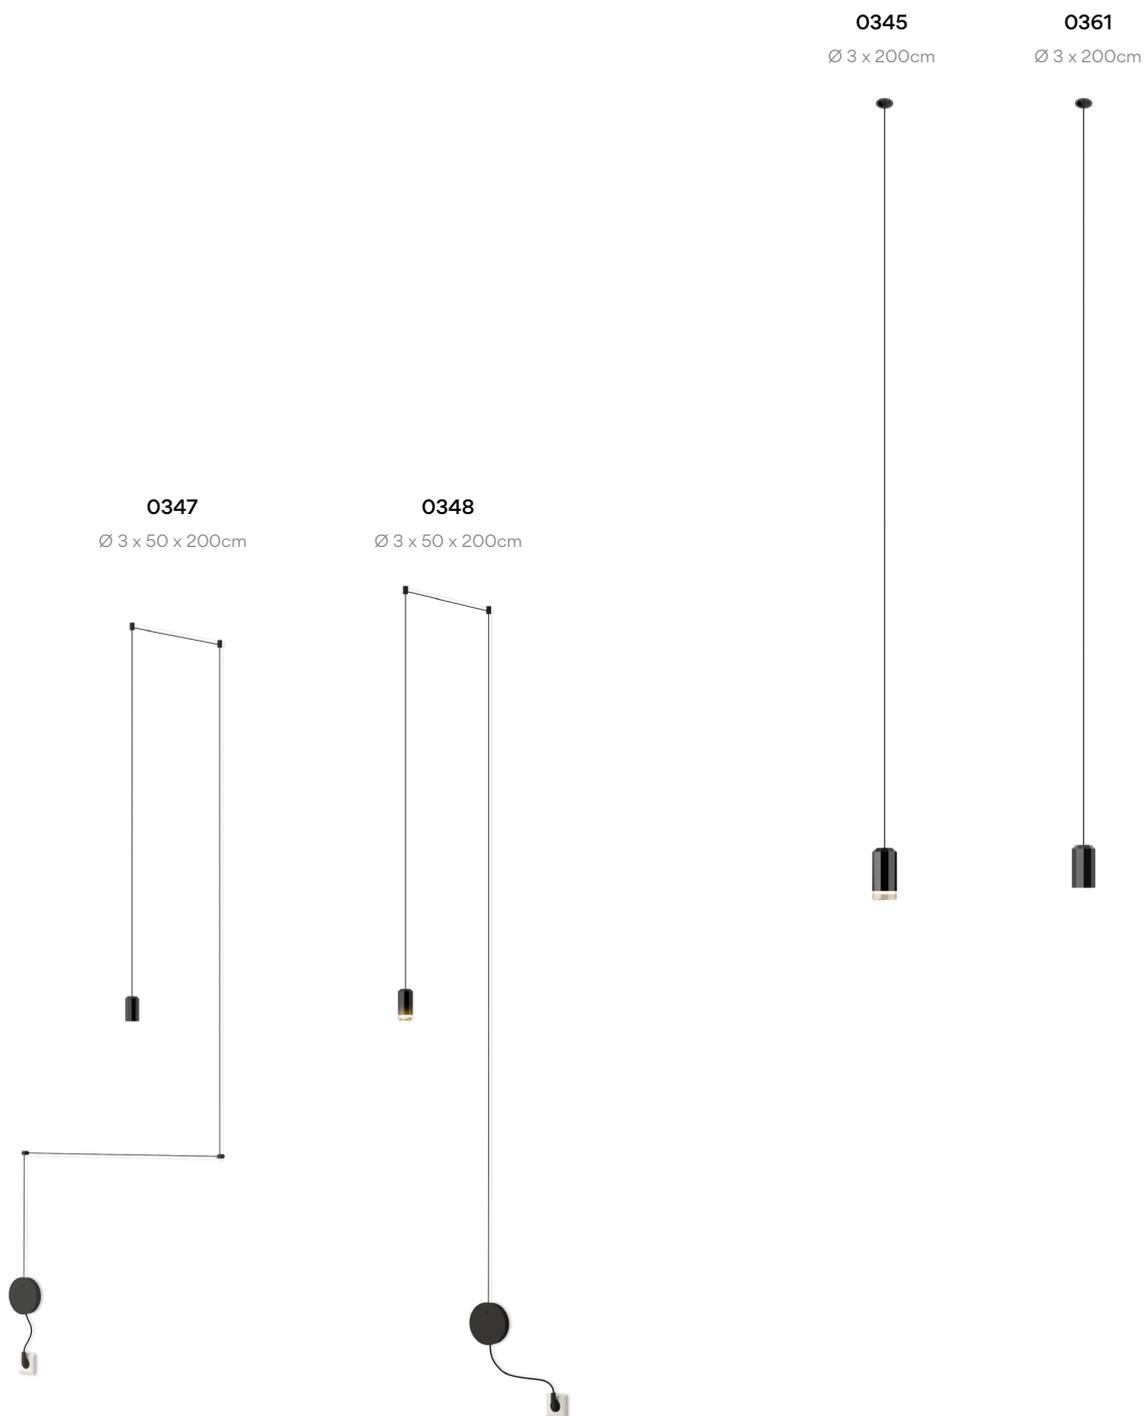


0345

Finishes  
● 04/ \_\_ Black  
(RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 485 lm  
/2 \_ 3000 K - 485 lm  
/3 \_ 3500 K - 500,3 lm  
CRI >90

Control  
0345 \_\_ / \_\_

\_\_ / \_ 1 DALI-2  
\_\_ / \_ B Push; 1-10V  
\_\_ / \_ Z Casambi



Select Electrical connection



Surface

Free Wire

Built-in XS

Remote  
Micro

Remote  
XXS

\_10 Surface  
\_18 Free Wire  
\_23 Built-in XS  
\_31 Remote  
Micro  
\_32 Remote  
XXS

Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes

With pressed-glass diffuser.  
Extra cable length.


LED IP20 CE UK ENE Bi-volt

0347

Finishes  
● 04/ \_\_ Black  
(RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 490 lm  
CRI >80

Control  
0347 \_\_ / 15 Push



Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.  
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1,35 Kg

Notes

Without pressed-glass diffuser.  
Electric cable 2,5 m. With plug.  
Dimmer push button on the wall plate.


LED IP20 CE UK ENE Bi-volt

0348

Finishes  
● 04/ \_\_ Black  
(RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 490 lm  
CRI >80

Control  
0348 04 / 15 Push



Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,9 Kg Net weight 1,71 Kg

Notes

With pressed-glass diffuser.  
Electric cable 2,5 m. With plug.  
Dimmer push button on the wall plate.

LED IP20 CE UK ENE Bi-volt


0361

Finishes  
 ● 04/ \_\_ Black  
 (RAL 9005)


LED Colour Temperature  
 /1 \_ 2700 K - 485 lm  
 D  
 /2 \_ 3000 K - 485 lm  
 /3 \_ 3500 K - 500,3 lm  
 E  
 CRI >90

Control  
 0361 \_\_ / \_\_

\_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi



⚡ Select Electrical connection

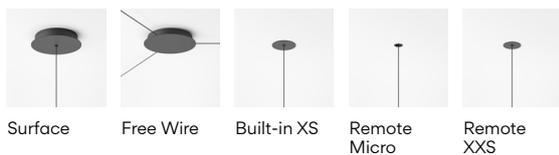

\_10 Surface  
 \_18 Free Wire  
 \_23 Built-in XS  
 \_31 Remote Micro  
 \_32 Remote XXS


Materials  
 Diffuser: PC-Polycarbonate. Body: Aluminum.  
 Canopy: Steel. Ceiling supports: POM.

Light Source and electronics  
 1 x LED 4,5 W 700 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging  
 1 Box 0,25 x 0,42 x 0,42 m  
 Vol 0,0441 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 2,34 Kg

Notes  
 Without pressed-glass diffuser.  
 Additional cable length personalisation 16,00 €/m



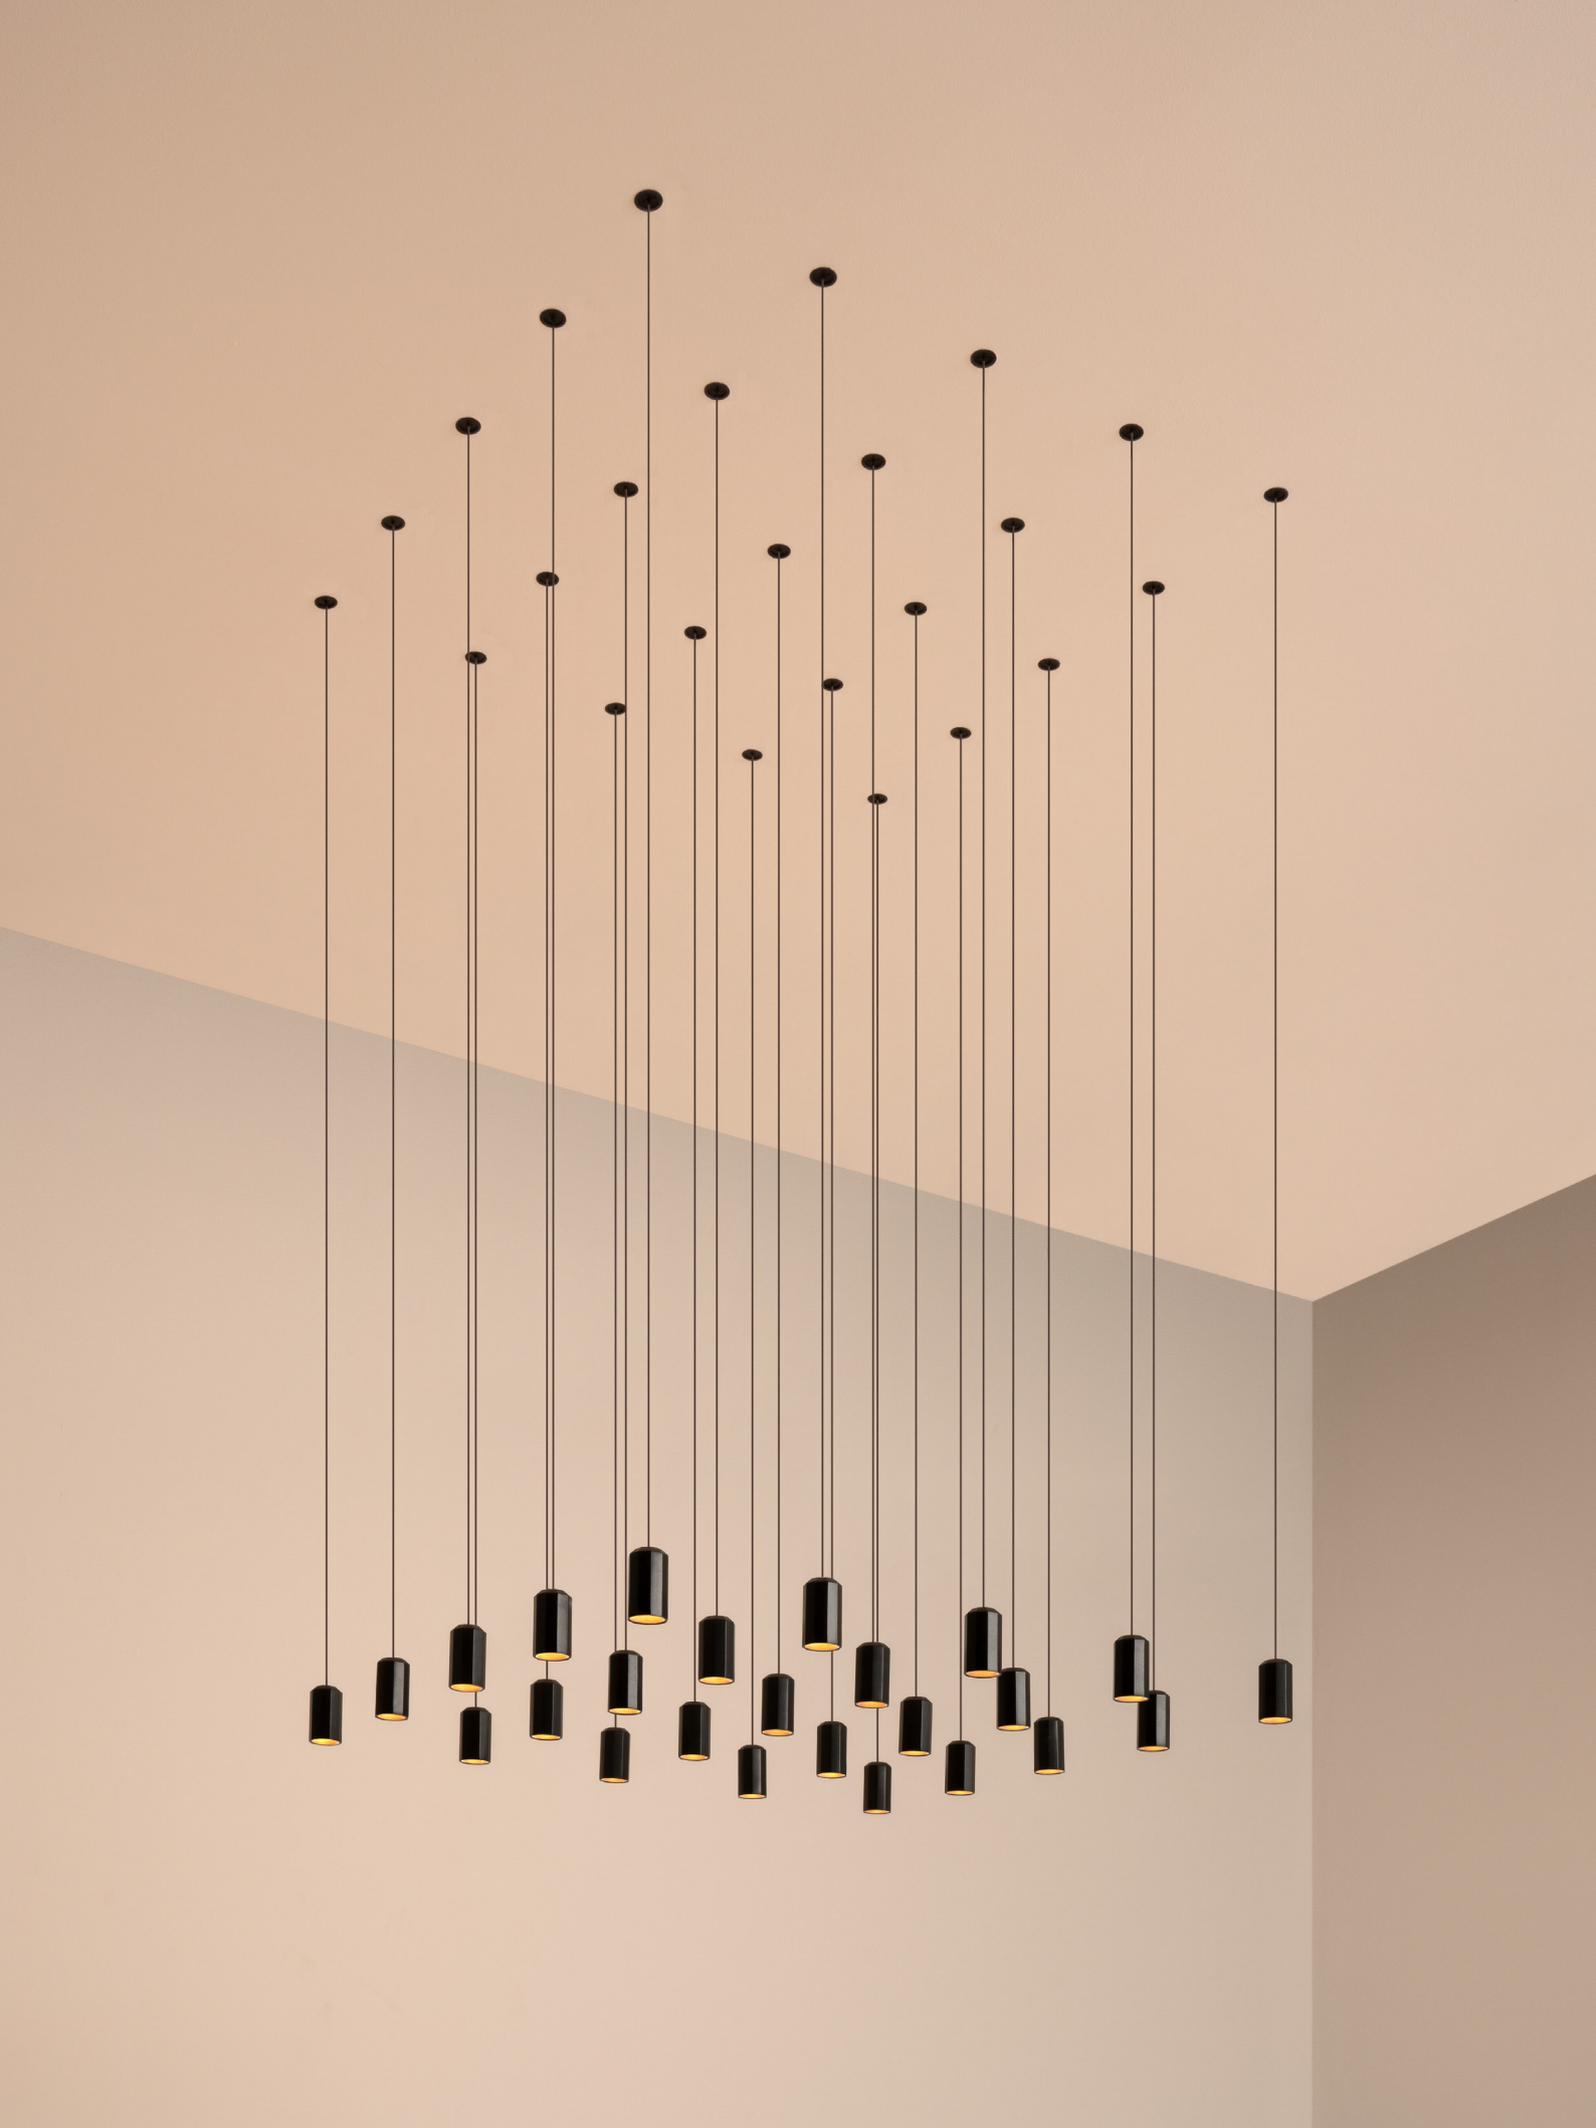

MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 0361



3 x 0345



3 x 0345



4 x 0361




4 x 0345



5 x 0345



5 x 0361




7 x 0345



6 x 0361




8 x 0345

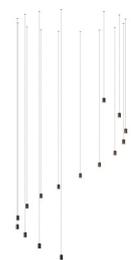


15 x 0361




8 x 0345

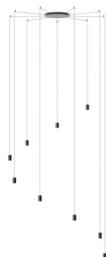

9 x 0361 From: 3.420,00 €

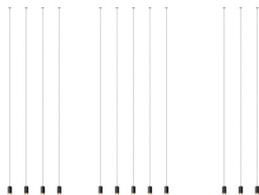

12 x 0345 From: 5.460,00 €



11 x 0361 From: 4.180,00 €




41 x 0361 From: 15.580,00 €



25 x 0345



54 x 0345



45 x 0361

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

● **04/** \_ \_ Black  
(RAL 9005)

LED Colour Temperature

/1 \_ 2700 K  
/2 \_ 3000 K  
/3 \_ 3500 K  
CRI >90

Control

Model \_ \_ / \_ \_

\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ B Push; 1-10V  
\_ \_ / \_ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

**Drop ceiling**

**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.


**\_23**  
Built-in XS




Ø 8 cm  
height 6 cm

match with fixture finish.

**Remote**



**Built-in**



**Regular ceiling**


**\_10**  
Surface



Ø 20 cm


match with fixture finish.

**\_18**  
Free Wire



Ø 20 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



Ø 36 cm



Ø 40 cm

Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.  
Body: Aluminum. Canopy: Steel.  
Ceiling supports: POM.

Notes

Additional cable length  
from 2 m. 16,00 €/m

LED IP20 CE UK ENE Bi-volt

# Wireflow Chandelier

Design by Arik Levy


Wireflow Chandelier is a contemporary reimagining of the traditional fixture. Its ultramodern silhouette provides an unexpected twist, while its graceful lines echo with a sense of timeless elegance. Though substantial in size its airy outline creates a feeling of transparency.

## Pendant

20 LEDs

**0315**

120 x 279 cm

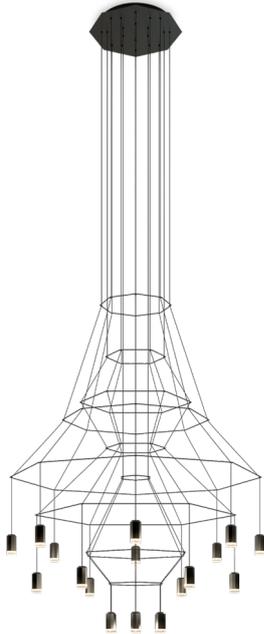

43 LEDs

**0374**

150 x 307 cm



43 LEDs

**0375**

150 x 396 cm



42 LEDs

**0376**


150 x 112 cm



42 LEDs

**0377**

150 x 194 cm

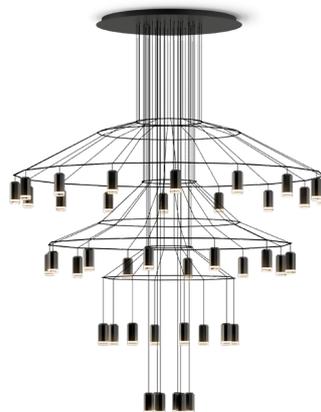



42 LEDs

**0378**

150 x 276 cm



Personalise your own Wireflow Chandelier composition quick and easy at [vibia.com](http://vibia.com)

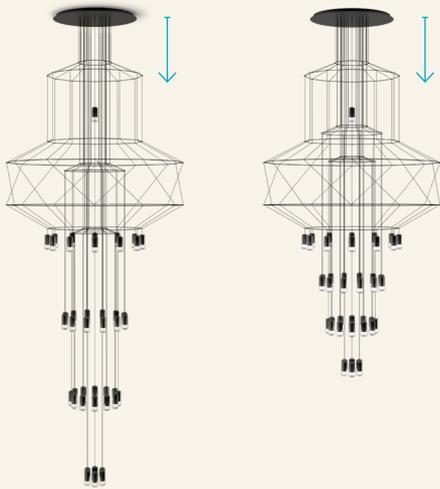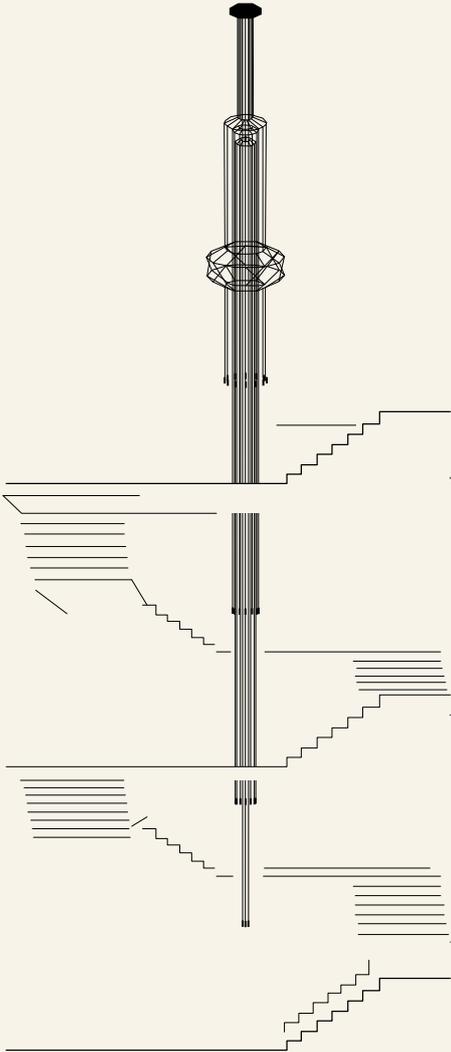


For configurations longer than 9 m, please ask Vibia customer service.



# Wireflow Chandelier

0315

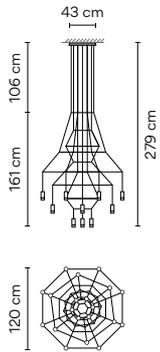

Finishes  
 ● **04/** \_\_ Black  
 (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 9700 lm  
 **D**  
 /2 \_ 3000 K - 9700 lm  
 /3 \_ 3500 K - 10006,1 lm  
 **E**  
 CRI >90

Control  
**0315** \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

Materials  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.


Light Source and electronics  
 20 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,3832 m<sup>3</sup>  
 Gross weight 32 Kg Net weight 18 Kg

Notes  
 Configuration layout at [vibia.com](http://vibia.com)  
 Min. quantity, upcharge and extra  
 lead time apply



0374

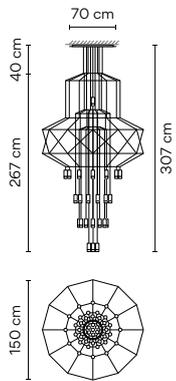

Finishes  
 ● **04/** \_\_ Black  
 (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 20855 lm  
 **D**  
 /2 \_ 3000 K - 20855 lm  
 /3 \_ 3500 K - 21513,1 lm  
 **E**  
 CRI >90

Control  
**0374** \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

Materials  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.


Light Source and electronics  
 43 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,5000 m<sup>3</sup>  
 Gross weight 57 Kg Net weight 47 Kg

Notes  
 Configuration layout at [vibia.com](http://vibia.com)  
 Min. quantity, upcharge and extra  
 lead time apply



0375

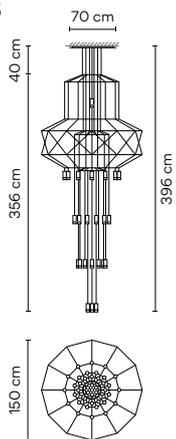

Finishes  
 ● **04/** \_\_ Black  
 (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 20855 lm  
 **D**  
 /2 \_ 3000 K - 20855 lm  
 /3 \_ 3500 K - 21513,1 lm  
 **E**  
 CRI >90

Control  
**0375** \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

Materials  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.


Light Source and electronics  
 43 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,5000 m<sup>3</sup>  
 Gross weight 57 Kg Net weight 47 Kg

Notes  
 Configuration layout at [vibia.com](http://vibia.com)  
 Min. quantity, upcharge and extra  
 lead time apply



0376

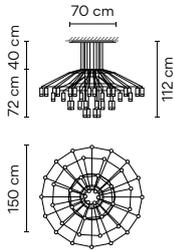

Finishes  
● 04/ \_ \_ Black (RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 20370 lm  
D  
/2 \_ 3000 K - 20370 lm  
/3 \_ 3500 K - 21012,8 lm  
E  
CRI >90

Control

0376 \_ \_ / \_ \_  
\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


2 Boxes  
Total Vol 0,5000 m<sup>3</sup>  
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at [vibia.com](http://vibia.com)  
Min. quantity, upcharge and extra lead time apply



0377

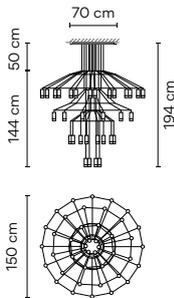

Finishes  
● 04/ \_ \_ Black (RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 20370 lm  
D  
/2 \_ 3000 K - 20370 lm  
/3 \_ 3500 K - 21012,8 lm  
E  
CRI >90

Control

0377 \_ \_ / \_ \_  
\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


2 Boxes  
Total Vol 0,5000 m<sup>3</sup>  
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at [vibia.com](http://vibia.com)  
Min. quantity, upcharge and extra lead time apply



0378

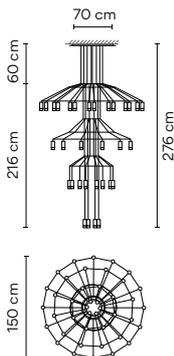

Finishes  
● 04/ \_ \_ Black (RAL 9005)

LED Colour Temperature  
/1 \_ 2700 K - 20370 lm  
D  
/2 \_ 3000 K - 20370 lm  
/3 \_ 3500 K - 21012,8 lm  
E  
CRI >90

Control

0378 \_ \_ / \_ \_  
\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy and horizontal rods: Steel.

Light Source and electronics

42 x LED 4,5 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,5000 m<sup>3</sup>  
Gross weight 56 Kg Net weight 46 Kg

Notes

Configuration layout at [vibia.com](http://vibia.com)  
Min. quantity, upcharge and extra lead time apply




# I.Cono

Design by Lievore, Altherr, Molina

I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

## Table Floor Wall

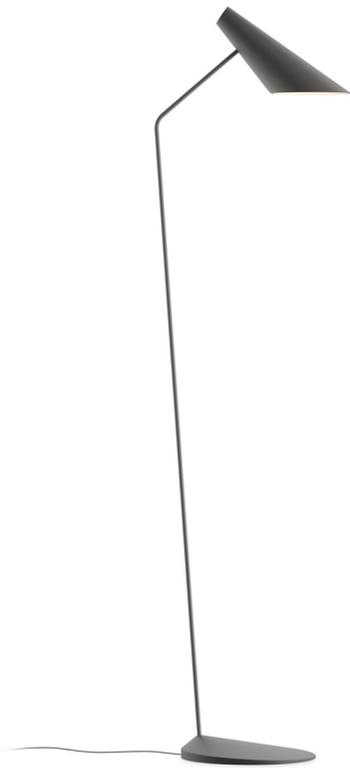

**0712**  
21 x 130 x 35 cm



**0700**  
17 x 56 x 32 cm




**0720**  
15 x 17 x 26 cm



**0721**  
15 x 17 x 26 cm

### 0700



#### Finishes

- **10 White**  
(NCS S 0300-N)
- **21 Black Grey**  
(NCS S 7000-N)
- **25 Beige D1**  
(NCS S 4005-G80Y)
- **37 Terra Red**  
(NCS S 4040-Y70R)
- **42 Blue M1**  
(NCS S 5010-B10G)

#### Materials

Shade: ABS + PC- Polycarbonate.  
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

#### Light Source and electronics

1 x LED 6W 350 mA  
Constant current 350mA  
100~240Vac 50/60Hz

#### LED Colour Temperature

/1\_ 2700 K - 745 lm



CRI >90

#### Control

**0700** \_\_ / \_\_

\_\_ / 15 Push

\_\_ / 1Y ProtoPixel\*

\_\_ / 1Z Casambi

#### Packaging

1 Box 0,81 x 0,31 x 0,33 m  
Vol 0,08 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,9 Kg

#### Notes


Electric cable 2,5 m.

On/off switch on the cable.

\*Available from January 2025.



0712

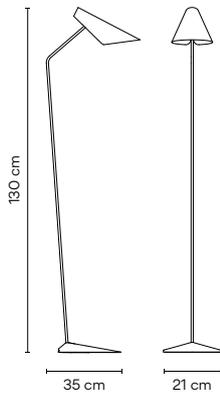

- Finishes**
- 10 White (NCS S 0300-N)
  - 21 Black Grey (NCS S 7000-N)
  - 25 Beige D1 (NCS S 4005-G80Y)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)

**LED Colour Temperature**  
 /1\_ 2700 K - 745 lm  
 E  
 CRI >90

**Control**  
 0712 \_\_ / \_\_  
 \_\_ / 15 Push  
 \_\_ / 1Y ProtoPixel\*  
 \_\_ / 1Z Casambi

**Materials**  
 Shade: ABS + PC- Polycarbonate.  
 Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.


**Light Source and electronics**  
 1 x LED 6W 350 mA  
 Constant current 350mA  
 100~240Vac 50/60Hz

**Packaging**  
 1 Box 1,43 x 0,30 x 0,30 m  
 Vol 0,13 m<sup>3</sup>  
 Gross weight 4 Kg Net weight 3 Kg

**Notes**  
 Electric cable 2,5 m.  
 On/off switch on the cable.  
 \*Available from January 2025.



0720

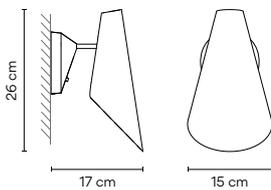

- Finishes**
- 10 White (NCS S 0300-N)
  - 21 Black Grey (NCS S 7000-N)
  - 25 Beige D1 (NCS S 4005-G80Y)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)

**LED Colour Temperature**  
 /1\_ 2700 K - 745 lm  
 E  
 CRI >90

**Control**  
 0720 \_\_ / 10 On/ Off

**Materials**  
 Shade: ABS + PC- Polycarbonate.  
 Diffuser: Aluminum. Base: Aluminum. Tube: Iron.


**Light Source and electronics**  
 1 x LED 6W 350 mA  
 Constant current 350mA  
 220~240Vac 50/60Hz

**Packaging**  
 1 Box 0,20 x 0,21 x 0,13 m  
 Vol 0,00546 m<sup>3</sup>  
 Gross weight 1,1 Kg Net weight 0,8 Kg

**Notes**  
 On/off switch on the base.



0721

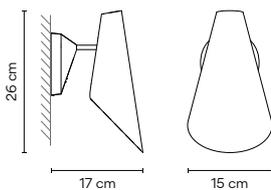

- Finishes**
- 10 White (NCS S 0300-N)
  - 21 Black Grey (NCS S 7000-N)
  - 25 Beige D1 (NCS S 4005-G80Y)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)

**LED Colour Temperature**  
 /1\_ 2700 K - 745 lm  
 E  
 CRI >90

**Control**  
 0721 \_\_ / \_\_  
 \_\_ / 10 On/ Off  
 \_\_ / 1D 30 Push; DALI (Remote)  
 \_\_ / 1Z 30 Casambi (Remote)

**Materials**  
 Shade: ABS + PC- Polycarbonate.  
 Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

**Light Source and electronics**  
 1 x LED 6W 350 mA  
 Constant current 350mA  
 220~240Vac 50/60Hz

**Packaging**  
 1 Box 0,20 x 0,21 x 0,13 m  
 Vol 0,00546 m<sup>3</sup>  
 Gross weight 1,1 Kg Net weight 0,8 Kg

**Notes**  
 Without switch.



# Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.


## Pendant

\* Built-in version

6 LEDs

**0830 \*0832**

123 x 25 cm

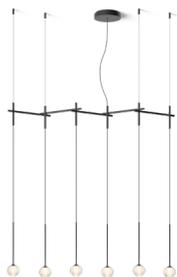

10 LEDs

**0835 \*0837**

214 x 25 cm



14 LEDs

**0840 \*0842**


306 x 25 cm



14 LEDs

**0845 \*0847**


183 x 34 cm

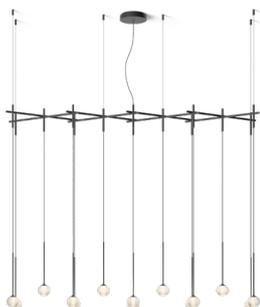

29 LEDs

**0850 \*0852**

399 x 34 cm

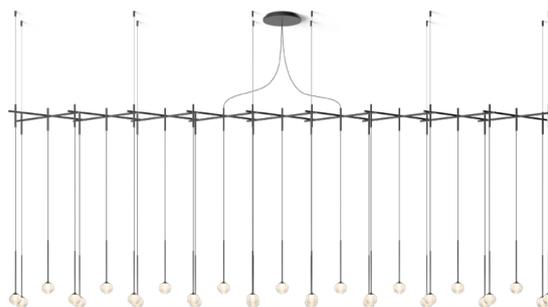

---

10 LEDs

**0825 \*0827**


75 x 85 cm



13 LEDs

**0860 \*0862**

110 x 110 cm

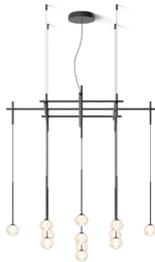

25 LEDs

**0865 \*0867**


160 x 160 cm



15 LEDs

**0870 \*0872**

110 x 60 cm





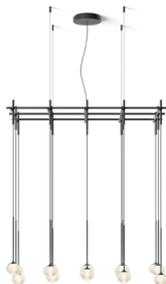


24 LEDs

**0875 \*0877**

185 x 60 cm



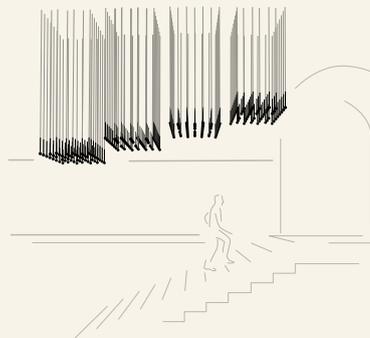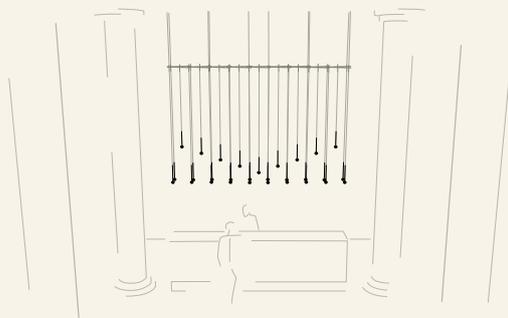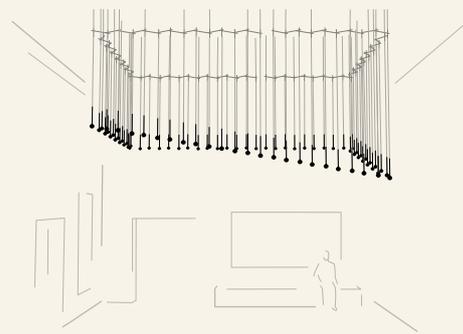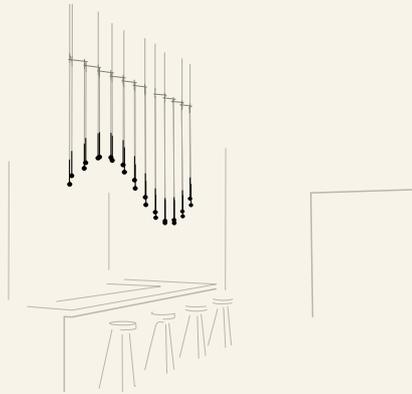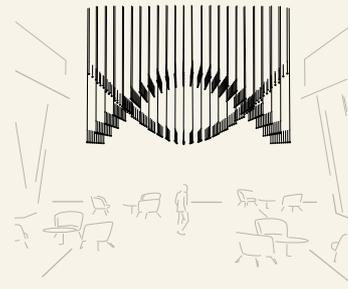

Surface.

Built-in.  
11,5 cm Die-cut diameter,  
12 cm minimum height in ceiling.

Adjustable cable installation.

Rigid stem installation.  
Fixed at 25 cm.




## Adjust height of standard model


To personalize luminaire height, without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own  
Algorithm composition  
quick and easy at  
[vibia.com](http://vibia.com)

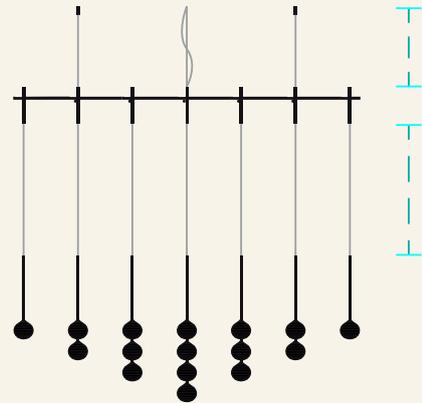

### 0825

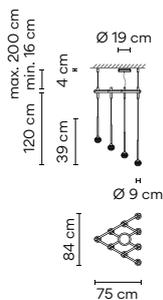

#### Finishes

● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

#### LED Colour Temperature

/1 \_ 2700 K - 3122,8 lm  
/2 \_ 3000 K - 3122,8 lm

F   
CRI >90

#### Control

0825 \_ \_ / \_ \_

\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

#### Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
Glass fastening: Aluminum. Canopy: Steel.  
Pendant structure: Steel. LED support: Aluminum.

#### Light Source and electronics

10 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz


#### Packaging

2 Boxes  
Total Vol 0,324 m<sup>3</sup>  
Gross weight 15,5 Kg Net weight 10,5 Kg

#### Notes

Surface

### 0827

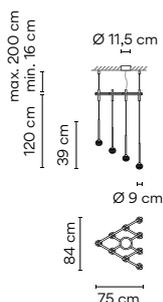

#### Finishes

● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

#### LED Colour Temperature

/1 \_ 2700 K - 3122,8 lm  
/2 \_ 3000 K - 3122,8 lm

F   
CRI >90

#### Control

0827 \_ \_ / \_ \_

\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

#### Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
Glass fastening: Aluminum. Canopy: Steel.  
Pendant structure: Steel. LED support: Aluminum.

#### Light Source and electronics

10 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,324 m<sup>3</sup>  
Gross weight 15,5 Kg Net weight 10,5 Kg

#### Notes

Built-in

Ø 10,5 cm

0830

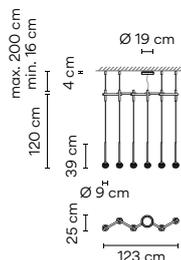

**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 1873,68 lm  
 /2 \_ 3000 K - 1873,7 lm

**Control**  
 0830 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 6 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,1705 m<sup>3</sup>  
 Gross weight 3,5 Kg Net weight 5,8 Kg

**Notes**  
 Surface

LED IP20 CE UK ENE E Bi-volt

0832

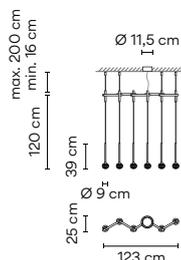

**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 1873,68 lm  
 /2 \_ 3000 K - 1873,7 lm

**Control**  
 0832 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 6 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,1705 m<sup>3</sup>  
 Gross weight 3,5 Kg Net weight 5,8 Kg

**Notes**  
 Built-in

LED IP20 CE UK ENE E Bi-volt Ø 10,5 cm

0835

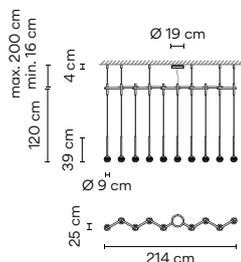

**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 3122,8 lm  
 /2 \_ 3000 K - 3122,8 lm

**Control**  
 0835 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 10 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3220 m<sup>3</sup>  
 Gross weight 15,5 Kg Net weight 10,5 Kg

**Notes**  
 Surface

LED IP20 CE UK ENE E Bi-volt

0837

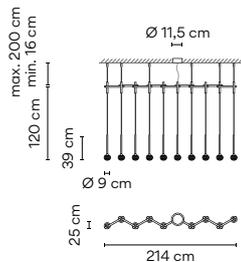

**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 3122,8 lm  
 /2 \_ 3000 K - 3122,8 lm

**Control**  
 0837 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 10 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3220 m<sup>3</sup>  
 Gross weight 15,5 Kg Net weight 10,5 Kg

**Notes**  
 Built-in

LED IP20 CE UK ENE E Bi-volt Ø 10,5 cm

0840

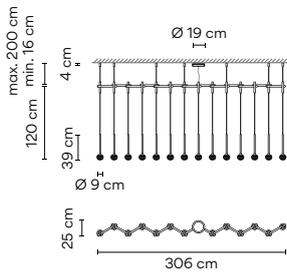

Finishes ● 18/ \_\_ Graphite (ADAPTA RF9913WX)  
 LED Colour Temperature /1 \_ 2700 K - 4371,92 lm /2 \_ 3000 K - 4371,92 lm  
 F > >  
 CRI >90

Control 0840 \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

Packaging


3 Boxes  
 Total Vol 0,5275 m<sup>3</sup>  
 Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Surface



0842

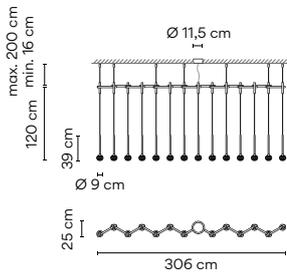

Finishes ● 18/ \_\_ Graphite (ADAPTA RF9913WX)  
 LED Colour Temperature /1 \_ 2700 K - 4371,92 lm /2 \_ 3000 K - 4371,92 lm  
 F > >  
 CRI >90

Control 0842 \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics


14 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

Packaging


3 Boxes  
 Total Vol 0,5275 m<sup>3</sup>  
 Gross weight 17,3 Kg Net weight 11,3 Kg

Notes

Built-in



0845

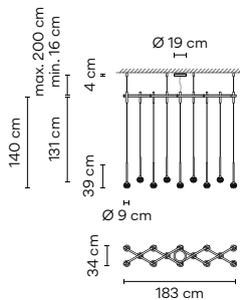

Finishes ● 18/ \_\_ Graphite (ADAPTA RF9913WX)  
 LED Colour Temperature /1 \_ 2700 K - 4371,92 lm /2 \_ 3000 K - 4371,92 lm  
 F > >  
 CRI >90

Control 0845 \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

14 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

Packaging


2 Boxes  
 Total Vol 0,3220 m<sup>3</sup>  
 Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Surface



0847

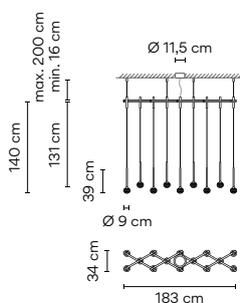

Finishes ● 18/ \_\_ Graphite (ADAPTA RF9913WX)  
 LED Colour Temperature /1 \_ 2700 K - 4371,92 lm /2 \_ 3000 K - 4371,92 lm  
 F > >  
 CRI >90

Control 0847 \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics


14 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

Packaging


2 Boxes  
 Total Vol 0,3220 m<sup>3</sup>  
 Gross weight 18,3 Kg Net weight 13,3 Kg

Notes

Built-in



0850

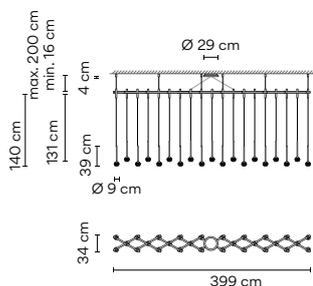

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 9056,12 lm  
 /2 \_ 3000 K - 9056,12 lm  
 F →  
 CRI >90

**Control**  
 0850 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi


**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 29 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,6260 m<sup>3</sup>  
 Gross weight 26 Kg Net weight 20 Kg

**Notes**  
 Surface  
 LED IP20 CE UK ENEC Dimmer Bi-volt

0852

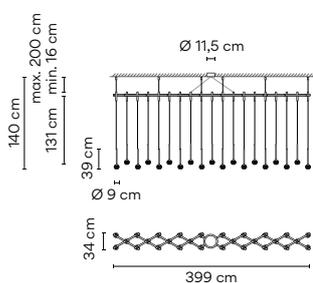

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 9056,12 lm  
 /2 \_ 3000 K - 9056,12 lm  
 F →  
 CRI >90

**Control**  
 0852 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi


**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 29 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,6260 m<sup>3</sup>  
 Gross weight 26 Kg Net weight 20 Kg

**Notes**  
 Built-in  
 LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

0860

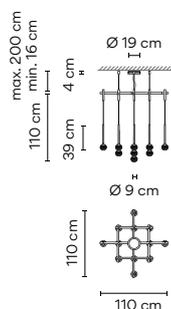

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4059,64 lm  
 /2 \_ 3000 K - 4059,64 lm  
 F →  
 CRI >90

**Control**  
 0860 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi


**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 13 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3290 m<sup>3</sup>  
 Gross weight 17,35 Kg Net weight 11,85 Kg

**Notes**  
 Surface  
 LED IP20 CE UK ENEC Bi-volt

0862

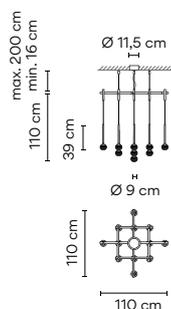

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4059,64 lm  
 /2 \_ 3000 K - 4059,64 lm  
 F →  
 CRI >90

**Control**  
 0862 \_\_ / \_\_  
 \_\_ / \_\_ A Push; 1-10V; DALI-2  
 \_\_ / \_\_ Z Casambi


**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 13 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,3290 m<sup>3</sup>  
 Gross weight 17,35 Kg Net weight 11,85 Kg

**Notes**  
 Built-in  
 LED IP20 CE UK ENEC Bi-volt Ø 10,5 cm

**0865**

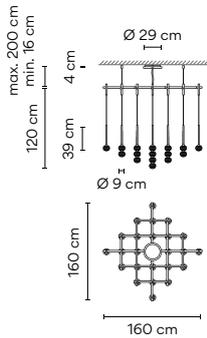

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 7807 lm  
 /2 \_ 3000 K - 7807 lm  
 F →  
 CRI >90

**Control**  
**0865** \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 25 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,7280 m<sup>3</sup>  
 Gross weight 25,25 Kg Net weight 20,25 Kg

**Notes**  
 Surface

LED IP20 CE UK ENE Bi-volt

**0867**

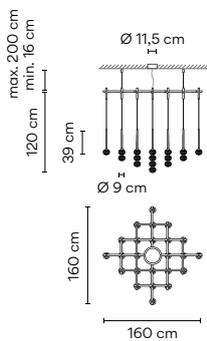

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 7807 lm  
 /2 \_ 3000 K - 7807 lm  
 F →  
 CRI >90

**Control**  
**0867** \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 25 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,7280 m<sup>3</sup>  
 Gross weight 25,25 Kg Net weight 20,25 Kg

**Notes**  
 Built-in

LED IP20 CE UK ENE Bi-volt ∅ 10,5 cm

**0870**

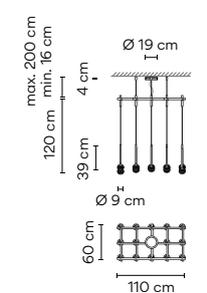

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4684,2 lm  
 /2 \_ 3000 K - 4684,2 lm  
 F →  
 CRI >90

**Control**  
**0870** \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 15 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,2679 m<sup>3</sup>  
 Gross weight 18,25 Kg Net weight 13,75 Kg

**Notes**  
 Surface

LED IP20 CE UK ENE Bi-volt

**0872**

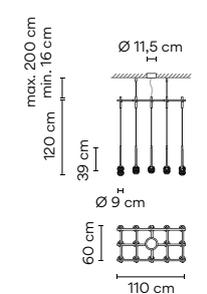

**Finishes**  
 ● 18/ \_\_ Graphite (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4684,2 lm  
 /2 \_ 3000 K - 4684,2 lm  
 F →  
 CRI >90

**Control**  
**0872** \_\_ / \_\_  
 \_\_ / \_ A Push; 1-10V; DALI-2  
 \_\_ / \_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate. Glass fastening: Aluminum. Canopy: Steel. Pendant structure: Steel. LED support: Aluminum.


**Light Source and electronics**  
 15 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,2679 m<sup>3</sup>  
 Gross weight 18,25 Kg Net weight 13,75 Kg

**Notes**  
 Built-in

LED IP20 CE UK ENE Bi-volt ∅ 10,5 cm

0875

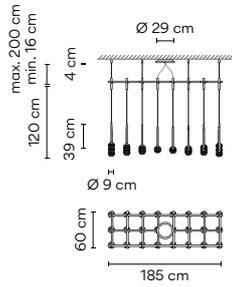

**Finishes**  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 7494,72 lm  
 /2 \_ 3000 K - 7494,72 lm  
 F →  
 CRI >90

**Control**  
**0875** \_ \_ / \_ \_  
 \_ \_ / \_ A Push; 1-10V; DALI-2  
 \_ \_ / \_ Z Casambi


**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 24 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,4500 m<sup>3</sup>  
 Gross weight 30,1 Kg Net weight 22,1 Kg

**Notes**  
 Surface  
 LED IP20 CE UK ENE Bi-volt

0877

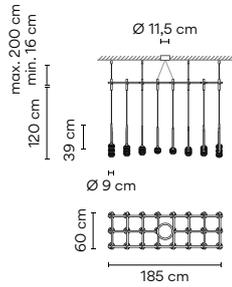

**Finishes**  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF9913WX)

**LED Colour Temperature**  
 /1 \_ 2700 K - 7494,72 lm  
 /2 \_ 3000 K - 7494,72 lm  
 F →  
 CRI >90

**Control**  
**0877** \_ \_ / \_ \_  
 \_ \_ / \_ A Push; 1-10V; DALI-2  
 \_ \_ / \_ Z Casambi

**Materials**  
 Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
 Glass fastening: Aluminum. Canopy: Steel.  
 Pendant structure: Steel. LED support: Aluminum.

**Light Source and electronics**  
 24 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,4500 m<sup>3</sup>  
 Gross weight 30,1 Kg Net weight 22,1 Kg

**Notes**  
 Built-in  
 Bi-volt IP20 CE UK ENE Bi-volt Ø 10,5 cm



# Algorithm Free

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Each unique grouping of globes defines areas of interior space, underlining their multiple uses while becoming a single aesthetic element.

1160	10	/1A	18
Model	Finish	LED Colour Temperature	Control
Electrical connection Only for pendant			

## INDIVIDUAL MODEL

### Pendant

**0820**  
Ø 9 cm




#### 0820

**Finishes**  
● **18/** \_ \_ Graphite  
(ADAPTA RF9913WX)

**LED Colour Temperature**  
/1 \_ 2700 K - 312,28 lm  
E   
/3 \_ 3500 K - 312,3 lm  
F   
CRI >90

**Control**  
**0820** \_ \_ / \_ \_

\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi



#### Select Electrical connection



\_10 Surface  
\_18 Free Wire  
\_23 Built-in XS  
\_31 Remote Micro  
\_32 Remote XXS

#### Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
Glass fastening: Aluminum. Canopy: Steel.  
Pendant structure: Steel. LED support: Aluminum.

#### Light Source and electronics

1 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,18 x 0,55 x 0,55 m  
Vol 0,0131 m<sup>3</sup>  
Gross weight 2,17 Kg Net weight 1,57 Kg

#### Notes

Surface.  
Extra cable length.





MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust




2 x 0820



3 x 0820



3 x 0820



3 x 0820




4 x 0820



4 x 0820



5 x 0820



5 x 0820



5 x 0820



7 x 0820



6 x 0820



7 x 0820



15 x 0820



9 x 0820




10 x 0820



20 x 0820



41 x 0820



30 x 0820



54 x 0820

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

LED Colour Temperature

/1\_ 2700 K  
/3\_ 3500 K  
CRI >90

Control

0820 \_ \_ / \_ \_  
\_ \_ / \_ A Push; 1-10V; DALI-2  
\_ \_ / \_ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0820

Drop ceiling

\_31  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

\_32  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.


\_23  
Built-in XS




Ø 8 cm  
height 6 cm

match with fixture finish.

Remote



Built-in



Regular ceiling

\_10  
Surface



Ø 19 cm

match with fixture finish.



1 - 3 wires

Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



4 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.  
Glass fastening: Aluminum. Canopy: Steel.  
Pendant structure: Steel. LED support: Aluminum.

Notes

Additional cable length  
from 2 m. 16,00 €/m

LED IP20 CE UK ENE Bi-volt

# Slim

Design by Jordi Vilardell

Streamlined and refined,  
Slim serves as a sleek punctuation mark.

---

## Pendant





### INDIVIDUAL MODEL

0920

Ø 2,6 cm



### MULTIPLE MODELS

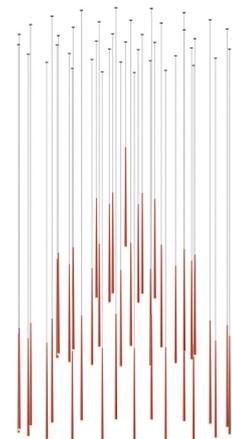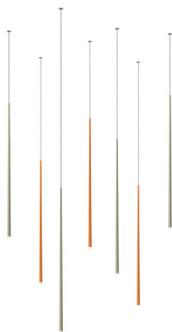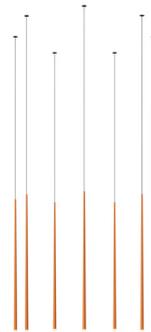

INDIVIDUAL MODEL

0920

Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500-N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- 68/ \_\_ Ocre (NCS S 3050-Y30R)

Finish customization


(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature


- /1 \_ 2700 K - 181,22 lm
- [F] >90
- /2 \_ 3000 K - 163,2 lm
- [G] >80
- /3 \_ 3500 K - 207,6 lm
- [F] >90

Control

- 0920 \_\_ / \_\_
- \_\_ / \_ 0 On/ Off
  - \_\_ / \_ 1 DALI-2
  - \_\_ / \_ B Push; 1-10V
  - \_\_ / \_ Z Casambi

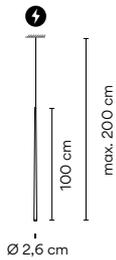

Select Electrical connection

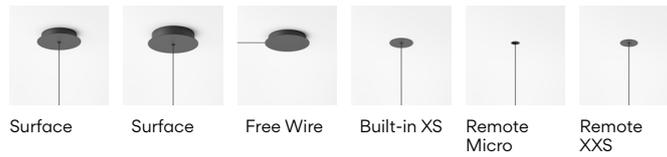

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Glass.  
Body: FG- Fiberglass.  
Canopy: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m  
Vol 0,0155 m<sup>3</sup>  
Gross weight 2,14 Kg Net weight 1,2 Kg


Notes

Surface.  
Extra cable length.



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust

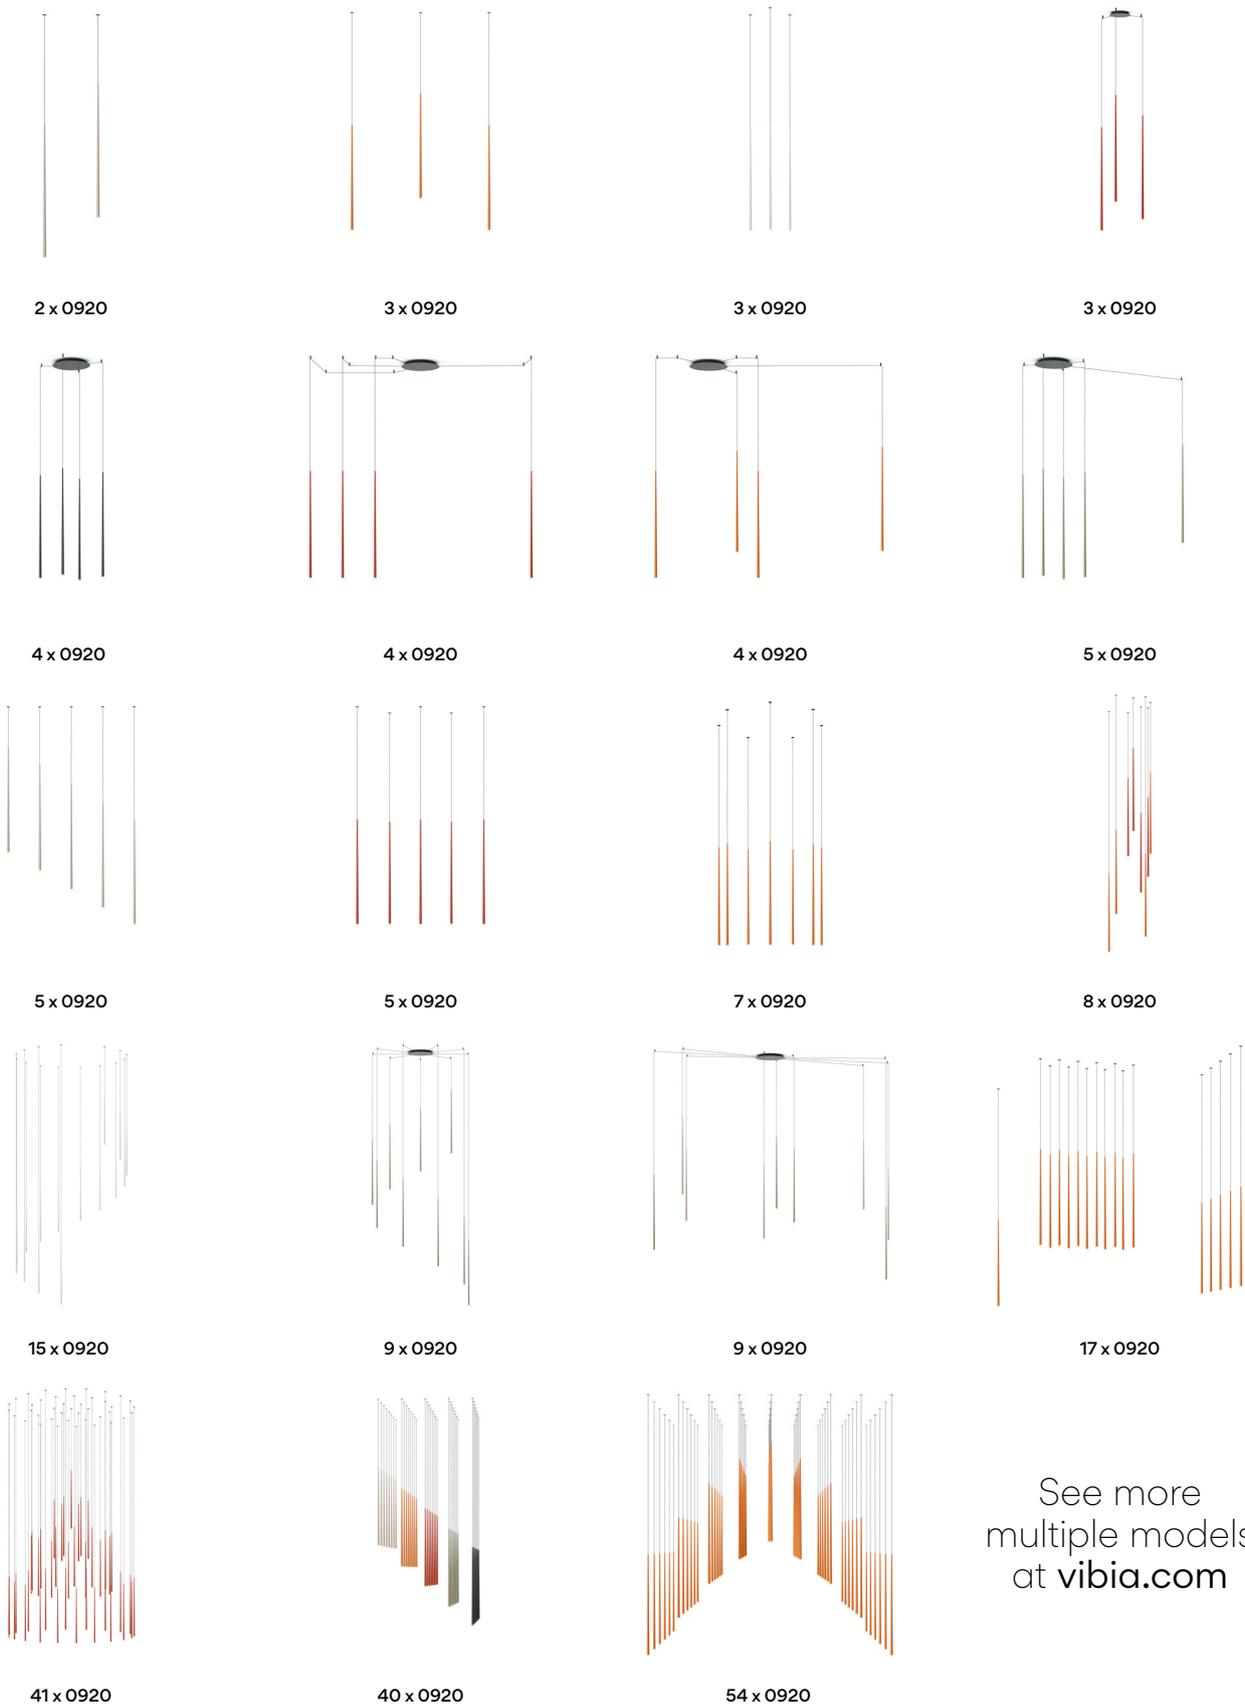

See more  
multiple models  
at [vibia.com](http://vibia.com)

**Finishes**

- **10/** \_\_ White  
(NCS S 0300-N)
- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **47/** \_\_ Green L1  
(NCS S 4005-G80Y)
- **68/** \_\_ Ocre  
(NCS S 3050-Y30R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**LED Colour Temperature**

- /1** 2700 K
- /2** 3000 K
- /3** 3500 K
- CRI >90

**Control**

**Model** \_\_ / \_\_

---

\_\_ / **0** On/ Off  
 \_\_ / **1** DALI-2  
 \_\_ / **B** Push; 1-10V  
 \_\_ / **Z** Casambi

---

**Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0920 \_\_ / \_\_ 0

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 17,3 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 - 3 wires</p> <p>Ø 20 cm</p>	 <p>4 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

For Ref. 0920 \_\_ / \_\_ 1 / \_\_ B / \_\_ Z

**Drop ceiling**


<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**


<p><b>_10</b> Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	--	---	---

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

**Remote**



**Built-in**



**Materials**


Diffuser: Glass. Body: FG- Fiberglass .  
Canopy: Steel.

**Notes**

Additional cable length  
from 2 m. 16,00 €/m




Pendant

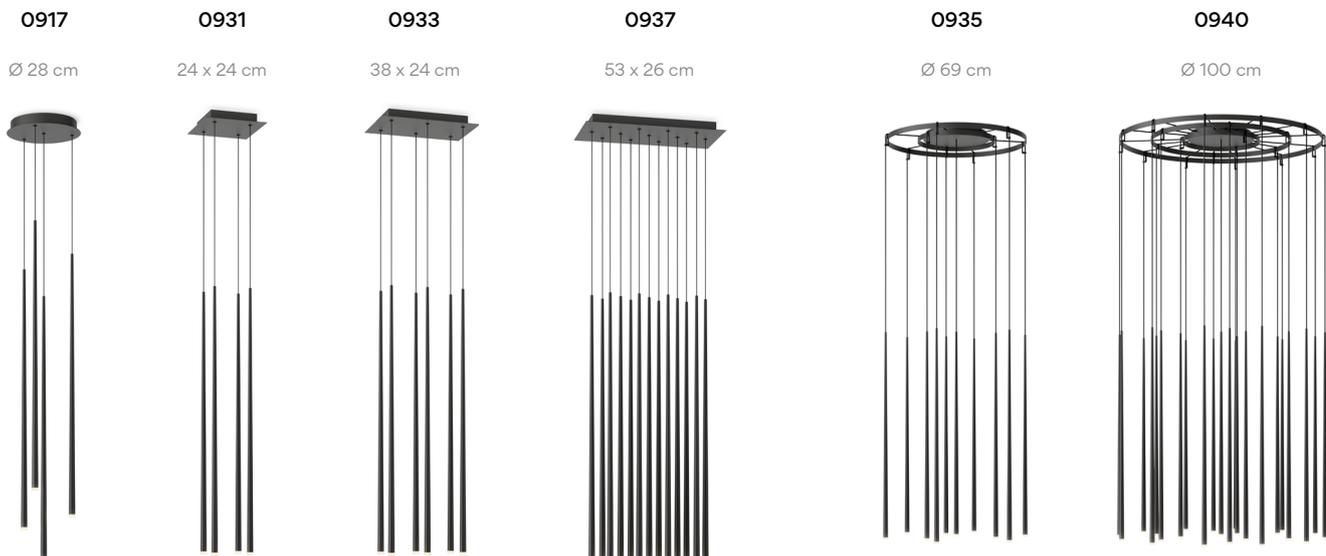

MULTIPLE MODELS

0917

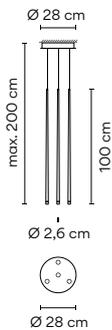

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_\_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**Materials**  
 Diffuser: Glass.  
 Body: FG- Fiberglass.  
 Canopy: Steel.

**Light Source and electronics**  
 4 x LED 2,1 W 700mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

- LED Colour Temperature**
- /1\_ 2700 K - 724,88 lm  
 F
  - /2\_ 3000 K - 652,8 lm  
 G
  - /3\_ 3500 K - 830,6 lm  
 F
- CRI >90  
 CRI >80  
 CRI >90


- Control**  
**0917** \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Packaging**  
 1 Box 0,22 x 0,48 x 1,20 m  
 Vol 0,1278 m<sup>3</sup>  
 Gross weight 8 Kg Net weight 5,2 Kg

**Notes**  
 Surface.  
 Extra cable length.  
**UNTIL STOCK RUNS OUT**



0931

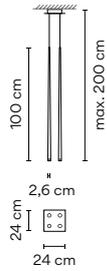

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_\_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 724,88 lm  
[F]
  - CRI >90
  - /2\_ 3000 K - 652,8 lm  
[G]
  - CRI >80
  - /3\_ 3500 K - 830,6 lm  
[F]
  - CRI >90

- Control**
- 0931 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: Glass.  
 Body: FG- Fiberglass.  
 Canopy: Steel.

**Light Source and electronics**

4 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

**Packaging**


1 Box 0,22 x 0,48 x 1,20 m  
 Vol 0,1267 m<sup>3</sup>  
 Gross weight 8 Kg Net weight 5,2 Kg

**Notes**

Surface.  
 Extra cable length.  
**UNTIL STOCK RUNS OUT**



0933

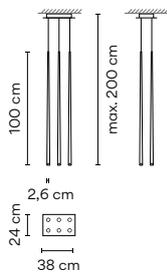

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_\_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1087,32 lm  
[F]
  - CRI >90
  - /2\_ 3000 K - 979,2 lm  
[G]
  - CRI >90
  - /3\_ 3500 K - 1245,9 lm  
[F]
  - CRI >90

- Control**
- 0933 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: Glass.  
 Body: FG- Fiberglass.  
 Canopy: Steel.

**Light Source and electronics**

6 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**


1 Box 0,22 x 0,48 x 1,20 m  
 Vol 0,1267 m<sup>3</sup>  
 Gross weight 12,5 Kg Net weight 9,1 Kg

**Notes**

Surface.  
 Extra cable length.  
**UNTIL STOCK RUNS OUT**



## 0935



Finishes	
● 10/ _ _ White (NCS S 0300-N)	
● 11/ _ _ Black (NCS S 8500-N)	
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	
● 37/ _ _ Terra Red (NCS S 4040-Y70R)	
● 47/ _ _ Green L1 (NCS S 4005-G80Y)	
● 68/ _ _ Ocre (NCS S 3050-Y30R)	

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature	
/1 _ 2700 K - 954,5 lm	CRI >90
/2 _ 3000 K - 1140 lm	CRI >80
/3 _ 3500 K - 1093,7 lm	CRI >90

F

Control	
0935 _ _ / _ _	
_ _ / _ 1 DALI-2	
_ _ / _ B Push; 1-10V	
_ _ / _ Z Casambi	

Materials	
Diffuser: Glass.	
Body: FG- Fiberglass.	
Canopy: Steel.	


Light Source and electronics  
10 x LED 1W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Packaging	
1 Box 1,14 x 1,14 x 0,34 m	
Vol 0,4410 m <sup>3</sup>	
Gross weight 19,2 Kg	Net weight 14,2 Kg

Notes	
Surface.	
Extra cable length.	
<b>UNTIL STOCK RUNS OUT</b>	



## 0937

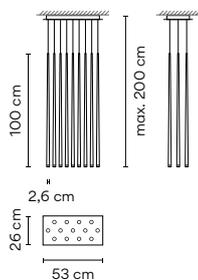

Finishes	
● 10/ _ _ White (NCS S 0300-N)	
● 11/ _ _ Black (NCS S 8500-N)	
● 24/ _ _ Beige M1 (NCS S 2005-Y50R)	
● 37/ _ _ Terra Red (NCS S 4040-Y70R)	
● 47/ _ _ Green L1 (NCS S 4005-G80Y)	
● 68/ _ _ Ocre (NCS S 3050-Y30R)	

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature	
/1 _ 2700 K - 2355,86 lm	CRI >90
/2 _ 3000 K - 2121,6 lm	CRI >80
/3 _ 3500 K - 2699,4 lm	CRI >90

F

Control	
0937 _ _ / _ _	
_ _ / _ 1 DALI-2	
_ _ / _ B Push; 1-10V	
_ _ / _ Z Casambi	

Materials	
Diffuser: Glass.	
Body: FG- Fiberglass.	
Canopy: Steel.	


Light Source and electronics  
13 x LED 2,1W 700mA  
Constant Current 700 mA  
110-240V 50/60Hz

Packaging	
1 Box 0,22 x 0,48 x 1,20 m	
Vol 0,1267 m <sup>3</sup>	
Gross weight 12,5 Kg	Net weight 18,46 Kg

Notes	
Surface.	
Extra cable length.	
<b>UNTIL STOCK RUNS OUT</b>	



0940

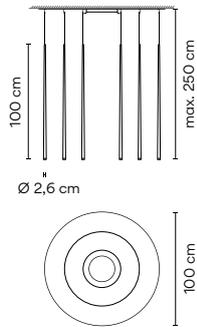

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_\_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
(Available options: Vibia colour palette.)
- Minimum quantity**  
10 units. Price + 10%

- LED Colour Temperature**
- /1 \_ 2700 K - 2099,9 lm CRI >90
  - /2 \_ 3000 K - 2508 lm CRI >80
  - /3 \_ 3500 K - 2406,1 lm CRI >90
- F

- Control**
- 0940 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- 
- \_\_ / \_ Z Casambi

**Materials**

Diffuser: Glass.  
Body: FG- Fiberglass.  
Canopy: Steel.

**Light Source and electronics**


22 x LED 1 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

1 Box 1,14 x 1,14 x 0,34 m  
Vol 0,4420 m<sup>3</sup>  
Gross weight 29,9 Kg Net weight 21,9 Kg

**Notes**

Surface.  
Extra cable length.  
**UNTIL STOCK RUNS OUT**

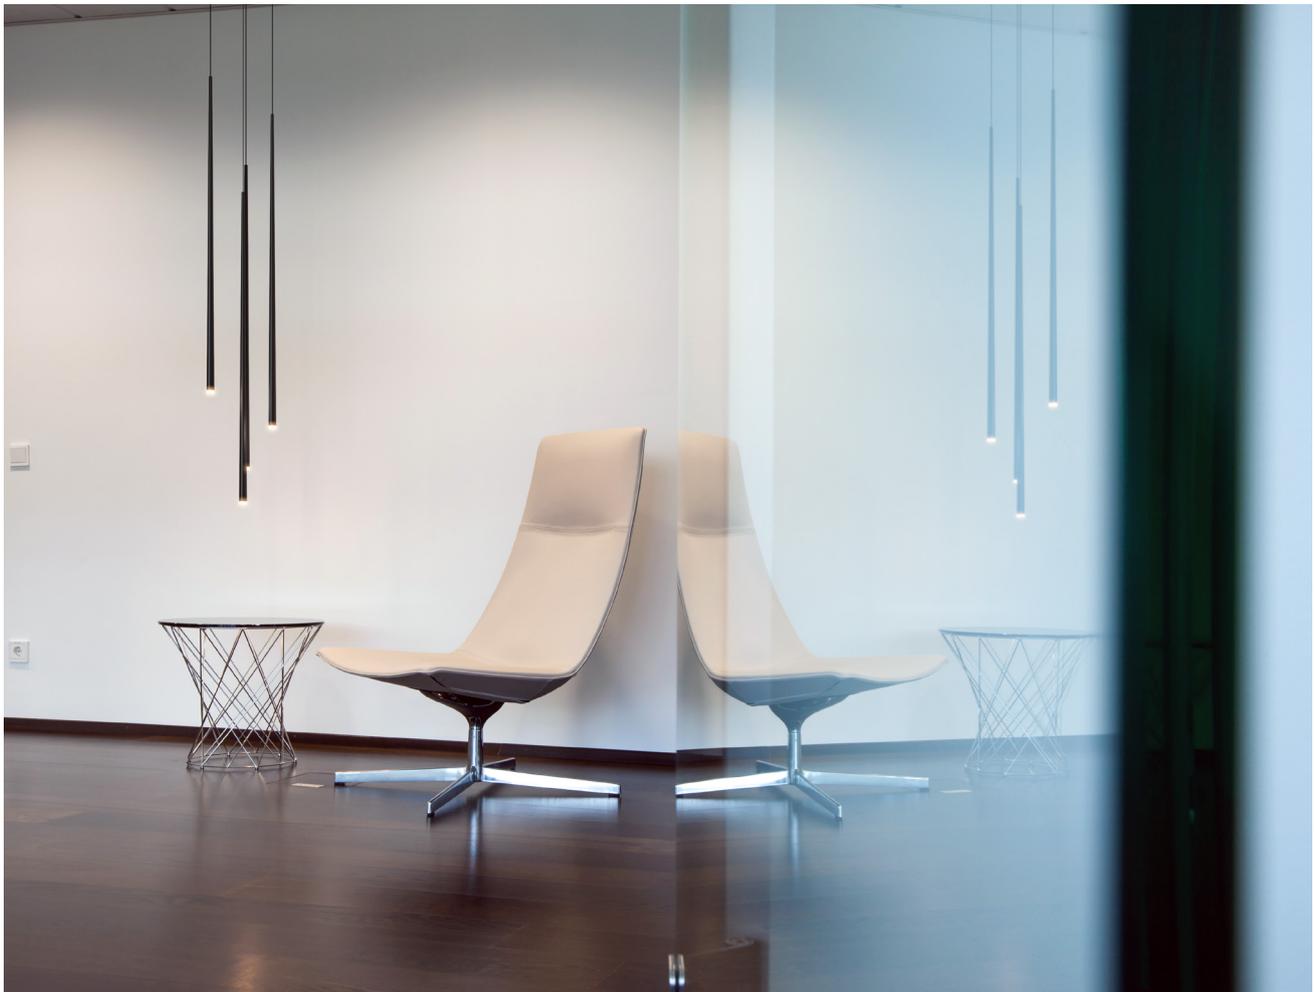


# Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

## Ceiling Wall

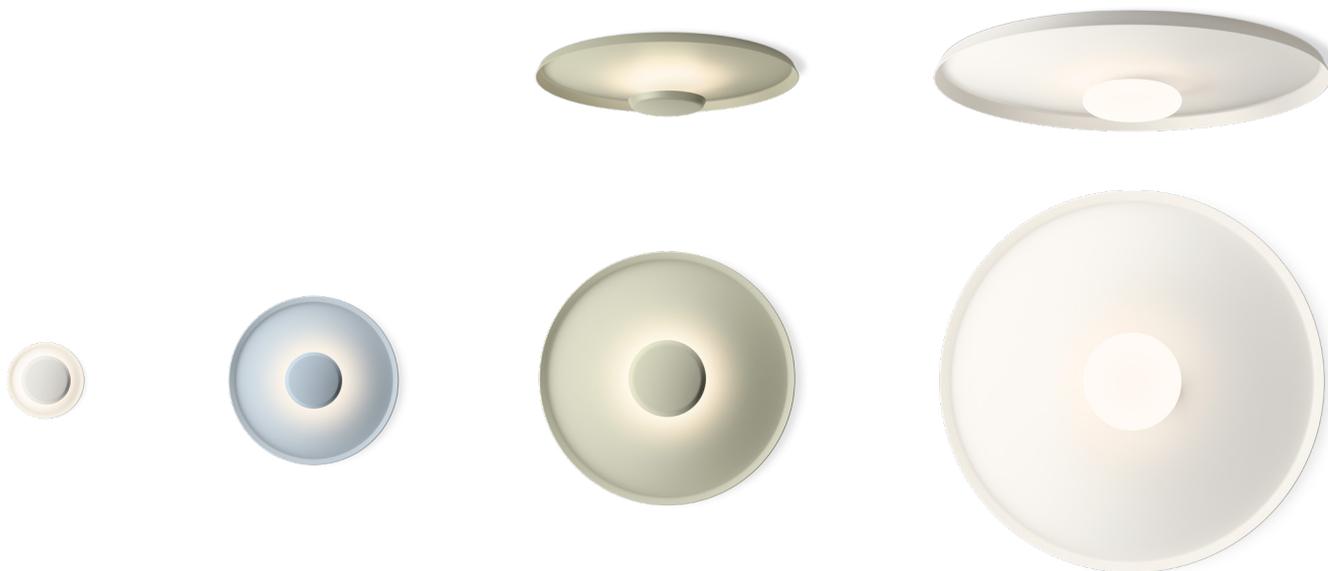

1154

Ø 17 cm

1155

Ø 40 cm


1160

Ø 60 cm

1170

Ø 90 cm

### 1154



#### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
- 40/ \_ \_ Blue L1 (NCS S 3010-B)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

#### LED Colour Temperature

- /1 \_ 2700 K - 550 lm E
- /3 \_ 3500 K - 540,2 lm F
- CRI >90

#### Control

1154 \_ \_ / \_ 0 On/ Off

#### Materials

Body: Aluminum.

#### Light Source and electronics


1 x LED PLATE 5,5 W 150 mA  
Constant Current 150 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,2 x 0,2 x 0,1 m  
Vol 0,004 m<sup>3</sup>  
Gross weight 0,8 Kg Net weight 0,5 Kg

LED IP20 CE ENEC ENEC Bi-volt

### 1155



#### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
- 40/ \_ \_ Blue L1 (NCS S 3010-B)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

#### LED Colour Temperature

- /1 \_ 2700 K - 2050 lm F
- /3 \_ 3500 K - 2013,4 lm G
- CRI >90

#### Control

1155 \_ \_ / \_ \_  
\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ B Push; 1-10V  
\_ \_ / \_ Z Casambi

#### Materials

Body: Aluminum.


#### Light Source and electronics

1 x LED PLATE 18,3 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz


#### Packaging

1 Box 0,45 x 0,45 x 0,15 m  
Vol 0,03 m<sup>3</sup>  
Gross weight 1,8 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ENEC

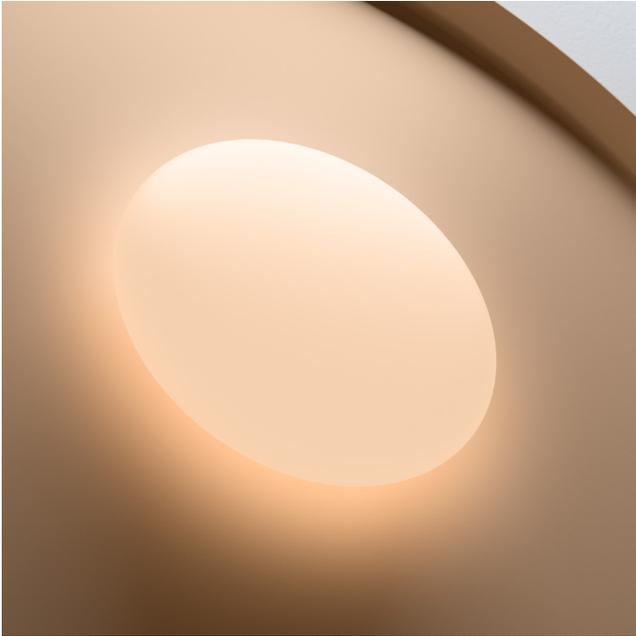

1160

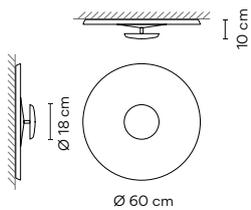

- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
  - 40/ \_ \_ Blue L1 (NCS S 3010-B)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

- LED Colour Temperature**
- /1\_ 2700 K - 2880 lm **E**
  - /3\_ 3500 K - 2828,6 lm **F**
- CRI >90

- Control**
- 1160 \_ \_ / \_ \_
- \_ \_ / \_ \_ A Push; 1-10V; DALI-2
  - \_ \_ / \_ \_ Z Casambi


**Materials**  
 Body: Aluminum.

**Light Source and electronics**  
 1 x LED PLATE 26,4 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,65 x 0,65 x 0,15 m  
 Vol 0,063 m<sup>3</sup>  
 Gross weight 3,13 Kg Net weight 2,5 Kg



1170

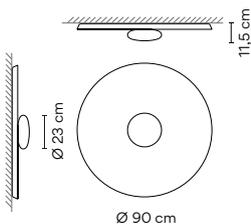

- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
  - 40/ \_ \_ Blue L1 (NCS S 3010-B)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

- LED Colour Temperature**
- /1\_ 2700 K - 4056,81 lm **F**
  - /3\_ 3500 K - 4243,6 lm **G**
- CRI >90

- Control**
- 1170 \_ \_ / \_ \_
- \_ \_ / \_ \_ A Push; 1-10V; DALI-2
  - \_ \_ / \_ \_ Z Casambi

**Materials**  
 Body: Aluminum.

**Light Source and electronics**  
 3 x LED 13,4 W 700 mA  
 Constant Current 700 mA  
 220-240V 50/60Hz

**Packaging**  
 1 Box 1 x 1 x 0,2 m  
 Vol 0,02 m<sup>3</sup>  
 Gross weight 7,7 Kg Net weight 5,3 Kg



# Jazz

Design by Diego Fortunato

Undulating and fluid, Jazz's smooth silhouette is strikingly organic. The gently curved design imparts a playful presence, like an oversized chess piece standing guard.


Floor



1329

Ø 25 x 190 cm

1329



#### Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 45 Blue D1 (NCS S 7010-B10G)

#### Materials

Body: PU- Polyurethane.  
Diffuser: PC- Polycarbonate.

#### Light Source and electronics

1 x LED 37,2W 1050 mA  
Constant Current 1050 mA  
100~240Vac 50/60Hz

#### LED Colour Temperature

/1\_ 2700 K - 3736 lm



CRI >90

#### Control

1329 \_\_ / \_\_

\_\_ / 15 Push

\_\_ / 1Z Casambi

\_\_ / 1Y ProtoPixel\*

#### Packaging

2 Boxes  
Total Vol 0,1880 m<sup>3</sup>  
Gross weight 19,8 Kg Net weight 15 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Dimmer on the cable. Electric cable 2,5 m.





# Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it, Flamingo projects a feeling of weightlessness hovering overhead. The deconstructed design separates the LED light source from its translucent shades, producing gradations of diffuse illumination.

## Pendant

1510

Ø 70 cm



1527

Ø 90 cm



1530

Ø 90 cm



1540

Ø 70 cm



1550

Ø 90 cm



1560

Ø 90 cm




1570

Ø 90 cm



1510



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1\_ 2700 K - 1108,02 lm  
 /3\_ 3500 K - 1278,8 lm

F

CRI >90

**Control**

1510 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

2 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,1320 m<sup>3</sup>  
 Gross weight 8,7 Kg Net weight 7,8 Kg

**Notes**

Extra cable length.



1527



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1\_ 2700 K - 1108,02 lm  
 /3\_ 3500 K - 1278,8 lm

F

CRI >90

**Control**

1527 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

2 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**


1 Box 0,12 x 0,80 x 0,79 m  
 Vol 0,0634 m<sup>3</sup>  
 Gross weight 4,1 Kg Net weight 3,69 Kg

**Notes**

Extra cable length.



1530



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1\_ 2700 K - 1662,03 lm  
 /3\_ 3500 K - 1918,2 lm

F

CRI >90

**Control**

1530 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

3 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz

**Packaging**


3 Boxes  
 Total Vol 0,1520 m<sup>3</sup>  
 Gross weight 10 Kg Net weight 7 Kg

**Notes**

Extra cable length.



1540



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1 \_ 2700 K - 554,01 lm  
 /3 \_ 3500 K - 639,4 lm

**F** →

CRI >90

**Control**

1540 \_\_ / \_\_

---

\_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

1 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,0620 m<sup>3</sup>  
 Gross weight 6 Kg Net weight 4 Kg

**Notes**

Extra cable length.

LED ⓘ IP20 CE UK ENE ⓘ Bi-volt

1550



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1 \_ 2700 K - 1662,03 lm  
 /3 \_ 3500 K - 1918,2 lm

**F** →

CRI >90

**Control**

1550 \_\_ / \_\_

---

\_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

3 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz

**Packaging**


3 Boxes  
 Total Vol 0,1520 m<sup>3</sup>  
 Gross weight 11,3 Kg Net weight 8,8 Kg

**Notes**

Extra cable length.

LED ⓘ IP20 CE UK ENE ⓘ

1560

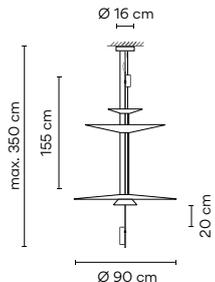

- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1 \_ 2700 K - 1662,03 lm  
 /3 \_ 3500 K - 1918,2 lm

**F** →

CRI >90

**Control**

1560 \_\_ / \_\_

---

\_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA.  
 Body: Aluminum.  
 Canopy and rods: Steel.

**Light Source and electronics**

3 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz

**Packaging**


3 Boxes  
 Total Vol 0,1860 m<sup>3</sup>  
 Gross weight 12,7 Kg Net weight 10,2 Kg

**Notes**

Extra cable length.

LED ⓘ IP20 CE UK ENE ⓘ

1570

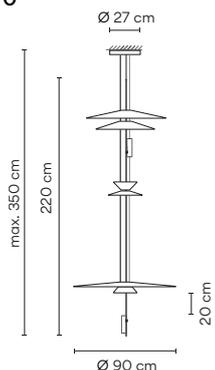

- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 20/ \_\_ Gold (Gold)
  - 67/ \_\_ Copper (Copper)
  - 93/ \_\_ White (RAL 9016)

**LED Colour Temperature**

/1 \_ 2700 K - 2216,04 lm  
 /3 \_ 3500 K - 2557,6 lm

**F** →

CRI >90

**Control**

1570 \_\_ / \_\_

---

\_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**

Diffuser: PMMA. Shade: PMMA.  
 Body: Aluminum. Canopy and rods: Steel.

**Light Source and electronics**

4 x LED 5,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,1633 m<sup>3</sup>  
 Gross weight 10 Kg Net weight 8,64 Kg

**Notes**

Extra cable length.

LED ⓘ IP20 CE UK ENE ⓘ



# Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

## Pendant

1590

Ø 45 cm

1575

Ø 45 cm

1580

Ø 9 cm


1585

Ø 45 cm

Option A

Option B

Option C

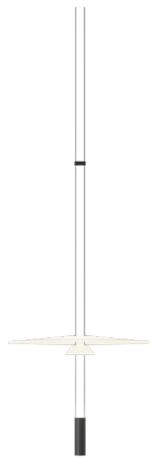

Three options of installation

1575

Finishes

- 11/ \_ Black (NCS S 8500-N)

LED Colour Temperature

/1\_ 2700 K - 726 lm



CRI >90


Control

1575 \_ \_ / \_ \_

\_ \_ / 11 DALI-2

\_ \_ / 1B Push; 1-10V

\_ \_ / 1Z Casambi



⚡ Select Electrical connection



Surface



Built-in XS

\_10 Surface  
\_23 Built-in XS

Materials

Diffuser: PMMA.  
Rods: Stainless steel.  
Body: Aluminum.  
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA  
Constant current 350 mA  
110-240Vac 50/60Hz

Packaging

2 Boxes  
Box 1: 0,07 x 0,07 x 1,25 m  
Box 2: 0,51 x 0,51 x 0,16 m  
Total Vol 0,0478 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Additional cable length  
personalisation 16,00 €/m

LED IP20 CE ENEC UK Bi-volt

1580


Finishes  
● **11/ \_ \_ Black**  
(NCS S 8500-N)

LED Colour Temperature  
**/1\_ 2700 K - 726 lm**  
  
CRI >90

Control

**1580 \_ \_ / \_ \_**

\_ \_ / **11** DALI-2  
\_ \_ / **1B** Push; 1-10V  
\_ \_ / **1Z** Casambi



 Select Electrical connection



Surface      Built-in XS

\_10 Surface  
\_23 Built-in XS

Materials

Diffuser: PMMA.  
Rods: Stainless steel.  
Body: Aluminum.  
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA  
Constant current 350 mA  
110-240Vac 50/60Hz

Packaging

2 Boxes  
Box 1: 0,068 x 0,068 x 1,25 m  
Box 2: 0,20 x 0,21 x 0,13 m  
Total Vol 0,0112 m<sup>3</sup>  
Gross weight 4 Kg Net weight 3 Kg

Notes

Additional cable length  
personalisation **16,00 €/m**

1585


Finishes  
● **11/ \_ \_ Black**  
(NCS S 8500-N)

LED Colour Temperature  
**/1\_ 2700 K - 726 lm**  
  
CRI >90

Control

**1585 \_ \_ / \_ \_**

\_ \_ / **11** DALI-2  
\_ \_ / **1B** Push; 1-10V  
\_ \_ / **1Z** Casambi



 Select Electrical connection



Surface      Built-in XS

\_10 Surface  
\_23 Built-in XS

Materials

Diffuser: PMMA.  
Rods: Stainless steel.  
Body: Aluminum.  
Canopy: ABS.

Light Source and electronics

2 x LED 3W 175 mA  
Constant current 350 mA  
110-240Vac 50/60Hz

Packaging

2 Boxes  
Box 1: 0,07 x 0,07 x 1,25 m  
Box 2: 0,51 x 0,51 x 0,16 m  
Total Vol 0,0478 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Additional cable length  
personalisation **16,00 €/m**


1590

Finishes  
 11/ \_ \_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1 \_ 2700 K - 1152 lm

CRI >90

Control  
 1590 \_ \_ / \_ \_  
 \_ \_ / 11 DALI-2  
 \_ \_ / 1B Push; 1-10V  
 \_ \_ / 1Z Casambi

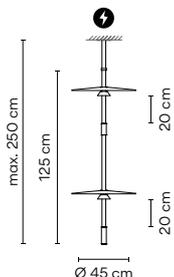

Select Electrical connection



Surface Built-in XS

\_10 Surface  
 \_23 Built-in XS

Materials

Diffuser: PMMA.  
 Rods: Stainless steel.  
 Body: Aluminum.  
 Canopy: ABS.

Light Source and electronics

3 x LED COB 3W 185 mA  
 Constant Current 550 mA  
 110-240Vac 50/60Hz

Packaging

2 Boxes  
 Box 1: 0,07 x 0,07 x 1,60 m  
 Box 2: 0,51 x 0,51 x 0,16 m  
 Total Vol 0,0494 m<sup>3</sup>  
 Gross weight 6,5 Kg Net weight 5 Kg

Notes

Additional cable length  
 personalisation 16,00 €/m



Select Electrical connection

Choose your preferred installation option  
 according to your needs.

Drop ceiling

\_23  
 Built-in XS



Ø 8 cm  
 height 6 cm

black finish.

Regular ceiling

\_10  
 Surface



Ø 16 cm

black finish.

Built-in





# Pin

Design by Ichiro Iwasaki


A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

## Table



1650


23 x 55 cm

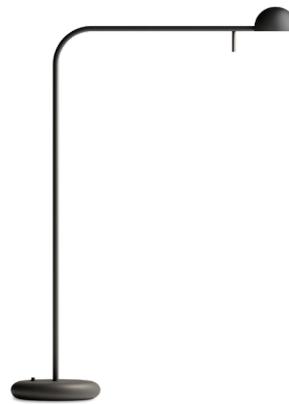

1655

40 x 55 cm

### 1650



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 0502-Y50R)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### Materials

Head: Aluminum. Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate. Rod: Steel.

#### Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### LED Colour Temperature

/1\_ 2700 K - 485 lm  
E →  
CRI >90

#### Control

1650 \_ \_ / 10 On/ Off

#### Packaging

1 Box 0,174 x 0,212 x 0,713 m  
Vol 0,0212 m<sup>3</sup>  
Gross weight 2,94 Kg Net weight 2 Kg

#### Notes


Switch on the base. Electric cable 3 m

LED IP20 CE ENEC EAC Bi-volt



1160	10	/1A
Model	Finish	Control
LED Colour Temperature		

1655



- Finishes**
- 11/ \_ \_ Black (NCS S 8500-N)
  - 23/ \_ \_ Warm White (NCS S 0502-Y50R)
  - 58/ \_ \_ Cream (NCS S 2005-Y20R)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
- Finish customization**  
(Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
/1\_ 2700 K - 485 lm  
E →  
CRI >90

**Control**  
1655 \_ \_ / 10 On/ Off

**Materials**  
Head: Aluminum. Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,20 x 0,357 x 0,67 m  
Vol 0,0480 m<sup>3</sup>  
Gross weight 3,68 Kg Net weight 2,2 Kg


**Notes**  
Switch on the base. Electric cable 3 m

LED IP20 CE ENEC ENEC Bi-volt

Floor



1660

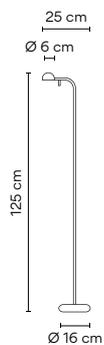

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **58/ \_ \_ Cream**  
(NCS S 2005-Y20R)
  - **62/ \_ \_ Green**  
(NCS S 3010-G20Y)
- Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**Materials**  
Head: Aluminum. Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**LED Colour Temperature**  
/1\_ 2700 K - 485 lm  
**E** →  
CRI >90

**Control**  
1660 \_ \_ / 10 On/ Off


**Packaging**  
1 Box 0,149 x 0,265 x 0,33 m  
Vol 0,1310 m<sup>3</sup>  
Gross weight 7,45 Kg Net weight 3,8 Kg

**Notes**  
Switch on the cable. Electric cable 3 m





1670

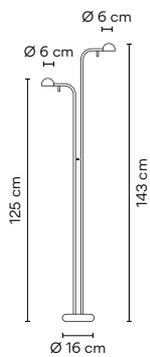

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 23/ \_\_ Warm White (NCS S 0502-Y50R)
  - 58/ \_\_ Cream (NCS S 2005-Y20R)
  - 62/ \_\_ Green (NCS S 3010-G20Y)
- Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 970 lm  
 E →  
 CRI >90

**Control**  
 1670 \_\_ / 10 On/ Off

**Materials**

Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rods: Steel.

**Light Source and electronics**

2 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**

1 Box 1,496 x 0,265 x 0,33 m  
 Vol 0,1310 m<sup>3</sup>  
 Gross weight 8,25 Kg Net weight 4,6 Kg

**Notes**

Switch on the cable. Electric cable 3 m



Wall



∅ 10 cm  
**1675 62**



∅ 10 cm  
**1675 11**



∅ 10 cm  
**1675 58**



∅ 10 cm  
**1675 23**



25 x 39 cm  
**1680**



30 x 70 x 8 cm  
**1685**




30 x 70 x 8 cm  
**1686**



∅ 10 x 40 x 8 cm  
**1690**




∅ 10 x 70 x 8 cm  
**1692**

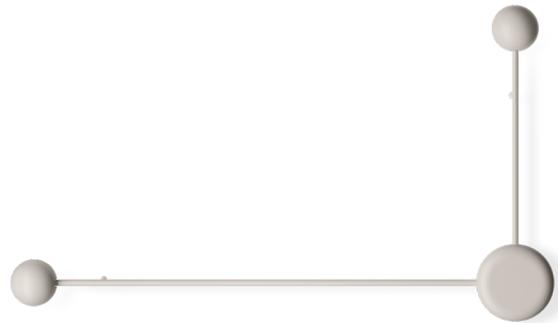

70 x 40 x 8 cm  
**1694**

1675



- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **58/ \_ \_ Cream**  
(NCS S 2005-Y20R)
  - **62/ \_ \_ Green**  
(NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 485 lm  
 E →  
 CRI >90

**Control**  
 1675 \_ \_ / 10 On/ Off

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.


**Light Source and electronics**  
 1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,193 x 0,148 x 0,161 m  
 Vol 0,0046 m<sup>3</sup>  
 Gross weight 0,85 Kg Net weight 0,6 Kg

**Notes**  
 Switch on the wall plate



1680



- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **58/ \_ \_ Cream**  
(NCS S 2005-Y20R)
  - **62/ \_ \_ Green**  
(NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 485 lm  
 E →  
 CRI >90

**Control**  
 1680 \_ \_ / 10 On/ Off

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.


**Light Source and electronics**  
 1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,146 x 0,355 x 0,473 m  
 Vol 0,0250 m<sup>3</sup>  
 Gross weight 1,745 Kg Net weight 1 Kg

**Notes**  
 Switch on the wall plate



1685



- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **58/ \_ \_ Cream**  
(NCS S 2005-Y20R)
  - **62/ \_ \_ Green**  
(NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 970 lm  
 E →  
 CRI >90

**Control**  
 1685 \_ \_ / 10 On/ Off

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.


**Light Source and electronics**  
 2 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,177 x 0,445 x 0,792 m  
 Vol 0,0620 m<sup>3</sup>  
 Gross weight 2,64 Kg Net weight 1,2 Kg

**Notes**  
 Switch on the wall plate



1686



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **58/** \_\_ Cream (NCS S 2005-Y20R)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
 2 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**LED Colour Temperature**  
 /1\_ 2700 K - 970 lm  
 E   
 CRI >90


**Control**  
 1686 \_\_ / 10 On/ Off

**Packaging**  
 1 Box 0,177 x 0,445 x 0,792 m  
 Vol 0,0620 m<sup>3</sup>  
 Gross weight 2,64 Kg Net weight 1,2 Kg

**Notes**  
 Switch on the wall plate



1690



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **58/** \_\_ Cream (NCS S 2005-Y20R)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
 1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz


**LED Colour Temperature**  
 /1\_ 2700 K - 485 lm  
 E   
 CRI >90

**Control**  
 1690 \_\_ / 10 On/ Off

**Packaging**  
 1 Box 0,146 x 0,355 x 0,473 m  
 Vol 0,0250 m<sup>3</sup>  
 Gross weight 1,545 Kg Net weight 0,8 Kg



1692



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **58/** \_\_ Cream (NCS S 2005-Y20R)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 485 lm  
 E →  
 CRI >90

**Control**  
 1692 \_\_ / 10 On/ Off


**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
 1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,177 x 0,445 x 0,792 m  
 Vol 0,620 m<sup>3</sup>  
 Gross weight 2,44 Kg Net weight 1 Kg



1694



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **58/** \_\_ Cream (NCS S 2005-Y20R)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 970 lm  
 E →  
 CRI >90

**Control**  
 1694 \_\_ / 10 On/ Off

**Materials**  
 Head: Aluminum. Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate. Rod: Steel.

**Light Source and electronics**  
 2 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,177 x 0,445 x 0,792 m  
 Vol 0,620 m<sup>3</sup>  
 Gross weight 2,84 Kg Net weight 1,4 Kg




# Offset

Design by Xuclà


Offset combines intuitive lighting with an industrial, geometric silhouette. A complementary system of superficial ceiling, wall and floor fixtures, the collection integrates five lighting effects with advanced colour and temperature regulation for a carefully curated atmosphere.

## Ceiling - Accent Downlight



**1720**

15 x 4 x 7 cm




**1722**

25 x 4 x 7 cm



**1725**

15 x 15 x 7 cm



**1727**

15 x 15 x 7 cm

**1720**  
UGR <20

### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

### LED Colour Temperature

- /1\_ 2700 K - 451 lm
- /2\_ 3000 K - 471 lm
- /3\_ 3500 K - 489 lm




CRI >90

### Control

**1720** \_ \_ / \_ \_

- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ 5 Push
- \_ \_ / \_ Y ProtoPixel\*
- \_ \_ / \_ Z Casambi



### Materials

Body: Aluminum.

### Light Source and electronics

1 x LED 2,9 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz



### Packaging

1 Box 0,10 x 0,08 x 0,325 m  
Vol 0,003 m<sup>3</sup>  
Gross weight 1 Kg Net weight 0,4 Kg


### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



1722



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1\_ 2700 K - 1353 lm
- /2\_ 3000 K - 1413 lm
- /3\_ 3500 K - 1467 lm

**E** →

CRI >90

**Control**

**1722** \_ \_ / \_ \_

---

\_ \_ / \_ 1 DALI-2

\_ \_ / \_ 5 Push

\_ \_ / \_ Y ProtoPixel\*

\_ \_ / \_ Z Casambi

**Materials**

Body: Aluminum.

**Light Source and electronics**

3 x LED 2,9 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,10 x 0,08 x 0,325 m  
Vol 0,003 m<sup>3</sup>  
Gross weight 1,1 Kg Net weight 0,6 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



1725



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1\_ 2700 K - 902 lm
- /2\_ 3000 K - 942 lm
- /3\_ 3500 K - 978 lm

**E** →

CRI >90

**Control**

**1725** \_ \_ / \_ \_

---

\_ \_ / \_ 1 DALI-2

\_ \_ / \_ 5 Push

\_ \_ / \_ Y ProtoPixel\*

\_ \_ / \_ Z Casambi

**Materials**

Body: Aluminum.

**Light Source and electronics**

2 x LED 2,9 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,20 x 0,21 x 0,13 m  
Vol 0,005 m<sup>3</sup>  
Gross weight 1,2 Kg Net weight 0,6 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



1727



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- /1** \_ 2700 K - 902 lm
- /2** \_ 3000 K - 942 lm
- /3** \_ 3500 K - 978 lm

**E** →

CRI >90

**Control**

**1727** \_ \_ / \_ \_

---

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **5** Push

\_ \_ / \_ **Y** ProtoPixel\*

\_ \_ / \_ **Z** Casambi

**Materials**

Body: Aluminum.

**Light Source and electronics**

2 x LED 2,9 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz

**Packaging**

1 Box 0,20 x 0,21 x 0,13 m  
Vol 0,005 m<sup>3</sup>  
Gross weight 1,2 Kg Net weight 0,6 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.




## Ceiling - High Comfort Diffuser




**1728**  
40 x 4 x 7 cm




**1730**  
65 x 4 x 7 cm

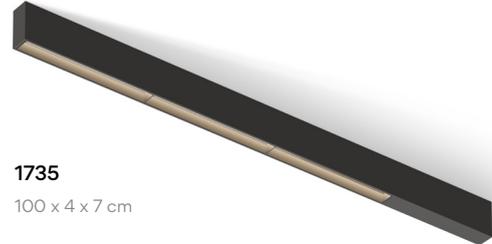

**1735**  
100 x 4 x 7 cm




**1740**  
31 x 15 x 7 cm



**1745**  
31 x 15 x 7 cm

### 1728 UGR <21



- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1\_ 2700 K - 1674 lm
  - /2\_ 3000 K - 1733 lm
  - /3\_ 3500 K - 1791 lm



- Tunable White**
- /8\_ (2200 K - 4000 K)  
921 lm - 1075 lm



CRI >90

**Control**

**1728** \_ / \_ \_

- \_ \_ / \_ 1 Push
- \_ \_ / \_ 5 DALI-2
- \_ \_ / \_ Y ProtoPixel\*
- \_ \_ / \_ Z Casambi

---

- \_ \_ / 81 Tunable White + DALI-2 DT8
- \_ \_ / 8Y Tunable White + ProtoPixel\*
- \_ \_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC - Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz

**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



**1730**  
UGR <24

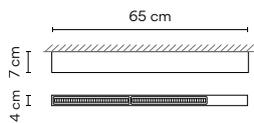

- |  |  |
|--|--|
| <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>11/ _ _ Black</b><br/>(NCS S 8500-N)</li> <li>● <b>23/ _ _ Warm White</b><br/>(NCS S 0502-Y50R)</li> <li>● <b>24/ _ _ Beige M1</b><br/>(NCS S 2005-Y50R)</li> </ul> | <p><b>LED Colour Temperature</b></p> <p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K - 3348 lm</li> <li>/2 _ 3000 K - 3466 lm</li> <li>/3 _ 3500 K - 3582 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8 _ (2200 K - 4000 K)<br/>1842 lm - 2150 lm</li> </ul> <p>CRI &gt;90</p> |
|--|--|

- Control**
- 1730 \_ \_ / \_ \_**
- 
- \_ \_ / \_ 1 Push
  - \_ \_ / \_ 5 DALI-2
  - \_ \_ / \_ Y ProtoPixel\*
  - \_ \_ / \_ Z Casambi
- 
- \_ \_ / 81 Tunable White + DALI-2 DT8
  - \_ \_ / 8Y Tunable White + ProtoPixel\*
  - \_ \_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 27,4W 650mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 20,8W  
Constant Voltage 24 VDC  
220-240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 1,095 m  
Vol 0,009198 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,4 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



**1735**

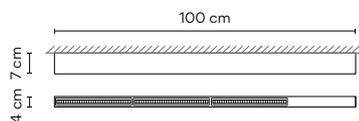

- |  |  |
|--|--|
| <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>11/ _ _ Black</b><br/>(NCS S 8500-N)</li> <li>● <b>23/ _ _ Warm White</b><br/>(NCS S 0502-Y50R)</li> <li>● <b>24/ _ _ Beige M1</b><br/>(NCS S 2005-Y50R)</li> </ul> | <p><b>LED Colour Temperature</b></p> <p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K - 5022 lm</li> <li>/2 _ 3000 K - 3466 lm</li> <li>/3 _ 3500 K - 5373 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8 _ (2200 K - 4000 K)<br/>2763 lm - 3225 lm</li> </ul> <p>CRI &gt;90</p> |
|--|--|

- Control**
- 1735 \_ \_ / \_ \_**
- 
- \_ \_ / \_ 1 Push
  - \_ \_ / \_ 5 DALI-2
  - \_ \_ / \_ Y ProtoPixel\*
  - \_ \_ / \_ Z Casambi
- 
- \_ \_ / 81 Tunable White + DALI-2 DT8
  - \_ \_ / 8Y Tunable White + ProtoPixel\*
  - \_ \_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 41,1 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 31,2 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 1,095 m  
Vol 0,009198 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,8 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



**1740**  
UGR <21



- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **23/** \_\_ Warm White  
(NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 1674 lm
  - /2 \_ 3000 K - 1733 lm
  - /3 \_ 3500 K - 1791 lm



- Tunable White**
- /8 \_ (2200 K - 4000 K)  
921 lm - 1075 lm



CRI >90

**Control**

**1740** \_\_ / \_\_

- \_\_ / \_1 Push
- \_\_ / \_5 DALI-2
- \_\_ / \_Y ProtoPixel\*
- \_\_ / \_Z Casambi

---

- \_\_ / **81** Tunable White + DALI-2 DT8
- \_\_ / **8Y** Tunable White + ProtoPixel\*
- \_\_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz

**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



**1745**  
UGR <21



- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **23/** \_\_ Warm White  
(NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 1674 lm
  - /2 \_ 3000 K - 1733 lm
  - /3 \_ 3500 K - 1791 lm



- Tunable White**
- /8 \_ (2200 K - 4000 K)  
921 lm - 1075 lm



CRI >90

**Control**

**1745** \_\_ / \_\_

- \_\_ / \_1 Push
- \_\_ / \_5 DALI-2
- \_\_ / \_Y ProtoPixel\*
- \_\_ / \_Z Casambi

---

- \_\_ / **81** Tunable White + DALI-2 DT8
- \_\_ / **8Y** Tunable White + ProtoPixel\*
- \_\_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz

**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


\*Available from January 2025.




Ceiling - Linear High Efficiency Low Glare



**1729**  
40 x 4 x 7 cm

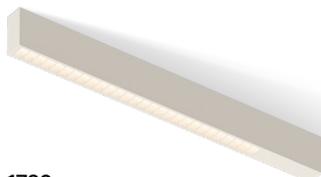

**1732**  
65 x 4 x 7 cm

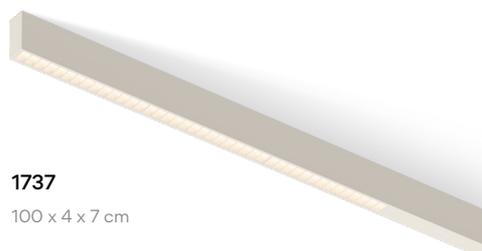

**1737**  
100 x 4 x 7 cm




**1742**  
32 x 15 x 7 cm



**1747**  
31 x 15 x 7 cm

**1729**  
UGR <18



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 3348 lm
  - /2 \_ 3000 K - 3466 lm
  - /3 \_ 3500 K - 3582 lm



- Tunable White**
- /8 \_ (2200 K - 4000 K) 1842 lm - 2150 lm



CRI >90

**Control**

**1729** \_ \_ / \_ \_

- \_ \_ / \_ 1 Push
- \_ \_ / \_ 5 DALI-2
- \_ \_ / \_ Y ProtoPixel\*
- \_ \_ / \_ Z Casambi

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8Y** Tunable White + ProtoPixel\*
- \_ \_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz



**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

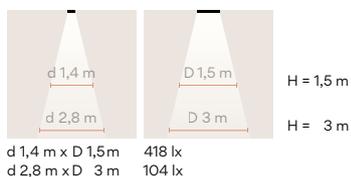

1732  
UGR <20

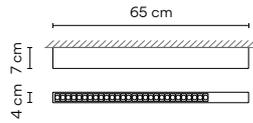

**Finishes**

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1\_ 2700 K - 3348 lm
  - /2\_ 3000 K - 3466 lm
  - /3\_ 3500 K - 3582 lm



- Tunable White**
- /8\_ (2200 K - 4000 K)  
1842 lm - 2150 lm



CRI >90

**Control**

1732 \_ \_ / \_ \_

- \_ \_ / \_ 1 Push
  - \_ \_ / \_ 5 DALI-2
  - \_ \_ / \_ Y ProtoPixel\*
  - \_ \_ / \_ Z Casambi
- 
- \_ \_ / 81 Tunable White + DALI-2 DT8
  - \_ \_ / 8Y Tunable White + ProtoPixel\*
  - \_ \_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 27,4 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 20,8 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz



**Packaging**

1 Box 0,105 x 0,08 x 1,095 m  
Vol 0,009198 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,4 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

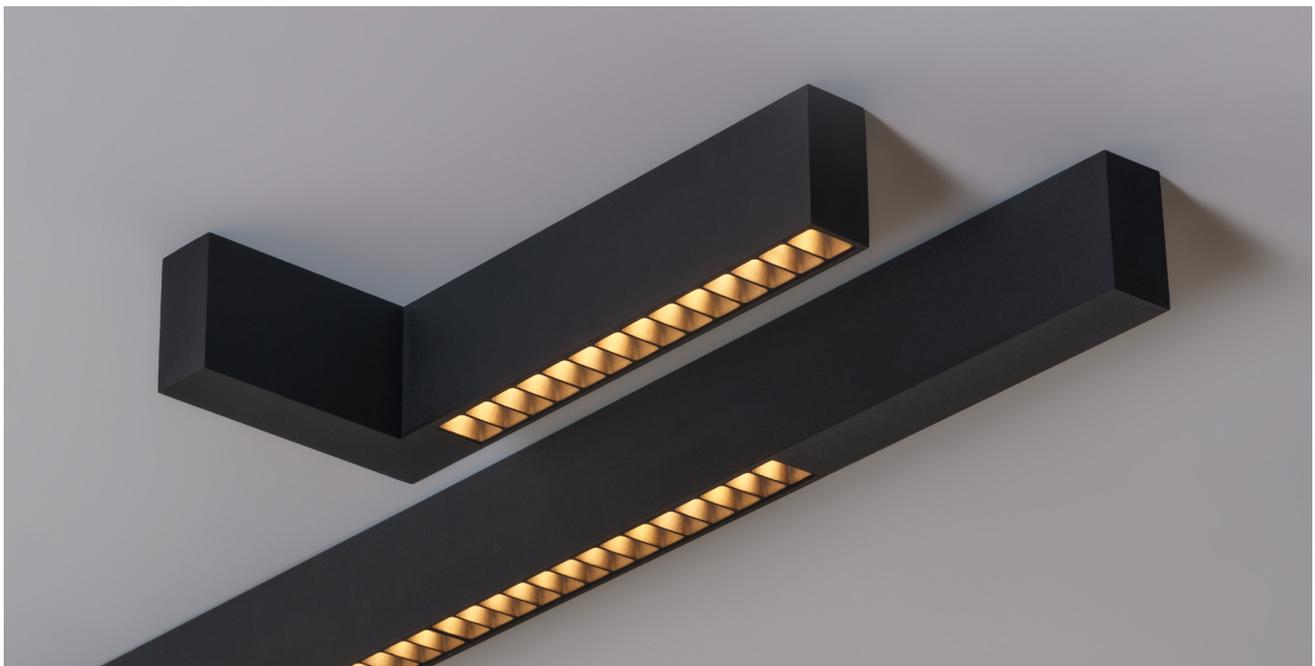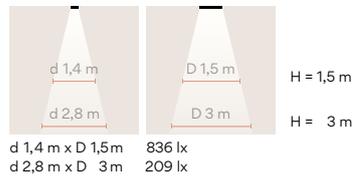

1737  
UGR <20

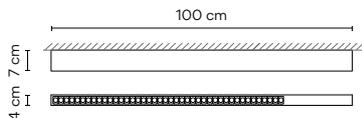

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 5022 lm
  - /2 \_ 3000 K - 5199 lm
  - /3 \_ 3500 K - 5373 lm
- Tunable White**
- /8 \_ (2200 K - 4000 K)  
2763 lm - 3225 lm
- CRI >90

- Control**
- 1737 \_ \_ / \_ \_
- 
- \_ \_ / \_ 1 Push
  - \_ \_ / \_ 5 DALI-2
  - \_ \_ / \_ Y ProtoPixel\*
  - \_ \_ / \_ Z Casambi
- 
- \_ \_ / 81 Tunable White + DALI-2 DT8
  - \_ \_ / 8Y Tunable White + ProtoPixel\*
  - \_ \_ / 8Z Tunable White + Casambi

**Materials**  
Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 41,1 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz


**Tunable White:**  
1 x LED STRIP 31,2 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz

**Packaging**  
1 Box 0,105 x 0,08 x 1,095 m  
Vol 0,009198 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,8 Kg

**Notes**  
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\*Available from January 2025.



1742



**Finishes**

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 1674 lm
  - /2 \_ 3000 K - 1733 lm
  - /3 \_ 3500 K - 1791 lm



- Tunable White**
- /8 \_ (2200 K - 4000 K)  
921 lm - 1075 lm



CRI >90

**Control**

**1742 \_ \_ / \_ \_**

- \_ \_ / \_ 1 Push
- \_ \_ / \_ 5 DALI-2
- \_ \_ / \_ Y ProtoPixel\*
- \_ \_ / \_ Z Casambi

---

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8Y** Tunable White + ProtoPixel\*
- \_ \_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz



**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

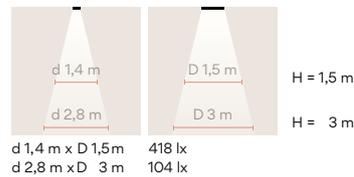

1747



- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**

- /1 \_ 2700 K - 1674 lm
- /2 \_ 3000 K - 1733 lm
- /3 \_ 3500 K - 1791 lm

**Tunable White**

- /8 \_ (2200 K - 4000 K)  
921 lm - 1075 lm

CRI >90

**Control**

**1747 \_ \_ / \_ \_**

---

- \_ \_ / \_ 1 Push
- \_ \_ / \_ 5 DALI-2
- \_ \_ / \_ Y ProtoPixel\*
- \_ \_ / \_ Z Casambi

---

- \_ \_ / 81 Tunable White + DALI-2 DT8
- \_ \_ / 8Y Tunable White + ProtoPixel\*
- \_ \_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,4 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz


**Packaging**

1 Box 0,42 x 0,29 x 0,10 m  
Vol 0,01218 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

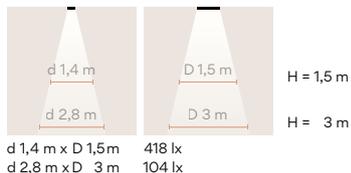


## Ceiling - Flat Diffuser



**1755**


125 x 4 x 7 cm

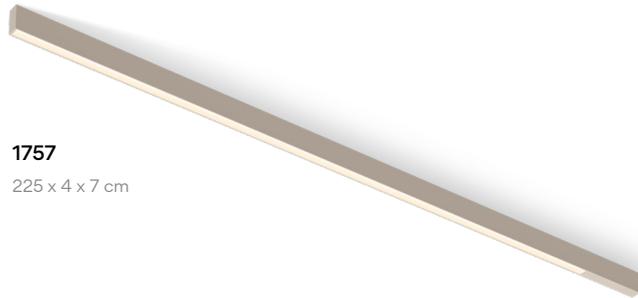

**1757**

225 x 4 x 7 cm

**1755**

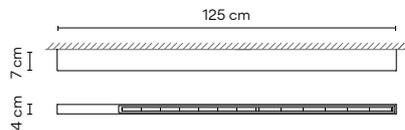

### Finishes

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

### LED Colour Temperature

- Static White**
- /1 \_ 2700 K - 2544 lm
  - /2 \_ 3000 K - 2628 lm
  - /3 \_ 3500 K - 2712 lm
- Tunable White**
- /8 \_ (2200 K - 4000 K)  
1751,96 lm - 2395,6 lm
- E**
- F**
- CRI >90

### Control

- 1755 \_ \_ / \_ \_**
- 
- \_ \_ / \_ 1 Push
  - \_ \_ / \_ 5 DALI-2
  - \_ \_ / \_ Y ProtoPixel\*
  - \_ \_ / \_ Z Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8Y** Tunable White + ProtoPixel\*
  - \_ \_ / **8Z** Tunable White + Casambi

### Materials

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 20,6 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 20,6 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz


### Packaging

1 Box 0,1 x 0,106 x 1,5 m  
Vol 0,016 m<sup>3</sup>  
Gross weight 3,5 Kg Net weight 2,1 Kg


### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



1757

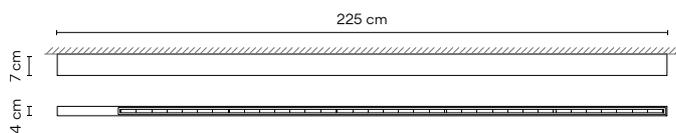

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>11/ _ _ Black</b> (NCS S 8500-N)</li> <li>● <b>23/ _ _ Warm White</b> (NCS S 0502-Y50R)</li> <li>● <b>24/ _ _ Beige M1</b> (NCS S 2005-Y50R)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1_ 2700 K - 5088 lm</li> <li>/2_ 3000 K - 5256 lm</li> <li>/3_ 3500 K - 5424 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8_ (2200 K - 4000 K) 3503,92 lm - 4791,2 lm</li> </ul> <p><b>Control</b></p> <p><b>1757 _ _ / _ _</b></p> <hr/> <ul style="list-style-type: none"> <li>_ _ / _ 1 Push</li> <li>_ _ / _ 5 DALI-2</li> <li>_ _ / _ Y ProtoPixel*</li> <li>_ _ / _ Z Casambi</li> </ul> <hr/> <ul style="list-style-type: none"> <li>_ _ / 81 Tunable White + DALI-2 DT8</li> <li>_ _ / 8Y Tunable White + ProtoPixel*</li> <li>_ _ / 8Z Tunable White + Casambi</li> </ul>
--	---

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 41,2 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 41,3 W  
Constant Voltage 24 VDC  
220~240V 50/60Hz


**Packaging**

1 Box 0,1 x 0,106 x 2,3 m  
Vol 0,024 m<sup>3</sup>  
Gross weight 6,0 Kg Net weight 3,5 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



## Ceiling Wall - Colour Mood Grazer




Right Left  
1760 1762  
7 x 125 x 5 cm



Right Left  
1765 1767  
7 x 225 x 5 cm

### 1760 Right

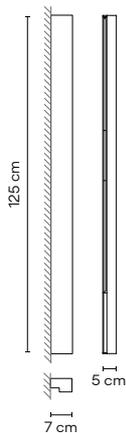

#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)

#### LED Colour Temperature

- /A\_ Infinite Colour (TW + RGB) 1572 lm - 1940 lm
- 70 lm (RED)
- 182 lm (GREEN)
- 35 lm (BLUE)



CRI >90

#### Control

1760 \_\_ / \_\_ Y ProtoPixel\*

#### Materials

Diffuser: PC- Polycarbonate.  
Lens: PMMA.

#### Light Source and electronics

1 x LED STRIP 17,2W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Packaging

1 Box 0,117 x 0,125 x 1,3 m  
Vol 0,020 m<sup>3</sup>  
Gross weight 4,0 Kg Net weight 2,6 Kg


#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



### 1762 Left

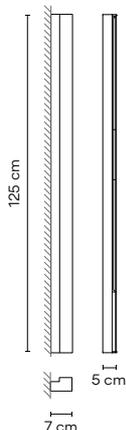

#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)

#### LED Colour Temperature

- /A\_ Infinite Colour (TW + RGB) 1572 lm - 1940 lm
- 70 lm (RED)
- 182 lm (GREEN)
- 35 lm (BLUE)



CRI >90

#### Control

1762 \_\_ / \_\_ Y ProtoPixel\*

#### Materials

Diffuser: PC- Polycarbonate.  
Lens: PMMA.

#### Light Source and electronics

1 x LED STRIP 17,2 W  
Constant Voltage 24 VDC  
110~240V 50/60Hz

#### Packaging

1 Box 0,117 x 0,125 x 1,3 m  
Vol 0,020 m<sup>3</sup>  
Gross weight 4,0 Kg Net weight 2,6 Kg


#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.




**1765**  
Right

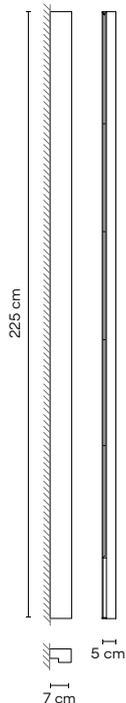


<b>Finishes</b> ● <b>11/ _ _ Black</b> (NCS S 8500-N) ● <b>23/ _ _ Warm White</b> (NCS S 0502-Y50R) ● <b>24/ _ _ Beige M1</b> (NCS S 2005-Y50R)	<b>LED Colour Temperature</b> <b>/A _ Infinite Colour (TW + RGB)</b> 3880 lm - 3144 lm 140 lm (RED) 364 lm (GREEN) 70 lm (BLUE) E → CRI >90	<b>Control</b> <b>1765 _ _ / _ Y ProtoPixel*</b>
---	--	---

<b>Materials</b> Diffuser: PC- Polycarbonate. Lens: PMMA.  <b>Light Source and electronics</b> 1 x LED STRIP 35,4 W Constant Voltage 24 VDC 110-240V 50/60Hz	<b>Packaging</b> 1 Box 0,1 x 0,106 x 2,3 m Vol 0,024 m <sup>3</sup> Gross weight 7,5 Kg Net weight 5,0 Kg  <b>Notes</b> ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). *Available from January 2025.
---	--




**1767**  
Left

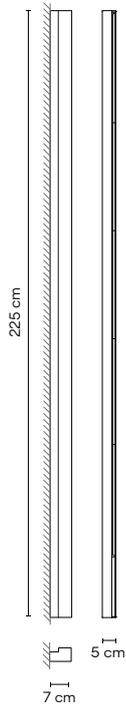

<b>Finishes</b> ● <b>11/ _ _ Black</b> (NCS S 8500-N) ● <b>23/ _ _ Warm White</b> (NCS S 0502-Y50R) ● <b>24/ _ _ Beige M1</b> (NCS S 2005-Y50R)	<b>LED Colour Temperature</b> <b>/A _ Infinite Colour (TW + RGB)</b> 3880 lm - 3144 lm 140 lm (RED) 364 lm (GREEN) 70 lm (BLUE) E → CRI >90	<b>Control</b> <b>1767 _ _ / _ Y ProtoPixel*</b>
---	--	---


<b>Materials</b> Diffuser: PC- Polycarbonate. Lens: PMMA.  <b>Light Source and electronics</b> 1 x LED STRIP 35,4 W Constant Voltage 24 VDC 220-240V 50/60Hz	<b>Packaging</b> 1 Box 0,1 x 0,106 x 2,3 m Vol 0,024 m <sup>3</sup> Gross weight 7,5 Kg Net weight 5,0 Kg  <b>Notes</b> ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). *Available from January 2025.
---	--



## Wall - Up&Down Surface Grazer



### 1770



#### Finishes

- **11/** \_\_ Black (NCS S 8500-N)
- **23/** \_\_ Warm White (NCS S 0502-Y50R)
- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

#### LED Colour Temperature

- /1** \_ 2700 K - 451 lm
  - /2** \_ 3000 K - 471 lm
  - /3** \_ 3500 K - 489 lm
- E** >
- CRI >90

#### Control

- 1770** \_\_ / \_\_
- \_\_ / \_ **0** Push
  - \_\_ / \_ **1** DALI-2 (Remote)
  - \_\_ / \_ **5** Push (Remote)
  - \_\_ / \_ **Z** Casambi (Remote)

#### Materials

Body: Aluminum.  
Lens: PMMA.

#### Light Source and electronics


2 x LED 2,9 W 250 mA  
Constant current 250 mA  
220~240V 50/60Hz

#### Packaging

1 Box 0,15 x 0,095 x 0,09 m  
Vol 0,0013 m<sup>3</sup>  
Gross weight 0,7 Kg Net weight 0,3 Kg



1772



**Finishes**  
 ● **11/** \_ \_ Black (NCS S 8500-N)  
 ● **23/** \_ \_ Warm White (NCS S 0502-Y50R)  
 ● **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**  
 /1 \_ 2700 K - 451 lm  
 /2 \_ 3000 K - 471 lm  
 /3 \_ 3500 K - 489 lm

**E** >

CRI >90

**Control**  
**1772** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 5 Push  
 \_ \_ / \_ Z Casambi


**Materials**  
 Body: Aluminum.  
 Lens: PMMA.

**Light Source and electronics**  
 2 x LED 2,9 W 250 mA  
 Constant current 250 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,15 x 0,08 x 1,095 m  
 Vol 0,0091 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 1,5 Kg



1774



**Finishes**  
 ● **11/** \_ \_ Black (NCS S 8500-N)  
 ● **23/** \_ \_ Warm White (NCS S 0502-Y50R)  
 ● **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**  
 /1 \_ 2700 K - 451 lm  
 /2 \_ 3000 K - 471 lm  
 /3 \_ 3500 K - 489 lm

**E** >

CRI >90

**Control**  
**1774** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 5 Push  
 \_ \_ / \_ Z Casambi


**Materials**  
 Body: Aluminum.  
 Lens: PMMA.

**Light Source and electronics**  
 2 x LED 2,9 W 250 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz


**Packaging**  
 1 Box 0,117 x 0,125 x 2 m  
 Vol 0,029 m<sup>3</sup>  
 Gross weight 4,1 Kg Net weight 2,3 Kg




## Floor

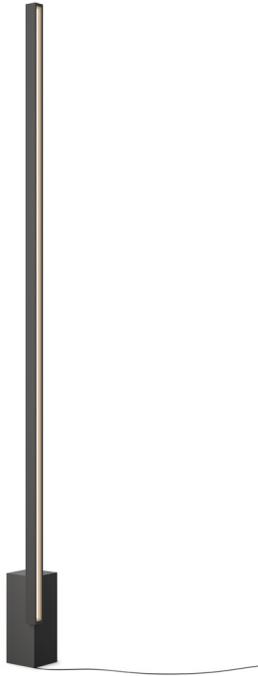

**1780**  
14 x 128 cm

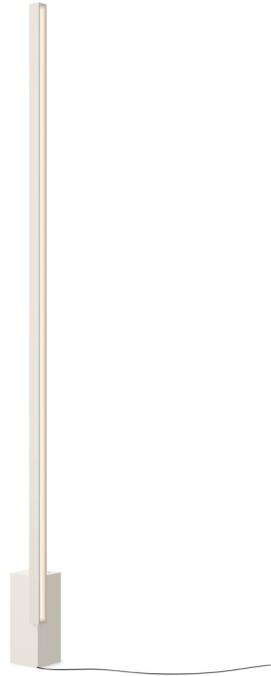


**1780**  
14 x 128 cm

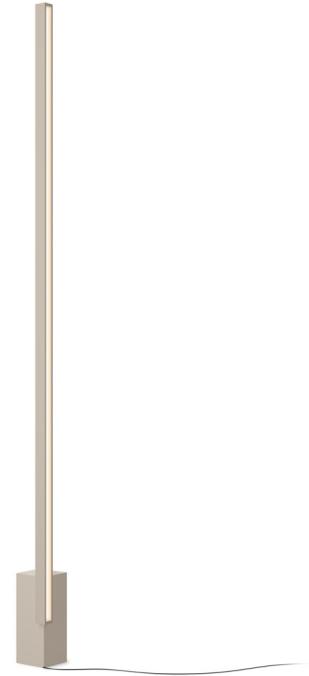

**1780**  
14 x 128 cm

### 1780



#### Finishes

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

#### LED Colour Temperature

- /A \_ Infinite Colour (TW + RGB)**  
3880 lm - 3144 lm
- 140 lm (RED)
- 364 lm (GREEN)
- 70 lm (BLUE)
- E** →
- CRI >90

#### Control

- 1780 \_ \_ / \_ Y ProtoPixel\***  
(also with push buttons)

#### Materials

Body: Aluminum.

#### Light Source and electronics

1 x LED STRIP 35,4 W  
Constant Voltage 24 VDC  
220-240V 50/60Hz

#### Packaging

1 Box 0,60 x 0,68 x 2,2 m  
Vol 0,9 m<sup>3</sup>  
Gross weight 7,0 Kg Net weight 4,3 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



# Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

## Pendant

Height 70 cm



Ø 37 cm

**1800**



Ø 54,5 cm


**1815**

Height 110 cm




Ø 37 cm

**1805**



Ø 54,5 cm

**1820**

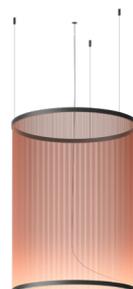

Ø 82,5 cm

**1830**



Ø 124 cm

**1840**

Height 190 cm



Ø 37 cm

**1810**



Ø 54,5 cm

**1825**



Ø 82,5 cm

**1835**



Ø 124 cm

**1845**

---

Height 70 cm



Ø 54,5 cm

**1850**

Height 110 cm



Ø 54,5 cm

**1855**



Ø 82,5 cm

**1865**



Ø 124 cm

**1875**

Height 190 cm



Ø 54,5 cm

**1860**



Ø 82,5 cm

**1870**




Ø 124 cm

**1880**



1810

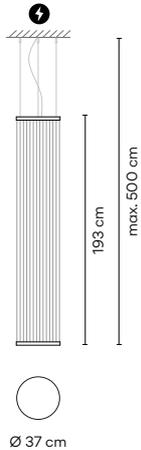

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1 \_ 2700 K - 2662 lm  
 ID >

**Control**

- 1810 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection

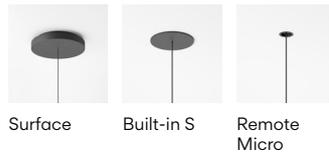

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 22W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,62 x 0,62 x 0,12 m  
 Vol 0,0461 m<sup>3</sup>  
 Gross weight 7,6 Kg Net weight 5,4 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1815

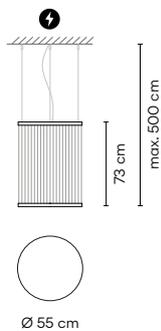

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**  
 /1 \_ 2700 K - 3993 lm  
 ID >

**Control**

- 1815 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 33W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,62 x 0,62 x 0,12 m  
 Vol 0,0461 m<sup>3</sup>  
 Gross weight 8,4 Kg Net weight 6,2 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1820

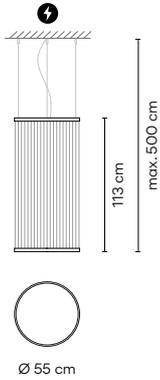

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature  
/1 \_ 2700 K - 3993 lm  
D  
CRI >90


Control

1820 \_\_ / \_\_

- \_\_ / 13 1-10V
- \_\_ / 1D Push; DALI-2
- \_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

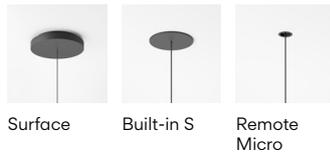

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials

Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m  
Vol 0,0461 m<sup>3</sup>  
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes

Extra cable length.



1825

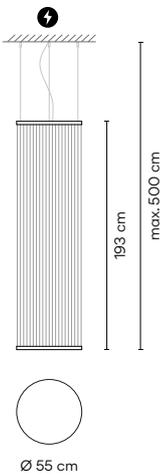

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature  
/1 \_ 2700 K - 3993 lm  
D  
CRI >90


Control

1825 \_\_ / \_\_

- \_\_ / 13 1-10V
- \_\_ / 1D Push; DALI-2
- \_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

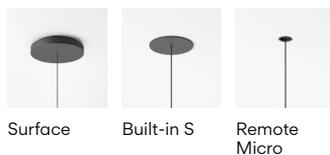

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials

Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m  
Vol 0,0461 m<sup>3</sup>  
Gross weight 9,2 Kg Net weight 7 Kg

Notes

Extra cable length.



1830

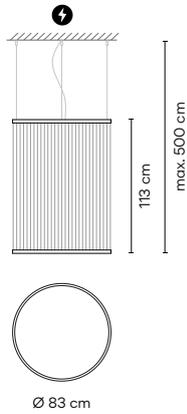

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1\_ 2700 K - 6050 lm  
 ID >

**Control**

1830 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection

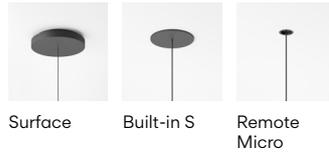

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 50W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,93 x 0,93 x 0,120 m  
 Vol 0,1037 m³  
 Gross weight 13,5 Kg Net weight 9,5 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1835

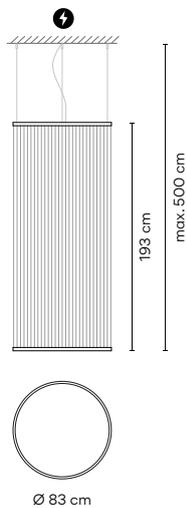

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1\_ 2700 K - 6050 lm  
 ID >

**Control**

1835 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection

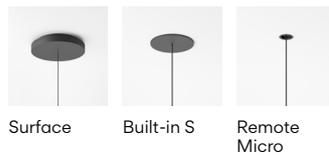

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 50W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,93 x 0,93 x 0,120 m  
 Vol 0,1037 m³  
 Gross weight 14,1 Kg Net weight 10,1 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1840

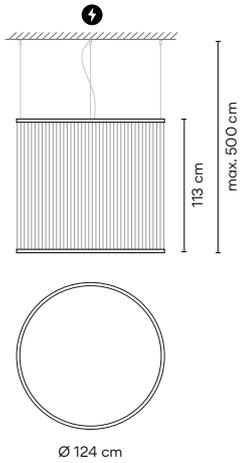

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature  
/1 \_ 2700 K - 9196 lm  
D  
CRI >90


Control

1840 \_\_ / \_\_

- \_\_ / 13 1-10V
- \_\_ / 1D Push; DALI-2
- \_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

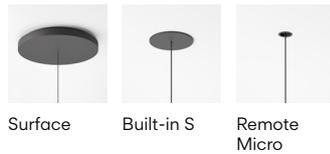

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials

Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m  
Vol 0,2187 m<sup>3</sup>  
Gross weight 19 Kg Net weight 13 Kg

Notes

Extra cable length.



1845

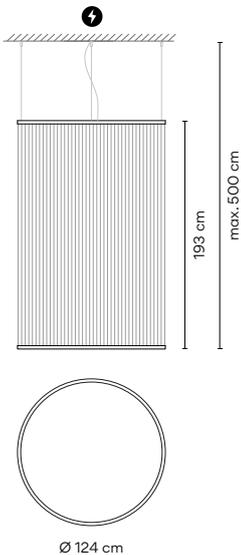

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature  
/1 \_ 2700 K - 9196 lm  
D  
CRI >90


Control

1845 \_\_ / \_\_

- \_\_ / 13 1-10V
- \_\_ / 1D Push; DALI-2
- \_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

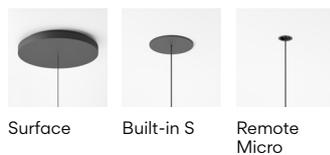

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials

Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m  
Vol 0,2187 m<sup>3</sup>  
Gross weight 19,9 Kg Net weight 13,9 Kg

Notes

Extra cable length.



1850

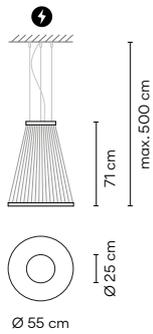

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1 \_ 2700 K - 3993 lm  
 ID >

**Control**

1850 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection

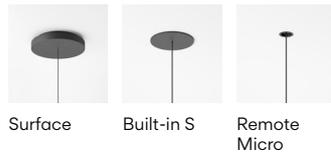

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 33W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,62 x 0,62 x 0,121 m  
 Vol 0,0461 m<sup>3</sup>  
 Gross weight 7,9 Kg Net weight 5,7 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1855

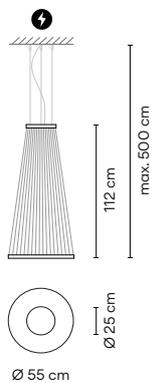

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1 \_ 2700 K - 3993 lm  
 ID >

**Control**

1855 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection

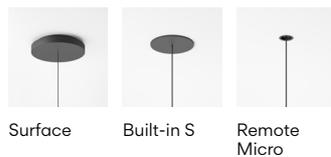

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 33W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**



1 Box 0,62 x 0,62 x 0,121 m  
 Vol 0,0461 m<sup>3</sup>  
 Gross weight 8,3 Kg Net weight 6,1 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1860

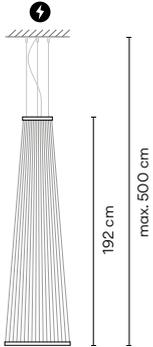

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature  
/1 \_ 2700 K - 3993 lm  
D  
CRI >90

Control

1860 \_\_ / \_\_  
\_\_ / 13 1-10V  
\_\_ / 1D Push; DALI-2  
\_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

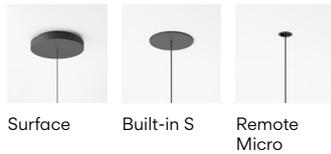

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials  
Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.



Light Source and electronics  
1 x LED STRIP 33W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging  
1 Box 0,62 x 0,62 x 0,121 m  
Vol 0,0461 m<sup>3</sup>  
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes  
Extra cable length.



1865

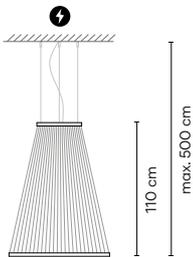

- Finishes (threads)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature  
/1 \_ 2700 K - 6050 lm  
D  
CRI >90

Control

1865 \_\_ / \_\_  
\_\_ / 13 1-10V  
\_\_ / 1D Push; DALI-2  
\_\_ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection

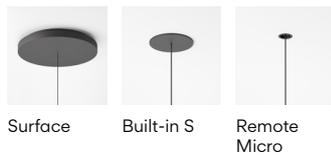


\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

Materials  
Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.


Light Source and electronics  
1 x LED STRIP 50W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz

Packaging  
1 Box 0,93 x 0,93 x 0,120 m  
Vol 0,1037 m<sup>3</sup>  
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes  
Extra cable length.



1870

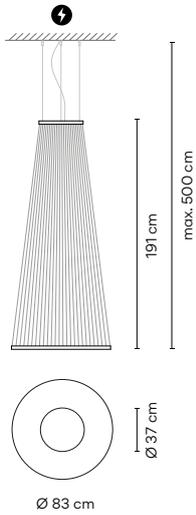

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1\_ 2700 K - 6050 lm  
 ID →  
 CRI >90

**Control**

1870 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

**Select Electrical connection**

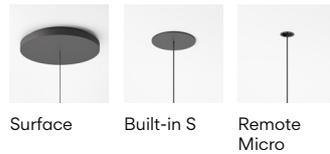

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 50W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 0,93 x 0,93 x 0,120 m  
 Vol 0,1037 m³  
 Gross weight 12,4 Kg Net weight 9,4 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENE Multi-volt

1875

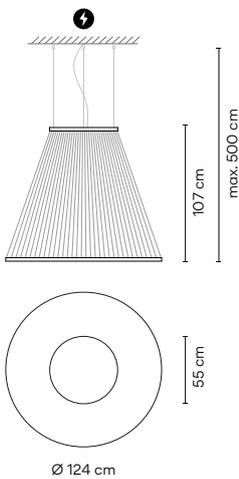

- Finishes (threads)**
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)


**LED Colour Temperature**  
 /1\_ 2700 K - 9196 lm  
 ID →  
 CRI >90

**Control**

1875 \_\_ / \_\_  
 \_\_ / 13 1-10V  
 \_\_ / 1D Push; DALI-2  
 \_\_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

**Select Electrical connection**

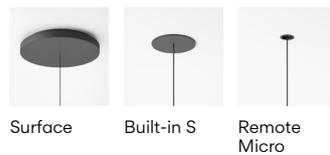

\_10 Surface  
 \_24 Built-in S  
 \_31 Remote Micro

**Materials**

Upper ring: Aluminum.  
 Bottom ring: Brass.  
 Diffuser: PC- Polycarbonate.  
 Threads: PES FR.

**Light Source and electronics**

1 x LED STRIP 76W 48V  
 Constant Voltage 48V  
 90-305Vac 50/60Hz

**Packaging**


1 Box 1,35 x 1,35 x 0,12 m  
 Vol 0,2187 m³  
 Gross weight 15,9 Kg Net weight 11,9 Kg

**Notes**

Extra cable length.

LED IP20 CE UK ENE Multi-volt

1880

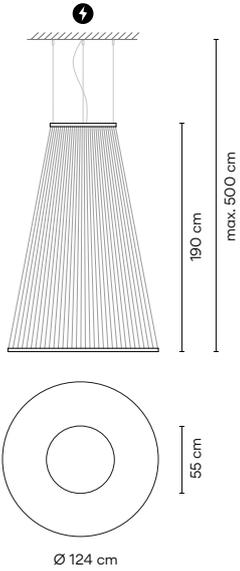

- Finishes (threads)**
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**  
/1 \_ 2700 K - 9196 lm  
D


CRI >90

**Control**  
1880 \_ \_ / \_ \_

\_ \_ / 13 1-10V  
\_ \_ / 1D Push; DALI-2  
\_ \_ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection

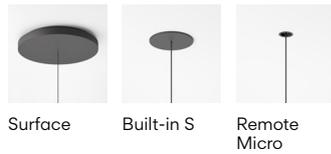

\_10 Surface  
\_24 Built-in S  
\_31 Remote Micro

**Materials**  
Upper ring: Aluminum.  
Bottom ring: Brass.  
Diffuser: PC- Polycarbonate.  
Threads: PES FR.

**Packaging**  
1 Box 1,35 x 1,35 x 0,12 m  
Vol 0,2187 m<sup>3</sup>  
Gross weight 16,8 Kg Net weight 12,8 Kg

**Light Source and electronics**  
1 x LED STRIP 76W 48V  
Constant Voltage 48V  
90-305Vac 50/60Hz


**Notes**  
Extra cable length.

LED IP20 CE UK ENEC Multi-volt


Select Electrical connection

Choose your preferred installation option according to your needs.


**Drop ceiling**

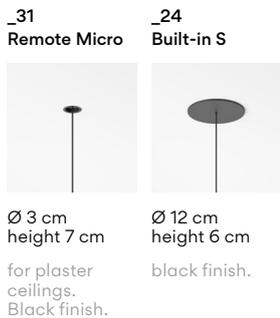


**Regular ceiling**

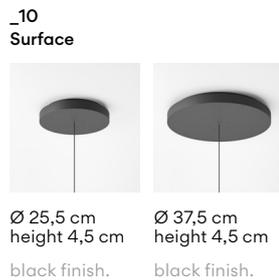

**Remote**



**Built-in**






# Funnel

A gentle presence with a distinctly sculptural form, Funnel is a study in materiality, light and space.

## Ceiling Wall



### 2012

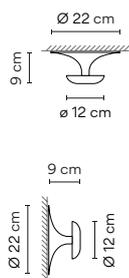

#### Finishes

- **10/** \_ \_ White  
(NCS S 0300-N)
- **36/** \_ \_ Soft Pink  
(NCS S 1010-Y50R)
- **47/** \_ \_ Green L1  
(NCS S 4005-G80Y)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### LED Colour Temperature

- /1** \_ 2700 K - 631,7 lm
- CRI >80
- /2** \_ 3000 K - 649 lm
- CRI >80
- /3** \_ 3500 K - 655,4 lm
- CRI >90

#### Control

**2012** \_ \_ / \_ 0 On/ Off

#### Finishes

- **51/** \_ \_ Gold leaf  
(Gold leaf)

#### LED Colour Temperature

- /1** \_ 2700 K - 631,7 lm
- CRI >80
- /2** \_ 3000 K - 649 lm
- CRI >80
- /3** \_ 3500 K - 655,4 lm
- CRI >90

#### Control

**2012 51** / \_ 0 On/ Off

#### Materials

Shade: Aluminum.  
Reflector: Aluminum.  
Support: Steel.



**Light Source and electronics**  
1 x LED PLATE 6,3 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,27 x 0,27 x 0,16 m  
Vol 0,0116 m<sup>3</sup>  
Gross weight 0,892 Kg Net weight 0,45 Kg



2013



**Finishes**

- 10/ \_\_ White (NCS S 0300-N)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**Finish customization**  
(Available options: Vibia colour palette.  
Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

/1\_ 2700 K - 2580 lm  
E

CRI >80

/2\_ 3000 K - 2580 lm  
E

CRI >90

/3\_ 3500 K - 2580 lm  
F

CRI >90

**Control**

2013 \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2

\_\_ / \_\_ Z Casambi

**Finishes**

- 51/ \_\_ Gold leaf (Gold leaf)

**LED Colour Temperature**

/1\_ 2700 K - 2580 lm  
E

CRI >80

/2\_ 3000 K - 2580 lm  
E

CRI >90

/3\_ 3500 K - 2580 lm  
F

CRI >90

**Control**

2013 \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2

\_\_ / \_\_ Z Casambi

**Materials**

Shade: Aluminum.  
Reflector: Aluminum.  
Support: Steel.

**Light Source and electronics**


6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,53 Kg Net weight 2 Kg



2014



**Finishes**

- 10/ \_\_ White (NCS S 0300-N)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**Finish customization**  
(Available options: Vibia colour palette.  
Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

/1\_ 2700 K - 2580 lm  
E

CRI >80

/2\_ 3000 K - 2580 lm  
E

CRI >80

/3\_ 3500 K - 2580 lm  
F

CRI >90

**Control**

2014 \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2

\_\_ / \_\_ Z Casambi

**Materials**

Shade: Aluminum.  
Reflector: Aluminum.  
Support: Steel.

**Light Source and electronics**

6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 3,782 Kg Net weight 3,3 Kg



# Rhythm Horizontal

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

---

## Pendant

Stick 47 cm




**2110**

45 x 47 cm




**2111**

93 x 47 cm

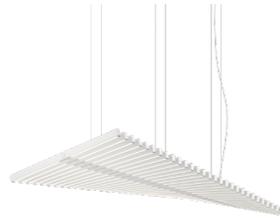

**2112**


141 x 47 cm

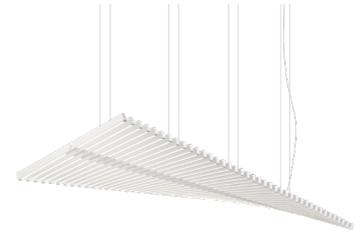

**2113**


189 x 47 cm

Stick 87 cm

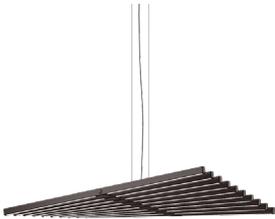


**2120**

63 x 87 cm

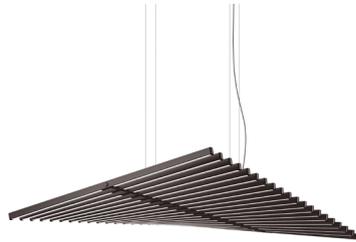

**2121**

131 x 87 cm

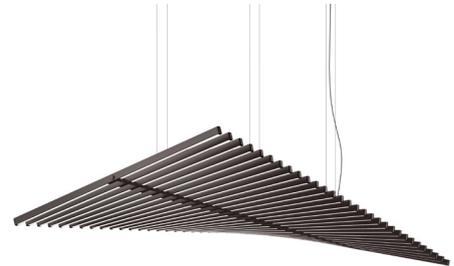

**2122**



199 x 87 cm



**2155**

49 x 87 cm

Each project is unique.  
 Personalise your own  
 Rhythm composition  
 quick and easy.

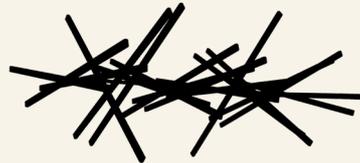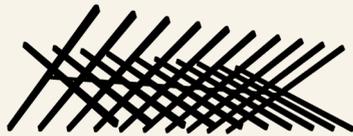

2110

Finishes

- 14/ \_\_ Chocolate (RAL 8019)
- 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 \_ 2700 K - 4332 lm
- /3 \_ 3500 K - 4578 lm



CRI >90


Control

2110 \_\_ / \_\_

\_\_ / \_1 DALI-2

\_\_ / \_3 1-10V

\_\_ / \_Z Casambi



Materials

Stick: PA- Polyamide.  
 Diffuser: PC- Polycarbonate.  
 Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

Packaging

2 Boxes  
 Total Vol 0,0591 m<sup>3</sup>  
 Gross weight 7,7 Kg Net weight 6 Kg

Notes

219114 Built-in accessory  
 (96 mm) chocolate

219158 Built-in accessory  
 (96 mm) off-white


Surface and built-in fitting.

Extra cable length.



∅ 18,5 cm Only for built-in

2111



- Finishes**
- **14/** \_ \_ Chocolate (RAL 8019)
  - **58/** \_ \_ Off-White (RAL D2 1109005)

**LED Colour Temperature**

- /1 \_ 2700 K - 8664 lm
- /3 \_ 3500 K - 9157 lm

IP20

CRI >90

**Control**

**2111** \_ \_ / \_ \_

---

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **3** 1-10V

\_ \_ / \_ **Z** Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate.  
Canopy: Steel.

**Light Source and electronics**

20 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,1570 m<sup>3</sup>  
Gross weight 14,2 Kg Net weight 10,5 Kg

**Notes**


**219114** Built-in accessory (96 mm) chocolate

**219158** Built-in accessory (96 mm) off-white

Surface and built-in fitting.  
Extra cable length.



2112



- Finishes**
- **14/** \_ \_ Chocolate (RAL 8019)
  - **58/** \_ \_ Off-White (RAL D2 1109005)

**LED Colour Temperature**

- /1 \_ 2700 K - 12996 lm
- /3 \_ 3500 K - 13736 lm

IP20

CRI >90

**Control**

**2112** \_ \_ / \_ \_

---

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **3** 1-10V

\_ \_ / \_ **Z** Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate.  
Canopy: Steel.

**Light Source and electronics**

30 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,0430 m<sup>3</sup>  
Gross weight 10,3 Kg Net weight 7 Kg

**Notes**


**219014** Built-in accessory (44,5 mm) chocolate

**219058** Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.  
Extra cable length.



2113

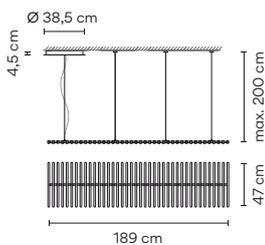

- Finishes**
- **14/** \_ \_ Chocolate (RAL 8019)
  - **58/** \_ \_ Off-White (RAL D2 1109005)

**LED Colour Temperature**

- /1 \_ 2700 K - 17328 lm
- /3 \_ 3500 K - 18314 lm

IP20

CRI >90

**Control**

**2113** \_ \_ / \_ \_

---

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **3** 1-10V

\_ \_ / \_ **Z** Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate.  
Canopy: Steel.

**Light Source and electronics**

40 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,1900 m<sup>3</sup>  
Gross weight 17,2 Kg Net weight 13,5 Kg

**Notes**


**219014** Built-in accessory (44,5 mm) chocolate

**219058** Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.  
Extra cable length.



2120

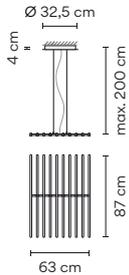

- Finishes
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature  
 /1 \_ 2700 K - 7602 lm  
 /3 \_ 3500 K - 8035 lm

IP20

CRI >90

Control

2120 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

Packaging

2 Boxes  
 Total Vol 0,1380 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 7,3 Kg


Notes

219214 Built-in accessory (136 mm) chocolate  
 219258 Built-in accessory (136 mm) off-white

Surface and built-in fitting.  
 Extra cable length.



2121

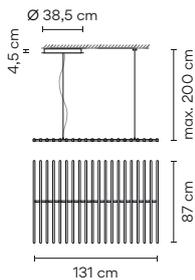

- Finishes
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature  
 /1 \_ 2700 K - 15204 lm  
 /3 \_ 3500 K - 16070 lm

IP20

CRI >90

Control

2121 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate.  
 Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

Packaging

2 Boxes  
 Total Vol 0,1664 m<sup>3</sup>  
 Gross weight 14,7 Kg Net weight 10,5 Kg


Notes

219014 Built-in accessory (44,5 mm) chocolate  
 219058 Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.  
 Extra cable length.



2122

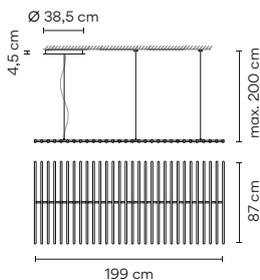

- Finishes
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature  
 /1 \_ 2700 K - 22807 lm  
 /3 \_ 3500 K - 24105 lm

IP20

CRI >90

Control

2122 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate.  
 Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

Packaging

2 Boxes  
 Total Vol 0,07120 m<sup>3</sup>  
 Gross weight 24 Kg Net weight 21,5 Kg


Notes

219014 Built-in accessory (44,5 mm) chocolate  
 219058 Built-in accessory (44,5 mm) off-white

Surface and built-in fitting.  
 Extra cable length.



**2155**  
Wood

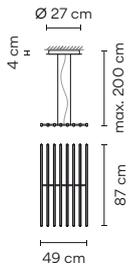

- Finishes  
 ● **82/** \_\_\_ White oak  
 ● **83/** \_\_\_ American walnut

LED Colour Temperature  
 /1 \_ 2700 K - 5893 lm  
 /3 \_ 3500 K - 6213 lm  
 □ ▸  
 CRI >90

Control  
**2155** \_\_\_ / \_\_\_  
 \_\_\_ / \_\_\_ 1 DALI-2  
 \_\_\_ / \_\_\_ 3 1-10V  
 \_\_\_ / \_\_\_ Z Casambi

Materials  
 Stick: Wood. Spacers: Aluminum.  
 Diffuser: PC-Polycarbonate.  
 Canopy: Steel.

Light Source and electronics  
 8 x LED STRIP 5,8 W 30V  
 Constant Voltage 30V  
 100~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,1570 m<sup>3</sup>  
 Gross weight 8,5 Kg Net weight 6,3 Kg

Notes  
**219282** Built-in accessory  
 (136 mm) Beige D1  
**219283** Built-in accessory  
 (136 mm) Brown D1

Surface and built-in fitting.  
 Extra cable length.

LED IP20 CE UK ENEC Bi-volt  
 ∅ 18,5 cm Only for built-in




# Rhythm Vertical

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

## Pendant


Stick 47 cm

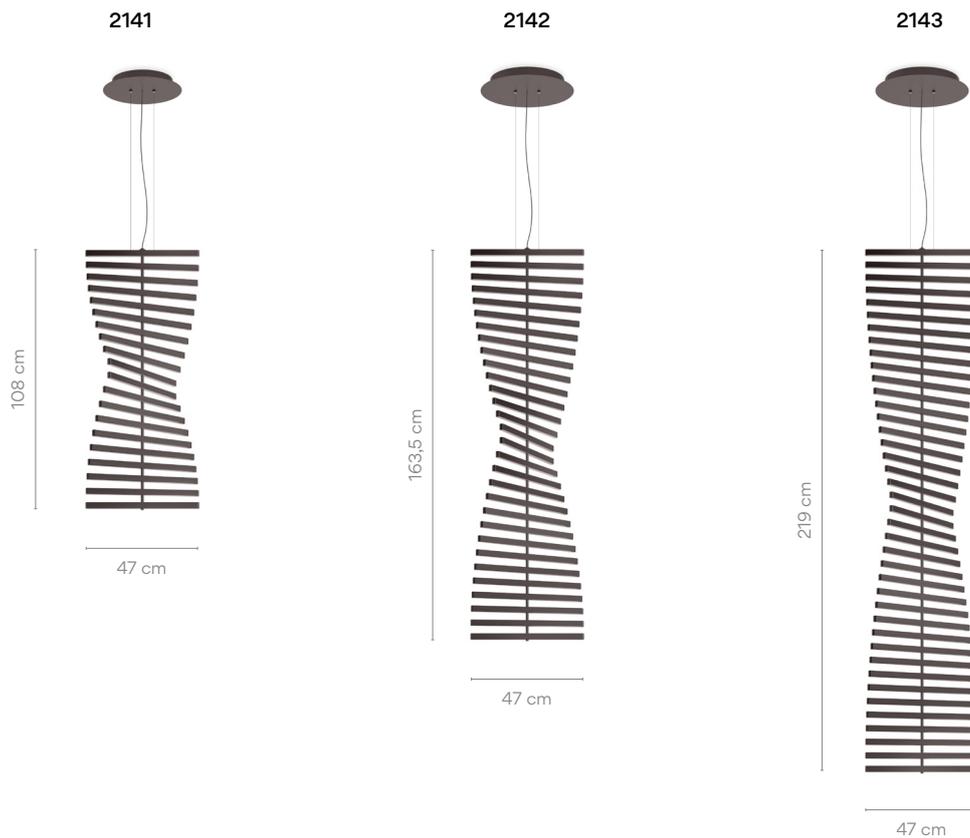

Stick 87 cm



Each project is unique.  
Personalise your own  
Rhythm composition  
quick and easy.

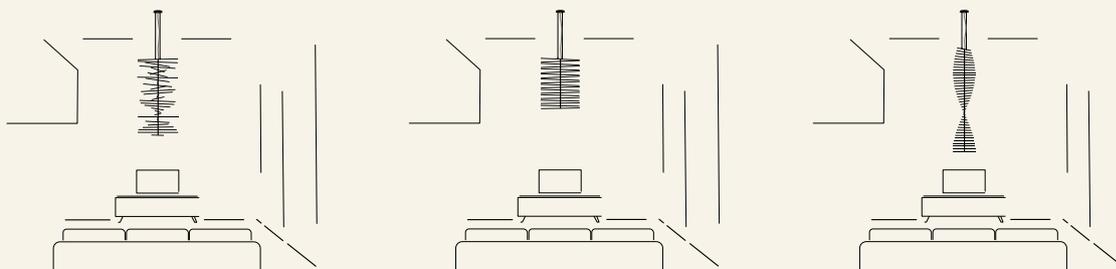

2141

Finishes


- 14/ \_\_ Chocolate (RAL 8019)
- 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 \_ 2700 K - 8664 lm
  - /3 \_ 3500 K - 9157 lm
- ☐ >
- CRI >90

Control

- 2141 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

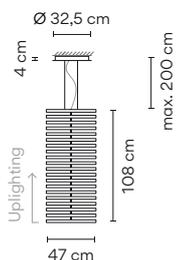

Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate.  
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,5850 m<sup>3</sup>  
Gross weight 10,3 Kg Net weight 7,4 Kg

Notes

- 219114 Built-in accessory (96 mm) chocolate
- 219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.  
Extra cable length.



2142

Finishes


- 14/ \_\_ Chocolate (RAL 8019)
- 58/ \_\_ Off-White (RAL D2 1109005)

LED Colour Temperature

- /1 2700 K - 12996 lm
  - /3 3500 K - 13736 lm
- ☐ >
- CRI >90

Control

- 2142 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

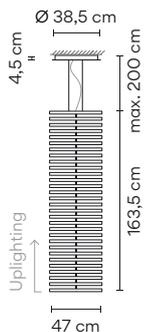

Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate.  
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,6239 m<sup>3</sup>  
Gross weight 13,7 Kg Net weight 8,2 Kg


Notes

- 219114 Built-in accessory (96 mm) chocolate
- 219158 Built-in accessory (96 mm) off-white

Surface and built-in fitting.  
Extra cable length.



**2143**

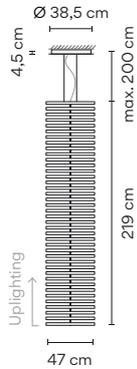

- Finishes**
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-White (RAL D2 1109005)

**LED Colour Temperature**

- /1 \_ 2700 K - 8664 lm
- /3 \_ 3500 K - 9157 lm

□ →  
CRI >90

**Control**

**2143** \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate.  
 Canopy: Steel.

**Light Source and electronics**

40 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,6600 m<sup>3</sup>  
 Gross weight 16,9 Kg Net weight 13 Kg


**Notes**

**219114** Built-in accessory (96 mm) chocolate  
**219158** Built-in accessory (96 mm) off-white

Surface and built-in fitting.  
 Extra cable length.



**2165**  
Wood



- Finishes**
- 82/ \_\_ White oak
  - 83/ \_\_ American walnut

**LED Colour Temperature**

- /1 \_ 2700 K - 5893 lm
- /3 \_ 3500 K - 6213 lm

□ →  
CRI >90

**Control**

**2165** \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Stick: Wood. Spacers: Aluminum.  
 Diffuser: Polycarbonate.  
 Canopy: Steel.

**Light Source and electronics**

8 x LED STRIP 5,8W 30V  
 Constant Voltage 30V  
 100~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,1570 m<sup>3</sup>  
 Gross weight 8,5 Kg Net weight 6,3 Kg


**Notes**

**219282** Built-in accessory (136 mm) Beige D1  
**219283** Built-in accessory (136 mm) Brown D1

Surface and built-in fitting.  
 Extra cable length.



**2167**  
Wood



- Finishes**
- 82/ \_\_ White oak
  - 83/ \_\_ American walnut

**LED Colour Temperature**

- /1 \_ 2700 K - 11049 lm
- /3 \_ 3500 K - 11649 lm

□ →  
CRI >90

**Control**

**2167** \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

**Materials**

Stick: Wood. Spacers: Aluminum.  
 Diffuser: Polycarbonate.  
 Canopy: Steel.

**Light Source and electronics**

15 x LED STRIP 5,8W 30V  
 Constant Voltage 30V  
 100~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,1570 m<sup>3</sup>  
 Gross weight 12,6 Kg Net weight 6,6 Kg

**Notes**

**219282** Built-in accessory (136 mm) Beige D1  
**219283** Built-in accessory (136 mm) Brown D1

Surface and built-in fitting.  
 Extra cable length.



# Guise

Design by Diez Office

Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

## Wall

SURFACE



**2260**

Ø 54 cm

SURFACE



**2262**

Ø 92 cm

REMOTE



**2263**

Ø 92 cm  
Infinite Colour

### 2260

#### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)

#### LED Colour Temperature


/2\_ 3000 K - 445 lm



CRI >90

#### Control

2260 18 / 26 Sensor



#### Materials

Diffuser: Borosilicate.  
LED support: Aluminum.

#### Light Source and electronics

1 x LED STRIP 24V 10 W  
Constant Voltage 24V  
100~240V 50/60Hz

#### Packaging


1 Box 0,69 x 0,69 x 0,09 m  
Vol 0,043 m<sup>3</sup>  
Gross weight 7 Kg Net weight 4 Kg

#### Notes

Electric cable with plug 3 m




2262



<b>Finishes</b> ● 18/ _ _ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /2_ 3000 K - 897 lm  CRI >90	<b>Control</b> 2262 18 / 26 Sensor
--	---	---------------------------------------

<b>Materials</b> Diffuser: Borosilicate. LED support: Aluminum.	<b>Packaging</b> 1 Box 1,04 x 1,04 x 0,10 m Vol 0,104 m <sup>3</sup> Gross weight 16,5 Kg Net weight 11,58 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 17,2 W. Constant Voltage 24V 100~240V 50/60Hz	<b>Notes</b> Electric cable with plug 3 m  

2263



<b>Finishes</b> ● 18/ _ _ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /A Infinite Colour (TW + RGB) 778 lm - 939 lm  CRI >90	<b>Control</b> 2263 18 / AY_ 30 Protapixel* (Remote) (also with push buttons)
--	--	--

<b>Materials</b> Diffuser: Borosilicate. LED support: Aluminum.	<b>Packaging</b> 1 Box 1,04 x 1,04 x 0,10 m Vol 0,104 m <sup>3</sup> Gross weight 16,5 Kg Net weight 11,58 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 17,2 W. Constant Voltage 24V 100~240V 50/60Hz	<b>Notes</b> ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us). *Available from January 2025.  



Pendant

2270




Ø 16 cm

2272



Ø 16 cm

2277

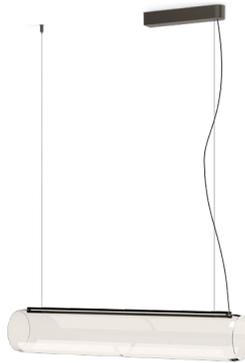


89 cm

2282




Ø 25 cm

2288

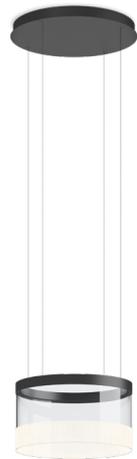

Ø 40 cm

2270

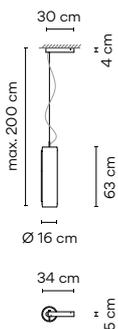

Finishes  
● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

LED Colour Temperature  
/2\_ 3000 K - 1097 lm  
G  
CRI >90

Control  
2270 \_ \_ / \_ \_  
\_ \_ / 21 DALI-2  
\_ \_ / 26 Sensor  
\_ \_ / 22 Casambi

Materials  
Diffuser: Borosilicate glass. Body: Aluminum.  
LED support: Aluminum. Canopy: Steel.


Light Source and electronics  
1 x LED STRIP 24V 20 W  
Constant Voltage 24V  
110~240V 50/60Hz

Packaging  
1 Box 0,87 x 0,35 x 0,37 m  
Vol 0,113 m<sup>3</sup>  
Gross weight 6,5 Kg Net weight 5 Kg

Notes  
Extra cable length.

LED IP20 CE UK ENE  
Dimmer Bi-volt

2272

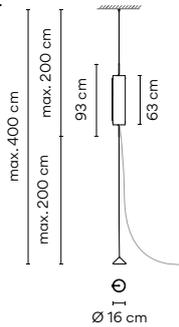


<b>Finishes</b> ● 18/ __ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /2 _ 3000 K - 1097 lm G CRI >90	<b>Control</b> 2272 __ / 26 Sensor
---	--	---------------------------------------

<b>Materials</b> Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.	<b>Packaging</b> 1 Box 0,45 x 0,80 x 0,20 m Vol 0,0072 m <sup>3</sup> Gross weight 16,10 Kg Net weight 16,10 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 20 W Constant Voltage 24V 110-240V 50/60Hz	<b>Notes</b> Extra cable length.

LED IP20 CE UK EAC Bi-volt

2277




<b>Finishes</b> ● 18/ __ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /2 _ 3000 K - 1404 lm G CRI >90	<b>Control</b> 2277 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2Z Casambi
---	--	---

<b>Materials</b> Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.	<b>Packaging</b> 1 Box 1,18 x 0,35 x 0,37 m Vol 0,153 m <sup>3</sup> Gross weight 9,5 Kg Net weight 7,5 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 30 W Constant Voltage 24V 100-240V 50/60Hz	<b>Notes</b> Extra cable length.

LED IP20 CE UK EAC Dimmer Bi-volt

2282




<b>Finishes</b> ● 18/ __ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /2 _ 3000 K - 398 lm G CRI >90	<b>Control</b> 2282 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2B Push; 1-10V __ / 2Z Casambi
---	---	--

<b>Materials</b> Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.	<b>Packaging</b> 1 Box 0,41 x 0,41 x 0,38 m Vol 0,0639 m <sup>3</sup> Gross weight 3,3 Kg Net weight 2,3 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 12 W Constant Voltage 24V 110-240V 50/60Hz	<b>Notes</b> Extra cable length.

LED IP20 CE UK EAC Bi-volt

2288

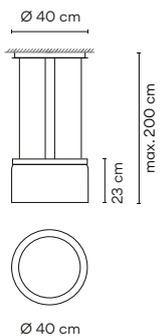

<b>Finishes</b> ● 18/ __ Graphite (ADAPTA RF9913WX)	<b>LED Colour Temperature</b> /2 _ 3000 K - 868 lm G CRI >90	<b>Control</b> 2288 __ / __ __ / 21 DALI-2 __ / 26 Sensor __ / 2B Push; 1-10V __ / 2Z Casambi
---	---	--

<b>Materials</b> Diffuser: Borosilicate glass. Body: Aluminum. LED support: Aluminum. Canopy: Steel.	<b>Packaging</b> 1 Box 0,56 x 0,56 x 0,46 m Vol 0,1443 m <sup>3</sup> Gross weight 11,7 Kg Net weight 9,7 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 18 W Constant Voltage 24V 110-240V 50/60Hz	<b>Notes</b> Extra cable length.

LED IP20 CE UK EAC

Ceiling

2292

Ø 25 cm




2298

Ø 40 cm



2292



**Finishes**  
● 18/ \_\_ Graphite  
(ADAPTA RF9913WX)

**LED Colour Temperature**  
/2 \_ 3000 K - 398 lm  
[G] →  
CRI >90

**Control**  
2292 \_\_ / \_\_

\_\_ / 21 DALI-2  
\_\_ / 2B Push; 1-10V  
\_\_ / 2Z Casambi



**Materials**  
Diffuser: Borosilicate glass. Body: Aluminum.  
LED support: Aluminum. Canopy: Steel.

**Light Source and electronics**  
1 x LED STRIP 24V 12 W  
Constant Voltage 24V  
110~240V 50/60Hz

**Packaging**  
1 Box 0,41 x 0,41 x 0,33 m  
Vol 0,0555 m<sup>3</sup>  
Gross weight 3,2 Kg Net weight 2,2 Kg



2298



**Finishes**  
● 18/ \_\_ Graphite  
(ADAPTA RF9913WX)

**LED Colour Temperature**  
/2 \_ 3000 K - 398 lm  
[G] →  
CRI >90


**Control**  
2298 \_\_ / \_\_

\_\_ / 21 DALI-2  
\_\_ / 2B Push; 1-10V  
\_\_ / 2Z Casambi

**Materials**  
Diffuser: Borosilicate glass. Body: Aluminum.  
LED support: Aluminum. Canopy: Steel.

**Light Source and electronics**  
1 x LED STRIP 24V 18 W  
Constant Voltage 24V  
220~240V 50/60Hz

**Packaging**  
1 Box 0,56 x 0,56 x 0,46 m  
Vol 0,1443 m<sup>3</sup>  
Gross weight 13,3 Kg Net weight 11,3 Kg





# Halo

Design by Martín Azúa


A seamless merging of light and matter, Halo lends the effect of light floating in the air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.

---


## Pendant



**2330**  
Ø 55,5 cm

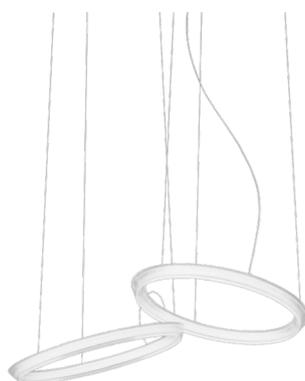

**2331**  
89 cm  
2 Units

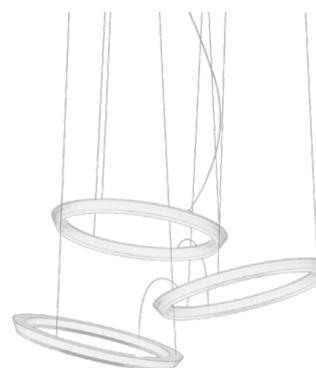


**2332**  
127 cm  
3 Units




**2333**  
197 cm  
5 Units

Each project is unique.  
 Personalise your own  
 Halo composition  
 quick and easy.

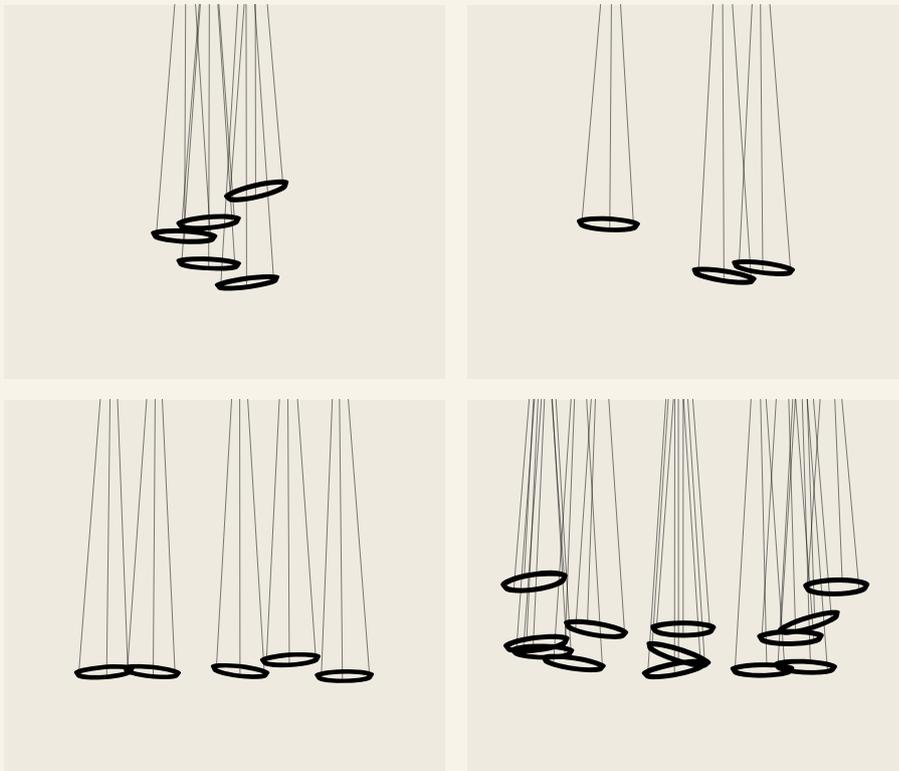

2330



Finishes  
 03/ \_\_ White  
 (RAL 9016)

LED Colour Temperature  
 /1 \_ 2700 K - 1904 lm  
 CRI >90  
 /2 \_ 3000 K - 1726 lm  
 CRI >80  
 D >

Control  
 2330 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Materials  
 LED support: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.


Light Source and electronics  
 1 x LED STRIP 24V 23 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

Packaging  
 1 Box 0,60 x 0,60 x 0,27 m  
 Vol 0,0972 m<sup>3</sup>  
 Gross weight 5,75 Kg Net weight 3,75 Kg

Notes  
 Extra cable length.



**2331**

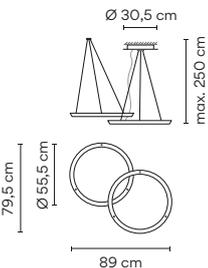

**Finishes**  
 ● **03/** \_\_ White (RAL 9016)

**LED Colour Temperature**  
 /1 \_ 2700 K - 3808 lm CRI >90  
 /2 \_ 3000 K - 3453 lm CRI >80  
**D** >

**Control**  
**2331** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

---

**Materials**  
 LED support: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel


**Packaging**  
 1 Box 0,60 x 0,60 x 0,27 m  
 Vol 0,0972 m<sup>3</sup>  
 Gross weight 10,25 Kg Net weight 6,25 Kg

**Light Source and electronics**  
 2 x LED STRIP 24V 23 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

**Notes**  
 Extra cable length.

LED ⓘ IP20 CE UK ENEC ⓘ Multi-volt

**2332**

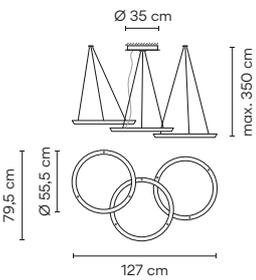

**Finishes**  
 ● **03/** \_\_ White (RAL 9016)

**LED Colour Temperature**  
 /1 \_ 2700 K - 5712 lm CRI >90  
 /2 \_ 3000 K - 5180 lm CRI >80  
**D** >

**Control**  
**2332** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

---

**Materials**  
 LED support: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.


**Packaging**  
 1 Box 0,60 x 0,60 x 0,27 m  
 Vol 0,0972 m<sup>3</sup>  
 Gross weight 14,75 Kg Net weight 8,75 Kg

**Light Source and electronics**  
 3 x LED STRIP 24V 23 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

**Notes**  
 Extra cable length.

LED ⓘ IP20 CE UK ENEC ⓘ Multi-volt

**2333**

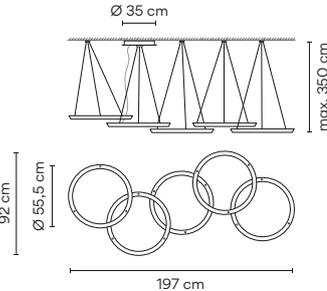

**Finishes**  
 ● **03/** \_\_ White (RAL 9016)

**LED Colour Temperature**  
 /1 \_ 2700 K - 9520 lm CRI >90  
 /2 \_ 3000 K - 8633 lm CRI >80  
**D** >

**Control**  
**2333** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

---

**Materials**  
 LED support: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.

**Packaging**  
 2 Boxes  
 Total Vol 0,1106 m<sup>3</sup>  
 Gross weight 23,75 Kg Net weight 13,75 Kg

**Light Source and electronics**  
 5 x LED STRIP 24V 23 W  
 Constant Voltage 24V  
 100~277V 50/60Hz


**Notes**  
 Extra cable length.

LED ⓘ IP20 CE UK ENEC ⓘ Multi-volt




---


Pendant

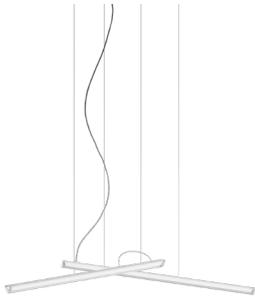


**2340**  
152 cm  
2 Units

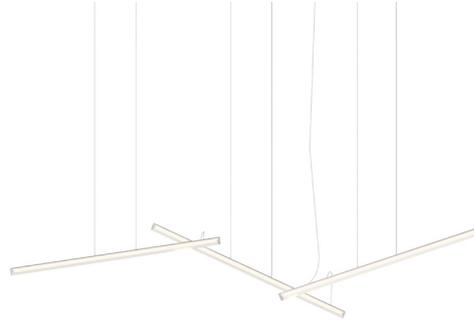

**2341**  
204 cm  
3 Units

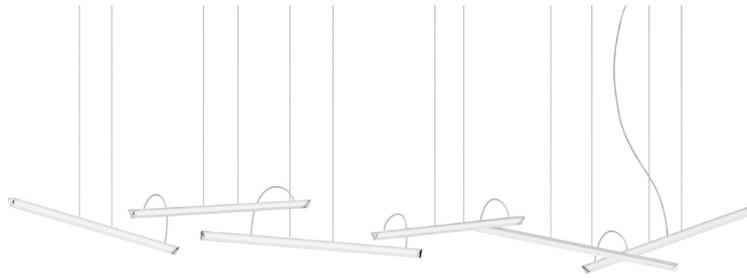


**2342**  
336 cm  
6 Units

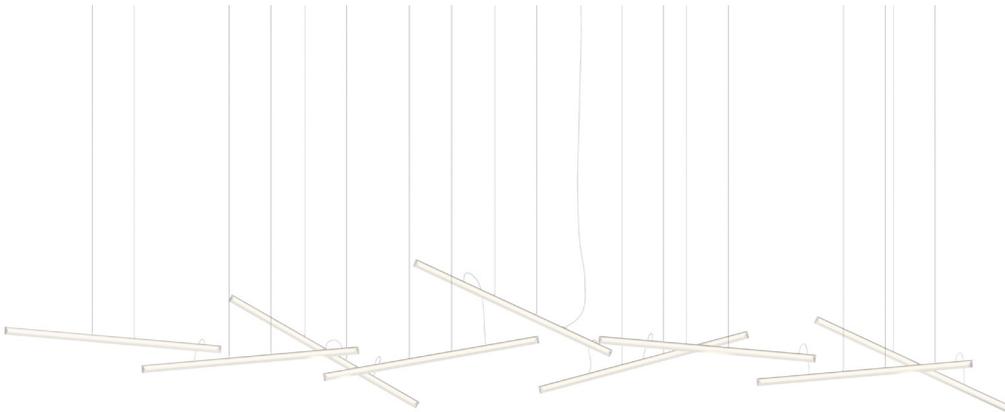

**2343**  
500 cm  
9 Units

Each project is unique.  
 Personalise your own  
 Halo composition  
 quick and easy.

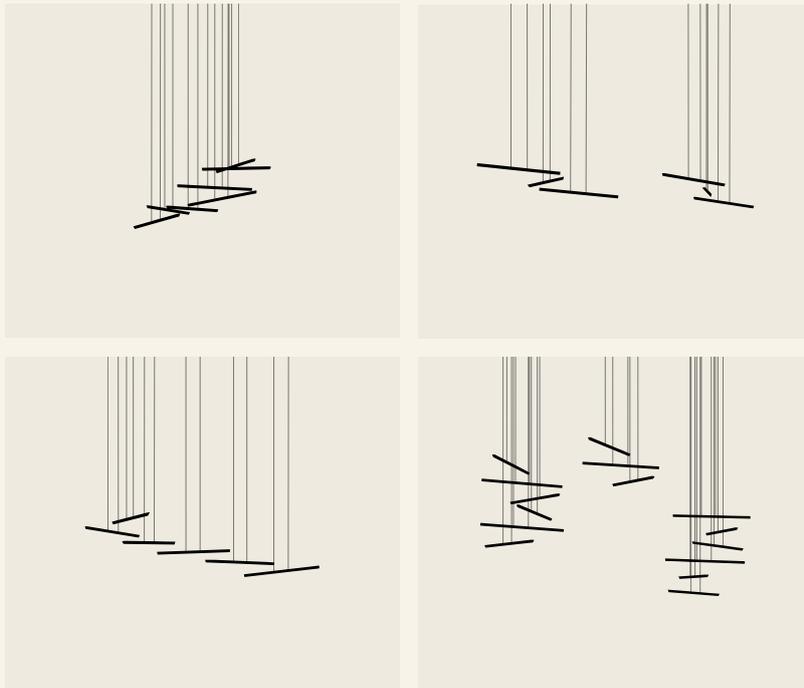


2340

Finishes  
 ● 03/ \_\_ White  
 (RAL 9016)

LED Colour Temperature  
 /1\_ 2700 K - 1904 lm  
 F →  
 /2\_ 3000 K - 1726 lm  
 G →  
 CRI >90

Control  
 2340 \_\_ / \_\_  
 \_\_ / 1 DALI-2  
 \_\_ / 3 1-10V  
 \_\_ / Z Casambi



Select Electrical connection



Surface    Remote Micro    Remote XXS

\_10 Surface  
 \_31 Remote Micro  
 \_32 Remote XXS

Materials  
 Diffuser: PMMA.  
 Canopy: Steel.

Light Source and electronics  
 2 x LED STRIP 24V 15,3 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,0753 m³  
 Gross weight 6,2 Kg Net weight 5,58 Kg

Notes  
 Extra cable length.



**2341**

**Finishes**  
 **03/** \_ \_ White (RAL 9016)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4246 lm  
 F  
 /2 \_ 3000 K - 3850 lm  
 G  
 CRI >90

**Control**  
**2341** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ Z Casambi

**Select Electrical connection**

Surface    Remote Micro    Remote XXS

**Materials**  
 Diffuser: PMMA.  
 Canopy: Steel.

**Light Source and electronics**  
 3 x LED STRIP 24V 15,3 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,0753 m<sup>3</sup>  
 Gross weight 7,3 Kg Net weight 6,57 Kg

**Notes**  
 Extra cable length.

LED IP20 CE UK ENEC Multi-volt

\_10 Surface  
 \_31 Remote Micro  
 \_32 Remote XXS

**2342**

**Finishes**  
 **03/** \_ \_ White (RAL 9016)

**LED Colour Temperature**  
 /1 \_ 2700 K - 8492 lm  
 F  
 /2 \_ 3000 K - 7701 lm  
 G  
 CRI >90

**Control**  
**2342** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ Z Casambi

**Select Electrical connection**

Surface    Remote Micro    Remote XXS

**Materials**  
 Diffuser: PMMA.  
 Canopy: Steel.

**Light Source and electronics**  
 6 x LED STRIP 24V 15,3 W  
 Constant Voltage 24V  
 100~277V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,0756 m<sup>3</sup>  
 Gross weight 11,8 Kg Net weight 10,25 Kg

**Notes**  
 Extra cable length.

LED IP20 CE UK ENEC Multi-volt


\_10 Surface  
 \_31 Remote Micro  
 \_32 Remote XXS

2343

Finishes  
 ● 03/ \_\_ White  
 (RAL 9016)

LED Colour Temperature  
 /1 \_ 2700 K - 12739 lm  
 F →  
 /2 \_ 3000 K - 11552 lm  
 G →  
 CRI >90

Control  
 2343 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

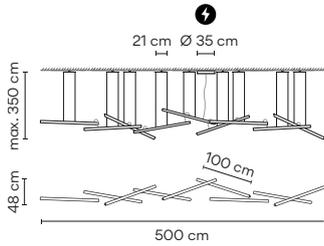

⚡ Select Electrical connection



Surface Remote Micro Remote XXS

\_10 Surface  
 \_31 Remote Micro  
 \_32 Remote XXS

Materials  
 Diffuser: PMMA.  
 Canopy: Steel.  
 Light Source and electronics  
 9 x LED STRIP 24V 15,3 W  
 Constant Voltage 24V  
 100-277V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,0756 m<sup>3</sup>  
 Gross weight 16,20 Kg Net weight 14,75 Kg

Notes  
 Extra cable length.



**Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2340, 2341

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 30,5 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 22 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	--	--	--

For Ref. 2342, 2343


**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---


**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 35 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 22 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	--	--	--

**Remote**



**Built-in**



## Wall



**2360**

102,5 x 5,7 cm

**2360**

- Finishes**
- 11/ \_ \_ Black  
(NCS S 8500-N)
  - 13/ \_ \_ Off-White  
(NCS S 1000-N)

**LED Colour Temperature**

- /1\_ 2700 K - 1415 lm
- /2\_ 3000 K - 1224 lm


**F**

CRI >90

**Control**

2360 \_ \_ / \_ \_

\_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ Z 30  
 Casambi (Remote)



**Materials**

Diffuser: PMMA.  
 LED support: Aluminum.

**Light Source and electronics**

1 x LED STRIP 24V 15,3 W  
 Constant Voltage 24V  
 220~240V 50/60Hz

**Packaging**

1 Box 0,10 x 1,025 x 0,10 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,25 Kg Net weight 1,75 Kg



# Halo Jewel

Design by Martín Azúa


Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.

## Pendant

### INDIVIDUAL MODELS

**2350**

Ø 56,3 cm

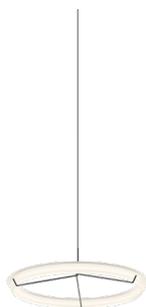

**2351**

Ø 56,3 cm



**2355**

Ø 16 x 350 cm



**2356**

Ø 27 x 350 cm




### MULTIPLE MODELS



INDIVIDUAL MODEL

2350

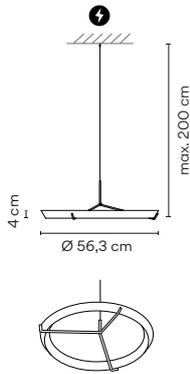

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm G	2350 __ / __
	CRI >90	__ / _1 DALI-2
	/2_ 3000 K - 2024 lm F	__ / _3 1-10V
	CRI >80	__ / _Z Casambi

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm G	2350 __ / __
	CRI >90	__ / _1 DALI-2
		__ / _3 1-10V
		__ / _Z Casambi

Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
Diffuser: PMMA. LED support: Aluminum.  
Pendant structure: Steel. Ceiling rose: Steel.


**Light Source and electronics**  
1 x LED STRIP 24V 23 W  
Constant Voltage 24V  
100~277V 50/60Hz

**Packaging**  
1 Box 0,6 x 0,6 x 0,27 m  
Vol 0,097 m<sup>3</sup>  
Gross weight 7 Kg Net weight 6,35 Kg

**Notes**  
Extra cable length.



2351

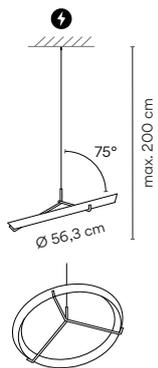

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm G	2351 __ / __
	CRI >90	__ / _1 DALI-2
	/2_ 3000 K - 2024 lm F	__ / _3 1-10V
	CRI >80	__ / _Z Casambi

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm G	2351 __ / __
	CRI >90	__ / _1 DALI-2
		__ / _3 1-10V
		__ / _Z Casambi

Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
Diffuser: PMMA. LED support: Aluminum.  
Pendant structure: Steel. Ceiling rose: Steel.

**Light Source and electronics**  
1 x LED STRIP 24V 23 W  
Constant Voltage 24V  
100~277V 50/60Hz

**Packaging**  
1 Box 0,6 x 0,6 x 0,27 m  
Vol 0,097 m<sup>3</sup>  
Gross weight 7 Kg Net weight 6,35 Kg


**Notes**  
Extra cable length.



2355

<b>Finishes</b> ● 11/ __ Black (NCS S 8500-N)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	<b>Control</b> 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

<b>Finishes</b> ● 20/ __ Gold (Gold)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	<b>Control</b> 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---

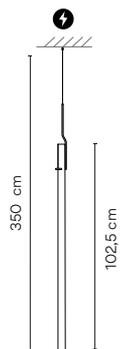

 Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS


<b>Materials</b> Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	<b>Packaging</b> 1 Box 0,13 x 0,19 x 1,265 m Vol 0,0312 m <sup>3</sup> Gross weight 5 Kg Net weight 4,1 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 24V 15,3 W Constant Voltage 24V 220~240V 50/60Hz	<b>Notes</b> Extra cable length.



2356

<b>Finishes</b> ● 11/ __ Black (NCS S 8500-N)	<b>LED Colour Temperature</b> /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	<b>Control</b> 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

<b>Finishes</b> ● 20/ __ Gold (Gold)	<b>LED Colour Temperature</b> /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	<b>Control</b> 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---

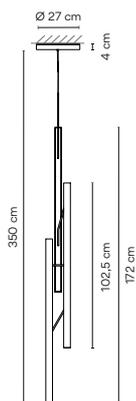

<b>Materials</b> Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	<b>Packaging</b> 1 Box 0,31 x 0,33 x 2 m Vol 0,2046 m <sup>3</sup> Gross weight 7,4 Kg Net weight 6,06 Kg
<b>Light Source and electronics</b> 3 x LED STRIP 24V 15,3 W Constant Voltage 24V 100~277V 50/60Hz	<b>Notes</b> Extra cable length.





MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 2355



2 x 2350



1 x 2351 2 x 2350



3 x 2351



3 x 2351



4 x 2350



5 x 2355



1 x 2351 3 x 2350



9 x 2355



17 x 2355



7 x 2355



25 x 2355

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 20/ \_\_ Gold (Gold)

LED Colour Temperature

- /1 \_ 2700 K
- /2 \_ 3000 K
- CRI >80
- CRI >90

Control

Model \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--

Regular ceiling

<p><b>_10</b> Surface</p>  <p>Ø 27 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 22 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	---	---

For Ref. 2355


Drop ceiling

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--


Regular ceiling

<p><b>_10</b> Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	---	---

Remote



Built-in



Materials

Diffuser: PMMA. LED support: Aluminum.  
 Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.




# Cosmos

Design by Lievore, Altherr, Molina

Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

## Pendant



Ø 19 cm

**2500**



Ø 27 cm

**2501**



Ø 48 cm

**2502**



55 cm

**2510**



65 cm

**2511**



76 cm


**2515**



86 cm

**2516**

### 2500



#### Finishes

- **14/** \_\_\_ Chocolate (RAL 8019)
- **62/** \_\_\_ Green (PANTONE 5645)
- **58/** \_\_\_ Off-White (NCS S 2005-Y20R)

#### LED Colour Temperature

- /1\_ 2700 K - 485 lm CRI >90
- /3\_ 3500 K - 128 lm CRI >80

#### Control

- 2500** \_\_\_ / \_\_\_
- 
- \_\_\_ / \_\_\_ 0 On/ Off
- \_\_\_ / \_\_\_ 1 DALI-2
- 
- \_\_\_ / \_\_\_ Z Casambi

#### Materials

Diffuser: PC- Polycarbonate.  
Body: PU- Polyurethane.  
Canopy: Steel.

#### Light Source and electronics

1 x LED 4,5 W 350mA  
Constant Current 350 mA  
/ 10: 100-240V 50/60Hz  
/ 1B: 110-240V 50/60Hz

#### Packaging


1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0180 m<sup>3</sup>  
Gross weight 1,62 Kg Net weight 1,18 Kg

#### Notes

Extra cable length.



### 2501



- Finishes**
- **14/** \_ \_ Chocolate (RAL 8019)
  - **62/** \_ \_ Green (PANTONE 5645)
  - **58/** \_ \_ Off-White (NCS S 2005-Y20R)

**LED Colour Temperature**

**/1** \_ 2700 K - 485 lm  
CRI >90

**/3** \_ 3500 K - 512 lm  
CRI >80

**E** >

**Control**

**2501** \_ \_ / \_ \_

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **Z** Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Body: PU- Polyurethane.  
Canopy: Steel

**Light Source and electronics**

1 x LED 4,5 W 350mA  
Constant Current 350 mA  
/ **10**: 100-240V 50/60Hz  
/ **1B**: 110-240V 50/60Hz

**Packaging**


1 Box 0,42 x 0,42 x 0,25 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,54 Kg Net weight 1,44 Kg

**Notes**

Extra cable length.

**LED** **IP20** **CE** **UK** **ERC** **Bi-volt**

### 2502



- Finishes**
- **10/** \_ \_ White (NCS S 0300-N)

**LED Colour Temperature**

**/1** \_ 2700 K - 485 lm  
CRI >90

**/3** \_ 3500 K - 512 lm  
CRI >80

**E** >

**Control**

**2502** \_ \_ / \_ \_

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **Z** Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Body: PU- Polyurethane.  
Canopy: Steel.

**Light Source and electronics**

1 x LED 4,5 W 350 mA.  
1 x LED 1 W 350 mA.  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,60 x 0,60 x 0,27 m  
Vol 0,0970 m<sup>3</sup>  
Gross weight 5,58 Kg Net weight 3,15 Kg

**Notes**

Extra cable length.

**LED** **IP20** **CE** **UK** **ERC** **Bi-volt**

### 2510

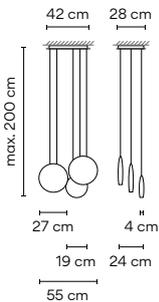

- Finishes**
- **62/** \_ \_ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019)

**LED Colour Temperature**

**/1** \_ 2700 K - 1455 lm  
CRI >90

**/2** \_ 3500 K - 1537 lm  
CRI >80

**E** >

**Control**

**2510** \_ \_ / \_ \_

\_ \_ / \_ **A** Push; 1-10V; DALI-2

\_ \_ / \_ **Z** Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Body: PU- Polyurethane.  
Canopy: Steel.

**Light Source and electronics**

3 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,60 x 0,60 x 0,27 m  
Vol 0,0970 m<sup>3</sup>  
Gross weight 7,54 Kg Net weight 5,11 Kg

**Notes**

Compositions and finishes can not be changed  
Extra cable length.

**LED** **IP20** **CE** **UK** **ERC** **Bi-volt**

<p><b>2511</b></p>	<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ __ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019)</li> <li>58/ __ Off-White, White and Chocolate (NCS S 2005-Y20R, NCS S 0300-N, RAL 801)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1 _ 2700 K - 1455 lm CRI &gt;90</p> <p>/3 _ 3500 K - 1537 lm CRI &gt;80</p> <p><b>E</b> </p>	<p><b>Control</b></p> <p><b>2511</b> __ / __</p> <p>__ / _ A Push; 1-10V; DALI-2</p> <p>__ / _ Z Casambi</p>
	<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel.</p> <p><b>Light Source and electronics</b></p> <p>3 x LED 4,5 W 350 mA 1 x LED 1 W 350 mA. Constant Current 350 mA 110-240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,60 x 0,60 x 0,27 m Vol 0,0970 m<sup>3</sup> Gross weight 9,25 Kg Net weight 6,82 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed Extra cable length.</p> <p><b>LED</b> <b>IP20</b> <b>Bi-volt</b></p>	

<p><b>2515</b></p>	<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ __ Green, Chocolate and Off-White (Pantone 5645, RAL 8019, NCS S 2005-Y20R)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1 _ 2700 K - 1940 lm CRI &gt;90</p> <p>/3 _ 3500 K - 2050 lm CRI &gt;80</p> <p><b>E</b> </p>	<p><b>Control</b></p> <p><b>2515</b> __ / __</p> <p>__ / _ A Push; 1-10V; DALI-2</p> <p>__ / _ Z Casambi</p>
	<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel.</p> <p><b>Light Source and electronics</b></p> <p>4 x LED 4,5 W 350 mA Constant Current 350 mA 110-240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,76 x 0,76 x 0,27 m Vol 0,1560 m<sup>3</sup> Gross weight 10,94 Kg Net weight 7,04 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed Extra cable length.</p> <p><b>LED</b> <b>IP20</b> <b>Bi-volt</b></p>	

<p><b>2516</b></p>	<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ __ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1 _ 2700 K - 1940 lm CRI &gt;90</p> <p>/3 _ 3500 K - 2050 lm CRI &gt;80</p> <p><b>E</b> </p>	<p><b>Control</b></p> <p><b>2516</b> __ / __</p> <p>__ / _ A Push; 1-10V; DALI-2</p> <p>__ / _ Z Casambi</p>
	<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Body: PU- Polyurethane. Canopy: Steel.</p> <p><b>Light Source and electronics</b></p> <p>4 x LED 4,5 W 350 mA 2x LED 1 W 350 mA Constant Current 350 mA 110-240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,73x0,73x0,32 m Vol 0,1705 m<sup>3</sup> Gross weight 14,62 Kg Net weight 15,5 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed Extra cable length.</p> <p><b>LED</b> <b>IP20</b> <b>Bi-volt</b></p>	



# Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

## Wall

**2600**

16 x 16 cm



**2602**

26 x 22 cm



**2610**

120 x 18 x 10 cm




**2612**

240 x 30 x 10 cm



**2615**

180 x 120 x 10 cm

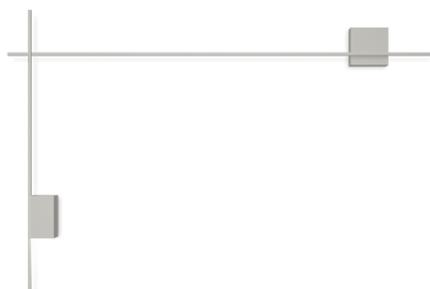


**2617**

84 x 240 x 10 cm



**2600**



### Finishes

- **15/** \_ \_ Grey L2 (NCS S 2500-N)
- **21/** \_ \_ Black Grey (NCS S 7000-N)

### Finish customization

(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

### Materials

Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

1 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110-240V 50/60Hz

### LED Colour Temperature

- /1** \_ 2700 K - 700 lm
  - /2** \_ 3000 K - 756 lm
  - /3** \_ 3500 K - 763 lm
- CRI >90

### Control


- 2600** \_ \_ / \_ \_
- 
- \_ \_ / \_ **1** DALI-2
- \_ \_ / \_ **3** 1-10V
- \_ \_ / \_ **Z** Casambi

### Packaging

1 Box 0,4 x 0,4 x 0,2 m  
Vol 0,032 m<sup>3</sup>  
Gross weight 1,35 Kg Net weight 0,9 Kg



### 2602



**Finishes**

- 15/ \_\_ Grey L2 (NCS S 2500-N)
- 21/ \_\_ Black Grey (NCS S 7000-N)

**Finish customization**  
(Available options: Vibia colour palette.)

Minimum quantity  
10 units. Price + 10%

**LED Colour Temperature**

/1 \_ 2700 K - 1400 lm  
F

/2 \_ 3000 K - 1513 lm

/3 \_ 3500 K - 1526 lm  
E

CRI >90

**Control**

2602 \_\_ / \_\_

\_\_ / \_ 1 DALI-2

\_\_ / \_ 3 1-10V

\_\_ / \_ Z Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**


1 Box 0,4 x 0,4 x 0,2 m  
Vol 0,032 m<sup>3</sup>  
Gross weight 2,85 Kg Net weight 1,9 Kg

**Notes**

\* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

### 2610

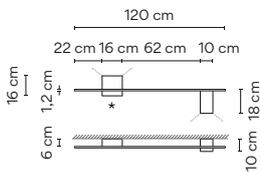

**Finishes**

- 15/ \_\_ Grey L2 (NCS S 2500-N)
- 21/ \_\_ Black Grey (NCS S 7000-N)

**Finish customization**  
(Available options: Vibia colour palette.)

Minimum quantity  
10 units. Price + 10%

**Materials**

Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

1 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Control**

2610 \_\_ / \_\_

\_\_ / \_ 1 DALI-2

\_\_ / \_ 3 1-10V

\_\_ / \_ Z Casambi

**Packaging**


2 Boxes  
Total Vol 0,036 m<sup>3</sup>  
Gross weight 3,6 Kg Net weight 2,4 Kg

**Notes**

\* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

### 2612

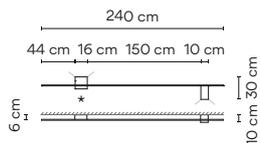

**Finishes**

- 15/ \_\_ Grey L2 (NCS S 2500-N)
- 21/ \_\_ Black Grey (NCS S 7000-N)

**Finish customization**  
(Available options: Vibia colour palette.)

Minimum quantity  
10 units. Price + 10%

**LED Colour Temperature**

/1 \_ 2700 K - 1400 lm  
F

/2 \_ 3000 K - 1513 lm

/3 \_ 3500 K - 1526 lm  
E

CRI >90

**Control**

2612 \_\_ / \_\_

\_\_ / \_ 1 DALI-2

\_\_ / \_ 3 1-10V

\_\_ / \_ Z Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,042 m<sup>3</sup>  
Gross weight 3,9 Kg Net weight 2,6 Kg

**Notes**

\* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2615

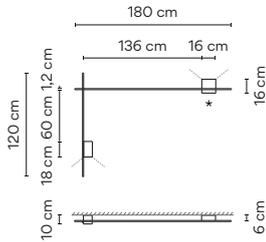

**Finishes**  
 ● 15/ \_\_ Grey L2 (NCS S 2500-N)  
 ● 21/ \_\_ Black Grey (NCS S 7000-N)  
**Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
 /1 \_ 2700 K - 1400 lm  
 F  
 /2 \_ 3000 K - 1513 lm  
 /3 \_ 3500 K - 1526 lm  
 E  
 CRI >90

**Control**  
**2615** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main body: Aluminum.  
 Structures: Aluminum.

**Packaging**  
 2 Boxes  
 Total Vol 0,038 m<sup>3</sup>  
 Gross weight 4,35 Kg Net weight 2,9 Kg

**Light Source and electronics**  
 2 x LED PLATE 24V 6 W  
 Constant Voltage 24V  
 110-240V 50/60Hz

**Notes**  
 \* Electrical connection point.  
 LED IP20 CE UK ENEC Bi-volt

2617

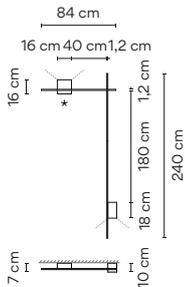

**Finishes**  
 ● 15/ \_\_ Grey L2 (NCS S 2500-N)  
 ● 21/ \_\_ Black Grey (NCS S 7000-N)  
**Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
 /1 \_ 2700 K - 1400 lm  
 F  
 /2 \_ 3000 K - 1513 lm  
 /3 \_ 3500 K - 1526 lm  
 E  
 CRI >90

**Control**  
**2617** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main body: Aluminum.  
 Structures: Aluminum.


**Packaging**  
 2 Boxes  
 Total Vol 0,041 m<sup>3</sup>  
 Gross weight 4,35 Kg Net weight 2,9 Kg

**Light Source and electronics**  
 2 x LED PLATE 24V 6 W  
 Constant Voltage 24V  
 110-240V 50/60Hz

**Notes**  
 \* Electrical connection point.  
 LED IP20 CE UK ENEC Bi-volt



2632



- Finishes**
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
  - 21/ \_ \_ Black Grey (NCS S 7000-N)
- Finish customization**  
(Available options: Vibia colour palette.)
- Minimum quantity 10 units. Price + 10%

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 2049 lm  
E →

/2 \_ 3000 K - 2214 lm  
/3 \_ 3500 K - 2233 lm  
D →

**Tunable White**  
/8 \_ (2200 K - 4000 K)  
1699 lm - 2188 lm  
F → - E →

CRI >90

**Control**

2632 \_ \_ / \_ \_

---

\_ \_ / \_ 1 Static White + DALI-2

\_ \_ / \_ 3 Static White + 1-10V

\_ \_ / \_ Z Static White + Casambi

---


\_ \_ / 81 Tunable White + DALI-2 DT8

\_ \_ / 8Z Tunable White + Casambi


**Materials**  
Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**  
1 x LED PLATE 24V 15 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
1 Box 0,34 x 0,34 x 0,25 m  
Vol 0,029 m<sup>3</sup>  
Gross weight 4,35 Kg Net weight 2,9 Kg



2634



- Finishes**
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
  - 21/ \_ \_ Black Grey (NCS S 7000-N)
- Finish customization**  
(Available options: Vibia colour palette.)
- Minimum quantity 10 units. Price + 10%

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 4098 lm  
E →

/2 \_ 3000 K - 4428 lm  
/3 \_ 3500 K - 4466 lm  
D →

**Tunable White**  
/8 \_ (2200 K - 4000 K)  
3398 lm - 4376 lm  
F → - E →

CRI >90

**Control**

2634 \_ \_ / \_ \_

---

\_ \_ / \_ 1 Static White + DALI-2

\_ \_ / \_ 3 Static White + 1-10V

\_ \_ / \_ Z Static White + Casambi

---

\_ \_ / 81 Tunable White + DALI-2 DT8

\_ \_ / 8Z Tunable White + Casambi


**Materials**  
Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**  
1 x LED PLATE 24V 30 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
1 Box 0,58 x 0,34 x 0,23 m  
Vol 0,045 m<sup>3</sup>  
Gross weight 5,85 Kg Net weight 3,9 Kg



2640



- Finishes**
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
  - 21/ \_ \_ Black Grey (NCS S 7000-N)
- Finish customization**  
(Available options: Vibia colour palette.)
- Minimum quantity 10 units. Price + 10%

**LED Colour Temperature**

**Static White**  
/1 \_ 2700 K - 3047 lm  
/2 \_ 3000 K - 3292 lm  
/3 \_ 3500 K - 3320 lm  
E →

**Tunable White**  
/8 \_ (2200 K - 4000 K)  
2519 lm - 3248 lm  
F → - E →

CRI >90

**Control**

2640 \_ \_ / \_ \_

---

\_ \_ / \_ 1 Static White + DALI-2

\_ \_ / \_ 3 Static White + 1-10V

\_ \_ / \_ Z Static White + Casambi

---

\_ \_ / 81 Tunable White + DALI-2 DT8

\_ \_ / 8Z Tunable White + Casambi

**Materials**  
Diffuser: PC- Polycarbonate.  
Main body: Aluminum.  
Structures: Aluminum.


**Light Source and electronics**  
1 x LED PLATE 24V 9 W  
1 x LED PLATE 24V 15 W  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
3 Boxes  
Total Vol 0,15 m<sup>3</sup>  
Gross weight 8,25 Kg Net weight 5,5 Kg

**Notes**  
\* Electrical connection point.



2642



- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 21/ \_\_ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 6147 lm  
 [E] →

/2 \_ 3000 K - 6642 lm  
 /3 \_ 3500 K - 6699 lm  
 [D] →

**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 5097 lm - 6564 lm  
 [F] → - [E] →

CRI >90

**Control**

2642 \_\_ / \_\_

---

\_\_ / \_ 1 Static White + DALI-2

\_\_ / \_ 3 Static White + 1-10V

\_\_ / \_ Z Static White + Casambi

---

\_\_ / 81 Tunable White + DALI-2 DT8

\_\_ / 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main body: Aluminum.  
 Structures: Aluminum.


**Light Source and electronics**  
 1 x LED PLATE 24V 15 W  
 1 x LED PLATE 24V 30 W  
 Constant Voltage 24V  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,25 x 0,60 x 1,7 m  
 Vol 0,255 m<sup>3</sup>  
 Gross weight 11,25 Kg Net weight 7,5 Kg

**Notes**  
 \* Electrical connection point.

[LED] [IP20] [CE] [UK] [EAC] [Bi-volt]

2645

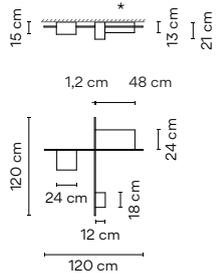

- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 21/ \_\_ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 7145 lm  
 [E] →

/2 \_ 3000 K - 7720 lm  
 /3 \_ 3500 K - 7786 lm  
 [D] →

**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 5917 lm - 7624 lm  
 [F] → - [E] →

CRI >90

**Control**

2645 \_\_ / \_\_

---

\_\_ / \_ 1 Static White + DALI-2

\_\_ / \_ 3 Static White + 1-10V

\_\_ / \_ Z Static White + Casambi

---

\_\_ / 81 Tunable White + DALI-2 DT8

\_\_ / 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main body: Aluminum.  
 Structures: Aluminum.


**Light Source and electronics**  
 1 x LED PLATE 24V 9 W  
 1 x LED PLATE 24V 15 W  
 1 x LED PLATE 24V 30 W  
 Constant Voltage 24V  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,25 x 1,2 x 1,2 m  
 Vol 0,42 m<sup>3</sup>  
 Gross weight 14,25 Kg Net weight 9,25 Kg

**Notes**  
 \* Electrical connection point.

[LED] [IP20] [CE] [UK] [EAC] [Bi-volt]

2647

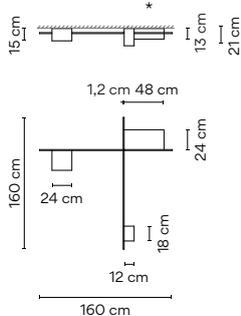

- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 21/ \_\_ Black Grey (NCS S 7000-N)
- Finish customization (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 7145 lm  
 [E] →

/2 \_ 3000 K - 7720 lm  
 /3 \_ 3500 K - 7786 lm  
 [D] →

**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 5917 lm - 7624 lm  
 [F] → - [E] →

CRI >90

**Control**

2647 \_\_ / \_\_

---

\_\_ / \_ 1 Static White + DALI-2

\_\_ / \_ 3 Static White + 1-10V

\_\_ / \_ Z Static White + Casambi

---

\_\_ / 81 Tunable White + DALI-2 DT8

\_\_ / 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main body: Aluminum.  
 Structures: Aluminum.

**Light Source and electronics**  
 1 x LED PLATE 24V 9 W  
 1 x LED PLATE 24V 15 W  
 1 x LED PLATE 24V 30 W  
 Constant Voltage 24V  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,25 x 1,7 x 1,7 m  
 Vol 0,72 m<sup>3</sup>  
 Gross weight 15,3 Kg Net weight 10,2 Kg

**Notes**  
 \* Electrical connection point.

[LED] [IP20] [CE] [UK] [EAC] [Bi-volt]

# Class

Design by Sebastian Herkner

A timeless and elegant solution for outdoor environments, Class combines the refined aesthetic of a patio light with the functional performance of a bollard. Consisting of a durable aluminum shaft and fluted glass diffuser, it washes the space with a gentle luminescence.

## Outdoor



**2810**

28 x 250 cm



**2815**

28 x 250 cm



**2800**

22 x 78,5 cm



**2805**

22 x 78,5 cm



**2820**


18 x 60 cm



**2825**

18 x 96 cm

### 2800



#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)

#### LED Colour Temperature

/1\_ 2700 K - 1188 lm



CRI >90

#### Control

2800 \_\_ / \_\_

\_\_ / 11 DALI-2

\_\_ / 15 Push

\_\_ / 1Z\_ 30 Casambi (Remote)

#### Materials

Body: Aluminum. Glass: Borosilicate glass.  
Diffuser: Opal PC- Polycarbonate.

#### Light Source and electronics


1 x LED 3,5W 150 mA  
Constant Current 150 mA  
220~240V. 50/60Hz

#### Packaging

2 Boxes  
Box 1: 0,95 x 0,30 x 0,30 m  
Box 2: 0,31 x 0,31 x 0,21 m  
Total Vol 0,11 m<sup>3</sup>  
Gross weight 11,6 Kg Net weight 9,6 Kg



### 2805



#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)

#### LED Colour Temperature

/1\_ 2700 K - 2376 lm



CRI >90

#### Control

2805 \_\_ / \_\_

\_\_ / 11 DALI-2

\_\_ / 15 Push

\_\_ / 1Z\_ 30 Casambi (Remote)

#### Materials

Body: Aluminum. Glass: Borosilicate glass.  
Diffuser: Opal PC- Polycarbonate.

#### Light Source and electronics


2 x LED 3,5W 150 mA  
Constant Current 300 mA  
220~240V. 50/60Hz

#### Packaging

2 Boxes  
Box 1: 0,95 x 0,30 x 0,30 m  
Box 2: 0,31 x 0,31 x 0,21 m  
Total Vol 0,11 m<sup>3</sup>  
Gross weight 14,8 Kg Net weight 12,8 Kg



**2810**

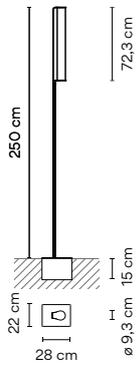

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 2376 lm  
 [G] >  
 CRI >90

**Control**

2810 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 15 Push  
 \_\_ / 1Z \_ 30 Casambi (Remote)

**Materials**

Body: Aluminum. Glass: Borosilicate glass.  
 Diffuser: Opal PC- Polycarbonate.

**Light Source and electronics**


1 x LED 7W 300 mA  
 Constant Current 300 mA  
 220-240V. 50/60Hz

**Packaging**

2 Boxes  
 Box 1: 2,92 x 0,32 x 0,32 m  
 Box 2: 0,37 x 0,32 x 0,22 m  
 Total Vol 0,33 m<sup>3</sup>  
 Gross weight 20,5 Kg Net weight 17,5 Kg



**2815**

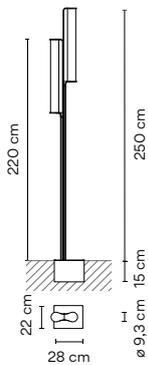

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 4752 lm  
 [G] >  
 CRI >90

**Control**

2815 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 15 Push  
 \_\_ / 1Z \_ 30 Casambi (Remote)

**Materials**

Body: Aluminum. Glass: Borosilicate glass.  
 Diffuser: Opal PC- Polycarbonate.

**Light Source and electronics**


2 x LED 7W 300 mA  
 Constant Current 600 mA  
 220-240V. 50/60Hz

**Packaging**

2 Boxes  
 Box 1: 2,92 x 0,32 x 0,32 m  
 Box 2: 0,37 x 0,32 x 0,22 m  
 Total Vol 0,33 m<sup>3</sup>  
 Gross weight 28,4 Kg Net weight 25,4 Kg



**2820**



**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 1188 lm  
 [G] >  
 CRI >90

**Control**

2820 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 15 Push  
 \_\_ / 1Z \_ 30 Casambi (Remote)

**Materials**

Body: Aluminum. Glass: Borosilicate glass.  
 Diffuser: Opal PC- Polycarbonate.

**Light Source and electronics**


1 x LED 3,5W 150 mA  
 Constant Current 150 mA  
 220-240V. 50/60Hz

**Packaging**

1 Box 0,95 x 0,40 x 0,20 m  
 Vol 0,08 m<sup>3</sup>  
 Gross weight 4,4 Kg Net weight 2,9 Kg



**2825**

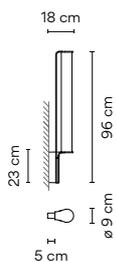

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 2376 lm  
 [G] >  
 CRI >90

**Control**

2825 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 15 Push  
 \_\_ / 1Z \_ 30 Casambi (Remote)

**Materials**

Body: Aluminum. Glass: Borosilicate glass.  
 Diffuser: Opal PC- Polycarbonate.

**Light Source and electronics**

1 x LED 7W 300 mA  
 Constant Current 300 mA  
 220-240V. 50/60Hz

**Packaging**

1 Box 0,95 x 0,30 x 0,30 m  
 Vol 0,09 m<sup>3</sup>  
 Gross weight 6,4 Kg Net weight 4,40 Kg



# Dama

Design by Ludovica+Roberto Palomba


Dama is a homage to the classic lamp, ideal for shaping an intimate atmosphere with an elevated aesthetic.

Combining technical quality with a layer of warmth and intimacy, the collection connects the charm of tradition with the finesse of contemporary lighting design.

## Table Floor Pendant



3225



### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)

### LED Colour Temperature

/1 \_ 2700 K - 2170 lm



CRI >90

### Control

3225 \_ \_ / \_ \_

\_ \_ / 15 Push

\_ \_ / 1Z Casambi

\_ \_ / 1Y ProtoPixel\*

### Materials

Tube: Steel.  
Base: Zinc Alloy.  
Shade: Paper.

### Light Source and electronics

1 x LED STRIP 16,7 W 900 mA  
Constant Voltage 24V  
100-240V. 50/60Hz

### Packaging

1 Box 0,75 x 0,55 x 0,55 m  
Vol 0,23 m<sup>3</sup>  
Gross weight 3,3 Kg Net weight 1,8 Kg

### Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Switch on the cable. Electric cable 2,5 m.

LED IP20 Bi-volt

3230

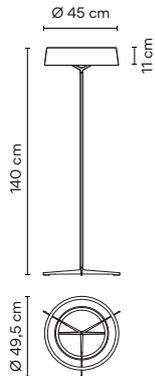

- Finishes
- 11/ \_\_ Black (NCS S 8500-N)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature  
 /1\_ 2700 K - 2170 lm  
 E →  
 CRI >90

Control  
 3230 \_\_ / \_\_  
 \_\_ / 15 Push  
 \_\_ / 1Z Casambi  
 \_\_ / 1Y ProtoPixel\*

Materials  
 Tube: Steel.  
 Base: Zinc Alloy.  
 Shade: Paper.


Light Source and electronics  
 1 x LED STRIP 16,7 W 900 mA  
 Constant Voltage 24V  
 100-240V. 50/60Hz

Packaging  
 1 Box 1,6 x 0,55 x 0,55 m  
 Vol 0,48 m<sup>3</sup>  
 Gross weight 5 Kg Net weight 2,55 Kg

Notes  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Switch on the cable. Electric cable 2,5 m.



3235

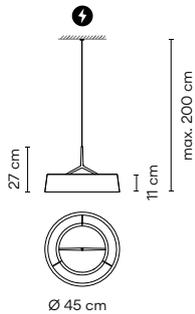


- Finishes
- 11/ \_\_ Black (NCS S 8500-N)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature  
 /1\_ 2700 K - 2170 lm  
 E →  
 CRI >90

Control  
 3235 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 1B Push; 1-10V  
 \_\_ / 1Z Casambi

Select Electrical connection

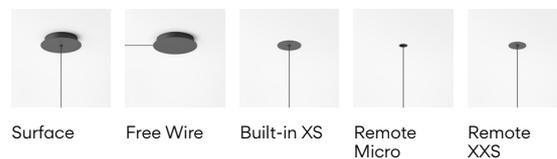

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials  
 Body: Aluminum.  
 Shade: Paper.

Light Source and electronics  
 1 x LED STRIP 16,7 W 900 mA  
 Constant Current 900 mA  
 110-240V. 50/60Hz

Packaging  
 1 Box 0,40 x 0,55 x 0,55 m  
 Vol 0,12 m<sup>3</sup>  
 Gross weight 3,2 Kg Net weight 1,6 Kg

Notes  
 Extra cable length.



⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 3235

**Drop ceiling**

**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.

**\_23**  
Built-in XS



Ø 8 cm  
height 6 cm

match with fixture finish.

**Regular ceiling**

**\_10**  
Surface



Ø 17,3 cm

match with fixture finish.

**\_18**  
Free Wire



1 wire

Ø 20 cm



2 wires

Ø 22 cm



3 - 6 wires

Ø 36 cm




7 - 8 wires


Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

**Remote**



**Built-in**





# Circle

Combining accent, diffuse and general lighting effects with dynamic control and temperature regulation, Circle is a highly-functional complementary product designed to curate a nuanced ambience.

---

## Ceiling - Accent Downlight - Colour



Ø 7 cm

Trim

**3300** Narrow  
**3303** Medium  
**3306** Wide



Ø 6 cm

Trimless

**3310** Narrow  
**3313** Medium  
**3316** Wide



Ø 11 cm

Trim

**3320** Narrow  
**3323** Medium  
**3326** Wide



Ø 10 cm

Trimless

**3330** Narrow  
**3333** Medium  
**3336** Wide

---

## Ceiling - Accent Downlight - Wood



Ø 7 cm

Trim

**3300** Narrow  
**3303** Medium  
**3306** Wide



Ø 6 cm

Trimless

**3310** Narrow  
**3313** Medium  
**3316** Wide



Ø 11 cm

Trim

**3320** Narrow  
**3323** Medium  
**3326** Wide




Ø 10 cm

Trimless

**3330** Narrow  
**3333** Medium  
**3336** Wide

**3300**  
TRIM Narrow  
**3303**  
TRIM Medium  
**3306**  
TRIM Wide



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 607 lm
  - /2 \_ 3000 K - 634 lm
  - /3 \_ 3500 K - 657 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F \_ (1800 K - 3000 K) 611 lm



CRI >90

- Control**
- 3300** \_ \_ / \_ \_
  - 3303** \_ \_ / \_ \_
  - 3306** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
- \_ \_ / \_ **D** Static White + Push, DALI-2
- \_ \_ / \_ **M** Static White + Without driver
- \_ \_ / \_ **Z** Static White + Casambi

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8M** Tunable White + Without driver
- \_ \_ / **8Z** Tunable White + Casambi

- \_ \_ / **F1** Dim-To-Warm + DALI-2
- \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
- \_ \_ / **FM** Dim-To-Warm + Without driver
- \_ \_ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** \_ \_ White oak
  - **83/** \_ \_ American walnut

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 607 lm
  - /2 \_ 3000 K - 634 lm
  - /3 \_ 3500 K - 657 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K) 308 lm - 504 lm

- Dim-To-Warm**
- /F \_ (1800 K - 3000 K) 611 lm



CRI >90

- Control**
- 3300** \_ \_ / \_ \_
  - 3303** \_ \_ / \_ \_
  - 3306** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
- \_ \_ / \_ **D** Static White + Push, DALI-2
- \_ \_ / \_ **M** Static White + Without driver
- \_ \_ / \_ **Z** Static White + Casambi

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8M** Tunable White + Without driver
- \_ \_ / **8Z** Tunable White + Casambi

- \_ \_ / **F1** Dim-To-Warm + DALI-2
- \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
- \_ \_ / **FM** Dim-To-Warm + Without driver
- \_ \_ / **FZ** Dim-To-Warm + Casambi

**Materials**

Body: Aluminum.  
 Shade: PC- Polycarbonate/ Wood.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 6,2 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 5,5 W 150 mA  
 Constant Current 150 mA  
 220-240V 50/60Hz

**Dim-To-Warm:**  
 1 x LED 5,8 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**


1 Box 0,15 x 0,15 x 0,15 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,5 Kg Net weight 0,33 Kg

**Notes**

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



**3310**  
TRIMLESS Narrow  
**3313**  
TRIMLESS Medium  
**3316**  
TRIMLESS Wide



Ø 6 cm

- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)

**LED Colour Temperature**

- Static White**
- /1** \_ 2700 K - 607 lm
  - /2** \_ 3000 K - 634 lm
  - /3** \_ 3500 K - 657 lm

- Tunable White**
- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm

- Dim-To-Warm**
- /F** \_ (1800 K - 3000 K)  
611 lm



CRI >90

**Control**

- 3310** \_ \_ / \_ \_  
**3313** \_ \_ / \_ \_  
**3316** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
- \_ \_ / \_ **D** Static White + Push, DALI-2
- \_ \_ / \_ **M** Static White + Without driver
- \_ \_ / \_ **Z** Static White + Casambi

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8M** Tunable White + Without driver
- \_ \_ / **8Z** Tunable White + Casambi

- \_ \_ / **F1** Dim-To-Warm + DALI-2
- \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
- \_ \_ / **FM** Dim-To-Warm + Without driver
- \_ \_ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** \_ \_ White oak
  - **83/** \_ \_ American walnut

**LED Colour Temperature**

- Static White**
- /1** \_ 2700 K - 607 lm
  - /2** \_ 3000 K - 634 lm
  - /3** \_ 3500 K - 657 lm

- Tunable White**
- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm

- Dim-To-Warm**
- /F** \_ (1800 K - 3000 K)  
611 lm



CRI >90

**Control**

- 3310** \_ \_ / \_ \_  
**3313** \_ \_ / \_ \_  
**3316** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
- \_ \_ / \_ **D** Static White + Push, DALI-2
- \_ \_ / \_ **M** Static White + Without driver
- \_ \_ / \_ **Z** Static White + Casambi

- \_ \_ / **81** Tunable White + DALI-2 DT8
- \_ \_ / **8M** Tunable White + Without driver
- \_ \_ / **8Z** Tunable White + Casambi

- \_ \_ / **F1** Dim-To-Warm + DALI-2
- \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
- \_ \_ / **FM** Dim-To-Warm + Without driver
- \_ \_ / **FZ** Dim-To-Warm + Casambi

**Materials**

Body: Aluminum.  
Shade: PC- Polycarbonate/ Wood.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**

1 x LED 6,2 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

**Tunable White:**

1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
220-240V 50/60Hz

**Dim-To-Warm:**


1 x LED 5,8 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,002 m<sup>3</sup>  
Gross weight 0,6 Kg Net weight 0,43 Kg

**Notes**


Trimless frame can be shipped beforehand.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



Ø 7 cm



**3320**  
TRIM Narrow  
**3323**  
TRIM Medium  
**3326**  
TRIM Wide



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**Dim-To-Warm**  
 /F \_ (1800 K - 3000 K)  
 1258 lm

F

CRI >90

**Control**

**3320** \_\_ / \_\_  
**3323** \_\_ / \_\_  
**3326** \_\_ / \_\_

---

\_\_ / **O** Static White + On/ Off  
 \_\_ / **D** Static White + Push, DALI-2  
 \_\_ / **M** Static White + Without driver  
 \_\_ / **Z** Static White + Casambi

---

\_\_ / **81** Tunable White + DALI-2 DT8  
 \_\_ / **8M** Tunable White + Without driver  
 \_\_ / **8Z** Tunable White + Casambi

---

\_\_ / **F1** Dim-To-Warm + DALI-2  
 \_\_ / **FB** Dim-To-Warm + Push; 1-10V  
 \_\_ / **FM** Dim-To-Warm + Without driver  
 \_\_ / **FZ** Dim-To-Warm + Casambi

- Finishes**
- **82/** \_\_ White oak
  - **83/** \_\_ American walnut

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**Dim-To-Warm**  
 /F \_ (1800 K - 3000 K)  
 1258 lm

F

CRI >90

**Control**

**3320** \_\_ / \_\_  
**3323** \_\_ / \_\_  
**3326** \_\_ / \_\_

---

\_\_ / **O** Static White + On/ Off  
 \_\_ / **D** Static White + Push, DALI-2  
 \_\_ / **M** Static White + Without driver  
 \_\_ / **Z** Static White + Casambi

---

\_\_ / **81** Tunable White + DALI-2 DT8  
 \_\_ / **8M** Tunable White + Without driver  
 \_\_ / **8Z** Tunable White + Casambi

---

\_\_ / **F1** Dim-To-Warm + DALI-2  
 \_\_ / **FB** Dim-To-Warm + Push; 1-10V  
 \_\_ / **FM** Dim-To-Warm + Without driver  
 \_\_ / **FZ** Dim-To-Warm + Casambi

**Materials**  
 Body: Aluminum.  
 Shade: PC- Polycarbonate/ Wood.



**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
 1 x LED 12,4 W 700 mA  
 Constant Current 700 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED 8,9 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Dim-To-Warm:**  
 1 x LED 11,6 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

**Packaging**  
 1 Box 0,15 x 0,15 x 0,15 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,6 Kg Net weight 0,4 Kg

**Notes**  
 Trimless frame can be shipped beforehand.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

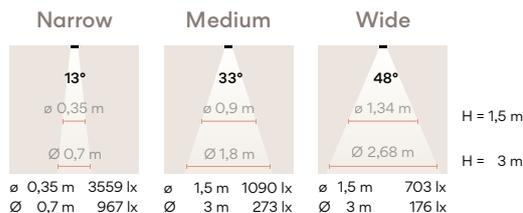

**3330**  
TRIMLESS Narrow

**3333**  
TRIMLESS Medium

**3336**  
TRIMLESS Wide

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**Dim-To-Warm**  
 /F \_ (1800 K - 3000 K)  
 1258 lm


**F** 

CRI >90

**Control**

**3330** \_ \_ / \_ \_  
**3333** \_ \_ / \_ \_  
**3336** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
  - \_ \_ / \_ **D** Static White + Push, DALI-2
  - \_ \_ / \_ **M** Static White + Without driver
  - \_ \_ / \_ **Z** Static White + Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8M** Tunable White + Without driver
  - \_ \_ / **8Z** Tunable White + Casambi
- 
- \_ \_ / **F1** Dim-To-Warm + DALI-2
  - \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
  - \_ \_ / **FM** Dim-To-Warm + Without driver
  - \_ \_ / **FZ** Dim-To-Warm + Casambi



Ø 10 cm

- Finishes**
- **82/** \_ \_ White oak
  - **83/** \_ \_ American walnut

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**Dim-To-Warm**  
 /F \_ (1800 K - 3000 K)  
 1258 lm

**F** 

CRI >90

**Control**

**3330** \_ \_ / \_ \_  
**3333** \_ \_ / \_ \_  
**3336** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White + On/ Off
  - \_ \_ / \_ **D** Static White + Push, DALI-2
  - \_ \_ / \_ **M** Static White + Without driver
  - \_ \_ / \_ **Z** Static White + Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8M** Tunable White + Without driver
  - \_ \_ / **8Z** Tunable White + Casambi
- 
- \_ \_ / **F1** Dim-To-Warm + DALI-2
  - \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
  - \_ \_ / **FM** Dim-To-Warm + Without driver
  - \_ \_ / **FZ** Dim-To-Warm + Casambi

**Materials**  
 Body: Aluminum.  
 Shade: PC- Polycarbonate/ Wood.


**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
 1 x LED 12,4 W 700 mA  
 Constant Current 700 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 8,9 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz


**Dim-To-Warm:**  
 1 x LED 11,6 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,002 m<sup>3</sup>  
 Gross weight 0,75 Kg Net weight 0,55 Kg

**Notes**  
 Trimless frame can be shipped beforehand.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



 Ø 11 cm

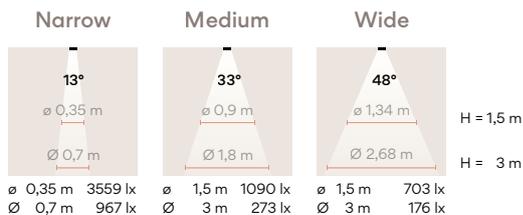



Ceiling - Wall Washer



Ø 11 cm


3350



Ø 10 cm

3353

3350 TRIM



Ø 11 cm

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 0502-Y50R)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

- Static White**
- /1 \_ 2700 K - 914 lm
  - /2 \_ 3000 K - 956 lm
  - /3 \_ 3500 K - 990 lm
- Tunable White**
- /8 \_ (1800 K - 4000 K) 571 lm - 895 lm
- Dim-To-Warm**
- /F \_ (1800 K - 3000 K) 1258 lm
- CRI >90

Control

- 3350 \_ \_ / \_ \_
- 
- \_ \_ / \_ 0 Static White + On/ Off
  - \_ \_ / \_ D Static White + Push, DALI-2
  - \_ \_ / \_ M Static White + Without driver
  - \_ \_ / \_ Z Static White + Casambi
- 
- \_ \_ / 81 Tunable White + DALI-2 DT8
  - \_ \_ / 8M Tunable White + Without driver
  - \_ \_ / 8Z Tunable White + Casambi
- 
- \_ \_ / F1 Dim-To-Warm + DALI-2
  - \_ \_ / FB Dim-To-Warm + Push; 1-10V
  - \_ \_ / FM Dim-To-Warm + Without driver
  - \_ \_ / FZ Dim-To-Warm + Casambi

Materials

Body: Aluminum.  
Shade: PC- Polycarbonate.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 7,4 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED 8,9 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

**Dim-To-Warm:**  
1 x LED 11,6 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Packaging


1 Box 0,15 x 0,15 x 0,1 m  
Vol 0,002 m<sup>3</sup>  
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes


Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



Ø 10 cm

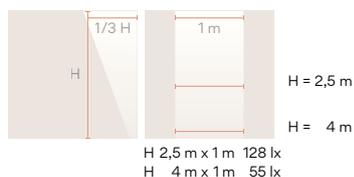

**3353**  
 TRIMLESS

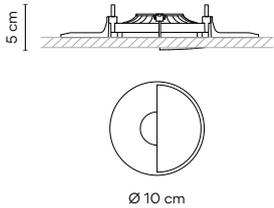

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 914 lm
  - /2 \_ 3000 K - 956 lm
  - /3 \_ 3500 K - 990 lm
- Tunable White**
- /8 \_ (1800 K - 4000 K) 571 lm - 895 lm
- Dim-To-Warm**
- /F \_ (1800 K - 3000 K) 1258 lm
- CRI >90

- Control**
- 3353** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** Static White + On/ Off
  - \_ \_ / \_ **D** Static White + Push, DALI-2
  - \_ \_ / \_ **M** Static White + Without driver
  - \_ \_ / \_ **Z** Static White + Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8M** Tunable White + Without driver
  - \_ \_ / **8Z** Tunable White + Casambi
- 
- \_ \_ / **F1** Dim-To-Warm + DALI-2
  - \_ \_ / **FB** Dim-To-Warm + Push; 1-10V
  - \_ \_ / **FM** Dim-To-Warm + Without driver
  - \_ \_ / **FZ** Dim-To-Warm + Casambi

**Materials**  
 Body: Aluminum.  
 Shade: PC- Polycarbonate.



**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
 1 x LED 6 W 300 mA  
 Constant Current 300 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 8,9 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz

**Dim-To-Warm:**  
 1 x LED 11,6 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,006 m<sup>3</sup>  
 Gross weight 0,6 Kg Net weight 0,4 Kg

**Notes**  
 Trimless frame can be shipped beforehand.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

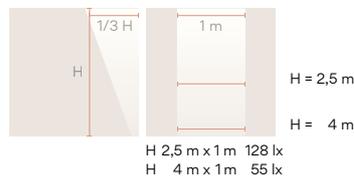

Ceiling - Flat Diffuser



Ø 36 cm


3360



Ø 47 cm

3363

3360



Ø 36 cm

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 23/ \_\_ Warm White (NCS S 0502-Y50R)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1\_ 2700 K - 1800 lm
  - /2\_ 3000 K - 1890 lm
  - /3\_ 3500 K - 1926 lm
- Tunable White**
- /8\_ (2200 K - 4000 K) 1607 lm - 2186 lm
- CRI >90

**Control**

- 3360 \_\_ / \_\_
- 
- \_\_ / \_\_ O Static White + On/ Off
  - \_\_ / \_\_ D Static White + Push, DALI-2
  - \_\_ / \_\_ M Static White + Without driver
  - \_\_ / \_\_ Z Static White + Casambi
- 
- \_\_ / 81 Tunable White + DALI-2 DT8
  - \_\_ / 8M Tunable White + Without driver
  - \_\_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum. Diffuser:PMMA. Shade: PC-Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED PLATE 17,4 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED PLATE 17,1 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

**Packaging**


1 Box 0,48 x 0,48 x 0,12 m  
Vol 0,03 m<sup>3</sup>  
Gross weight 2,4 Kg Net weight 2 Kg

**Notes**

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



3363

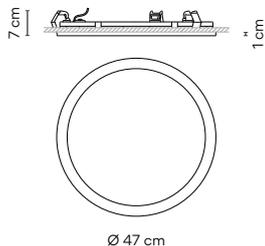

Ø 47 cm

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 23/ \_\_ Warm White (NCS S 0502-Y50R)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)

- LED Colour Temperature**
- Static White**
- /1\_ 2700 K - 2798 lm
  - /2\_ 3000 K - 2938 lm
  - /3\_ 3500 K - 2994 lm
- Tunable White**
- /8\_ (2200 K - 4000 K) 2471 lm - 3198 lm
- CRI >90

**Control**

- 3363 \_\_ / \_\_
- 
- \_\_ / \_\_ O Static White + On/ Off
  - \_\_ / \_\_ A Static White + Push; 1-10V; DALI-2
  - \_\_ / \_\_ M Static White + Without driver
  - \_\_ / \_\_ Z Static White + Casambi
- 
- \_\_ / 81 Tunable White + DALI-2 DT8
  - \_\_ / 8M Tunable White + Without driver
  - \_\_ / 8Z Tunable White + Casambi

**Materials**

Body: Aluminum. Diffuser:PMMA. Shade: PC-Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED PLATE 25,6 W 550 mA  
Constant Current 550 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED PLATE 25,8 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Packaging**

1 Box 0,68 x 0,68 x 0,12 m  
Vol 0,055 m<sup>3</sup>  
Gross weight 3,4 Kg Net weight 2,9 Kg

**Notes**

3363 \_\_ / \_\_ A: Push; 1-10V; DALI-2 **Bi-volt**

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.





# Line

Line consists of a series of simple linear luminaires, each with a distinct lighting effect. Integrating dynamic control and subtle gradients in intensity, tone and colour, the collection complements Vibia's wider product range to curate a subtle atmosphere.

---

## Ceiling - High Comfort Diffuser



**3500 Trim**

14 x 4 cm



**3503 Trimless**

13 x 3 cm



**3505 Trim**

27 x 4 cm



**3508 Trimless**

26 x 3 cm



**3510 Trim**

53 x 4 cm



**3513 Trimless**

51 x 3 cm



**3515 Trim**


104 x 4 cm




**3518 Trimless**

102 x 3 cm


TRIM

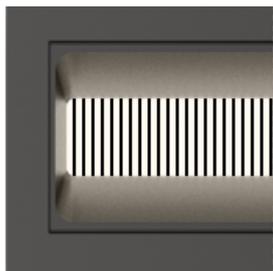

TRIMLESS



**3500**  
 TRIM  
 UGR <21

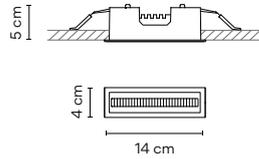

Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Static White</b> /1 _ 2700 K - 897 lm /2 _ 3000 K - 928 lm /3 _ 3500 K - 960 lm E →	<b>3500</b> __ / __ __ / __ <b>O</b> Static White + On/ Off __ / __ <b>D</b> Static White + Push, DALI-2 __ / __ <b>M</b> Without driver __ / __ <b>Z</b> Static White + Casambi
	<b>Tunable White</b> /8 _ (2200 K - 4000 K) 642 lm - 701 lm F → CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Frame: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 7,4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz  
**Tunable White:**  
 1 x LED STRIP 7,2 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**


1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,5 Kg Net weight 0,35 Kg

**Notes**

For Tunable White versions, a grouping driver is recommended.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

LED IP20 CE UK ENEC  
 13,5 x 3,5 cm

**3503**  
 TRIMLESS  
 UGR <21



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Static White</b> /1 _ 2700 K - 897 lm /2 _ 3000 K - 928 lm /3 _ 3500 K - 960 lm E →	<b>3503</b> __ / __ __ / __ <b>O</b> Static White + On/ Off __ / __ <b>D</b> Static White + Push, DALI-2 __ / __ <b>M</b> Without driver __ / __ <b>Z</b> Static White + Casambi
	<b>Tunable White</b> /8 _ (2200 K - 4000 K) 642 lm - 701 lm F → CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 7,4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz  
**Tunable White:**  
 1 x LED STRIP 7,2 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz


**Packaging**

2 Boxes  
 Vol 0,006 m<sup>3</sup>  
 Gross weight 0,825kg Net weight 0,525 kg

**Notes**

Trimless frame can be shipped in advance under request.  
 For Tunable White versions, remote driver only required.  
 For Tunable White versions, a grouping driver is recommended.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

LED IP20 CE UK ENEC  
 14,5 x 4 cm

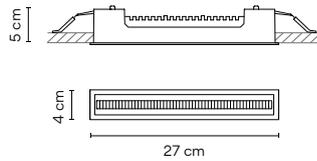**3505**  
 TRIM  
 UGR <21


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Static White</b> /1_ 2700 K - 1674 lm /2_ 3000 K - 1733 lm /3_ 3500 K - 1791 lm [E]	<b>3505</b> __ / __ __ / __ <b>O</b> Static White + On/ Off __ / __ <b>D</b> Static White + Push, DALI-2 __ / __ <b>M</b> Without driver __ / __ <b>Z</b> Static White + Casambi
	<b>Tunable White</b> /8_ (2200 K - 4000 K) 1221 lm - 1343 lm [F] CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Frame: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 13,7 W 650 mA  
 Constant Current 650 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 13,7 W  
 Constant Voltage 24VDC  
 220-240V 50/60Hz

**Packaging**


1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,65 Kg Net weight 0,45 Kg

**Notes**

For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

26,2 x 3,5 cm

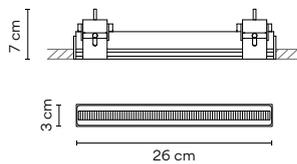**3508**  
 TRIMLESS  
 UGR <21


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Static White</b> /1_ 2700 K - 1674 lm /2_ 3000 K - 1733 lm /3_ 3500 K - 1791 lm [E]	<b>3508</b> __ / __ __ / __ <b>O</b> Static White + On/ Off __ / __ <b>D</b> Static White + Push, DALI-2 __ / __ <b>M</b> Without driver __ / __ <b>Z</b> Static White + Casambi
	<b>Tunable White</b> /8_ (2200 K - 4000 K) 1221 lm - 1343 lm [F] CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 13,7 W 650 mA  
 Constant Current 650 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 13,7 W  
 Constant Voltage 24VDC  
 220-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,006 m<sup>3</sup>  
 Gross weight 1,05 Kg Net weight 0,75 Kg

**Notes**


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

27 x 4 cm

**3510**  
TRIM  
UGR <21

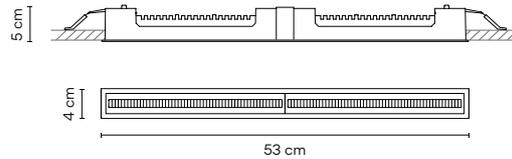

Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b> /1 _ 2700 K - 3348 lm	<b>3510</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 3466 lm	__ / <b>O</b> Static White + On/ Off
	/3 _ 3500 K - 3582 lm	__ / <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>Tunable White</b> /8 _ (2200 K - 4000 K) 2442 lm - 2686 lm	__ / <b>M</b> Static White + Without driver
	<b>E</b> >	__ / <b>Z</b> Static White + Casambi
	<b>F</b> >	__ / <b>81</b> Tunable White + DALI-2 DT8
	CRI >90	__ / <b>8M</b> Tunable White + Without driver
		__ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
Shade: PC- Polycarbonate & Bronze.  
Diffuser: PE- Polyethylene.  
Frame: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 27,4 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**

1 x LED STRIP 27,4 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 0,570 m  
Vol 0,005 m<sup>3</sup>  
Gross weight 1,25 Kg Net weight 0,78 Kg

**Notes**

3510 \_\_ / \_ A: Push; 1-10V; DALI-2 **Bi-volt**


For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



52 x 3,5 cm

**3513**  
TRIMLESS  
UGR <21

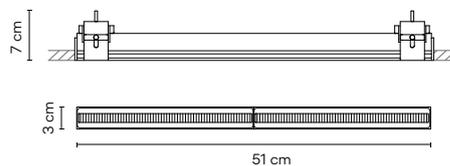

Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b> /1 _ 2700 K - 3348 lm	<b>3513</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 3466 lm	__ / <b>O</b> Static White + On/ Off
	/3 _ 3500 K - 3582 lm	__ / <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>Tunable White</b> /8 _ (2200 K - 4000 K) 2442 lm - 2686 lm	__ / <b>M</b> Static White + Without driver
	<b>E</b> >	__ / <b>Z</b> Static White + Casambi
	<b>F</b> >	__ / <b>81</b> Tunable White + DALI-2 DT8
	CRI >90	__ / <b>8M</b> Tunable White + Without driver
		__ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
Shade: PC- Polycarbonate & Bronze.  
Diffuser: PE- Polyethylene.  
Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 27,4 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz

**Tunable White:**

1 x LED STRIP 27,4 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,010 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,32 Kg


**Notes**

3513 \_\_ / \_ A: Push; 1-10V; DALI-2 **Bi-volt**


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



53 x 4 cm

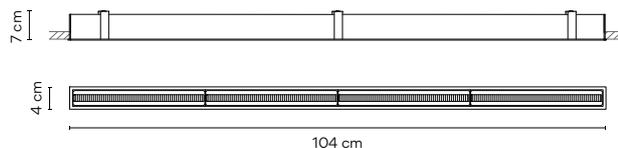**3515**  
 TRIM  
 UGR <21


Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b> /1_ 2700 K - 6696 lm	<b>3515</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	/2_ 3000 K - 6932 lm /3_ 3500 K - 7164 lm E	__ / <b>O</b> Static White + On/ Off __ / <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>Tunable White</b> /8_ (2200 K - 4000 K) 4884 lm - 5372 lm F	__ / <b>M</b> Static White + Without driver __ / <b>Z</b> Static White + Casambi
	CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Frame: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 54,8 W 650 mA  
 Constant Current 650 mA  
 220~240V 50/60Hz

**Tunable White:**

1 x LED STRIP 54,7 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**


1 Box 0,105 x 0,08 x 1,095 m  
 Vol 0,009 m<sup>3</sup>  
 Gross weight 3,25 Kg Net weight 2,36 Kg

**Notes**


3515 \_\_ / \_\_ O: On/ Off **Bi-volt**

3515 \_\_ / \_\_ A: Push; 1-10V; DALI-2 **Bi-volt**

For Tunable White versions, a grouping driver is recommended.



103 x 3,5 cm

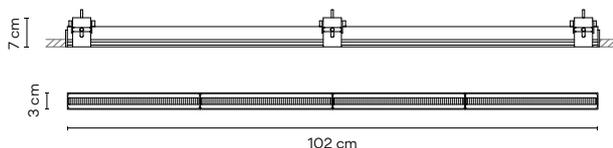**3518**  
 TRIMLESS  
 UGR <21


Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b> /1_ 2700 K - 6696 lm	<b>3518</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	/2_ 3000 K - 6932 lm /3_ 3500 K - 7164 lm E EPREL	__ / <b>O</b> Static White + On/ Off __ / <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>Tunable White</b> /8_ (2200 K - 4000 K) 4884 lm - 5372 lm F EPREL	__ / <b>M</b> Static White + Without driver __ / <b>Z</b> Static White + Casambi
	CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8 __ / <b>8M</b> Tunable White + Without driver __ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum / PC- Polycarbonate.  
 Shade: PC- Polycarbonate & Bronze.  
 Diffuser: PE- Polyethylene.  
 Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 54,8 W 650 mA  
 Constant Current 650 mA  
 220~240V 50/60Hz

**Tunable White:**

1 x LED STRIP 54,7 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,018 m<sup>3</sup>  
 Gross weight 3,35 kg Net weight 2,46 Kg

**Notes**

3518 \_\_ / \_\_ O: On/ Off **Bi-volt**

3518 \_\_ / \_\_ A: Push; 1-10V; DALI-2 **Bi-volt**

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.



104 x 4 cm



---

Ceiling - Flat Diffuser



**3530 Trim**  
53 x 4 cm



**3533 Trimless**  
51 x 3 cm



**3535 Trim**  
103 x 4 cm



**3538 Trimless**  
102 x 3 cm




**3540 Trim**  
203 x 4 cm




**3543 Trimless**  
202 x 3 cm


TRIM

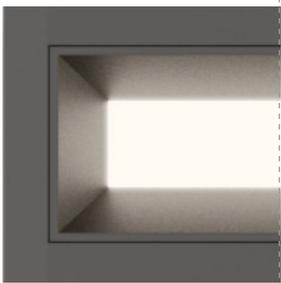

TRIMLESS



**3530**  
TRIM

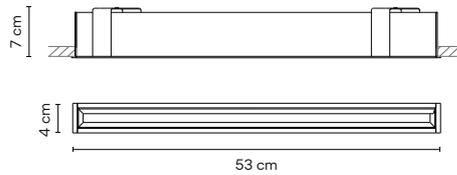

Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/ __ Black</b> (NCS S 8500-N)</li> <li>● <b>23/ __ Warm White</b> (NCS S 0502-Y50R)</li> </ul>	<p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K - 1272 lm</li> <li>/2 _ 3000 K - 1314 lm</li> <li>/3 _ 3500 K - 1356 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8 _ (2200 K - 4000 K)</li> <li>875 lm - 1197 lm</li> </ul> <p> <b>E</b></p> <p>CRI &gt;90</p>	<p><b>3530</b> __ / __</p> <hr/> <p>__ / <b>0</b> Static White + On/ Off</p> <p>__ / <b>A</b> Static White + Push; 1-10V; DALI-2</p> <p>__ / <b>M</b> Static White + Without driver</p> <p>__ / <b>Z</b> Static White + Casambi</p> <hr/> <p>__ / <b>81</b> Tunable White + DALI-2 DT8</p> <p>__ / <b>8M</b> Tunable White + Without driver</p> <p>__ / <b>8Z</b> Tunable White + Casambi</p>

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 10,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 0,570 m  
Vol 0,005 m<sup>3</sup>  
Gross weight 1,25 Kg Net weight 0,78 Kg

**Notes**

For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



52 x 3,5 cm

**3533**  
TRIMLESS



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/ __ Black</b> (NCS S 8500-N)</li> <li>● <b>23/ __ Warm White</b> (NCS S 0502-Y50R)</li> </ul>	<p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K - 1272 lm</li> <li>/2 _ 3000 K - 1314 lm</li> <li>/3 _ 3500 K - 1356 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8 _ (2200 K - 4000 K)</li> <li>875 lm - 1197 lm</li> </ul> <p> <b>E</b></p> <p>CRI &gt;90</p>	<p><b>3533</b> __ / __</p> <hr/> <p>__ / <b>0</b> Static White + On/ Off</p> <p>__ / <b>A</b> Static White + Push; 1-10V; DALI-2</p> <p>__ / <b>M</b> Static White + Without driver</p> <p>__ / <b>Z</b> Static White + Casambi</p> <hr/> <p>__ / <b>81</b> Tunable White + DALI-2 DT8</p> <p>__ / <b>8M</b> Tunable White + Without driver</p> <p>__ / <b>8Z</b> Tunable White + Casambi</p>

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.  
Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 10,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 10,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,010 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,32 Kg


**Notes**

For Tunable White versions, a grouping driver is recommended.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



53 x 4 cm

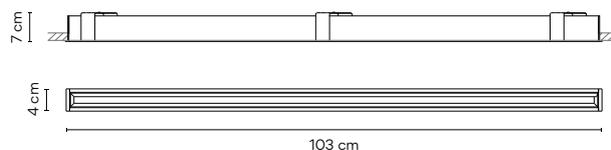**3535**  
 TRIM


Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b>	<b>3535</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/1</b> _ 2700 K - 2544 lm	__ / _ <b>O</b> Static White + On/ Off
	<b>/2</b> _ 3000 K - 2628 lm	__ / _ <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>/3</b> _ 3500 K - 2712 lm	__ / _ <b>M</b> Static White + Without driver
	<b>Tunable White</b>	__ / _ <b>Z</b> Static White + Casambi
	<b>/8</b> _ (2200 K - 4000 K) 1751 lm - 2395 lm	
	<b>E</b>	
	CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8
		__ / <b>8M</b> Tunable White + Without driver
		__ / <b>8Z</b> Tunable White + Casambi

## Materials

Body: Aluminum.  
Diffuser: PC - Polycarbonate.  
Frame: Aluminum.

## Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 20,6 W  
Constant Voltage 24VDC  
220-240V 50/60Hz

**Tunable White:**

1 x LED STRIP 20,6 W  
Constant Voltage 24VDC  
220-240V 50/60Hz

## Packaging


1 Box 0,105 x 0,08 x 1,095 m  
Vol 0,009 m<sup>3</sup>  
Gross weight 3,25 Kg Net weight 2,36 Kg

## Notes

For Tunable White versions, a grouping driver is recommended.



102 x 3,5 cm

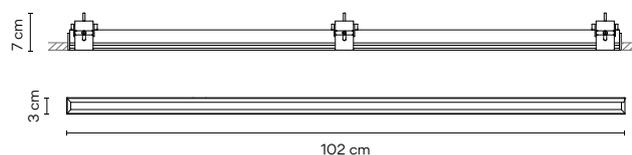**3538**  
 TRIMLESS


Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b>	<b>3538</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/1</b> _ 2700 K - 2544 lm	__ / _ <b>O</b> Static White + On/ Off
	<b>/2</b> _ 3000 K - 2628 lm	__ / _ <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>/3</b> _ 3500 K - 2712 lm	__ / _ <b>M</b> Static White + Without driver
	<b>Tunable White</b>	__ / _ <b>Z</b> Static White + Casambi
	<b>/8</b> _ (2200 K - 4000 K) 1751 lm - 2395 lm	
	<b>E</b>	
	CRI >90	__ / <b>81</b> Tunable White + DALI-2 DT8
		__ / <b>8M</b> Tunable White + Without driver
		__ / <b>8Z</b> Tunable White + Casambi

## Materials

Body: Aluminum.  
Diffuser: PC - Polycarbonate.  
Trimless frame: Aluminum.

## Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 20,6 W  
Constant Voltage 24VDC  
220-240V 50/60Hz

**Tunable White:**

1 x LED STRIP 20,6 W  
Constant Voltage 24VDC  
220-240V 50/60Hz

## Packaging

2 Boxes  
Vol 0,018 m<sup>3</sup>  
Gross weight 3,35 Kg Net weight 2,46 Kg


## Notes

Trimless frame can be shipped in advance under request.  
For Tunable White versions, a grouping driver is recommended.



103 x 4 cm

### 3540 TRIM

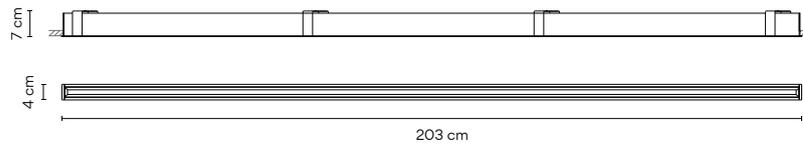

Finishes	LED Colour Temperature	Control
● <b>11/</b> _ _ Black (NCS S 8500-N)	<b>Static White</b>	<b>3540</b> _ _ / _ _
● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)	<b>/1</b> _ 2700 K - 5088 lm	_ _ / _ <b>0</b> Static White + On/ Off
	<b>/2</b> _ 3000 K - 5256 lm	_ _ / _ <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>/3</b> _ 3500 K - 5424 lm	_ _ / _ <b>M</b> Static White + Without driver
	<b>Tunable White</b>	_ _ / _ <b>Z</b> Static White + Casambi
	<b>/8</b> _ (2200 K - 4000 K) 3503 lm - 4791 lm	
		
	CRI >90	_ _ / <b>81</b> Tunable White + DALI-2 DT8
		_ _ / <b>8M</b> Tunable White + Without driver
		_ _ / <b>8Z</b> Tunable White + Casambi

#### Materials

Body: Aluminum.  
Diffuser: PC - Polycarbonate.  
Frame: Aluminum.

#### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 41,2 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Tunable White:


1 x LED STRIP 41,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Packaging


1 Box 0,125 x 0,125 x 2,25 m  
Vol 0,035 m<sup>3</sup>  
Gross weight 7,25 Kg Net weight 5,16 Kg

#### Notes

For Tunable White versions, a grouping driver is recommended.



### 3543 TRIMLESS

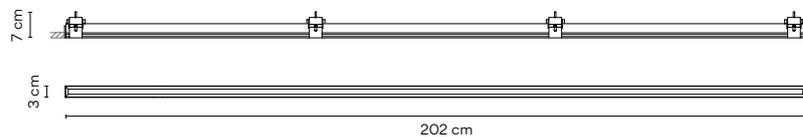

Finishes	LED Colour Temperature	Control
● <b>11/</b> _ _ Black (NCS S 8500-N)	<b>Static White</b>	<b>3543</b> _ _ / _ _
● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)	<b>/1</b> _ 2700 K - 5088 lm	_ _ / _ <b>0</b> Static White + On/ Off
	<b>/2</b> _ 3000 K - 5256 lm	_ _ / _ <b>A</b> Static White + Push; 1-10V; DALI-2
	<b>/3</b> _ 3500 K - 5424 lm	_ _ / _ <b>M</b> Static White + Without driver
	<b>Tunable White</b>	_ _ / _ <b>Z</b> Static White + Casambi
	<b>/8</b> _ (2200 K - 4000 K) 3503 lm - 4791 lm	
		
	CRI >90	_ _ / <b>81</b> Tunable White + DALI-2 DT8
		_ _ / <b>8M</b> Tunable White + Without driver
		_ _ / <b>8Z</b> Tunable White + Casambi

#### Materials

Body: Aluminum.  
Diffuser: PC - Polycarbonate.  
Trimless frame: Aluminum.

#### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 24V 41,2 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Tunable White:

1 x LED STRIP 41,3 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Packaging

2 Boxes  
Total Vol 0,07 m<sup>3</sup>  
Gross weight 7,85 Kg Net weight 5,66 Kg

#### Notes

Trimless frame can be shipped in advance under request.  
For Tunable White versions, a grouping driver is recommended.



---

Ceiling - High Efficiency Low Glare



**3550 Trim**  
14 x 4 cm



**3553 Trimless**  
13 x 3 cm



**3555 Trim**  
27 x 4 cm



**3558 Trimless**  
26 x 3 cm



**3560 Trim**  
53 x 4 cm



**3563 Trimless**  
51 x 3 cm



**3565 Trim**  
104 x 4 cm




**3568 Trimless**  
102 x 3 cm


TRIM



TRIMLESS



3550  
 TRIM  
 UGR <18

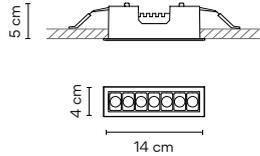

Finishes

- 11/ \_\_ Black  
(NCS S 8500-N)
- 23/ \_\_ Warm White  
(NCS S 0502-Y50R)

LED Colour Temperature

- Static White**  
 /1 \_ 2700 K - 897 lm  
 /2 \_ 3000 K - 928 lm  
 /3 \_ 3500 K - 960 lm

- Tunable White**  
 /8 (2200 K - 4000 K)  
 664 lm - 898 lm



CRI >90

Control

3550 \_\_ / \_\_

\_\_ / \_ **O** Static White +  
On/ Off

\_\_ / \_ **D** Static White +  
Push, DALI-2

\_\_ / \_ **M** Static White +  
Without driver

\_\_ / \_ **Z** Static White +  
Casambi

\_\_ / **81** Tunable White +  
DALI-2 DT8

\_\_ / **8M** Tunable White +  
Without driver

\_\_ / **8Z** Tunable White +  
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 7,4 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 7,2 W  
 Constant Voltage 24VDC  
 220-240V 50/60Hz

Packaging


1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,5 Kg Net weight 0,35 Kg

Notes



For Tunable White versions,  
 a grouping driver is recommended.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just  
 one electrical point.



13,5 x 3,5 cm

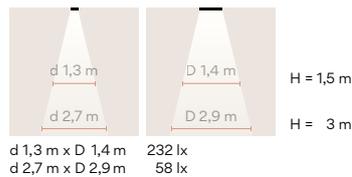

**3553**  
TRIMLESS  
UGR <18



**Finishes**

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 897 lm
  - /2 \_ 3000 K - 928 lm
  - /3 \_ 3500 K - 960 lm

- Tunable White**
- /8 \_ (2200 K - 4000 K)  
664 lm - 898 lm



CRI >90

**Control**

**3553** \_ \_ / \_ \_

- 
- \_ \_ / \_ **O** Static White +  
On/ Off
  - \_ \_ / \_ **D** Static White +  
Push, DALI-2
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi
- 

**Materials**

Body: Aluminum & PC-Polycarbonate.  
Shade: PC - Polycarbonate.  
Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 7,4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 7,2 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,006 m<sup>3</sup>  
Gross weight 0,825 Kg Net weight 0,525 Kg

**Notes**


Trimless frame can be shipped in advance under request.  
For Tunable White versions, remote driver only required.  
For tunable White versions, a grouping driver is recommended.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



14,5 x 4 cm

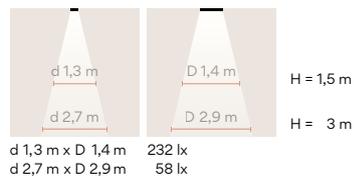

**3555**  
 TRIM  
 UGR <18

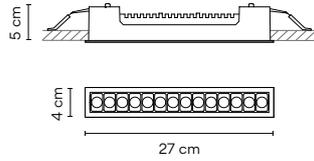

**Finishes**

- **11/ \_ \_ Black**  
 (NCS S 8500-N)
- **23/ \_ \_ Warm White**  
 (NCS S 0502-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 1674 lm
  - /2 \_ 3000 K - 1733 lm
  - /3 \_ 3500 K - 1791 lm

- Tunable White**
- /8 \_ (2200 K - 4000 K)  
 1262 lm - 1707 lm



CRI >90

**Control**

**3555 \_ \_ / \_ \_**

\_ \_ / \_ **O** Static White +  
 On/ Off

\_ \_ / \_ **D** Static White +  
 Push, DALI-2

\_ \_ / \_ **M** Static White +  
 Without driver

\_ \_ / \_ **Z** Static White +  
 Casambi

\_ \_ / **81** Tunable White +  
 DALI-2 DT8

\_ \_ / **8M** Tunable White +  
 Without driver

\_ \_ / **8Z** Tunable White +  
 Casambi

**Materials**

Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 13,7 W 650 mA  
 Constant Current 650 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 13,7 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**


1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,003 m<sup>3</sup>  
 Gross weight 0,55 Kg Net weight 0,45 Kg

**Notes**


For Tunable White versions, a grouping driver is recommended.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



26,2 x 3,5 cm

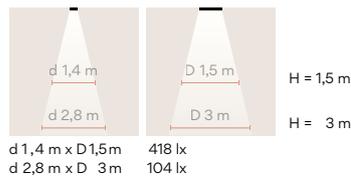

**3558**  
TRIMLESS  
UGR <18

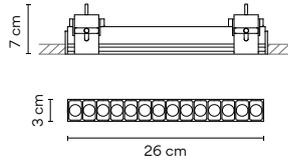

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)

**LED Colour Temperature**

**Static White**

- /1 \_ 2700 K - 1674 lm
- /2 \_ 3000 K - 1733 lm
- /3 \_ 3500 K - 1791 lm

**Tunable White**

- /8 \_ (2200 K - 4000 K)  
1262 lm - 1707 lm

**E** →

CRI >90

- Control**
- 3558 \_ \_ / \_ \_**
- 
- \_ \_ / \_ **O** Static White + On/ Off
  - \_ \_ / \_ **D** Static White + Push, DALI-2
  - \_ \_ / \_ **M** Static White + Without driver
  - \_ \_ / \_ **Z** Static White + Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8M** Tunable White + Without driver
  - \_ \_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum & PC-Polycarbonate.  
Shade: PC - Polycarbonate.  
Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,7 W 650 mA  
Constant Current 650 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 13,7 W  
Constant Voltage 24VDC  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,006 m<sup>3</sup>  
Gross weight 1,05 Kg Net weight 0,75 Kg

**Notes**


Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.


Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

LED IP20 CE UK ENEC

27 x 4 cm

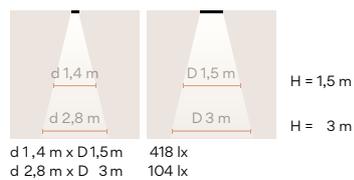

**3560**  
 TRIM  
 UGR <18

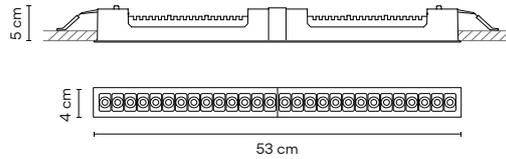

- Finishes**
- **11/ \_\_ Black**  
 (NCS S 8500-N)
  - **23/ \_\_ Warm White**  
 (NCS S 0502-Y50R)

- LED Colour Temperature**
- Static White**
- /1\_ 2700 K - 3348 lm
  - /2\_ 3000 K - 3466 lm
  - /3\_ 3500 K - 3582 lm
- Tunable White**
- /8\_ (2200 K - 4000 K)  
 2524 lm - 3414 lm
- E** →
- CRI >90

- Control**
- 3560 \_\_ / \_\_**
- 
- \_\_ / **0** Static White +  
 On/ Off
  - \_\_ / **A** Static White +  
 Push; 1-10V; DALI-2
  - \_\_ / **M** Static White +  
 Without driver
  - \_\_ / **Z** Static White +  
 Casambi
- 
- \_\_ / **81** Tunable White +  
 DALI-2 DT8
  - \_\_ / **8M** Tunable White +  
 Without driver
  - \_\_ / **8Z** Tunable White +  
 Casambi

**Materials**  
 Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.

**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 27,4 W 650 mA  
 Constant Current 650 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 27,4 W  
 Constant Voltage 24VDC  
 220-240V 50/60Hz


**Packaging**  
 1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,005 m<sup>3</sup>  
 Gross weight 1,25 Kg Net weight 0,78 Kg

**Notes**  
 3560 \_\_ / \_\_ A: Push; 1-10V; DALI-2 **Bi-volt**  
 3560 \_\_ / \_\_ Z: Casambi **Bi-volt**  
 For Tunable White versions, a grouping driver is recommended.  
 Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

**LED** **IP20** **CE** **UK** **ERL** **Ⓢ**  
 52 x 3,5 cm



**3563**  
TRIMLESS  
UGR <18

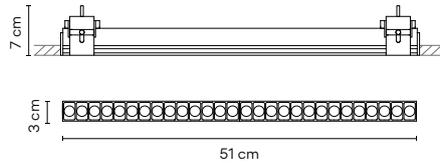

- |   |  |
|---|--|
| <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>11/ _ _ Black</b><br/>(NCS S 8500-N)</li> <li>● <b>23/ _ _ Warm White</b><br/>(NCS S 0502-Y50R)</li> </ul> | <p><b>LED Colour Temperature</b></p> <p><b>Static White</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K - 3348 lm</li> <li>/2 _ 3000 K - 3466 lm</li> <li>/3 _ 3500 K - 3582 lm</li> </ul> <p><b>Tunable White</b></p> <ul style="list-style-type: none"> <li>/8 _ (2200 K - 4000 K)<br/>2524 lm - 3414 lm</li> </ul> <p> <b>CRI &gt;90</b></p> |
|---|--|


- Control**
- 3563 \_ \_ / \_ \_**
- 
- \_ \_ / \_ **O** Static White +  
On/ Off
  - \_ \_ / \_ **A** Static White +  
Push; 1-10V; DALI-2
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi

**Materials**  
Body: Aluminum & PC-Polycarbonate.  
Shade: PC - Polycarbonate.  
Trimless frame: Aluminum.


**Light Source and electronics**  
2700 K - 3000 K - 3500K:  
1 x LED STRIP 27,4 W 650 mA  
Constant Current 650 mA  
220~240V 50/60Hz  
Tunable White:  
1 x LED STRIP 27,4 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,010 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,32 Kg

**Notes**  
3563 \_ \_ / \_ A: Push; 1-10V; DALI-2 **Bi-volt**  
3563 \_ \_ / \_ Z: Casambi **Bi-volt**  
Trimless frame can be shipped in advance  
under request.  
For Tunable White versions, a grouping driver  
is recommended.  
Visit [vibia.com](http://vibia.com) to group several pieces with just  
one electrical point.

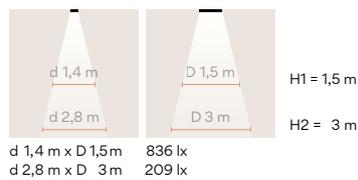

**3565**  
 TRIM  
 UGR <18

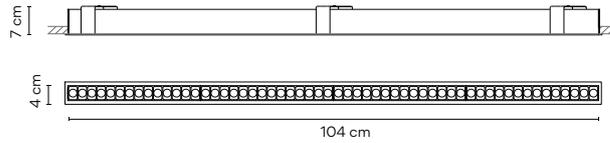

**Finishes**

- **11/ \_\_ Black**  
(NCS S 8500-N)
- **23/ \_\_ Warm White**  
(NCS S 0502-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 6696 lm
  - /2 \_ 3000 K - 6932 lm
  - /3 \_ 3500 K - 7164 lm

- Tunable White**
- /8 \_ (2200 K - 4000 K)  
5048 lm - 6828 lm



CRI >90

**Control**

**3565 \_\_ / \_\_**

- \_\_ / \_ **O** Static White +  
On/ Off
  - \_\_ / \_ **A** Static White +  
Push; 1-10V; DALI-2
  - \_\_ / \_ **M** Static White +  
Without driver
  - \_\_ / \_ **Z** Static White +  
Casambi
- 
- \_\_ / **81** Tunable White +  
DALI-2 DT8
  - \_\_ / **8M** Tunable White +  
Without driver
  - \_\_ / **8Z** Tunable White +  
Casambi

**Materials**

Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.  
 Frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 54,8 W 650 mA  
 Constant Current 650 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 54,7 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 1,095 m  
 Vol 0,009 m<sup>3</sup>  
 Gross weight 3,25 Kg Net weight 2,36 Kg

**Notes**


3565 \_\_ / \_ **O**: Static White + On/ Off **Bi-volt**  
 3565 \_\_ / \_ **A**: Push; 1-10V; DALI-2 **Bi-volt**  
 3565 \_\_ / \_ **Z**: Casambi **Bi-volt**  
 For Tunable White versions, a grouping driver is recommended.



102 x 3,5 cm



**3568**  
 TRIMLESS  
 UGR <18

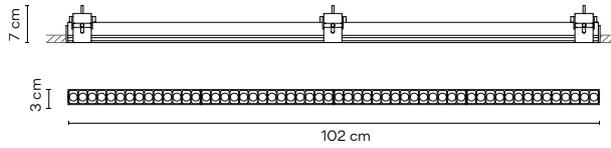

- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)

- LED Colour Temperature**
- Static White**
- /1** \_ 2700 K - 6696 lm
  - /2** \_ 3000 K - 6932 lm
  - /3** \_ 3500 K - 7164 lm
- Tunable White**
- /8** \_ (2200 K - 4000 K)  
5048 lm - 6828 lm
-    
 CRI >90

- Control**
- 3568** \_ \_ / \_ \_
- 
- \_ \_ / \_ **0** Static White +  
On/ Off
  - \_ \_ / \_ **A** Static White +  
Push; 1-10V; DALI-2
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi

**Materials**  
 Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.  
 Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 54,8 W 650 mA  
 Constant Current 650 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 54,7 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,105 x 0,08 x 1,095 m  
 Vol 0,018 m<sup>3</sup>  
 Gross weight 3,35 Kg Net weight 2,46 Kg

**Notes**

3568 \_ \_ / \_ 0: On/ Off 

3568 \_ \_ / \_ A: Push; 1-10V; DALI-2 

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

 104 x 4 cm





---

Ceiling - Wall Washer



**3575 Trim**

27 x 4 cm



**3578 Trimless**

26 x 3 cm



**3580 Trim**

53 x 4 cm



**3583 Trimless**

51 x 3 cm



**3585 Trim**


104 x 4 cm



**3588 Trimless**

102 x 3 cm


TRIM

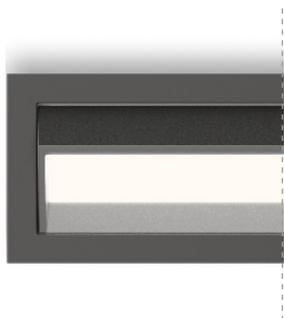

TRIMLESS



**3575**  
TRIM

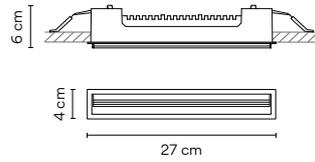

**Finishes**

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **23/ \_ \_ Warm White**  
(NCS S 0502-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 1392 lm
  - /2 \_ 3000 K - 1430 lm
  - /3 \_ 3500 K - 1455 lm

- Tunable White**
- /8 (2200 K - 4000 K)  
764 lm - 849 lm



CRI >90

**Control**

**3575 \_ \_ / \_ \_**

- \_ \_ / \_ **O** Static White +  
On/ Off
  - \_ \_ / \_ **D** Static White +  
Push, DALI-2
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi

**Materials**

Frame: PC- Polycarbonate.  
 Body: Aluminum & PC-Polycarbonate.  
 Lens: PMMA. Shade: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 13,3 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 11,5 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 0,325 m  
 Vol 0,015 m<sup>3</sup>  
 Gross weight 0,55 Kg Net weight 0,45 Kg


**Notes**

For Tunable White versions, a grouping driver is recommended.


Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



∠ 26,2 x 3,5 cm

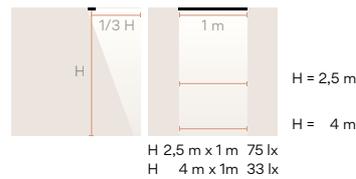

**3578**  
TRIMLESS

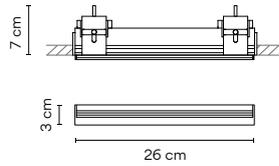

- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)

**LED Colour Temperature**

**Static White**

- /1 \_ 2700 K - 1392 lm
- /2 \_ 3000 K - 1430 lm
- /3 \_ 3500 K - 1455 lm

**Tunable White**

- /8 \_ (2200 K - 4000 K)  
764 lm - 849 lm

**F**

CRI >90

**Control**

- 3578** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** Static White + On/ Off
  - \_ \_ / \_ **D** Static White + Push, DALI-2
  - \_ \_ / \_ **M** Static White + Without driver
  - \_ \_ / \_ **Z** Static White + Casambi
- 
- \_ \_ / **81** Tunable White + DALI-2 DT8
  - \_ \_ / **8M** Tunable White + Without driver
  - \_ \_ / **8Z** Tunable White + Casambi

**Materials**

Body: Aluminum & PC-Polycarbonate.  
Shade: PC - Polycarbonate. Lens: PMMA.  
Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 13,3 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 11,5 W  
Constant Voltage 24VDC  
220-240V 50/60Hz


**Packaging**

2 Boxes  
Total Vol 0,03 m<sup>3</sup>  
Gross weight 1,1 Kg Net weight 0,75 Kg


**Notes**

Trimless frame can be shipped in advance under request.  
For tunable White versions, a grouping driver is recommended.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

27 x 4 cm

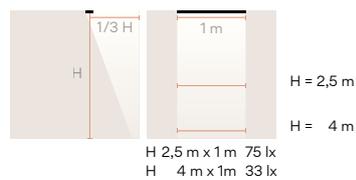

**3580**  
TRIM

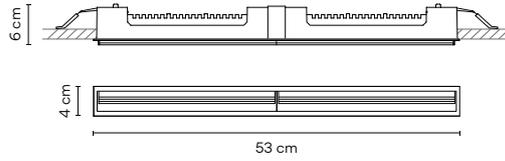

- Finishes**
- **11/ \_\_ Black**  
(NCS S 8500-N)
  - **23/ \_\_ Warm White**  
(NCS S 0502-Y50R)

**LED Colour Temperature**

- Static White**
- /1\_ 2700 K - 2784 lm
  - /2\_ 3000 K - 2860 lm
  - /3\_ 3500 K - 2911 lm

- Tunable White**
- /8\_ (2200 K - 4000 K)  
1528 lm - 1698 lm



CRI >90

**Control**

**3580 \_\_ / \_\_**

- \_\_ / \_\_ **0** Static White + On/ Off
  - \_\_ / \_\_ **A** Static White + Push; 1-10V; DALI-2
  - \_\_ / \_\_ **M** Static White + Without driver
  - \_\_ / \_\_ **Z** Static White + Casambi
- 
- \_\_ / **81** Tunable White + DALI-2 DT8
  - \_\_ / **8M** Tunable White + Without driver
  - \_\_ / **8Z** Tunable White + Casambi

**Materials**

Frame: PC- Polycarbonate.  
 Body: Aluminum & PC-Polycarbonate.  
 Lens: PMMA. Shade: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 26,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 23 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**

1 Box 0,105 x 0,08 x 0,57 m  
 Vol 0,005 m<sup>3</sup>  
 Gross weight 1,25 Kg Net weight 0,78 Kg

**Notes**


3580 \_\_ / \_\_ A: Push; 1-10V; DALI-2 **Bi-volt**  
 3568 \_\_ / \_\_ Z: Casambi **Bi-volt**

For Tunable White versions, a grouping driver is recommended.


Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



52 x 3,5 cm

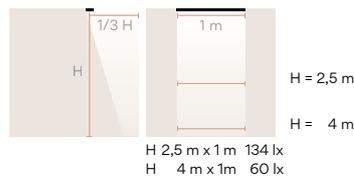

**3583**  
TRIMLESS

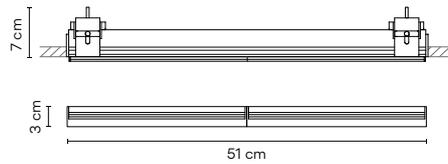

Finishes	LED Colour Temperature
● <b>11/</b> _ _ Black (NCS S 8500-N)	<b>Static White</b>
● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)	<b>/1</b> _ 2700 K - 2784 lm
	<b>/2</b> _ 3000 K - 2860 lm
	<b>/3</b> _ 3500 K - 2911 lm
	<b>Tunable White</b>
	<b>/8</b> _ (2200 K - 4000 K)
	1528 lm - 1698 lm
	<b>F</b> >
	CRI >90

Control

**3583** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White +  
On/ Off
- \_ \_ / \_ **A** Static White +  
Push; 1-10V; DALI-2
- \_ \_ / \_ **M** Static White +  
Without driver
- \_ \_ / \_ **Z** Static White +  
Casambi

---

- \_ \_ / **81** Tunable White +  
DALI-2 DT8
- \_ \_ / **8M** Tunable White +  
Without driver
- \_ \_ / **8Z** Tunable White +  
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.  
Shade: PC - Polycarbonate. Lens: PMMA.  
Trimless frame: Aluminum.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED STRIP 26,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED STRIP 23 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,01 m<sup>3</sup>  
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3568 \_ \_ / \_ A: Push; 1-10V; DALI-2 **Bi-volt**

3568 \_ \_ / \_ Z: Casambi **Bi-volt**


Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.


Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



53 x 4 cm

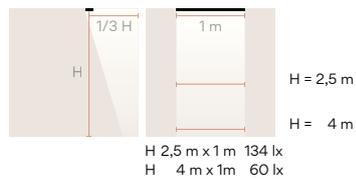

**3585**  
TRIM

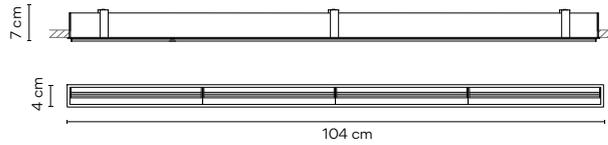

Finishes	LED Colour Temperature	Control
● <b>11/</b> _ _ Black (NCS S 8500-N)	<b>Static White</b> /1 _ 2700 K - 5568 lm	<b>3583</b> _ _ / _ _
● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)	/2 _ 3000 K - 5721 lm /3 _ 3500 K - 5822 lm	_ _ / _ <b>0</b> Static White + On/ Off
	<b>Tunable White</b> /8 _ (2200 K - 4000 K) 3056 lm - 3396 lm	_ _ / _ <b>A</b> Static White + Push; 1-10V; DALI-2
		_ _ / _ <b>M</b> Static White + Without driver
	CRI >90	_ _ / _ <b>Z</b> Static White + Casambi
		_ _ / <b>81</b> Tunable White + DALI-2 DT8
		_ _ / <b>8M</b> Tunable White + Without driver
		_ _ / <b>8Z</b> Tunable White + Casambi

**Materials**

Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate.  
 Lens: PMMA.  
 Frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 53,2 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 46 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**


1 Box 0,125 x 0,125 x 1,9 m  
 Vol 0,017 m<sup>3</sup>  
 Gross weight 3,25 Kg Net weight 2,3 Kg


**Notes**

3585 \_ \_ / \_ **0**: On/ Off **[Bi-volt]**  
 3585 \_ \_ / \_ **A**: Push; 1-10V; DALI-2 **[Bi-volt]**  
 3585 \_ \_ / \_ **Z**: Casambi **[Bi-volt]**  
 For Tunable White versions, a grouping driver is recommended.



 103 x 3,5 cm

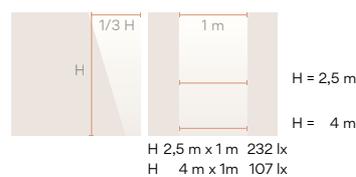

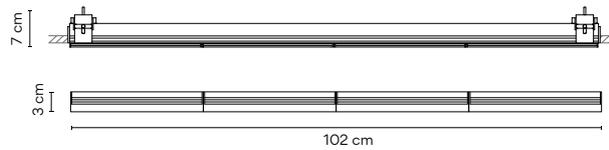**3588**  
 TRIMLESS


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> _ _ Black (NCS S 8500-N)</li> <li>● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)</li> </ul>	<p><b>Static White</b></p> <p><b>/1</b> _ 2700 K - 5568 lm</p> <p><b>/2</b> _ 3000 K - 5721 lm</p> <p><b>/3</b> _ 3500 K - 5822 lm</p> <p><b>Tunable White</b></p> <p><b>/8</b> _ (2200 K - 4000 K) 3056 lm - 3396 lm</p> <p><b>F</b> &gt;</p> <p>CRI &gt;90</p>	<p><b>3588</b> _ _ / _ _</p> <hr/> <p>_ _ / _ <b>O</b> Static White + On/ Off</p> <p>_ _ / _ <b>A</b> Static White + Push; 1-10V; DALI-2</p> <p>_ _ / _ <b>M</b> Static White + Without driver</p> <p>_ _ / _ <b>Z</b> Static White + Casambi</p> <hr/> <p>_ _ / <b>81</b> Tunable White + DALI-2 DT8</p> <p>_ _ / <b>8M</b> Tunable White + Without driver</p> <p>_ _ / <b>8Z</b> Tunable White + Casambi</p>

**Materials**

Body: Aluminum & PC-Polycarbonate.  
 Shade: PC - Polycarbonate. Lens: PMMA.  
 Trimless frame: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED STRIP 53,2 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Tunable White:**  
 1 x LED STRIP 46 W  
 Constant Voltage 24VDC  
 220~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,017 m<sup>3</sup>  
 Gross weight 4,5 Kg Net weight 3,06 Kg

**Notes**

3588 \_ \_ / \_ O: On/ Off **Bi-volt**


3588 \_ \_ / \_ A: Push; 1-10V; DALI-2 **Bi-volt**

3588 \_ \_ / \_ Z: Casambi **Bi-volt**

For Tunable White versions, a grouping driver is recommended.

**LED** **IP20** **CE** **UK** **ERC** **E**

104 x 4 cm

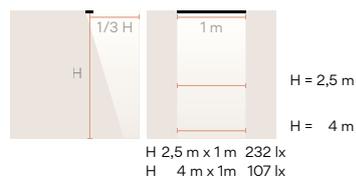



---

Ceiling - Colour Mood Grazer



**3605 Trim**  
103 x 4 cm



**3608 Trimless**  
100 x 3 cm




**3610 Trim**  
203 x 4 cm




**3616 Trimless**  
202 x 3 cm


TRIM

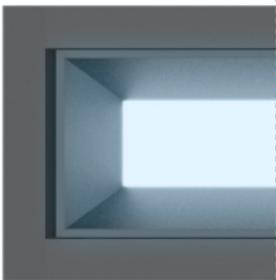

TRIMLESS



### 3605 TRIM

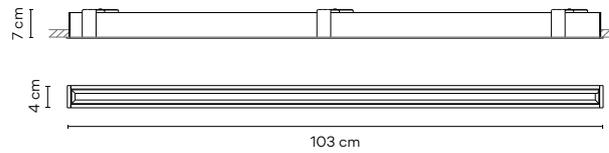

#### Finishes

- **11/ \_\_ Black**  
(NCS S 8500-N)
- **23/ \_\_ Warm White**  
(NCS S 0502-Y50R)

#### LED Colour Temperature

- Infinite Colour (TW+ RGB)**
- /A \_ 1575 lm - 1861 lm
  - 70 lm 11 (RED)
  - 182 lm (GREEN)
  - 35 lm (BLUE)



CRI >90

#### Control

**3605 \_\_ / AY** ProtoPixel\*

#### Materials

Frame: Aluminum.  
Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC - Polycarbonate.

#### Light Source and electronics

1 x LED STRIP 24V 28 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Packaging

1 Box 0,105 x 0,08 x 1,09 m  
Vol 0,009 m<sup>3</sup>  
Gross weight 3,17 Kg Net weight 2,4 Kg

#### Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



102 x 3,5 cm

### 3608 TRIMLESS

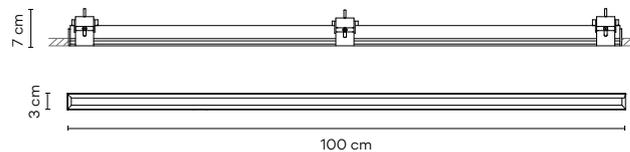

#### Finishes

- **11/ \_\_ Black**  
(NCS S 8500-N)
- **23/ \_\_ Warm White**  
(NCS S 0502-Y50R)

#### LED Colour Temperature

- Infinite Colour (TW+ RGB)**
- /A \_ 1575 lm - 1861 lm
  - 70 lm 11 (RED)
  - 182 lm (GREEN)
  - 35 lm (BLUE)



CRI >90

#### Control

**3608 \_\_ / AY** ProtoPixel\*

#### Materials

Trimless frame: Aluminum.  
Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC - Polycarbonate.

#### Light Source and electronics

1 x LED STRIP 24V 28 W  
Constant Voltage 24VDC  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,02 m<sup>3</sup>  
Gross weight 3,17 Kg Net weight 2,4 Kg

#### Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Trimless frame can be shipped in advance under request.



103 x 4 cm

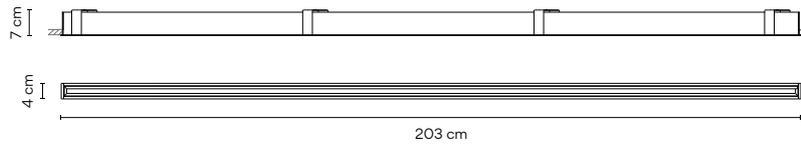**3610**  
TRIM


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> _ _ Black (NCS S 8500-N)</li> <li>● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Infinite Colour (TW+ RGB)</b> <b>/A</b> _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE)	<b>3610</b> _ _ / <b>AY</b> ProtoPixel*
	 CRI >90	

**Materials**

Frame: Aluminum.  
 Body: Aluminum.  
 Shade: Aluminum.  
 Diffuser: PC - Polycarbonate.

**Light Source and electronics**

1 x LED STRIP 56 W 24 V  
 Constant Voltage 24VDC  
 220-240V 50/60Hz

**Packaging**

1 Box 0,125 x 0,125 x 2,09 m  
 Vol 0,047 m<sup>3</sup>  
 Gross weight 5,25 Kg Net weight 4,6 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.



202 x 3,5 cm

**3613**  
TRIMLESS


Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● <b>11/</b> _ _ Black (NCS S 8500-N)</li> <li>● <b>23/</b> _ _ Warm White (NCS S 0502-Y50R)</li> </ul>	<b>Infinite Colour (TW+ RGB)</b> <b>/A</b> _ 3150 lm - 3722 lm 140 lm 11 (RED) 364 lm (GREEN) 70 lm (BLUE)	<b>3613</b> _ _ / <b>AY</b> ProtoPixel*
	 CRI >90	

**Materials**

Trimless frame: Aluminum.  
 Body: Aluminum.  
 Shade: Aluminum.  
 Diffuser: PC - Polycarbonate.

**Light Source and electronics**

1x LED STRIP 24V 56 W  
 Constant Voltage 24VDC  
 220-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,093 m<sup>3</sup>  
 Gross weight 5,25 Kg Net weight 4,6 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Trimless frame can be shipped in advance under request.



203 x 4 cm



# Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

## Wall



**3700**

55 x 19 x 25 cm

**3702**

85 x 22 x 25 cm

**3704**

120 x 22 x 25 cm

**3706**

195 x 22 x 25 cm



**3710**

22 x 55 x 25 cm

**3714**

22 x 114 x 26 cm

**3716**

22 x 114 x 26 cm

**3718**

22 x 187 x 26 cm

**3700**

Finishes

● **18/** \_ \_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature


/1\_ 2700 K - 868 lm

F

CRI >90

Control

**3700 18 / 1B** Push; 1-10V



Materials

Diffuser: Blown-glass.  
Profile: Aluminum.

Light Source and electronics


2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

Packaging

1 Box 0,57 x 0,31 x 0,21 m  
Vol 0,0382 m<sup>3</sup>  
Gross weight 3 Kg Net weight 1,8 Kg

LED IP20 CE UK ENEC

**3702**



Finishes  
 ● **18/ \_ \_ Graphite**  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1\_ 2700 K - 868 lm  
**F**   
 CRI >90

Control  
**3702** \_ \_ / \_ \_  
 \_ \_ / 11 DALI-2  
 \_ \_ / 1B Push; 1-10V

**Materials**

Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.


Light Source and electronics  
 2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**

1 Box 0,87 x 0,31 x 0,21 m  
 Vol 0,0581 m<sup>3</sup>  
 Gross weight 4,05 Kg Net weight 2,4 Kg



**3704**



Finishes  
 ● **18/ \_ \_ Graphite**  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1\_ 2700 K - 1736 lm  
**F**   
 CRI >90

Control  
**3704** \_ \_ / \_ \_  
 \_ \_ / 11 DALI-2  
 \_ \_ / 1B Push; 1-10V

**Materials**

Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.


Light Source and electronics  
 4 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,0081 m<sup>3</sup>  
 Gross weight 6,2 Kg Net weight 3,9 Kg



**3706**



Finishes  
 ● **18/ \_ \_ Graphite**  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1\_ 2700 K - 2604 lm  
**F**   
 CRI >90

Control  
**3706** \_ \_ / \_ \_  
 \_ \_ / 11 DALI-2  
 \_ \_ / 1B Push; 1-10V

**Materials**

Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.


Light Source and electronics  
 6 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,1793 m<sup>3</sup>  
 Gross weight 6,4 Kg Net weight 3,9 Kg



**3710**



Finishes  
 ● **18/ \_ \_ Graphite**  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1\_ 2700 K - 868 lm  
**F**   
 CRI >90

Control  
**3710 18 / 1B** Push; 1-10V

**Materials**

Diffuser: Blown-glass.  
 Profile: Aluminum.


Light Source and electronics  
 2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**

1 Box 0,57 x 0,31 x 0,21 m  
 Vol 0,0382 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 1,8 Kg



**3714**



**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF 9913 WX)

**LED Colour Temperature**  
 /1\_ 2700 K - 868 lm  
 F →  
 CRI >90

**Control**  
**3714** \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 1B Push; 1-10V

---


**Materials**  
 Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.

**Light Source and electronics**  
 2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,0081 m<sup>3</sup>  
 Gross weight 5,2 Kg Net weight 2,9 Kg

LED ⓘ IP20 CE UK ENEC

**3716**



**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF 9913 WX)

**LED Colour Temperature**  
 /1\_ 2700 K - 1736 lm  
 F →  
 CRI >90

**Control**  
**3716** \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 1B Push; 1-10V

---


**Materials**  
 Diffuser: Blown-glass.  
 Profile: Aluminum.

**Light Source and electronics**  
 4 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,0081 m<sup>3</sup>  
 Gross weight 6,5 Kg Net weight 4,2 Kg

LED ⓘ IP20 CE UK ENEC

**3718**



**Finishes**  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF 9913 WX)

**LED Colour Temperature**  
 /1\_ 2700 K - 2604 lm  
 F →  
 CRI >90

**Control**  
**3718** \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 1B Push; 1-10V

---

**Materials**  
 Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.

**Light Source and electronics**  
 6 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,1793 m<sup>3</sup>  
 Gross weight 8,6 Kg Net weight 6,1 Kg

LED ⓘ IP20 CE UK ENEC

Pendant

3720



Ø 25 cm

3724



Ø 25 cm

3726



Ø 25 cm

3728



Ø 25 cm

3730



Ø 25 cm

3734



150 cm

3735



150 cm

3736



195 cm


3720

Finishes  
 ● 18/ \_\_ Graphite  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1\_ 2700 K - 868 lm  
 F  
 CRI >90

Control

3720 \_\_ / \_\_  
 \_\_ / 11 DALI-2  
 \_\_ / 1B Push; 1-10V  
 \_\_ / 1Z Casambi



Materials

Diffuser: Blown-glass.  
 Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,71 x 0,27 x 0,21 m  
 Vol 0,0413 m<sup>3</sup>  
 Gross weight 3,75 Kg Net weight 2,8 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE Bi-volt

3724



Finishes  
● 18/ \_ \_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature  
/1\_ 2700 K - 868 lm  
F  
CRI >90

Control

3724 \_ \_ / \_ \_  
\_ \_ / 11 DALI-2  
\_ \_ / 1B Push; 1-10V  
\_ \_ / 1Z Casambi


Materials  
Diffuser: Blown-glass.  
Profile: Aluminum.  
Planter: PMMA.

Light Source and electronics  
2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

Packaging  
1 Box 1,02 x 0,27 x 0,21 m  
Vol 0,0588 m<sup>3</sup>  
Gross weight 4,6 Kg Net weight 3,3 Kg

Notes  
Extra cable length.  
LED IP20 CE UK ENEC ENEC Bi-volt

3726



Finishes  
● 18/ \_ \_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature  
/1\_ 2700 K - 1736 lm  
F  
CRI >90

Control

3726 \_ \_ / \_ \_  
\_ \_ / 11 DALI-2  
\_ \_ / 1B Push; 1-10V  
\_ \_ / 1Z Casambi


Materials  
Diffuser: Blown-glass.  
Profile: Aluminum.

Light Source and electronics  
4 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

Packaging  
1 Box 1,02 x 0,27 x 0,21 m  
Vol 0,0588 m<sup>3</sup>  
Gross weight 5,4 Kg Net weight 4,1 Kg

Notes  
Extra cable length.  
LED IP20 CE UK ENEC ENEC Bi-volt

3728

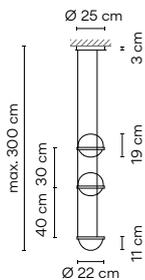

Finishes  
● 18/ \_ \_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature  
/1\_ 2700 K - 1736 lm  
F  
CRI >90

Control

3728 \_ \_ / \_ \_  
\_ \_ / 11 DALI-2  
\_ \_ / 1B Push; 1-10V  
\_ \_ / 1Z Casambi


Materials  
Diffuser: Blown-glass.  
Profile: Aluminum.  
Planter: PMMA.

Light Source and electronics  
4 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

Packaging  
1 Box 0,75 x 0,53 x 0,21 m  
Vol 0,0857 m<sup>3</sup>  
Gross weight 8,8 Kg Net weight 4,7 Kg

Notes  
Extra cable length.  
LED IP20 CE UK ENEC ENEC Bi-volt

3730

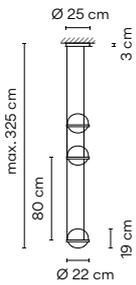

Finishes  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1 \_ 2700 K - 2604 lm  
 F  
 CRI >90

Control  
 3730 \_ \_ / \_ \_

\_ \_ / 1A Push; 1-10V; DALI-2  
 \_ \_ / 1Z Casambi

Materials

Diffuser: Blown-glass.  
 Profile: Aluminum.

Light Source and electronics

6 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,75 x 0,53 x 0,21 m  
 Vol 0,0857 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 5,4 Kg

Notes

Extra cable length.



3734



Finishes  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1 \_ 2700 K - 2265 lm  
 F  
 CRI >90

Control  
 3734 \_ \_ / \_ \_

\_ \_ / 1A Push; 1-10V; DALI-2  
 \_ \_ / 1Z Casambi

Materials

Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.

Light Source and electronics

1 x LED 2 W 500 mA  
 4 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging


1 Box 1,72 x 0,33 x 0,31 m  
 Vol 0,1790 m<sup>3</sup>  
 Gross weight 9,4 Kg Net weight 5,95 Kg

Notes

Extra cable length.



3735



Finishes  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1 \_ 2700 K - 2265 lm  
 F  
 CRI >90

Control  
 3735 \_ \_ / \_ \_

\_ \_ / 1A Push; 1-10V; DALI-2  
 \_ \_ / 1Z Casambi

Materials

Diffuser: Blown-glass.  
 Profile: Aluminum.

Light Source and electronics

6 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging


1 Box 1,72 x 0,33 x 0,31 m  
 Vol 0,1790 m<sup>3</sup>  
 Gross weight 9,4 Kg Net weight 5,95 Kg

Notes

Extra cable length.



3736

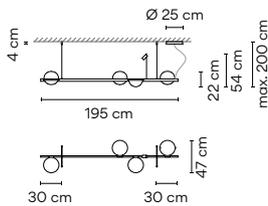

Finishes  
 ● 18/ \_ \_ Graphite  
 (ADAPTA RF 9913 WX)

LED Colour Temperature  
 /1 \_ 2700 K - 3133 lm  
 F  
 CRI >90

Control  
 3736 \_ \_ / \_ \_

\_ \_ / 1A Push; 1-10V; DALI-2  
 \_ \_ / 1Z Casambi

Materials

Diffuser: Blown-glass.  
 Profile: Aluminum.  
 Planter: PMMA.

Light Source and electronics

1 x LED 2 W 500 mA  
 6 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging

1 Box 2,17 x 0,33 x 0,31 m  
 Vol 0,2219 m<sup>3</sup>  
 Gross weight 12,29 Kg Net weight 8,16 Kg

Notes


Extra cable length.



Ceiling



**3760**



Finishes  
● **18/** \_\_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature  
**/1** \_ 2700 K - 1736 lm  
F →  
CRI >90


Control  
**3760** \_\_ / \_\_

\_\_ / **11** DALI-2  
\_\_ / **1B** Push; 1-10V  
\_\_ / **1Z** Casambi

Materials  
Diffuser: Blown-glass.  
Profile: Aluminum.  
Light Source and electronics  
4 x LED 4,6 W 500 mA  
Constant Current 500 mA  
100~240Vac 50/60Hz

Packaging  
1 Box 0,81 x 0,33 x 0,31 m  
Vol 0,0083 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 3,9 Kg  
LED ⓘ IP20 CE UK ENEC ⓘ Bi-volt

**3764**



Finishes  
● **18/** \_\_ Graphite  
(ADAPTA RF 9913 WX)

LED Colour Temperature  
**/1** \_ 2700 K - 3472 lm  
F →  
CRI >90

Control  
**3764** \_\_ / \_\_

\_\_ / **1A** Push; 1-10V;  
DALI-2  
\_\_ / **1Z** Casambi

Materials  
Diffuser: Blown-glass.  
Profile: Aluminum.  
Light Source and electronics  
8 x LED 4,6 W 500 mA  
Constant Current 500 mA  
100~240Vac 50/60Hz

Packaging  
1 Box 0,81 x 0,33 x 0,31 m  
Vol 0,0083 m<sup>3</sup>  
Gross weight 9,5 Kg Net weight 5,4 Kg  
LED ⓘ IP20 CE UK ENEC ⓘ Bi-volt



# Bigger

Design by La Invisible

Bigger serves as statement lighting without overbearing the space it occupies, radiating with profuse light which cascades down from the ceiling, its impressive scale bringing the space to life.

## Ceiling

3900

Ø 80 cm



3905

Ø 84 cm



3910

Ø 103 cm



3915

Ø 107 cm



3900

### Finishes

- 23/ \_\_ Beige L1 (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 53/ \_\_ Green M1 (NCS S 6005-G80Y)

### LED Colour Temperature

#### Static White

/1\_ 2700 K - 7010 lm



/3\_ 3500 K - 7729 lm



#### Tunable White

/8\_ (1800 K - 4000 K)  
6046 lm - 7404 lm



CRI >90

### Control

3900 \_\_ / \_\_

\_\_ / \_\_ A Static White +  
Push; 1-10V; DALI-2

\_\_ / \_\_ Z Static White +  
Casambi

\_\_ / 81 Tunable White +  
DALI-2 DT8

\_\_ / 8Z Tunable White +  
Casambi

10 cm



Ø 80 cm

### Materials

Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

### Light Source and electronics

#### 2700 K - 3500 K:

4 x LED QUADRANT 13,2 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

#### Tunable White:


4 x LED QUADRANT 13,1 W 1040 mA  
Constant Current 1040 mA  
220-250V 50/60Hz

### Packaging

1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 11,65 Kg Net weight 9,65 Kg

LED IP20 CE UK ENE Dimmer Bi-volt

### 3905



- Finishes**
- **23/** \_\_ Beige L1 (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 7010 lm  
D

/3\_ 3500 K - 7729 lm  
E

**Tunable White**  
/8\_ (1800 K - 4000 K)  
6046 lm - 7404 lm  
D  
CRI >90

**Control**

**3905** \_\_ / \_\_

---

\_\_ / \_\_ **A** Static White + Push; 1-10V; DALI-2

---

\_\_ / \_\_ **Z** Static White + Casambi

---

\_\_ / **81** Tunable White + DALI-2 DT8

---

\_\_ / **8Z** Tunable White + Casambi

**Materials**  
Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Packaging**  
1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 12,7 Kg Net weight 10,75 Kg


**Light Source and electronics**

**2700 K - 3500 K:**  
4 x LED QUADRANT 13,2 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

**Tunable White:**  
4 x LED QUADRANT 13,1 W 1040 mA  
Constant Current 1040 mA  
220-250V 50/60Hz

LED IP20 CE UK ENEC Dimmer Bi-volt

### 3910



- Finishes**
- **23/** \_\_ Beige L1 (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 13665 lm  
/3\_ 3500 K - 14301 lm

**Tunable White**  
/8\_ (1800 K - 4000 K)  
10244 lm - 12708 lm  
D  
CRI >90

**Control**

**3910** \_\_ / \_\_

---

\_\_ / \_\_ **A** Static White + Push; 1-10V; DALI-2

---

\_\_ / \_\_ **Z** Static White + Casambi

---

\_\_ / **81** Tunable White + DALI-2 DT8

---

\_\_ / **8Z** Tunable White + Casambi

**Materials**  
Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Packaging**  
1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 17,9 Kg Net weight 15,8 Kg


**Light Source and electronics**

**2700 K - 3500 K:**  
4 x LED QUADRANT 24,5 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

**Tunable White:**  
4 x LED QUADRANT 19,78 W 865 mA  
Constant Current 865 mA  
120-250V 50/60Hz

LED IP20 CE UK ENEC Dimmer Bi-volt

3915



- Finishes**
- **23/** \_\_ Beige L1  
(NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
  - **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

- LED Colour Temperature**
- Static White**
- /1** \_ 2700 K - 13665 lm
  - /3** \_ 3500 K - 14301 lm
- Tunable White**
- /8** \_ (1800 K - 4000 K)  
10244 lm - 12708 lm
- D**
- CRI >90

- Control**
- 3915** \_\_ / \_\_
- 
- \_\_ / **A** Static White +  
Push; 1-10V; DALI-2
- 
- \_\_ / **Z** Static White +  
Casambi
- 
- \_\_ / **81** Tunable White +  
DALI-2 DT8
- 
- \_\_ / **8Z** Tunable White +  
Casambi

**Materials**

Body: Aluminum.  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3500 K:**  
4 x LED QUADRANT 13,2 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

**Tunable White:**  
4 x LED QUADRANT 13,1 W 1040 mA  
Constant Current 1040 mA  
220-250V 50/60Hz

**Packaging**

1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 19,2 Kg Net weight 17,1 Kg

**LED** **IP20** **CE** **UKA** **ERC** **Dimmer** **Bi-volt**



## Pendant



**3920**  
Ø 80 cm



**3925**  
Ø 84 cm




**3930**  
Ø 103 cm



**3935**  
Ø 107 cm

### 3920



- Finishes**
- **23/** \_ \_ Beige L1 (NCS S 0502-Y50R)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**

**/1** \_ 2700 K - 7010 lm  
 **D**

**/3** \_ 3500 K - 7729 lm  
 **E**

**Tunable White**

**/8** \_ (1800 K - 4000 K)  
 6046 lm - 7404 lm  
 **D**

CRI >90

#### Control

**3920** \_ \_ / \_ \_

---

\_ \_ / \_ A Static White +  
 Push; 1-10V; DALI-2

---

\_ \_ / \_ Z Static White +  
 Casambi

---

\_ \_ / **81** Tunable White +  
 DALI-2 DT8

---

\_ \_ / **8Z** Tunable White +  
 Casambi

#### Materials

Body: Aluminum.  
 Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.

#### Light Source and electronics

**2700 K - 3500 K:**  
 4 x LED QUADRANT 13,2 W 1050 mA  
 Constant Current 1050 mA  
 110-240V 50/60Hz


**Tunable White:**  
 4 x LED QUADRANT 13,1 W 1040 mA  
 Constant Current 1040 mA  
 220-250V 50/60Hz

#### Packaging

1 Box 1,16 x 0,16 x 0,3 m  
 Vol 0,487 m<sup>3</sup>  
 Gross weight 11,71 Kg Net weight 9,7 Kg

LED  IP20  CE  UKA  ENEC  Dimmer  Bi-volt

3925



- Finishes**
- 23/ \_\_ Beige L1 (NCS S 0502-Y50R)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 7010 lm  
D

/3\_ 3500 K - 7729 lm  
E

**Tunable White**  
/8\_ (1800 K - 4000 K)  
6046 lm - 7404 lm  
D

CRI >90

**Control**

3925 \_\_ / \_\_

---

\_\_ / \_\_ A Static White +  
Push; 1-10V; DALI-2

---

\_\_ / \_\_ Z Static White +  
Casambi

---

\_\_ / 81 Tunable White +  
DALI-2 DT8

---

\_\_ / 8Z Tunable White +  
Casambi

**Materials**  
Body: Aluminum. Shade: Aluminum.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
**2700 K - 3500 K:**  
4 x LED QUADRANT 13,2 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

**Tunable White:**  
4 x LED QUADRANT 13,1 W 1040 mA  
Constant Current 1040 mA  
220-250V 50/60Hz

**Packaging**  
1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 12,75 Kg Net weight 10,75 Kg

LED IP20 CE UK ENE Dimmer Bi-volt

3930



- Finishes**
- 23/ \_\_ Beige L1 (NCS S 0502-Y50R)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 13665 lm  
/3\_ 3500 K - 14301 lm

**Tunable White**  
/8\_ (1800 K - 4000 K)  
10244 lm - 12708 lm  
D

CRI >90

**Control**

3930 \_\_ / \_\_

---

\_\_ / \_\_ A Static White +  
Push; 1-10V; DALI-2

---

\_\_ / \_\_ Z Static White +  
Casambi

---

\_\_ / 81 Tunable White +  
DALI-2 DT8

---

\_\_ / 8Z Tunable White +  
Casambi

**Materials**  
Body: Aluminum. Shade: Aluminum.  
Diffuser: PC- Polycarbonate.



**Light Source and electronics**  
**2700 K - 3500 K:**  
4 x LED QUADRANT 24,5 W 1050 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

**Tunable White:**  
4 x LED QUADRANT 19,78 W 865 mA  
Constant Current 865 mA  
120-250V 50/60Hz

**Packaging**  
1 Box 1,16 x 0,16 x 0,3 m  
Vol 0,487 m<sup>3</sup>  
Gross weight 18 Kg Net weight 15,9 Kg

LED IP20 CE UK ENE Dimmer Bi-volt

3935



- Finishes**
- **23/** \_\_ Beige L1 (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 13665 lm  
 /3 \_ 3500 K - 14301 lm

**Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 10244 lm - 12708 lm

**D**   
 CRI >90

**Control**

**3935** \_\_ / \_\_

---

\_\_ / \_\_ **A** Static White + Push; 1-10V; DALI-2

---

\_\_ / \_\_ **Z** Static White + Casambi

---

\_\_ / **81** Tunable White + DALI-2 DT8

---

\_\_ / **8Z** Tunable White + Casambi

**Materials**  
 Body: Aluminum. Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K - 3500 K:**  
 4 x LED QUADRANT 13,2 W 1050 mA  
 Constant Current 1050 mA  
 110-240V 50/60Hz

**Tunable White:**  
 4 x LED QUADRANT 13,1 W 1040 mA  
 Constant Current 1040 mA  
 220-250V 50/60Hz

**Packaging**  
 1 Box 1,16 x 0,16 x 0,3 m  
 Vol 0,487 m<sup>3</sup>  
 Gross weight 19,3 Kg Net weight 17,2 Kg




# Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition. Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

## Outdoor

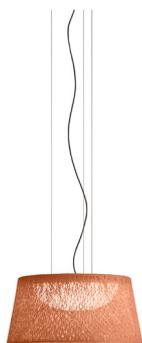

**4072**

Ø 60 cm



**4077**

Ø 60 cm



**4078**

Ø 120 cm



**4057**

Ø 60 x 191 cm



**4062**


Ø 120 x 195 cm



**4067**

Ø 60 x 166 cm

### 4057

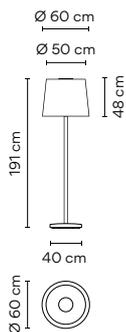

#### Finishes

- **27/** \_ \_ Sand (NCS S 1505-Y50R)
- **53/** \_ \_ Green M1 (NCS S 6005-G80Y)
- **61/** \_ \_ Ocre red (NCS S 3050-Y60R)

#### LED Colour Temperature

/1\_ 2700 K - 3299 lm  
  
 CRI >90

#### Control

**4057** \_ \_ / 10 On/ Off

#### Materials

Shade: FG- Fibreglass. Weight: Concrete.  
 Lid: Steel. Diffuser: PMMA.

#### Light Source and electronics

1 x LED PLATE 25 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz


#### Packaging

2 Boxes  
 Total Vol 1,0300 m<sup>3</sup>  
 Gross weight 45,1 Kg Net weight 27,8 Kg


#### Notes

Portable version. Electric cable 1,5 m



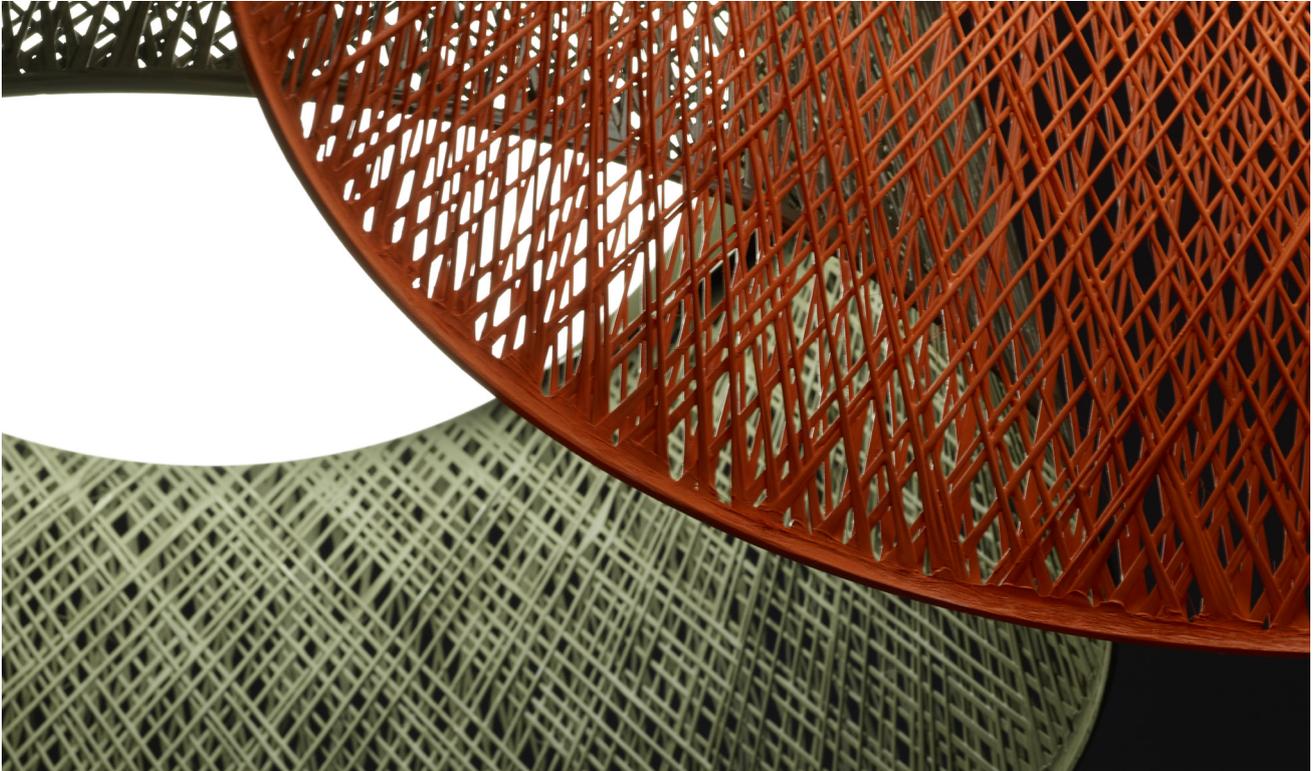

4062

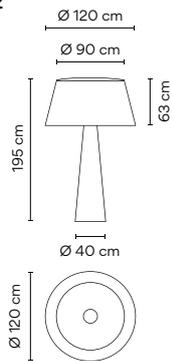

- Finishes**
- 27/ \_ \_ Sand (NCS S 1505-Y50R)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)
  - 61/ \_ \_ Ocre red (NCS S 3050-Y60R)

**LED Colour Temperature**  
 /1\_ 2700 K - 3481 lm  
 [D] >  
 CRI >90

**Control**  
 4062 \_ \_ / 10 On/ Off

**Materials**  
 Shade: FG- Fiberglass. Base: FG- Fiberglass.  
 Diffuser: PMMA.


**Light Source and electronics**  
 4 x LED PLATE 14 W 500 mA  
 1 x LED 2,4 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**  
 4 Boxes  
 Total Vol 2,3500 m<sup>3</sup>  
 Gross weight 125,2 Kg Net weight 113,23 Kg

**Notes**  
 Portable version. Electric cable 2 m



4067

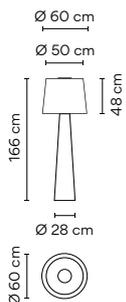

- Finishes**
- 27/ \_ \_ Sand (NCS S 1505-Y50R)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)
  - 61/ \_ \_ Ocre red (NCS S 3050-Y60R)

**LED Colour Temperature**  
 /1\_ 2700 K - 3481 lm  
 [D] >  
 CRI >90

**Control**  
 4067 \_ \_ / 10 On/ Off

**Materials**  
 Shade: FG- Fiberglass. Base: FG- Fiberglass.  
 Diffuser: PMMA.


**Light Source and electronics**  
 1 x LED PLATE 25 W 700 mA  
 1 x LED 2,4 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**  
 3 Boxes  
 Total Vol 1,5000 m<sup>3</sup>  
 Gross weight 50 Kg Net weight 30,5 Kg

**Notes**  
 Portable version. Electric cable 1,5 m



4072



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● 27/ __ Sand (NCS S 1505-Y50R)</li> <li>● 53/ __ Green M1 (NCS S 6005-G80Y)</li> <li>● 61/ __ Ocre red (NCS S 3050-Y60R)</li> </ul>	/1_ 2700 K - 3299 lm  CRI >90	4072 __ / 10 On/ Off

**Materials**

Shade: FG- Fiberglass. Canopy: Steel.  
Lid: Steel. Diffuser: PMMA.

**Light Source and electronics**

1 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,50 x 0,77 x 0,77 m  
Vol 0,2970 m<sup>3</sup>  
Gross weight 11,1 Kg Net weight 9,9 Kg

**Notes**

Surface mounted  
Extra cable length.



4077



Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● 27/ __ Sand (NCS S 1505-Y50R)</li> <li>● 53/ __ Green M1 (NCS S 6005-G80Y)</li> <li>● 61/ __ Ocre red (NCS S 3050-Y60R)</li> </ul>	/1_ 2700 K - 3299 lm  CRI >90	4077 __ / 10 On/ Off

**Materials**

Shade: FG- Fiberglass. Canopy: Steel.  
Lid: Steel. Diffuser: PMMA.

**Light Source and electronics**

1 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,67 x 0,67 x 0,62 m  
Vol 0,2970 m<sup>3</sup>  
Gross weight 11 Kg Net weight 9,9 Kg

**Notes**

Surface mounted  
Extra cable length.



4078

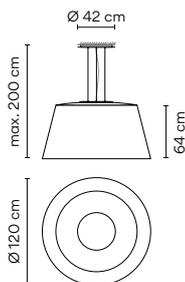

Finishes	LED Colour Temperature	Control
<ul style="list-style-type: none"> <li>● 27/ __ Sand (NCS S 1505-Y50R)</li> <li>● 53/ __ Green M1 (NCS S 6005-G80Y)</li> <li>● 61/ __ Ocre red (NCS S 3050-Y60R)</li> </ul>	/1_ 2700 K - 3299 lm  CRI >90	4078 __ / 10 On/ Off

**Materials**

Shade: FG- Fiberglass. Canopy: Steel.  
Lid: Steel. Diffuser: PMMA.

**Light Source and electronics**

3 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,74 x 1,24 x 1,27 m  
Vol 1,1300 m<sup>3</sup>  
Gross weight 38 Kg Net weight 30 Kg

**Notes**

Indoor only  
Extra cable length.





# Break

Design by Xuclà & Alemany

Break is distinguished by its architectural attitude. A series of cubic volumes provide indirect downlight while doubling up as a dynamic sculptural presence.

## Outdoor



**4101**  
25 x 81 cm




**4106**  
25 x 43 cm



**4108**  
48 x 38 cm

### 4101

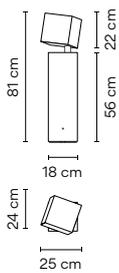

- Finishes**
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 80/ \_\_ Concrete (Natural finish)

**LED Colour Temperature**  
/1\_ 2700 K - 710 lm  
E →  
CRI >80

**Control**  
4101 \_\_ / 10 On/ Off


**Materials**  
Body: Steel.  
Head: Concrete.  
Base: Concrete.  
Diffuser: PMMA.

**Light Source and electronics**  
1 x LED 6,2 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,88 x 0,35 x 0,34 m  
Vol 0,1032 m<sup>3</sup>  
Gross weight 38,9 Kg Net weight 35,01 Kg

LED Ⓡ IP66 CE UK ENEC Bi-volt

### 4106



- Finishes**
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 80/ \_\_ Concrete (Natural finish)

**LED Colour Temperature**  
/1\_ 2700 K - 710 lm  
E →  
CRI >80

**Control**  
4106 \_\_ / 10 On/ Off


**Materials**  
Head: Concrete.  
Base: Concrete.  
Diffuser: PMMA.

**Light Source and electronics**  
1 x LED 6,2 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,88 x 0,35 x 0,34 m  
Vol 0,0598 m<sup>3</sup>  
Gross weight 21,5 Kg Net weight 19,35 Kg

LED Ⓡ IP66 CE UK ENEC Bi-volt

4108



**Finishes**  
 ● 22/ \_ \_ Graphite Black  
 (NCS S 8000-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 2500 lm  
  
 CRI >80

**Control**  
 4108 22 / 10 On/ Off

**Materials**  
 Body: Steel.  
 Diffuser: PMMA.

**Light Source and electronics**  
 2 x LED Strip 9,2 W 400 mA  
 Constant Current 400 mA  
 220-240V 50/60Hz

**Packaging**  
 1 Box 0,49 x 0,51 x 0,52 m  
 Vol 0,1312 m<sup>3</sup>  
 Gross weight 6,6 Kg Net weight 16 Kg




# Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

## Outdoor

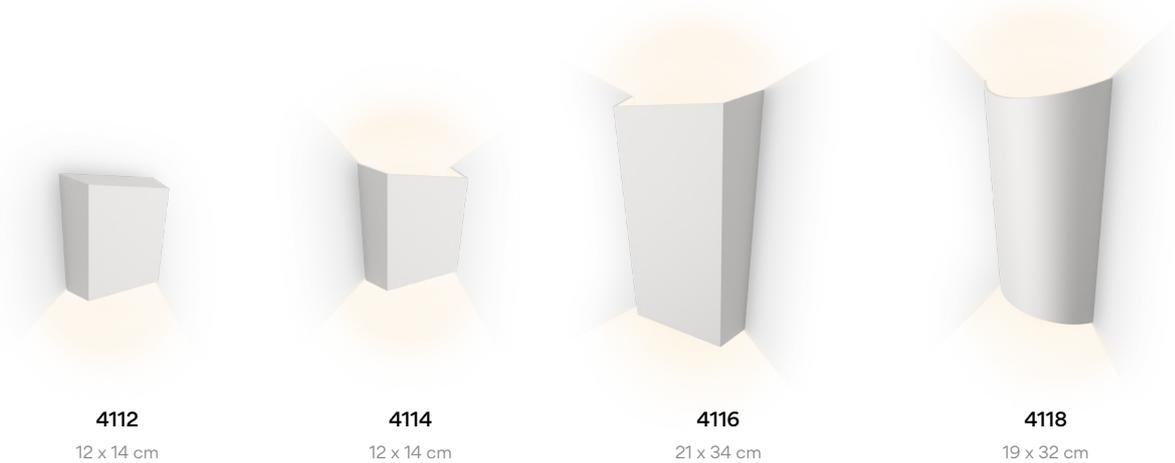


**4112**  
12 x 14 cm

**4114**  
12 x 14 cm

**4116**  
21 x 34 cm

**4118**  
19 x 32 cm

### 4112



- Finishes**
- **22/** \_\_ Graphite Black (NCS S 8000-N)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **95/** \_\_ Primer (NCS S 1000-N)

**LED Colour Temperature**

- /1** \_ 2700 K - 113 lm
- F** >
- /3** \_ 3500 K - 146 lm
- D** >
- CRI >90

**Control**

**4112** \_ \_ / \_ \_

---

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1 30** DALI-2 (Remote)

\_ \_ / \_ **Z 30** Casambi (Remote)

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**


1 x LED 1W 350 mA  
Constant Current 350 mA  
100~240Vac. 50/60Hz

**Packaging**

1 Box 0,07 x 0,19 x 0,23 m  
Vol 0,0030 m<sup>3</sup>  
Gross weight 1 Kg Net weight 0,610 Kg



### 4114



- Finishes**
- **22/** \_\_ Graphite Black (NCS S 8000-N)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **95/** \_\_ Primer (NCS S 1000-N)

**LED Colour Temperature**

- /1** \_ 2700 K - 227 lm
- F** >
- /3** \_ 3500 K - 292 lm
- D** >
- CRI >90

**Control**

**4114** \_ \_ / \_ \_

---

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1 30** DALI-2 (Remote)

\_ \_ / \_ **Z 30** Casambi (Remote)

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

2 x LED 1W 350 mA  
Constant Current 350 mA  
100~240Vac. 50/60Hz


**Packaging**

1 Box 0,07 x 0,19 x 0,23 m  
Vol 0,0030 m<sup>3</sup>  
Gross weight 1 Kg Net weight 0,590 Kg





4116



- Finishes
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 95/ \_\_ Primer (NCS S 1000-N)

LED Colour Temperature

/1 \_ 2700 K - 707 lm  
 G

/3 \_ 3500 K - 925 lm  
 F

CRI >90

Control

4116 \_ \_ / \_ \_

---

\_ \_ / \_ 0 On/ Off

\_ \_ / \_ 1 30 DALI-2 (Remote)

\_ \_ / \_ Z 30 Casambi (Remote)

Materials

Body: Aluminum.  
 Diffuser: PC- Polycarbonate.

Light Source and electronics


2 x LED 4W 350 mA  
 Constant Current 350 mA  
 100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m  
 Vol 0,0120 m<sup>3</sup>  
 Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP65 CE UK ENEC Bi-volt

4118



- Finishes
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 95/ \_\_ Primer (NCS S 1000-N)

LED Colour Temperature

/1 \_ 2700 K - 707 lm  
 G

/3 \_ 3500 K - 925 lm  
 F

CRI >90

Control

4118 \_ \_ / \_ \_

---

\_ \_ / \_ 0 On/ Off

\_ \_ / \_ 1 30 DALI-2 (Remote)

\_ \_ / \_ Z 30 Casambi (Remote)

Materials

Body: Aluminum.  
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA  
 Constant Current 350 mA  
 100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m  
 Vol 0,0120 m<sup>3</sup>  
 Gross weight 3,2 Kg Net weight 1,71 Kg

LED IP65 CE UK ENEC Bi-volt

# Empty


Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

## Outdoor



### 4125

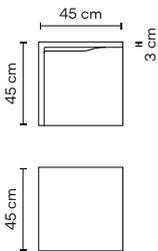

- Finishes**
- 18/ \_\_ Polymer Concrete Grey (NCS S 2002-B50G)
  - 22/ \_\_ Graphite Black (NCS S 8000-N)

**LED Colour Temperature**

/1 \_ 2700 K - 664 lm  
/3 \_ 3500 K - 1247 lm

**LED**

CRI >80 CRI >90

**Control**

4125 \_\_ / \_ 0 On/ Off

**Materials**

Body: Polymer concrete.  
Diffuser: PMMA.

**Light Source and electronics**

2 x LED STRIP 24V 8,6 W  
Constant Voltage 24V  
100~277V 50/60Hz

**Packaging**


1 Box 0,56 x 0,50 x 0,50 m  
Vol 0,176 m<sup>3</sup>  
Gross weight 40 Kg Net weight 36 Kg

**Notes**

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

**LED** **IP66** **CE** **UK** **ERC** **Bi-volt**

### 4130

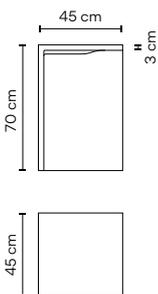

- Finishes**
- 18/ \_\_ Polymer Concrete Grey (NCS S 2002-B50G)
  - 22/ \_\_ Graphite Black (NCS S 8000-N)

**LED Colour Temperature**

/1 \_ 2700 K - 664 lm  
/3 \_ 3500 K - 1247 lm

**LED**

CRI >80 CRI >90

**Control**

4130 \_\_ / \_ 0 On/ Off

**Materials**

Body: Polymer concrete.  
Diffuser: PMMA.

**Light Source and electronics**

2 x LED STRIP 24V 8,6 W  
Constant Voltage 24V  
100~277V 50/60Hz

**Packaging**

1 Box 0,56 x 0,56 x 0,81 m  
Vol 0,254 m<sup>3</sup>  
Gross weight 54,7 Kg Net weight 49,7 Kg


**Notes**

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

**LED** **IP66** **CE** **UK** **ERC** **Bi-volt**



4135



**Finishes**

- 18/ \_\_ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ \_\_ Graphite Black (NCS S 8000-N)

**LED Colour Temperature**

- /1\_ 2700 K - 304 lm
  - /3\_ 3500 K - 1247 lm
- LED icon:
- CRI >80 CRI >90

**Control**

4135 \_\_ / \_ 0 On/ Off

**Materials**

Body: Polymer concrete.  
Diffuser: PMMA.

**Light Source and electronics**

2 x LED STRIP 24V 4,3 W  
Constant Voltage 24V  
100-240V 50/60Hz

**Packaging**


1 Box 0,36 x 0,36 x 0,36 m  
Vol 0,04 m<sup>3</sup>  
Gross weight 12,2 Kg Net weight 10,4 Kg

**Notes**

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC EAC Bi-volt

4136



**Finishes**

- 18/ \_\_ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ \_\_ Graphite Black (NCS S 8000-N)

**LED Colour Temperature**

- /1\_ 2700 K - 304 lm
  - /3\_ 3500 K - 1247 lm
- LED icon:
- CRI >80 CRI >90

**Control**

4136 \_\_ / \_ 0 On/ Off

**Materials**

Body: Polymer concrete.  
Diffuser: PMMA.

**Light Source and electronics**

2 x LED STRIP 24V 4,3 W  
Constant Voltage 24V  
100-240V 50/60Hz

**Packaging**

1 Box 0,36 x 0,36 x 0,65 m  
Vol 0,084 m<sup>3</sup>  
Gross weight 22 Kg Net weight 19 Kg

**Notes**

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC EAC

Dimmer Bi-volt

# Out


Design by Víctor Carrasco

A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

## Floor Outdoor



**4270 Not Fixed**  
211 x 242 cm

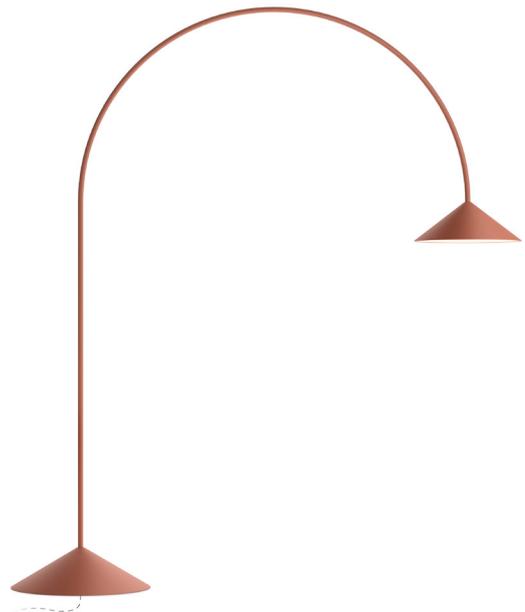

**4275 Bolt-down "hard wired"**  
211 x 242 cm

### 4270

#### Finishes

- **22/** \_ \_ Graphite Black (NCS S 8000-N)
- **23/** \_ \_ Warm White (NCS S 0502-Y50R)
- **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)
- **36/** \_ \_ Soft Pink (NCS S 1010-Y50R)
- **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
- **47/** \_ \_ Green L1 (NCS S 4005-G80Y)

#### LED Colour Temperature

**/1\_** 2700 K - 1300 lm  
**F** →  
CRI >90


#### Control

**4270** \_ \_ / \_ \_

\_ \_ / \_ **5** Push

\_ \_ / \_ **Y** ProtoPixel\*

\_ \_ / \_ **Z** Casambi

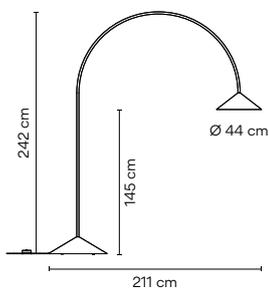

#### Materials

Tube: Stainless Steel.  
Shades: Aluminum.  
Diffuser: PE- Polyethylene.

#### Light Source and electronics

1 x LED 12,4 W 700 mA  
Constant Voltage 24V 1.0A  
220-240V. 50/60Hz

#### Packaging

5 Boxes  
Box 1: 0,17 x 0,39 x 0,51 m  
Box 2: 0,17 x 0,39 x 0,51 m  
Box 3: 0,60 x 0,60 x 0,27 m  
Box 4: 0,72 x 0,72 x 0,32 m  
Box 5: 2,40 x 2,10 x 0,1 m  
Total Vol 0,835 m<sup>3</sup>  
Gross weight 84 Kg Net weight 49,5 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Switch on the cable. Electric cable 4 m.






4275

- Finishes**
- **22/** \_ \_ Graphite Black  
(NCS S 8000-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)
  - **36/** \_ \_ Soft Pink  
(NCS S 1010-Y50R)
  - **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
  - **47/** \_ \_ Green L1  
(NCS S 4005-G80Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 1300 lm  
 F →  
 CRI >90

**Control**  
**4275** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ Z 30 Casambi  
 (Remote)

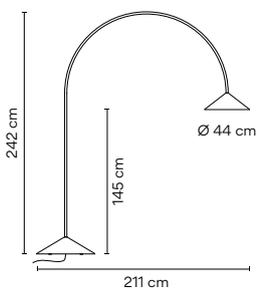

**Materials**  
 Tube: Stainless Steel.  
 Shades: Aluminum.  
 Diffuser: PE- Polyethylene.

**Light Source and electronics**  
 1 x LED 12,4 W 700 mA  
 Constant Current 700 mA  
 220~240V. 50/60Hz

**Packaging**  
 5 Boxes  
 Box 1: 0,17 x 0,39 x 0,51 m  
 Box 2: 0,17 x 0,39 x 0,51 m  
 Box 3: 0,60 x 0,60 x 0,27 m  
 Box 4: 0,72 x 0,72 x 0,32 m  
 Box 5: 2,40 x 2,10 x 0,1 m  
 Total Vol 0,835 m<sup>3</sup>  
 Gross weight 84 Kg Net weight 49,5 Kg

**Notes**  
 Bolt-down "hard wired"




# Up


Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

## Ceiling

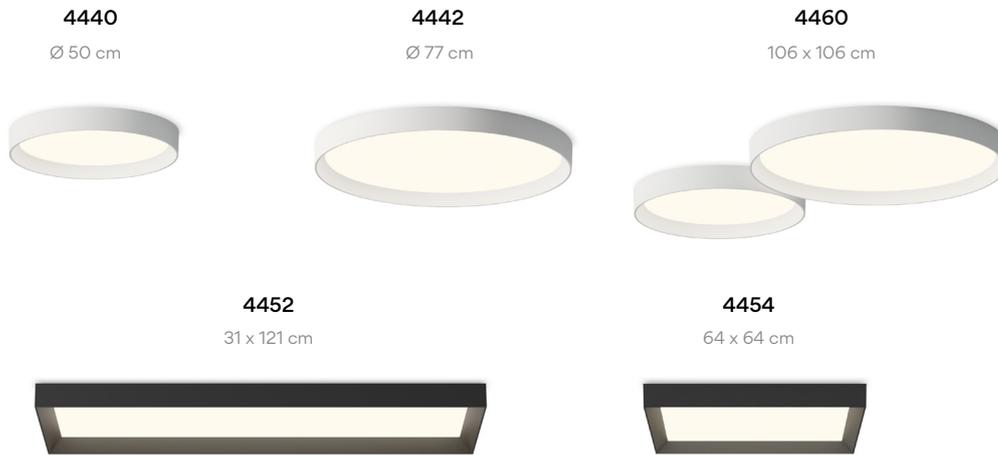

### 4440



- Finishes**
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 2207 lm  
F

**Tunable White**  
/8\_ (2200 K - 4000 K)  
1901 lm - 2461 lm  
G - F  
CRI >90

#### Control

**4440** \_ \_ / \_ \_

---

\_ \_ / **A** Static White + Push; 1-10V; DALI-2

---

\_ \_ / **Z** Static White + Casambi

---

\_ \_ / **81** Tunable White + DALI-2 DT8

---

\_ \_ / **8Z** Tunable White + Casambi

#### Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

#### Light Source and electronics


1 x LED PLATE 26,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

#### Packaging

1 Box 0,17 x 0,55 x 0,55 m  
Vol 0,0514 m<sup>3</sup>  
Gross weight 11 Kg Net weight 7,5 Kg



### 4442



- Finishes**
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

**LED Colour Temperature**

**Static White**  
/1\_ 2700 K - 3959 lm  
F

**Tunable White**  
/8\_ (2200 K - 4000 K)  
3138 lm - 4238 lm  
G - F  
CRI >90

#### Control

**4442** \_ \_ / \_ \_

---

\_ \_ / **A** Static White + Push; 1-10V; DALI-2

---

\_ \_ / **Z** Static White + Casambi

---

\_ \_ / **81** Tunable White + DALI-2 DT8

---

\_ \_ / **8Z** Tunable White + Casambi

#### Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

#### Light Source and electronics


1 x LED PLATE 55,3 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

#### Packaging

1 Box 0,17 x 0,90 x 0,90 m  
Vol 0,1377 m<sup>3</sup>  
Gross weight 13 Kg Net weight 15 Kg



4452



- Finishes
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

LED Colour Temperature

**Static White**  
/1\_ 2700 K - 3957 lm  
F

**Tunable White**  
/8\_ (2200 K - 4000 K)  
4355 lm - 5744 lm  
G - F  
CRI >90

Control  
4452 \_ \_ / \_ \_

- \_ \_ / \_ A Static White + Push; 1-10V; DALI-2
- \_ \_ / \_ Z Static White + Casambi
- \_ \_ / 81 Tunable White + DALI-2 DT8
- \_ \_ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.  
Body: Aluminum.  
Ceiling support: Steel.


Light Source and electronics  
1 x LED PLATE 50 W 900 mA  
Constant Current 900 mA  
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m  
Vol 0,0924 m<sup>3</sup>  
Gross weight 14 Kg Net weight 12 Kg



4454



- Finishes
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

LED Colour Temperature

**Static White**  
/1\_ 2700 K - 3957 lm  
F

**Tunable White**  
/8\_ (2200 K - 4000 K)  
5050 lm - 5039 lm  
G - F  
CRI >90

Control  
4454 \_ \_ / \_ \_

- \_ \_ / \_ A Static White + Push; 1-10V; DALI-2
- \_ \_ / \_ Z Static White + Casambi
- \_ \_ / 81 Tunable White + DALI-2 DT8
- \_ \_ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.  
Body: Aluminum.  
Ceiling support: Steel.


Light Source and electronics  
1 x LED PLATE 50 W 900 mA  
Constant Current 900 mA  
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m  
Vol 0,0905 m<sup>3</sup>  
Gross weight 14 Kg Net weight 13 Kg



4460

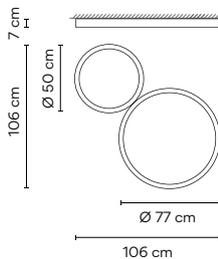

- Finishes
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

LED Colour Temperature

**Static White**  
/1\_ 2700 K - 3957 lm  
G

**Tunable White**  
/8\_ (2200 K - 4000 K)  
5039 lm - 6699 lm  
G - F  
CRI >90

Control  
4460 \_ \_ / \_ \_

- \_ \_ / \_ A Static White + Push; 1-10V; DALI-2
- \_ \_ / \_ Z Static White + Casambi
- \_ \_ / 81 Tunable White + DALI-2 DT8
- \_ \_ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.  
Body: Aluminum.  
Ceiling support: Steel.

Light Source and electronics  
1 x LED PLATE 26,5 W 700 mA  
1 x LED PLATE 55,3W 750 mA  
Constant Current 700 / 750 mA  
110-240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,1891 m<sup>3</sup>  
Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point



# Origami

Design by Ramón Esteve

Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

---

## Wall Outdoor

**4500**

30 x 30 cm




**4501**

30 x 30 cm




**4504**

53 x 63cm

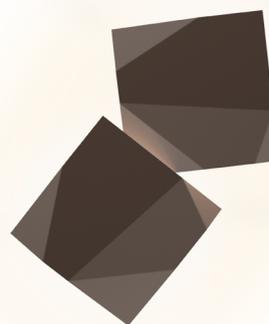


**4506**

70 x 91 cm

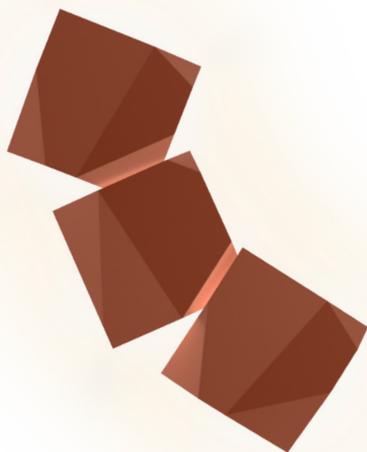


**4508**

94 x 107 cm

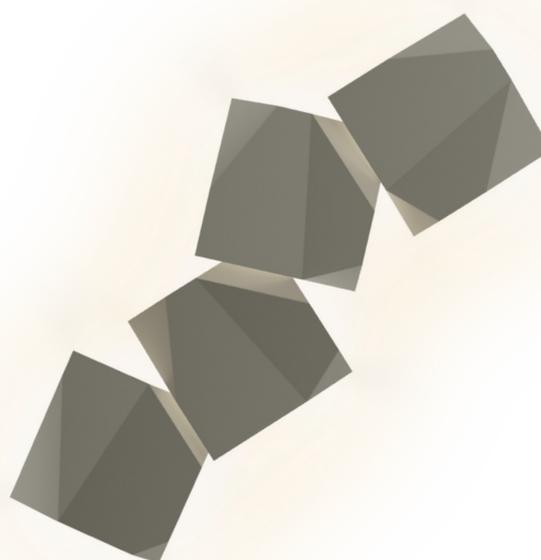


Each project is unique. Visit [vibia.com](http://vibia.com) and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Origami composition quick and easy at [vibia.com](http://vibia.com)

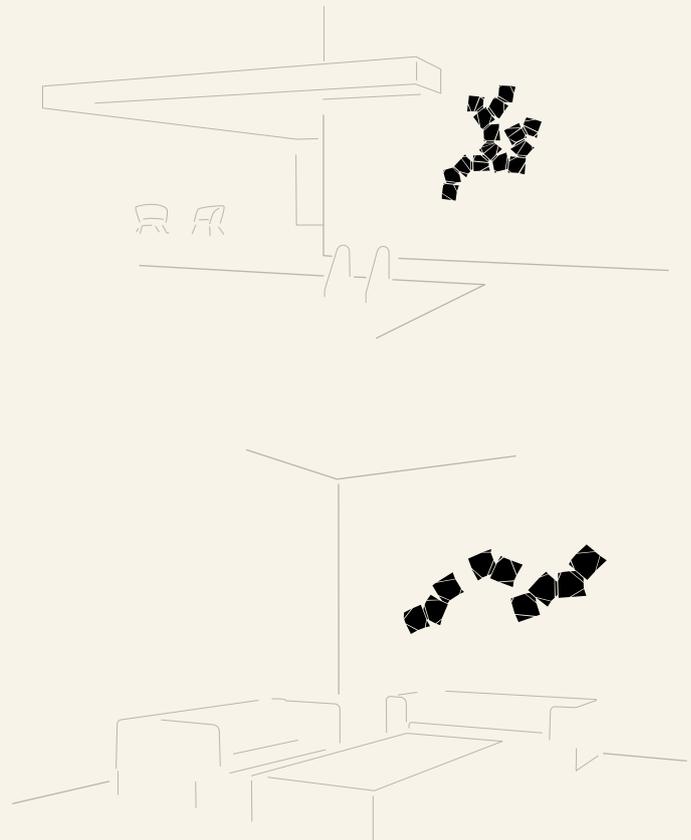

4500



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 29/ \_\_ Brown D1 (NCS S 8005-Y50R)
  - 38/ \_\_ Terra Dark (NCS S 5040-Y70R)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 \_ 2700 K - 756 lm
  - /3 \_ 3500 K - 799 lm
- CRI >90

**Control**  
4500 \_\_ / \_ 4 TRIAC

**Materials**  
Shade: ABS.  
Diffuser: PC- Polycarbonate.  
Lid: PC- Polycarbonate.  
Arm: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED STRIP 6,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

**Packaging**  
1 Box 0,35 x 0,35 x 0,12 m  
Vol 0,0150 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1 Kg

**Notes**  
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system



**4501**



**Finishes**

- **10/** \_\_ White (NCS S 0300-N)
- **29/** \_\_ Brown D1 (NCS S 8005-Y50R)
- **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
- **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1** 2700 K - 756 lm 
- /3** 3500 K - 799 lm 

CRI >90

**Control**  
**4501** \_\_ / \_\_ **4** TRIAC

---

**Materials**  
Shade: ABS.  
Diffuser: PC- Polycarbonate.  
Lid: PC- Polycarbonate.  
Arm: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED STRIP 6,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

**Packaging**  
1 Box 0,35 x 0,35 x 0,12 m  
Vol 0,0150 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1 Kg

**Notes**  
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

**4504**



**Finishes**

- **10/** \_\_ White (NCS S 0300-N)
- **29/** \_\_ Brown D1 (NCS S 8005-Y50R)
- **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
- **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1** 2700 K - 1512 lm 
- /3** 3500 K - 1598 lm 

CRI >90

**Control**  
**4504** \_\_ / \_\_ **4** TRIAC

---

**Materials**  
Shade: ABS.  
Diffuser: PC- Polycarbonate.  
Lid: PC- Polycarbonate.  
Arm: PC- Polycarbonate.


**Light Source and electronics**  
2 x LED STRIP 6,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

**Packaging**  
1 Box 0,64 x 0,40 x 0,22 m  
Vol 0,0563 m<sup>3</sup>  
Gross weight 4,05 Kg Net weight 2,15 Kg

**Notes**  
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

**4506**



**Finishes**

- **10/** \_\_ White (NCS S 0300-N)
- **29/** \_\_ Brown D1 (NCS S 8005-Y50R)
- **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
- **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1** 2700 K - 2269 lm 
- /3** 3500 K - 2397 lm 

CRI >90

**Control**  
**4506** \_\_ / \_\_ **4** TRIAC

---

**Materials**  
Shade: ABS.  
Diffuser: PC- Polycarbonate.  
Lid: PC- Polycarbonate.  
Arm: PC- Polycarbonate.


**Light Source and electronics**  
3 x LED STRIP 6,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

**Packaging**  
1 Box 0,95 x 0,40 x 0,22 m  
Vol 0,0836 m<sup>3</sup>  
Gross weight 5,33 Kg Net weight 3,23 Kg

**Notes**  
A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

4508

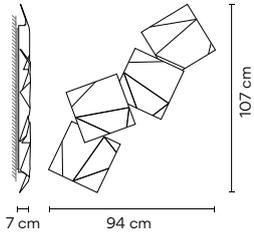

- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)
  - 38/ \_ \_ Terra Dark (NCS S 5040-Y70R)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

/1\_ 2700 K - 3025 lm  
 D

/3\_ 3500 K - 3196 lm  
 E

CRI >90

**Control**

4508 \_ \_ / \_ 4 TRIAC

**Materials**

Shade: ABS.  
 Diffuser: PC- Polycarbonate.  
 Lid: PC- Polycarbonate.  
 Arm: PC- Polycarbonate.

**Light Source and electronics**

4 x LED STRIP 6,3 W 350 mA  
 Constant Current 350 mA  
 110-277V 50/60Hz

**Packaging**

1 Box 1,25 x 0,40 x 0,22 m  
 Vol 0,1100 m<sup>3</sup>  
 Gross weight 7,2 Kg Net weight 6,48 Kg

**Notes**

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system




# Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel “branches” are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

## Outdoor

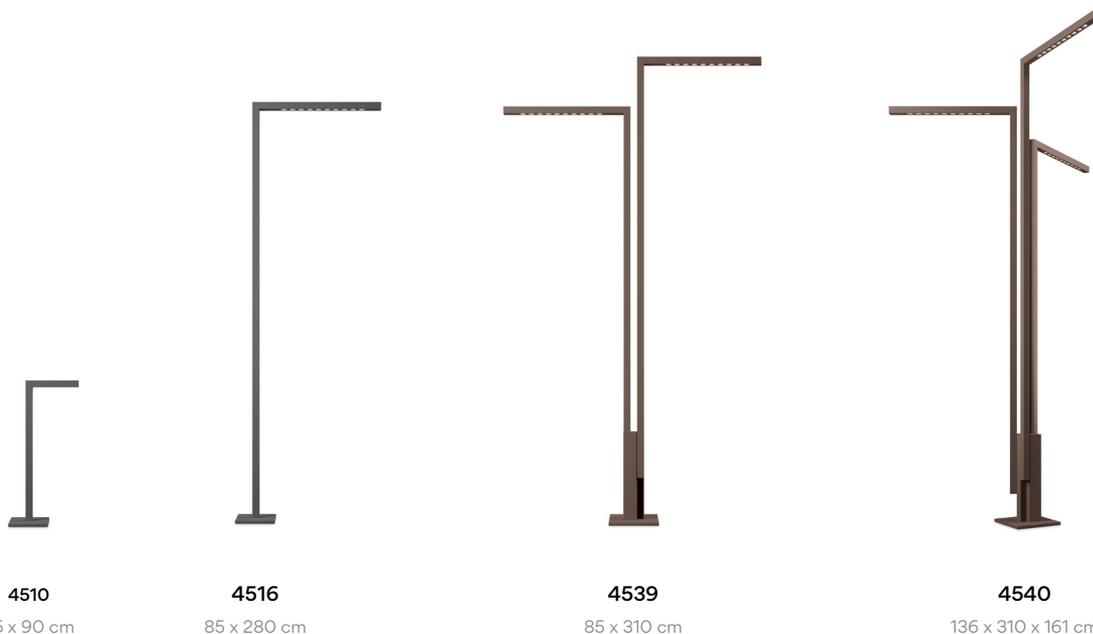

### 4510



- Finishes**
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 29/ \_\_ Brown D1 (NCS S 8005-Y50R)

**LED Colour Temperature**

/1 \_ 2700 K - 179 lm  
/3 \_ 3500 K - 179 lm

☐

CRI >90

**Control**

4510 \_\_ / \_ 0 On/ Off

**Materials**

Body: Steel.  
Cover: Steel.

**Light Source and electronics**


2 x LED 2,2 W 700 mA  
Constant Current 700 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,44 x 0,40 x 1,10 m  
Vol 0,2080 m<sup>3</sup>  
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 CE UK ENEC Bi-volt

### 4516

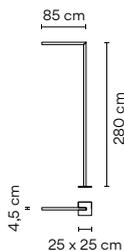

- Finishes**
- 22/ \_\_ Graphite Black (NCS S 8000-N)
  - 29/ \_\_ Brown D1 (NCS S 8005-Y50R)

**LED Colour Temperature**

/1 \_ 2700 K - 1044 lm  
/3 \_ 3500 K - 1045 lm

☐

CRI >90

**Control**

4516 \_\_ / \_ 0 On/ Off

**Materials**

Body: Steel.  
Cover: Steel.

**Light Source and electronics**


1 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100~240V 50/60Hz

**Packaging**

1 Box 0,32 x 0,32 x 2,64 m  
Vol 0,2703 m<sup>3</sup>  
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 CE UK ENEC Bi-volt

4539

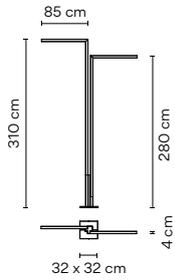

- Finishes**
- 22/ \_ \_ Graphite Black (NCS S 8000-N)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)

**LED Colour Temperature**

/1 \_ 2700 K - 2089 lm  
/3 \_ 3500 K - 2089 lm

**G**

CRI >90

**Control**

4539 \_ \_ / \_ 0 On/ Off

**Materials**

Body: Steel.  
Cover: Steel.

**Light Source and electronics**


2 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100-240V 50/60Hz

**Packaging**

1 Box 0,37 x 0,37 x 2,61 m  
Vol 0,3570 m<sup>3</sup>  
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 CE Multi-volt

4540

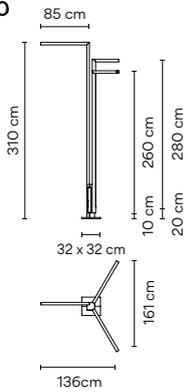

- Finishes**
- 22/ \_ \_ Graphite Black (NCS S 8000-N)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)

**LED Colour Temperature**

/1 \_ 2700 K - 3134 lm  
/3 \_ 3500 K - 3134 lm

**G**

CRI >90

**Control**

4540 \_ \_ / \_ 0 On/ Off

**Materials**

Body: Steel.  
Cover: Steel.

**Light Source and electronics**

3 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100-240V 50/60Hz

**Packaging**

1 Box 0,40 x 0,44 x 2,64 m  
Vol 0,4646 m<sup>3</sup>  
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 CE Multi-volt



# Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bellflower,  
Brisa is the essence of flawless landscape integration.  
Its stylised silhouette and natural inspiration bring  
a subtle charm to any exterior.

## Outdoor



**4625**  
10 x 103 cm



**4630**  
10 x 100 cm




**4635**  
22 x 99,5 x 23 cm



**4640**  
30 x 100 x 27,5 cm

### 4625



#### Finishes

- 07/ \_ Khaki (RAL 7039)
- 54/ \_ Oxide (RAL 8014)

#### LED Colour Temperature

/1\_ 2700 K - 181 lm

G

/3\_ 3500 K - 193 lm

F

CRI >90

#### Control

4625 \_ \_ / \_ 0 On/ Off

#### Materials

Shade and Base: Aluminum.  
Disc: Stainless steel.  
Vertical tube: Steel.

#### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

#### Packaging


1 Box 0,16 x 0,16 x 1,6 m  
Vol 0,0409 m<sup>3</sup>  
Gross weight 1,8 Kg Net weight 1,3 Kg

#### Notes

Spike. Surface

LED IP64

4630



- Finishes
- 07/ \_\_ Khaki (RAL 7039)
  - 54/ \_\_ Oxide (RAL 8014)

LED Colour Temperature

/1 \_ 2700 K - 543 lm  
 G

/3 \_ 3500 K - 581 lm  
 F

CRI >90

Control

4630 \_\_ / \_ 0 On/ Off

Materials

Shade and Base: Aluminum.  
 Disc: Stainless steel.  
 Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

Packaging


1 Box 0,16 x 0,16 x 1,6 m  
 Vol 0,0409 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 2 Kg

Notes

Built-in



4635

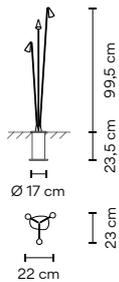

- Finishes
- 07/ \_\_ Khaki (RAL 7039)
  - 54/ \_\_ Oxide (RAL 8014)

LED Colour Temperature

/1 \_ 2700 K - 906 lm  
 G

/3 \_ 3500 K - 969 lm  
 F

CRI >90

Control

4635 \_\_ / \_ 0 On/ Off

Materials

Shade and Base: Aluminum.  
 Disc: Stainless steel.  
 Vertical tube: Steel.

Light Source and electronics

3 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

Packaging


1 Box 0,32 x 0,36 x 1,16 m  
 Vol 0,1336 m<sup>3</sup>  
 Gross weight 6,5 Kg Net weight 5,85 Kg

Notes

Built-in



4640

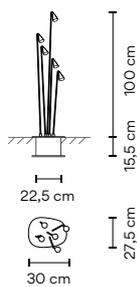

- Finishes
- 07/ \_\_ Khaki (RAL 7039)
  - 54/ \_\_ Oxide (RAL 8014)

LED Colour Temperature

/1 \_ 2700 K - 1268 lm  
 G

/3 \_ 3500 K - 1357 lm  
 F

CRI >90

Control

4640 \_\_ / \_ 0 On/ Off

Materials

Shade and Base: Aluminum.  
 Disc: Stainless steel.  
 Vertical tube: Steel.

Light Source and electronics

5 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

Packaging

1 Box 0,32 x 0,36 x 1,16 m  
 Vol 0,1336 m<sup>3</sup>  
 Gross weight 6 Kg Net weight 4 Kg

Notes

Built-in




# Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular v. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

---

## Wall

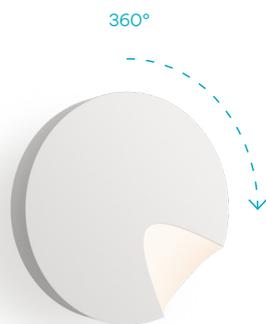

Ø 17,5 cm

Ajustable: 360° turn.  
4662: On-off switch on the back plate.

**4660 - 4662**



Ø 17,5 cm

Once installed position is fixed and cannot be adjusted.

**4665**



Ø 17,5 cm

Ajustable: 360° turn.


**4670**



Ø 17,5 cm

**4675**

### 4660



Finishes	LED Colour Temperature	Control
● <b>13/</b> __ Off-White (NCS S 1000-N)	<b>/1</b> _ 2700 K - 482 lm	<b>4660</b> __ / __
● <b>27/</b> __ Brown L1 (NCS S 1505-Y50R)	<b>/3</b> _ 3500 K - 412 lm	__ / _ <b>0</b> On/ Off
● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)	<b>F</b> >	__ / _ <b>1</b> DALI-2
● <b>47/</b> __ Green L1 (NCS S 4005-G80Y)	CRI >90	__ / _ <b>3</b> 1-10V
		__ / _ <b>4</b> TRIAC

Finishes	LED Colour Temperature	Control
● <b>82/</b> __ White oak	<b>/1</b> _ 2700 K - 482 lm	<b>4660</b> __ / __
● <b>83/</b> __ American walnut	<b>/3</b> _ 3500 K - 412 lm	__ / _ <b>0</b> On/ Off
	<b>F</b> >	__ / _ <b>1</b> DALI-2
	CRI >90	__ / _ <b>3</b> 1-10V
		__ / _ <b>4</b> TRIAC

#### Materials

Body: ABS / Wood.  
Diffuser: PC- Polycarbonate.  
Canopy: Aluminum.

#### Light Source and electronics

1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

#### Packaging


1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg

#### Notes

22° light halo



### 4662



Finishes	LED Colour Temperature	Control
● <b>13/</b> __ Off-White (NCS S 1000-N)	<b>/1</b> _ 2700 K - 482 lm	<b>4662</b> __ / __
● <b>27/</b> __ Brown L1 (NCS S 1505-Y50R)	<b>/3</b> _ 3500 K - 412 lm	__ / _ <b>0</b> On/ Off
● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)	<b>F</b> >	__ / _ <b>4</b> TRIAC
● <b>47/</b> __ Green L1 (NCS S 4005-G80Y)	CRI >90	

Finishes	LED Colour Temperature	Control
● <b>82/</b> __ White oak	<b>/1</b> _ 2700 K - 482 lm	<b>4662</b> __ / __
● <b>83/</b> __ American walnut	<b>/3</b> _ 3500 K - 412 lm	__ / _ <b>0</b> On/ Off
	<b>F</b> >	__ / _ <b>4</b> TRIAC
	CRI >90	

#### Materials

Body: ABS / Wood.  
Diffuser: PC- Polycarbonate.  
Canopy: Aluminum.

#### Light Source and electronics

1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

#### Packaging


1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg

#### Notes

22° light halo  
Switch on the back plate



4665



- Finishes**
- 13/ \_\_ Off-White (NCS S 1000-N)
  - 27/ \_\_ Brown L1 (NCS S 1505-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**

/1 \_ 2700 K - 482 lm  
/3 \_ 3500 K - 412 lm

F

CRI >90

**Control**

4665 \_\_ / \_ 0 On/ Off

**Materials**

Body: ABS.  
Diffuser: PC- Polycarbonate.  
Canopy: Aluminum.

**Light Source and electronics**


1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
Gross weight 0,65 Kg Net weight 0,4 Kg



4670



- Finishes**
- 13/ \_\_ Off-White (NCS S 1000-N)
  - 27/ \_\_ Brown L1 (NCS S 1505-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**

/1 \_ 2700 K - 482 lm  
/3 \_ 3500 K - 412 lm

F

CRI >90

**Control**

4670 \_\_ / \_\_

\_\_ / \_ 0 On/ Off  
\_\_ / \_ 1 DALI-2  
\_\_ / \_ 3 1-10V  
\_\_ / \_ 4 TRIAC

- Finishes**
- 82/ \_\_ White oak
  - 83/ \_\_ American walnut

**LED Colour Temperature**

/1 \_ 2700 K - 482 lm  
/3 \_ 3500 K - 412 lm

F

CRI >90

**Control**

4670 \_\_ / \_\_

\_\_ / \_ 0 On/ Off  
\_\_ / \_ 1 DALI-2  
\_\_ / \_ 3 1-10V  
\_\_ / \_ 4 TRIAC

**Materials**


Body: ABS / Wood.  
Diffuser: PC- Polycarbonate.  
Canopy: Aluminum.

**Light Source and electronics**



1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg



4675



- Finishes**
- **13/** \_\_ Off-White (NCS S 1000-N)
  - **27/** \_\_ Brown L1 (NCS S 1505-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **47/** \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**

**/1** \_ 2700 K - 573 lm  
E

**/3** \_ 3500 K - 515 lm  
F

CRI >90

**Control**

**4675** \_\_ / \_\_

---

\_\_ / **0** On/ Off

\_\_ / **1** DALI-2

\_\_ / **3** 1-10V

\_\_ / **4** TRIAC

- Finishes**
- **82/** \_\_ White oak
  - **83/** \_\_ American walnut

**LED Colour Temperature**

**/1** \_ 2700 K - 482 lm

**/3** \_ 3500 K - 515 lm  
F

CRI >90

**Control**

**4675** \_\_ / \_\_

---

\_\_ / **0** On/ Off

\_\_ / **1** DALI-2

\_\_ / **3** 1-10V

\_\_ / **4** TRIAC

**Materials**

Body: ABS / Wood.  
Diffuser: PC- Polycarbonate.  
Canopy: Aluminum.

**Light Source and electronics**

1 x LED PLATE 4,5 W 500 mA  
Constant Current 500 mA  
100-240V 50/60Hz

**Packaging**

1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg



# Dots Glass

Design by Martín Azúa

Sheathed in layers of transparent optical glass, the LED source within the fixture generates a warm, 360-degree glow, while the layering of the glass and aluminum at the edge of each disc creates a pulsating ambient effect.


## Wall Outdoor



**4680**

Ø 20 cm

**4680**



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)

### LED Colour Temperature

- /1 \_ 2700 K - 985 lm
- /3 \_ 3500 K - 1015 lm



CRI >90

### Control

**4680** \_ \_ / \_ \_

- \_ \_ / \_ 0 On/ Off
- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ 3 1-10V
- \_ \_ / \_ Z \_ 30 Casambi (Remote)

### Materials

Body: Aluminum.  
Diffuser: Optical Glass.

### Light Source and electronics

1 x LED 10 W 500 mA  
Constant Current 500 mA  
100~240Vac 50/60Hz


### Packaging

1 Box 0,305 x 0,305 x 0,105 m  
Vol 0,00976 m<sup>3</sup>  
Gross weight 1,8 Kg Net weight 2,2 Kg

### Notes

4680 \_ \_ / \_ 3: 1-10V **Bi-volt**



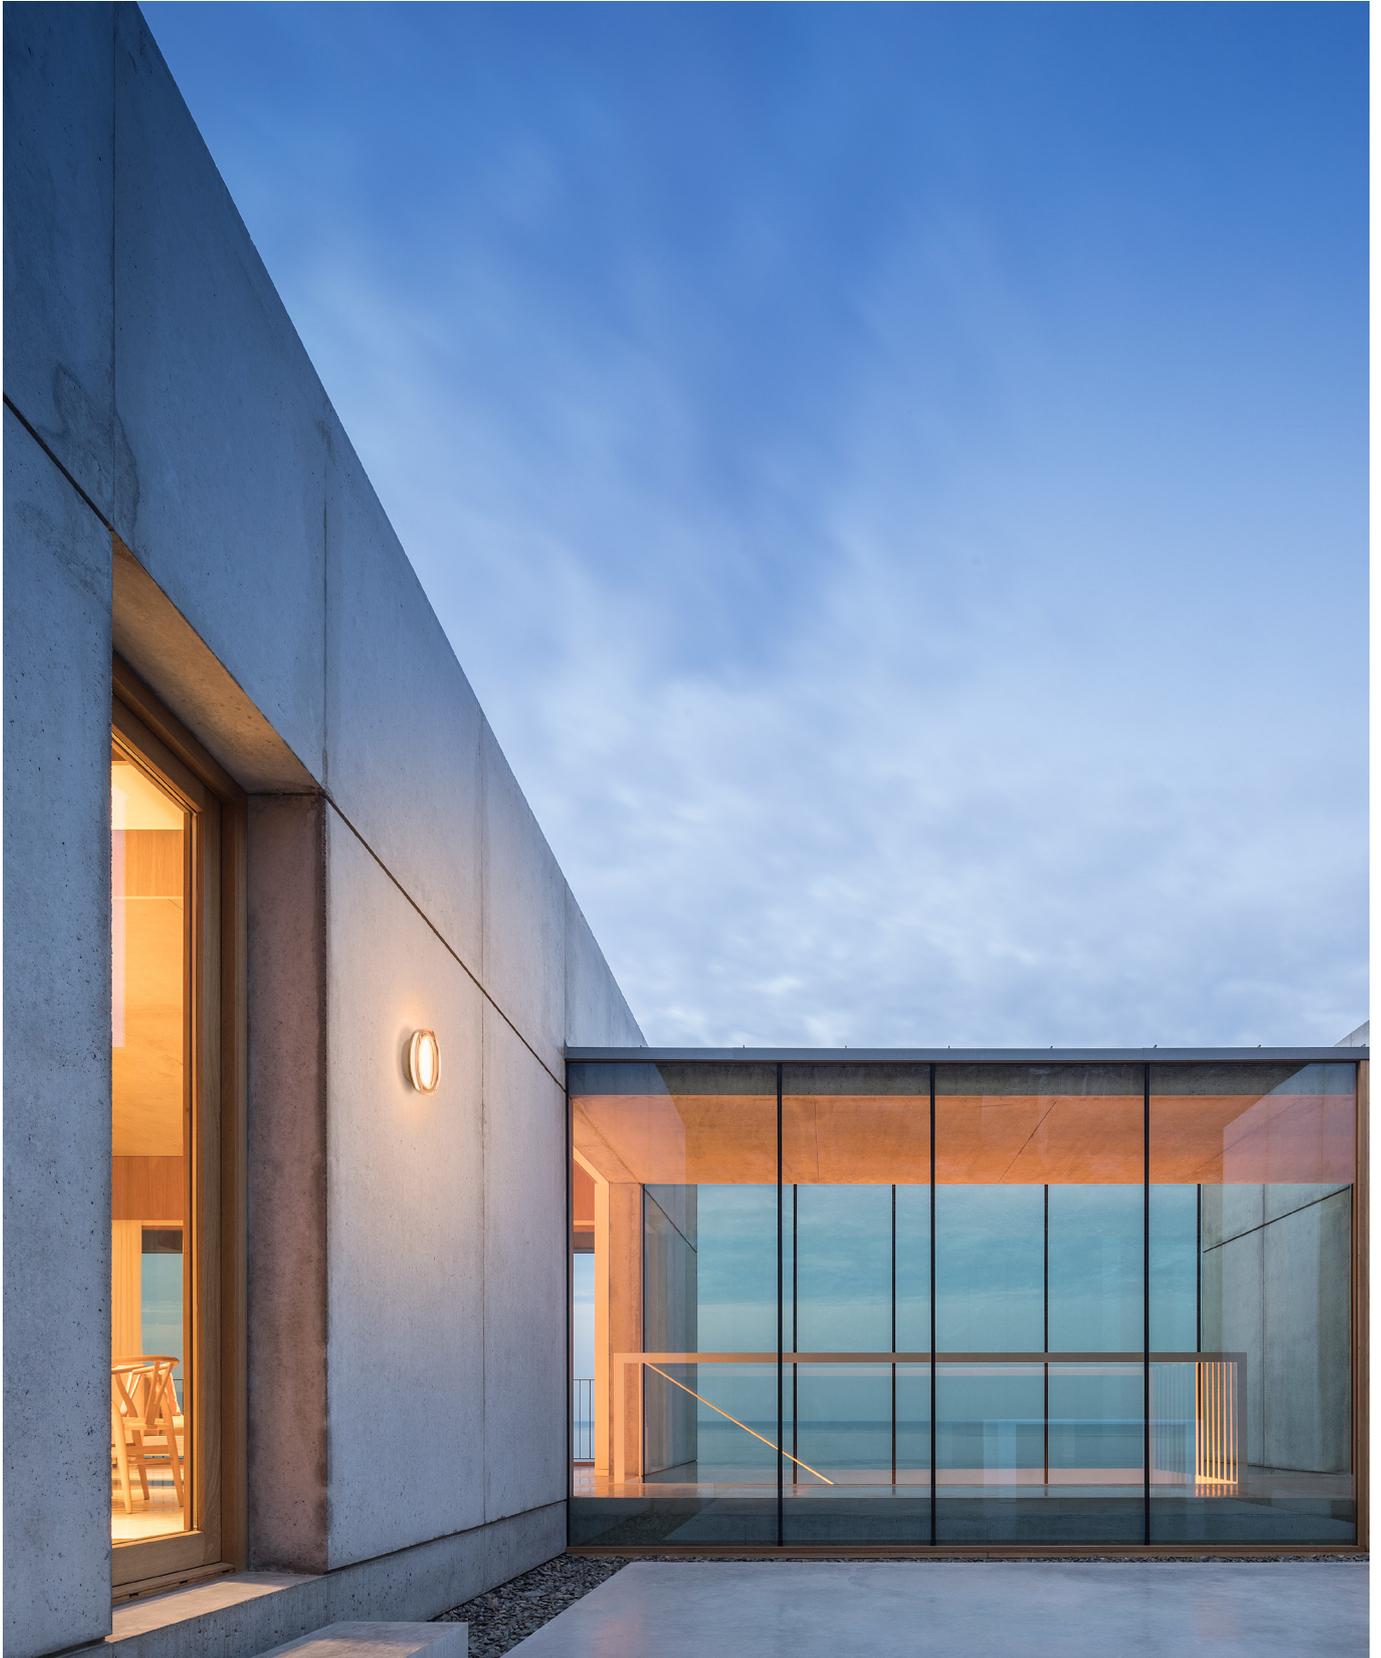

# Dots Outdoor

Design by Martín Azúa

Diminutive, compact and easily installed, Dots Outdoor is the perfect solution for subtle outdoor illumination. Designed to nestle discreetly into the undergrowth of a garden or patio, Dots shines at night with a diffuse or focused glow from an invisible source.

## Outdoor




**4684**  
Ø 20 cm



**4688**  
Ø 20 cm

### 4684



- Finishes**
- **22/** \_ \_ Graphite Black (NCS S 8000-N)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

/1 \_ 2700 K - 400 lm  
/2 \_ 3500 K - 412 lm

**F**

CRI >90

#### Control

**4684** \_ \_ / \_ \_

---

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **3** 1-10V

\_ \_ / \_ **Z** **30** Casambi (Remote)

#### Materials

Body: Aluminium.  
Diffuser: PC- Polycarbonate.

#### Light Source and electronics

1 x LED 4,5 W 500 mA  
Constant Current 500 mA  
100~240Vac 50/60Hz

#### Packaging


1 Box 0,305 x 0,305 x 0,105 m  
Vol 0,00976 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 2,0 Kg

#### Notes

4684 \_ \_ / \_ 0: On/ Off **Bi-volt**

**LED** **IP66** **CE** **UK** **ERC**

### 4688



- Finishes**
- **22/** \_ \_ Graphite Black (NCS S 8000-N)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

/1 \_ 2700 K - 500 lm  
/2 \_ 3500 K - 515 lm

**F**

CRI >90

#### Control

**4688** \_ \_ / \_ \_

---

\_ \_ / \_ **0** On/ Off

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **3** 1-10V

\_ \_ / \_ **Z** **30** Casambi (Remote)

#### Materials

Body: Aluminium.  
Diffuser: Glass.

#### Light Source and electronics

1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
100~240Vac 50/60Hz

#### Packaging

1 Box 0,305 x 0,305 x 0,105 m  
Vol 0,00976 m<sup>3</sup>  
Gross weight 1,7 Kg Net weight 2,1 Kg

#### Notes

4688 \_ \_ / \_ 0: On/ Off **Bi-volt**

**LED** **IP66** **CE** **UK** **ERC** **Bi-volt**

## Outdoor



**4695**  
Ø 20 x 12 cm



**4697**  
Ø 15 x 9 cm




**4700**  
Ø 20 x 12 cm



**4702**  
Ø 15 x 9 cm

### 4695



- Finishes**
- **22/** \_ \_ Graphite Black (NCS S 8000-N)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
/1\_ 2700 K - 750,2 lm  
F

CRI >90

#### Control

**4695** \_ \_ / \_ \_

- \_ \_ / \_ **0** On/ Off
- \_ \_ / \_ **1** **30** DALI-2 (Remote)
- \_ \_ / \_ **Z** **30** Casambi (Remote)

#### Materials

Body: Aluminum.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED STRIP 7,8W 350 mA  
Constant Current 350 mA  
100~277V 50/60Hz

#### Packaging

1 Box 0,30 x 0,27 x 0,18 m  
Vol 0,0146 m<sup>3</sup>  
Gross weight 3,4 Kg Net weight 2,7 Kg

LED IP65 Multi-volt

### 4697



- Finishes**
- **22/** \_ \_ Graphite Black (NCS S 8000-N)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
/1\_ 2700 K - 375,9 lm  
F

CRI >90

#### Control

**4697** \_ \_ / \_ \_

- \_ \_ / \_ **0** On/ Off
- \_ \_ / \_ **1** **30** DALI-2 (Remote)
- \_ \_ / \_ **Z** **30** Casambi (Remote)

#### Materials

Body: Aluminum.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED STRIP 4,6W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,24 x 0,20 x 0,13 m  
Vol 0,0624 m<sup>3</sup>  
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65 Multi-volt

4700



- Finishes**
- **22/** \_\_ Graphite Black (NCS S 8000-N)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
/1\_ 2700 K - 1445 lm  
F

CRI >90

**Control**  
4700 \_\_ / \_\_

- \_\_ / \_\_ 0 On/ Off
- \_\_ / \_\_ 1 30 DALI-2 (Remote)
- \_\_ / \_\_ Z 30 Casambi (Remote)


**Materials**  
Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 14,8W 350 mA  
Constant Current 350 mA  
100~277V 50/60Hz

**Packaging**  
1 Box 0,30 x 0,27 x 0,18 m  
Vol 0,0146 m<sup>3</sup>  
Gross weight 3,8 Kg Net weight 3,1 Kg



4702



- Finishes**
- **22/** \_\_ Graphite Black (NCS S 8000-N)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
/1\_ 2700 K - 1294 lm  
F

CRI >90


**Control**  
4702 \_\_ / \_\_

- \_\_ / \_\_ 0 On/ Off
- \_\_ / \_\_ 1 30 DALI-2 (Remote)
- \_\_ / \_\_ Z 30 Casambi (Remote)

**Materials**  
Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 12,8W 300 mA  
Constant Current 300 mA  
100~277V 50/60Hz

**Packaging**  
1 Box 0,24 x 0,20 x 0,13 m  
Vol 0,0146 m<sup>3</sup>  
Gross weight 1,9 Kg Net weight 1,5 Kg





# Meridiano


Design by Jordi Vilardell & Meritxell Vidal

Composed of a structure of corrugated steel rods, Meridiano radiates with a burst of light and shadow that enriches its surrounding environment. As a floor lamp, it doubles up as outdoor furniture; as a wall sconce, it animates a bare façade with a dynamic sunburst motif.

## Outdoor



### 4710



- Finishes**
- 07/ \_\_ Khaki (RAL 7006)
  - 58/ \_\_ Off-white (PANTONE WARM GRAY 2U)

**LED Colour Temperature**

/1 \_ 2700 K - 1269 lm

CRI >90

/3 \_ 3500 K - 1709 lm

CRI >80

**Control**

4710 \_\_ / \_ 0 On/ Off

**Materials**

Seat: PU- Polyurethane. Rods: Steel.  
 Arm: Steel. Diffuser: Glass.

**Light Source and electronics**

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**


1 Box 0,57 x 0,66 x 0,66 m  
 Vol 0,2483 m<sup>3</sup>  
 Gross weight 18,2 Kg Net weight 15,6 Kg

**Notes**

It can be connected with or without a plug.  
 Electric cable 2 m.

LED  IP64 CE UK ENEC  Bi-volt

### 4715



- Finishes**
- 07/ \_\_ Khaki (RAL 7006)
  - 58/ \_\_ Off-white (PANTONE WARM GRAY 2U)

**LED Colour Temperature**

/1 \_ 2700 K - 1269 lm

CRI >90

/3 \_ 3500 K - 1709 lm

CRI >80

**Control**

4715 \_\_ / \_ 0 On/ Off

**Materials**

Seat: PU- Polyurethane. Rods: Steel.  
 Arm: Steel. Diffuser: Glass.

**Light Source and electronics**

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**

1 Box 0,43 x 0,94 x 0,94 m  
 Vol 0,38 m<sup>3</sup>  
 Gross weight 20,1 Kg Net weight 16,7 Kg


**Notes**

It can be connected with or without a plug.  
 Electric cable 2 m.

LED  IP64 CE UK ENEC  Bi-volt



4720



- Finishes**
- 07/ \_ \_ Khaki (RAL 7006)
  - 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED Colour Temperature**

/1 \_ 2700 K - 1269 lm  
 **D**

CRI >90

/3 \_ 3500 K - 1709 lm  
 **C**

CRI >80

**Control**

4720 \_ \_ / \_ 0 On/ Off

**Materials**  
 Base: Steel.

**Light Source and electronics**  
 1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,106 x 0,310 x 0,310 m  
 Vol 0,102 m<sup>3</sup>  
 Gross weight 1,5 Kg Net weight 1 Kg



# June

Design by Ana Mir + Emili Padrós (Emiliana Design Studio)

Inspired by traditional lanterns, June's moon-like spheres cast a warm, ambient glow, lending a touch of nostalgia to an outdoor space.

## Outdoor



**4785**


Ø 9 x 120 cm



**4780**

Ø 9 x 80 cm

**4780**



### Finishes

- **54/ \_ \_ Brown**  
(Pantone Black U)

### LED Colour Temperature

/1\_ 2700 K - 95,5 lm



CRI >90

### Control

**4780 54 / 10** On/ Off

### Materials

Diffuser: Opal blown glass.  
Tubes: Steel.

### Light Source and electronics

1 x LED 1 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

### Packaging

1 Box 1 x 0,4 x 0,4 m  
Vol 0,16 m<sup>3</sup>  
Gross weight 5 Kg Net weight 3 Kg


### Notes

Built-in.

LED IP65 CE UKCA EAC Bi-volt



4785

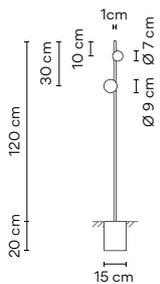

Finishes  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

LED Colour Temperature  
 /1\_ 2700 K - 190,9 lm  
 F  
 CRI >90

Control  
 4785 54 / 10 On/ Off

Materials  
 Diffuser: Opal blown glass.  
 Tubes: Steel.

Light Source and electronics  
 2 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging  
 1 Box 1,5 x 0,4 x 0,4 m  
 Vol 0,24 m<sup>3</sup>  
 Gross weight 6 Kg Net weight 4 Kg

Notes  
 Built-in.

LED IP65 CE ENEC EAC Bi-volt

# Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

## Outdoor



**4820**

19 x 6 cm



**4800 4802**

6 x 60 cm

**4801 4803**

6 x 90 cm

**4804**

6 x 190 cm

**4805**

6 x 270 cm

**4810**

Ø 43 x 190 cm


**4811**

Ø 35 x 270 cm

**4812**

Ø 40 x 270 cm

### 4800



#### Finishes

- **07/ \_\_ Khaki**  
(RAL 7006)
- **54/ \_\_ Oxide**  
(RAL 8017)
- **58/ \_\_ Off-white**  
(PANTONE WARM GRAY 2U)

#### LED Colour Temperature

- /1\_ 2700 K - 181,2 lm
  - /3\_ 3500 K - 181,2 lm
- ☐ **G** ☐
- CRI >90

#### Control

**4800 \_\_ / \_\_ 0 On/ Off**

#### Materials

Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.

#### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

#### Packaging


1 Box 0,125 x 0,125 x 1,3 m  
Vol 0,0203 m<sup>3</sup>  
Gross weight 4 Kg Net weight 3,6 Kg

#### Notes

Surface



### 4801



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

**Control**  
4801 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Light Source and electronics**  
2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0470 m<sup>3</sup>  
Gross weight 8,5 Kg Net weight 6 Kg

**Notes**  
Surface

LED IP66 CE ENEC ENEC Bi-volt

### 4802



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 181,2 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 181,2 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

**Control**  
4802 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Light Source and electronics**  
1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0480 m<sup>3</sup>  
Gross weight 7 Kg Net weight 5,5 Kg

**Notes**  
Built-in

LED IP66 CE ENEC ENEC Bi-volt

### 4803



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

**Control**  
4803 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Light Source and electronics**  
2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0470 m<sup>3</sup>  
Gross weight 8,5 Kg Net weight 5,8 Kg

**Notes**  
Built-in

LED IP66 CE ENEC ENEC Bi-volt

## 4804



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 543,7 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 543,7 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<input type="checkbox"/> <b>G</b>
	CRI >90

**Control**  
4804 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Packaging**  
2 Boxes  
Total Vol 0,0480 m<sup>3</sup>  
Gross weight 8 Kg Net weight 6,5 Kg

**Light Source and electronics**  
3 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Notes**  
Built-in

LED   IP66 CE UK ENEC ENEC Bi-volt

## 4805



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 724,9 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 724,9 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<input type="checkbox"/> <b>G</b>
	CRI >90

**Control**  
4805 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Packaging**  
2 Boxes  
Total Vol 0,0600 m<sup>3</sup>  
Gross weight 9 Kg Net weight 7 Kg

**Light Source and electronics**  
4 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Notes**  
Built-in

LED   IP66 CE UK ENEC ENEC Bi-volt

## 4810

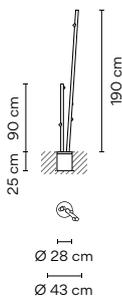

<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 906,1 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 906,1 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<input type="checkbox"/> <b>G</b>
	CRI >90

**Control**  
4810 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Packaging**  
3 Boxes  
Total Vol 0,1388 m<sup>3</sup>  
Gross weight 15 Kg Net weight 12,5 Kg

**Light Source and electronics**  
5 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Notes**  
Built-in

LED   IP66 CE UK ENEC ENEC Bi-volt

## 4811

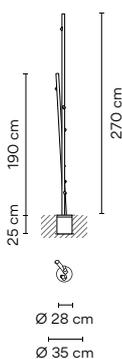

<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	/1 _ 2700 K - 1268,5 lm
● <b>54/</b> __ Oxide (RAL 8017)	/3 _ 3500 K - 1268,5 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<input type="checkbox"/> <b>G</b>
	CRI >90

**Control**  
4811 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Packaging**  
3 Boxes  
Total Vol 1,660 m<sup>3</sup>  
Gross weight 16,5 Kg Net weight 13 Kg

**Light Source and electronics**  
7 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Notes**  
Built-in

LED   IP66 CE UK ENEC ENEC Bi-volt

4812

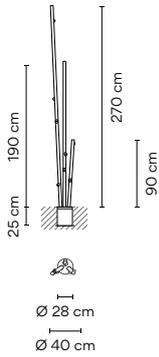

<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	<b>/1</b> 2700 K - 1631,0 lm
● <b>54/</b> __ Oxide (RAL 8017)	<b>/3</b> 3500 K - 1631,0 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<b>LED</b>
	CRI >90

**Control**  
4812 \_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.


**Light Source and electronics**  
9 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Packaging**  
4 Boxes  
Total Vol 0,1854 m<sup>3</sup>  
Gross weight 21,6 Kg Net weight 19,44 Kg

**Notes**  
Built-in

LED IP66 CE UK ENEC Bi-volt

4815



<b>Finishes</b>
● <b>18</b> Polymer concrete (NCS S 2002-B50G)


4815 18

**Materials**  
Base: Polymer concrete.

**Packaging**  
1 Box 0,40 x 0,50 x 0,50 m  
Vol 0,1000 m<sup>3</sup>  
Gross weight 39 Kg Net weight 35 Kg

**Notes**  
Surface installation accessory.  
For ref. 4810. 4811. 4812

4820



<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>07/</b> __ Khaki (RAL 7006)	<b>/1</b> 2700 K - 181,2 lm
● <b>54/</b> __ Oxide (RAL 8017)	<b>/3</b> 3500 K - 181,2 lm
● <b>58/</b> __ Off-white (PANTONE WARM GRAY 2U)	<b>LED</b>
	CRI >90

**Control**  
4820 \_\_ / \_\_  
\_\_ / \_\_ 0 On/ Off

**Materials**  
Cane: PES + FG- Fiberglass.  
Diffuser: PMMA.

**Light Source and electronics**  
1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

**Packaging**  
1 Box 0,25 x 0,10 x 0,10 m  
Vol 0,0025 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1 Kg

**Notes**  
Surface

LED IP66 CE UK ENEC Bi-volt

# Duo

Design by Ramos & Bassols

Duo brings natural warmth to a space. Its gently curved form encases a supple wood-finished interior, lending a soothing sensibility.

## Ceiling

4870

Ø 47,5 cm



4872

Ø 78,5 cm



4874

Ø 35 cm



4878

Ø 70 cm



4876

Ø 35 cm



4880

Ø 70 cm



4870

### Finishes

- 18/ \_\_ Graphite (Adapta RF9913WX)
- 58/ \_\_ Cream (RAL 7044)
- 93/ \_\_ White (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

### LED Colour Temperature

**Static White**  
/1 \_ 2700 K - 2207 lm  
/3 \_ 3500 K - 2304 lm  
F →

**Tunable White**  
/8 \_ (2200 K - 4000 K)  
1901 lm - 2461 lm  
G → - F →

CRI >90 CRI >80  
CRI >90

### Control

4870 \_\_ / \_\_

---

\_\_ / \_ A Static White + Push; 1-10V; DALI-2

---


\_\_ / \_ Z Static White + Casambi

---

\_\_ / \_ 81 Tunable White + DALI-2 DT8

---

\_\_ / \_ 8Z Tunable White + Casambi



### Materials

Diffuser: PC- Polycarbonate.  
Main Body: Aluminum.  
Inner structure: Oak wood.

### Light Source and electronics


1 x LED PLATE 26,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,56 x 0,56 x 0,26 m  
Vol 0,0815 m<sup>3</sup>  
Gross weight 7 Kg Net weight 6 Kg

LED IP20 CE UK ENE Bi-volt

4872



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 3959 lm  
 [F] →  
 /3 \_ 3500 K - 4133 lm  
 [E] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 3138 lm - 4238 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
**4872** \_\_ / \_\_  
 \_\_ / \_ A Static White + Push; 1-10V; DALI-2  
 \_\_ / \_ Z Static White + Casambi  
 \_\_ / \_ 81 Tunable White + DALI-2 DT8  
 \_\_ / \_ 8Z Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Oak wood.

**Light Source and electronics**  
 1 x LED PLATE 50 W 700 mA  
 Constant Current 750 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,9 x 0,9 x 0,25 m  
 Vol 0,2025 m<sup>3</sup>  
 Gross weight 19 Kg Net weight 17 Kg



4874



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 644 lm  
 /3 \_ 3500 K - 632 lm  
 [G] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1244 lm - 1582 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
**4874** \_\_ / \_\_  
 \_\_ / \_ 1 Static White + DALI-2  
 \_\_ / \_ B Static White + Push; 1-10V  
 \_\_ / \_ Z Static White + Casambi  
 \_\_ / \_ 81 Tunable White + DALI-2 DT8  
 \_\_ / \_ 8Z Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Oak wood.

**Light Source and electronics**  
 1 x LED PLATE 12 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,44 x 0,44 x 0,35 m  
 Vol 0,0678 m<sup>3</sup>  
 Gross weight 5 Kg Net weight 4 Kg



4876



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 644 lm  
 /3 \_ 3500 K - 632 lm  
 [G] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1244 lm - 1582 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
**4876** \_\_ / \_\_  
 \_\_ / \_ 1 Static White + DALI-2  
 \_\_ / \_ B Static White + Push; 1-10V  
 \_\_ / \_ Z Static White + Casambi  
 \_\_ / \_ 81 Tunable White + DALI-2 DT8  
 \_\_ / \_ 8Z Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Oak wood.

**Light Source and electronics**  
 1 x LED PLATE 12 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,44 x 0,44 x 0,35 m  
 Vol 0,0678 m<sup>3</sup>  
 Gross weight 5 Kg Net weight 4 Kg



4878

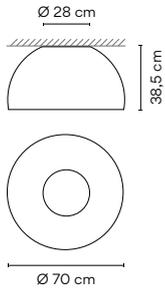

**Finishes**

- **18/** \_\_ Graphite (Adapta RF9913WX)
- **58/** \_\_ Cream (RAL 7044)
- **93/** \_\_ White (RAL 9016)

**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 2207 lm  
 /3 \_ 3500 K - 2304 lm  
**F** →

**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1901 lm - 2461 lm  
**G** → - **F** →  
 CRI >90

**Control**  
**4878** \_\_ / \_\_

---

\_\_ / \_ **A** Static White + Push; 1-10V; DALI-2

---

\_\_ / \_ **Z** Static White + Casambi

---

\_\_ / \_ **81** Tunable White + DALI-2 DT8

---

\_\_ / \_ **8Z** Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Oak wood.

**Light Source and electronics**  
 1 x LED PLATE 26,5 W 700 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,79 x 0,79 x 0,59 m  
 Vol 0,3682 m<sup>3</sup>  
 Gross weight 16 Kg Net weight 14 Kg

LED ⓘ IP20 CE UK ENE ⓘ Bi-volt

4880

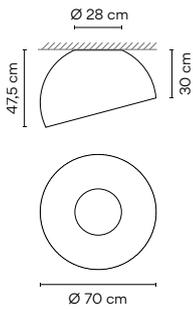

**Finishes**

- **18/** \_\_ Graphite (Adapta RF9913WX)
- **58/** \_\_ Cream (RAL 7044)
- **93/** \_\_ White (RAL 9016)

**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**

**Static White**  
 /1 \_ 2700 K - 2207 lm  
 /3 \_ 3500 K - 2304 lm  
**F** →

**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1901 lm - 2461 lm  
**G** → - **F** →  
 CRI >90

**Control**  
**4880** \_\_ / \_\_

---

\_\_ / \_ **A** Static White + Push; 1-10V; DALI-2

---

\_\_ / \_ **Z** Static White + Casambi

---

\_\_ / \_ **81** Tunable White + DALI-2 DT8

---

\_\_ / \_ **8Z** Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Oak wood.

**Light Source and electronics**  
 1 x LED PLATE 26,5 W 700 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,79 x 0,79 x 0,59 m  
 Vol 0,3682 m<sup>3</sup>  
 Gross weight 16 Kg Net weight 14 Kg

LED ⓘ IP20 CE UK ENE ⓘ Bi-volt



# Duo Petra

Design by Ramos & Bassols

Duo Petra's slate veneer lends a timeless elegance to the collection. The ceiling lamp's gently curved form encases a velvety slate-finished interior for a sophisticated, natural aesthetic.

---

## Ceiling

**4871**

Ø 47,5 cm



**4873**

Ø 78,5 cm



**4875**

Ø 35 cm



**4877**

Ø 35 cm



**4879**

Ø 70 cm




**4881**

Ø 70 cm



4871



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)


**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 2207 lm  
 /3 \_ 3500 K - 2304 lm  
 [F] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1901 lm - 2461 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
 4871 \_\_ / \_\_  
 \_\_ / \_ A Static White + Push; 1-10V; DALI-2  
 \_\_ / \_ Z Static White + Casambi  
 \_\_ / \_ 81 Tunable White + DALI-2 DT8  
 \_\_ / \_ 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.  
**Light Source and electronics**  
 1 x LED PLATE 26,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,56 x 0,56 x 0,26 m  
 Vol 0,0815 m³  
 Gross weight 7 Kg Net weight 6 Kg  
 [LED] [IP20] [CE] [UK] [EAC] [RoHS] [Bi-volt]

4873



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)


**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 3959 lm  
 [F] →  
 /3 \_ 3500 K - 4133 lm  
 [E] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 3138 lm - 4238 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
 4873 \_\_ / \_\_  
 \_\_ / \_ A Static White + Push; 1-10V; DALI-2  
 \_\_ / \_ Z Static White + Casambi  
 \_\_ / \_ 81 Tunable White + DALI-2 DT8  
 \_\_ / \_ 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.  
**Light Source and electronics**  
 1 x LED PLATE 50 W 700 mA  
 Constant Current 750 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,9 x 0,9 x 0,25 m  
 Vol 0,2025 m³  
 Gross weight 19 Kg Net weight 17 Kg  
 [LED] [IP20] [CE] [UK] [EAC] [RoHS] [Bi-volt]

4875



**Finishes**  
 ● 18/ \_\_ Graphite (Adapta RF9913WX)  
 ● 58/ \_\_ Cream (RAL 7044)  
 ● 93/ \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)


**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 644 lm  
 /3 \_ 3500 K - 632 lm  
 [G] →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1244 lm - 1582 lm  
 [G] → - [F] →  
 CRI >90

**Control**  
 4875 \_\_ / \_\_  
 \_\_ / 11 Static White + DALI-2  
 \_\_ / 1B Static White + Push; 1-10V  
 \_\_ / 1Z Static White + Casambi  
 \_\_ / 81 Tunable White + DALI-2 DT8  
 \_\_ / 8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.  
**Light Source and electronics**  
 1 x LED PLATE 12 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,44 x 0,44 x 0,35 m  
 Vol 0,0678 m³  
 Gross weight 5 Kg Net weight 4 Kg  
 [LED] [IP20] [CE] [UK] [EAC] [RoHS] [Bi-volt]

4877



**Finishes**  
 ● **18/** \_\_ Graphite (Adapta RF9913WX)  
 ● **58/** \_\_ Cream (RAL 7044)  
 ● **93/** \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 644 lm  
 /3 \_ 3500 K - 632 lm  
 G →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1244 lm - 1582 lm  
 G → - F →  
 CRI >90

**Control**  
**4877** \_\_ / \_\_  
 \_\_ / \_1 Static White + DALI-2  
 \_\_ / \_B Static White + Push; 1-10V  
 \_\_ / \_Z Static White + Casambi  
 \_\_ / \_81 Tunable White + DALI-2 DT8  
 \_\_ / \_8Z Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.

**Light Source and electronics**  
 1 x LED PLATE 12 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,44 x 0,44 x 0,35 m  
 Vol 0,0678 m<sup>3</sup>  
 Gross weight 5 Kg Net weight 4 Kg



4879

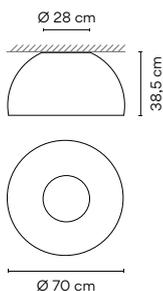

**Finishes**  
 ● **18/** \_\_ Graphite (Adapta RF9913WX)  
 ● **58/** \_\_ Cream (RAL 7044)  
 ● **93/** \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 2207 lm  
 /3 \_ 3500 K - 2304 lm  
 F →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1901 lm - 2461 lm  
 G → - F →  
 CRI >90

**Control**  
**4879** \_\_ / \_\_  
 \_\_ / \_A Static White + Push; 1-10V; DALI-2  
 \_\_ / \_Z Static White + Casambi  
 \_\_ / \_81 Tunable White + DALI-2 DT8  
 \_\_ / \_8Z Tunable White + Casambi


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.

**Light Source and electronics**  
 1 x LED PLATE 26,5 W 700 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,79 x 0,79 x 0,59 m  
 Vol 0,3682 m<sup>3</sup>  
 Gross weight 16 Kg Net weight 14 Kg



4881

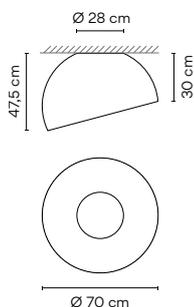

**Finishes**  
 ● **18/** \_\_ Graphite (Adapta RF9913WX)  
 ● **58/** \_\_ Cream (RAL 7044)  
 ● **93/** \_\_ White (RAL 9016)  
**Finish customization**  
 (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

**LED Colour Temperature**  
**Static White**  
 /1 \_ 2700 K - 2207 lm  
 /3 \_ 3500 K - 2304 lm  
 F →  
**Tunable White**  
 /8 \_ (2200 K - 4000 K)  
 1901 lm - 2461 lm  
 G → - F →  
 CRI >90

**Control**  
**4881** \_\_ / \_\_  
 \_\_ / \_A Static White + Push; 1-10V; DALI-2  
 \_\_ / \_Z Static White + Casambi  
 \_\_ / \_81 Tunable White + DALI-2 DT8  
 \_\_ / \_8Z Tunable White + Casambi

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Main Body: Aluminum.  
 Inner structure: Slate.

**Light Source and electronics**  
 1 x LED PLATE 26,5 W 700 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,79 x 0,79 x 0,59 m  
 Vol 0,3682 m<sup>3</sup>  
 Gross weight 16 Kg Net weight 14 Kg





# Warm

Design by Ramos & Bassols

A contemporary take on a timeless design, Warm features a generous drum shade in a muted colour palette for a refined touch.

## Table



**4895 4896**


Ø 19 x 41 cm



**4900 4901**

Ø 32,4 x 59 cm

**4895**



### Finishes

- **10 White** (NCS S 0300-N)

LED 2700 K 470 lm

**4895 10 / 00**

### Materials

Shade: Screen.  
Diffuser: PMMA.  
Rod: Aluminum.  
Base: Steel.

Light Source and electronics  
3 x LED G9 230V 4,2 W

### Packaging


2 Boxes  
Total Vol 0,0390 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,3 Kg

### Notes

On/ Off switch on the cable.  
Electric cable 2 m



**4896**



### Finishes

- **10 White** (NCS S 0300-N)
- **25 Beige D1** (NCS S 4005-Y50R)
- **28 Brown M1** (NCS S 4020-Y60R)
- **56 Green D1** (NCS S 7010-G30Y)

LED 2700 K 470 lm

**4896 \_\_ / 00**

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

### Materials

Shade: Screen.  
Diffuser: PMMA.  
Rod: Aluminum.  
Base: Steel.

Light Source and electronics  
3 x LED G9 230V 4,2 W

### Packaging

2 Boxes  
Total Vol 0,0390 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 2 Kg


### Notes

On/ Off switch on the cable.  
Electric cable 2 m





#### 4900



Finishes  
● **10 White**  
 (NCS S 0300-N)

LED 2700 K 1520 lm

4900 10 / 00

#### Materials

Shade: Screen.  
 Diffuser: PMMA.  
 Rod: Aluminum.  
 Base: Steel.

Light Source and electronics  
 3 x LED E27 230V 12 W

#### Packaging


2 Boxes  
 Total Vol 0,2153 m<sup>3</sup>  
 Gross weight 4,3 Kg Net weight 3,8 Kg

#### Notes

On/ Off switch on the cable.  
 Electric cable 2 m



#### 4901



Finishes  
● **10 White**  
 (NCS S 0300-N)  
● **25 Beige D1**  
 (NCS S 4005-Y50R)  
● **28 Brown M1**  
 (NCS S 4020-Y60R)  
● **56 Green D1**  
 (NCS S 7010-G30Y)

LED 2700 K 1520 lm

4901 \_\_ / 00

Finish customization  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

#### Materials

Shade: Aluminum.  
 Diffuser: PMMA.  
 Rod: Aluminum.  
 Base: Steel.

Light Source and electronics  
 3 x LED E27 230V 12 W

#### Packaging

2 Boxes  
 Total Vol 0,2153 m<sup>3</sup>  
 Gross weight 4,8 Kg Net weight 4,3 Kg

#### Notes

On/ Off switch on the cable.  
 Electric cable 2 m




Floor



**4905 4906**  
Ø 32,4 x 150 cm

**4905**

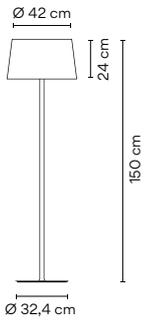

Finishes

- **10 White**  
(NCS S 0300-N)

LED 2700 K 1520 lm

**4905 10 / 00**

Materials

Shade: Screen.  
Diffuser: PMMA.  
Rod: Aluminum.  
Base: Steel.

Light Source and electronics  
3 x LED E27 230V 12 W

Packaging


2 Boxes  
Total Vol 0,3426 m<sup>3</sup>  
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/ Off switch on the cable.  
Electric cable 2,5 m



**4906**

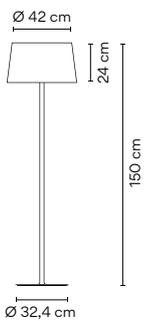

Finishes

- **10 White**  
(NCS S 0300-N)
- **25 Beige D1**  
(NCS S 4005-Y50R)
- **28 Brown M1**  
(NCS S 4020-Y60R)
- **56 Green D1**  
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

**4906 \_\_ / 00**

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

Materials

Diffuser: PMMA.  
Rod: Aluminum.  
Base: Steel.

Light Source and electronics  
3 x LED E27 230V 12 W

Packaging

2 Boxes  
Total Vol 0,3426 m<sup>3</sup>  
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/ Off switch on the cable.  
Electric cable 2,5 m




## Pendant



**4925 4926**

Ø 62 cm

**4925**

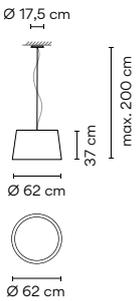

**Finishes**  
**10 White**  
 (NCS S 0300-N)

LED 2700 K 1520 lm

**4925 10 / 00**

**Materials**  
 Shade: Screen.  
 Canopy: Steel.  
 Diffuser: PMMA.


**Light Source and electronics**  
 4 x LED E27 230V 12 W

**Packaging**  
 1 Box 0,68 x 0,68 x 0,39 m  
 Vol 0,18 m<sup>3</sup>  
 Gross weight 7,7 Kg Net weight 3,9 Kg

**Notes**  
 Extra cable length.



**4926**

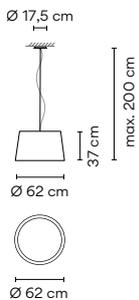

**Finishes**  
**10 White**  
 (NCS S 0300-N)  
**25 Beige D1**  
 (NCS S 4005-Y50R)  
**28 Brown M1**  
 (NCS S 4020-Y60R)  
**56 Green D1**  
 (NCS S 7010-G30Y)

LED 2700 K 1520 lm

**4926 \_ \_ / 00**

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**Materials**  
 Shade: Aluminum.  
 Canopy: Steel.  
 Diffuser: PMMA.

**Light Source and electronics**  
 4 x LED E27 230V 12 W

**Packaging**  
 1 Box 0,77 x 0,77 x 0,50 m  
 Vol 0,2965 m<sup>3</sup>  
 Gross weight 8,9 Kg Net weight 5,1 Kg

**Notes**  
 Extra cable length.



# Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates with a warm, welcoming glow.

## Table



**4960**

Ø 47,5 x 112 cm



**4965**

Ø 47,5 x 92 cm




**4970**

Ø 47,5 x 88 cm

## Dimming and installation options




/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer presson dims the light.

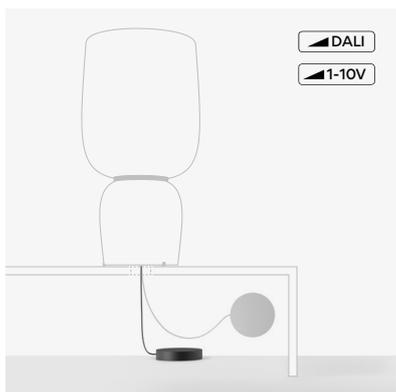

Dimming and installation options: The driver of the DALI-2, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

### 4960

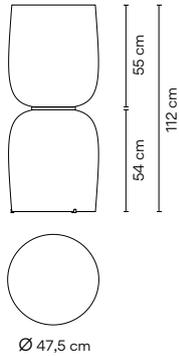

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 5432,0 lm  
 D →  
 CRI >90

**Control**  
 4960 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ 5 Push  
(with or without memory)
- \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: Opal Glass.  
 Metal parts: Aluminum.


**Packaging**  
 2 Boxes  
 Total Vol 0,6051 m<sup>3</sup>  
 Gross weight 25,7 Kg Net weight 22,7 Kg

**Light Source and electronics**  
 2 x LED 19,8 W 800 mA  
 Constant Current 800 mA  
 100~240V 50/60Hz

**Notes**  
 A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.  
 Electric cable 2 m.



### 4965

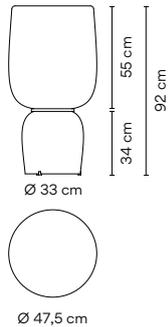

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 5432,0 lm  
 D →  
 CRI >90

**Control**  
 4965 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ 5 Push  
(with or without memory)
- \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: Opal Glass.  
 Metal parts: Aluminum.


**Packaging**  
 2 Boxes  
 Total Vol 0,6051 m<sup>3</sup>  
 Gross weight 20,6 Kg Net weight 17,6 Kg

**Light Source and electronics**  
 2 x LED 19,8 W 800 mA  
 Constant Current 800 mA  
 100~240V 50/60Hz

**Notes**  
 A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.  
 Electric cable 2 m.



### 4970

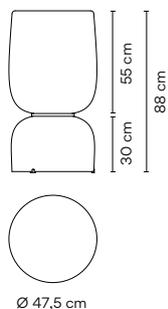

**Finishes**  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 5432,0 lm  
 D →  
 CRI >90

**Control**  
 4970 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ 5 Push  
(with or without memory)
- \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: Opal Glass.  
 Metal parts: Aluminum.

**Packaging**  
 2 Boxes  
 Total Vol 0,6051 m<sup>3</sup>  
 Gross weight 21,7 Kg Net weight 18,7 Kg

**Light Source and electronics**  
 2 x LED 19,8 W 800 mA  
 Constant Current 800 mA  
 100~240V 50/60Hz

**Notes**  
 A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.  
 Electric cable 2 m.




Pendant



**4987**  
Ø 47,5 cm

**4987**

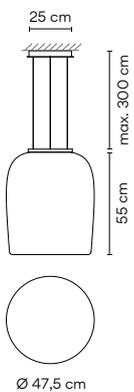

**Finishes**  
● **11/ \_ \_** Black  
(NCS S 8500-N)

**LED Colour Temperature**  
**/1\_** 2700 K - 4826,7 lm  
**D**  
CRI >90

**Control**  
**4987 \_ \_ / \_ \_**  
\_ \_ / \_ **A** Push; -10V;  
DALI-2  
\_ \_ / \_ **Z** Casambi

**Materials**  
Diffuser: Opal Glass.  
Metal parts: Aluminum.

**Light Source and electronics**  
1 x LED 37,2 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,61 x 0,62 x 0,80 m  
Vol 0,3026 m³  
Gross weight 13,9 Kg Net weight 12,4 Kg  
Extra cable length.

**LED**  **IP20** **CE** **UL** **ETL** **RoHS**  
**Dimmer** **Bi-volt**




# Balance

Design by Jordi Vilardell

Balance features a classic drum shade, elegantly cantilevered from its column to provide a general ambient lighting effect or a more focused reading light.

---

## Floor

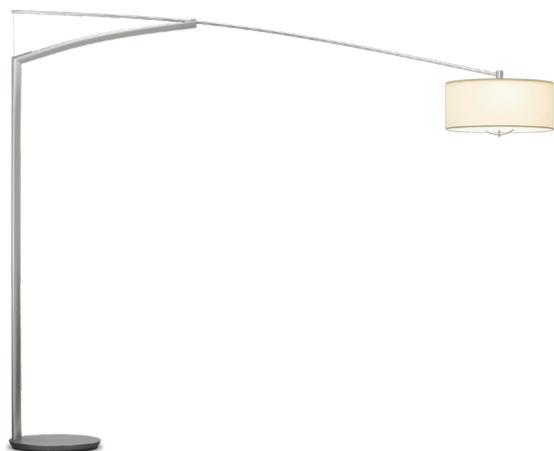

**5189 5190**

260 x 210 cm




**5191 5192**

215 x 210 cm



5189

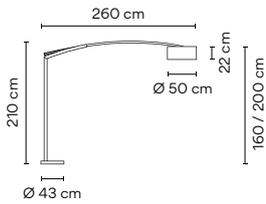

- Finishes
- 18 Graphite (RAL 7016)
  - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5189 \_\_ / 05 Push

Materials

Vertical tube: Aluminum.  
Base: Steel.  
Arm: Stainless steel.  
Shade: Aluminum.

Light Source and electronics  
3 x E27 230V 12 W

Packaging


3 Boxes  
Total Vol 0,3472 m<sup>3</sup>  
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes

Dimmer on the cable. 3 m



5190

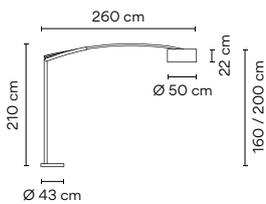

- Finishes
- 18 Graphite (RAL 7016)
  - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5190 \_\_ / 05 Push

Materials

Vertical tube: Aluminum.  
Base: Steel.  
Arm: Stainless steel.  
Shade: Parchment paper.

Light Source and electronics  
3 x E27 230V 12 W

Packaging


3 Boxes  
Total Vol 0,3472 m<sup>3</sup>  
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes

Dimmer on the cable. 3 m



5191

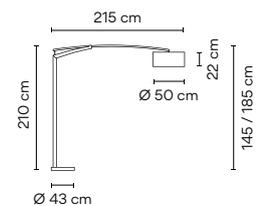

- Finishes
- 18 Graphite (RAL 7016)
  - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5191 \_\_ / 05 Push

Materials

Vertical tube: Aluminum.  
Base: Steel.  
Arm: Stainless steel.  
Shade: Parchment paper.

Light Source and electronics  
3 x E27 230V 12 W

Packaging


3 Boxes  
Total Vol 0,3472 m<sup>3</sup>  
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m



5192

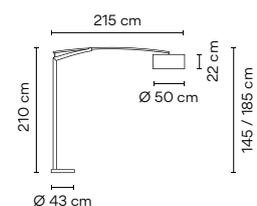

- Finishes
- 18 Graphite (RAL 7016)
  - 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control

5192 \_\_ / 05 Push

Materials

Vertical tube: Aluminum.  
Base: Steel.  
Arm: Stainless steel.  
Shade: Aluminum.

Light Source and electronics  
3 x E27 230V 12 W

Packaging

3 Boxes  
Total Vol 0,3472 m<sup>3</sup>  
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes

Dimmer on the cable. 3 m



# Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

---

## Ceiling Wall



**5410**  
24,4 x 6,6 cm



**5412**  
27,2 x 7,7 cm



**5425 5427**  
31,8 x 24,2 cm




**5430 5432**  
46,7 x 38 cm



**5435 5437**  
56,8 x 49,2cm

5410



Finishes  
● **03 White**  
(RAL 9016)

LED Colour Temperature  
2700 K 470 lm

**5410 03 / 00** On/ Off

**Materials**

Canopy: Aluminum.  
Diffuser: Blown-glass.


Light Source and electronics  
2 x LED G9 4,2 W

**Packaging**

1 Box 0,37 x 0,37 x 0,23 m  
Vol 0,0315 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,7 Kg



5412



Finishes  
● **03/ \_ \_ White**  
(RAL 9016)

LED Colour Temperature  
/1\_ 2700 K - 880 lm  
   
CRI >90

Control  
**5412 03 / 10** On/ Off

**Materials**

Canopy: Aluminum.  
Diffuser: Blown-glass.


Light Source and electronics  
1 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**

1 Box 0,37 x 0,37 x 0,23 m  
Vol 0,0315 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,7 Kg



5425



Finishes  
● **03 White**  
(RAL 9016)

LED Colour Temperature  
2700 K - 470 lm

**5425 03 / 00** On/ Off

**Materials**

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics  
2 x LED G9 4,2 W

**Packaging**


1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,26 Kg Net weight 1,08 Kg

**Notes**

All version require only one electrical connection



5427



Finishes  
● **03/ \_ \_ White**  
(RAL 9016)

LED Colour Temperature  
/1\_ 2700 K - 831 lm  
   
/3\_ 3500 K - 878 lm  
   
CRI >90

Control  
**5427 03 / \_ 0** On/ Off

**Materials**

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics  
2 x LED PLATE 3,2 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,26 Kg Net weight 1,08 Kg

**Notes**

All version require only one electrical connection



5430


Finishes

- 03 White (RAL 9016)

LED Colour Temperature

2700 K 470 lm

5430 03 / 00 On/ Off



Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

2 x LED G9 4,2 W

Packaging

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes

All version require only one electrical connection



5432

Finishes

- 03/ \_\_ White (RAL 9016)

LED Colour Temperature


/1\_ 2700 K - 1760 lm



CRI &gt;90

Control

5432 03 / 10 On/ Off



Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

2 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes

All version require only one electrical connection



5435


Finishes

- 03 White (RAL 9016)

LED Colour Temperature

2700 K 470 lm

5435 03 / 00 On/ Off



Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

3 x LED G9 4,2 W

Packaging

2 Boxes  
Total Vol 0,0780 m<sup>3</sup>  
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes

All version require only one electrical connection



5437

Finishes

- 03/ \_\_ White (RAL 9016)

LED Colour Temperature


/1\_ 2700 K - 2640 lm



CRI &gt;90

Control

5437 03 / 10 On/ Off



Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

3 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,0780 m<sup>3</sup>  
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes

All version require only one electrical connection





# Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

## Wall



**5470**

Ø 30 cm



**5471**

Ø 40 cm




**5472**

Ø 45 cm



**5474**

Ø 46 cm




**5476**

Ø 60 cm



**5480**

58 x 58 x 6 cm

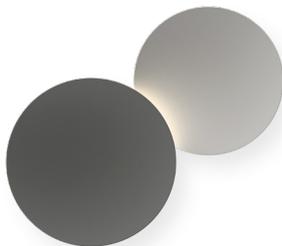

**5481**

69 x 69 x 9 cm



**5485**

68 x 68 x 9 cm



**5487**

87 x 87 x 9 cm



**5486**


87 x 87 x 11 cm



**5491**

103 x 84 x 11 cm

Each project is unique.  
Personalise your own  
Puck Wall Art composition  
quick and easy.

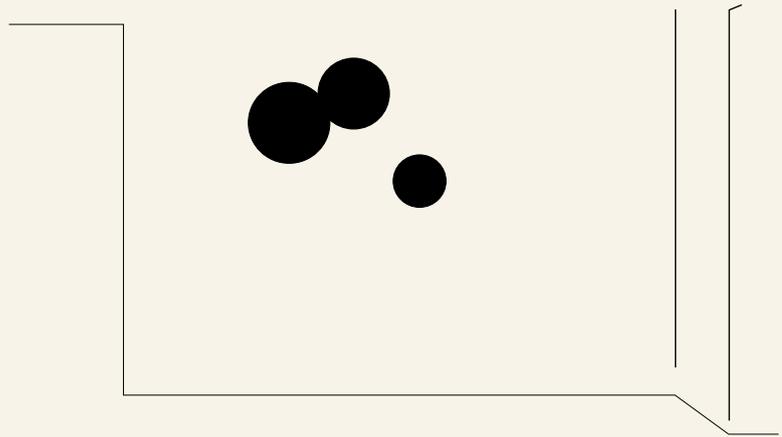

## 5470

- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 21/ \_\_ Black Grey (NCS S 7000-N)
  - 28/ \_\_ Brown M1 (NCS S 4020-Y60R)

**LED Colour Temperature**

/1 \_ 2700 K - 952 lm  
/3 \_ 3500 K - 1017 lm


**E** >

CRI >90

**Control**

5970 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ 4 Triac
- \_\_ / \_ 5 Push
- \_\_ / \_ Z Casambi



- Finishes**
- 76/ \_\_ Grey Felt L1
  - 77/ \_\_ Grey Felt D1

**LED Colour Temperature**

/1 \_ 2700 K - 952 lm  
/3 \_ 3500 K - 1017 lm

**E** >

CRI >90

**Control**

5970 \_\_ / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ 4 Triac
- \_\_ / \_ 5 Push
- \_\_ / \_ Z Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Shade: ABS.  
Wall support: Aluminum.

**Light Source and electronics**

1 x LED STRIP 8,4 W 700 mA  
Constant Current 700 mA

/ \_ 1 110-240V 50/60Hz Bi-volt  
/ \_ 3 110-240V 50/60Hz Bi-volt  
/ \_ 5 110-240V 50/60Hz Bi-volt  
/ \_ 4 220-240V 50/60Hz  
/ \_ Z 220-240V 50/60Hz

**Packaging**


1 Box 0,34 x 0,34 x 0,23 m  
Vol 0,0266 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,6 Kg

**Notes**

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system




<b>5471</b>	<b>Finishes</b> ● <b>15/</b> __ Grey L2 (NCS S 2500-N) ● <b>21/</b> __ Black Grey (NCS S 7000-N) ● <b>28/</b> __ Brown M1 (NCS S 4020-Y60R)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90	<b>Control</b> <b>5471</b> __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
-------------	---	---	---



<b>Finishes</b> ● <b>76/</b> __ Grey Felt L1 ● <b>77/</b> __ Grey Felt D1	<b>LED Colour Temperature</b> /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90	<b>Control</b> <b>5471</b> __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
---	---	---

<b>Materials</b> Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum.	<b>Packaging</b> 1 Box 0,44 x 0,44 x 0,25 m Vol 0,0484 m <sup>3</sup> Gross weight 3,5 Kg Net weight 1,9 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA / _ 1 110~240V 50/60Hz Bi-volt / _ 3 110~240V 50/60Hz Bi-volt / _ 5 110~240V 50/60Hz Bi-volt / _ 4 220~240V 50/60Hz / _ Z 220~240V 50/60Hz	<b>Notes</b> A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system LED  IP20  CE  UK  ENEC  Bi-volt 

<b>5472</b>	<b>Finishes</b> ● <b>15/</b> __ Grey L2 (NCS S 2500-N) ● <b>21/</b> __ Black Grey (NCS S 7000-N) ● <b>28/</b> __ Brown M1 (NCS S 4020-Y60R)	<b>LED Colour Temperature</b> /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90	<b>Control</b> <b>5472</b> __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
-------------	---	---	---




<b>Finishes</b> ● <b>76/</b> __ Grey Felt L1 ● <b>77/</b> __ Grey Felt D1	<b>LED Colour Temperature</b> /1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90	<b>Control</b> <b>5472</b> __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ 4 Triac __ / _ 5 Push __ / _ Z Casambi
---	---	---

<b>Materials</b> Diffuser: PC- Polycarbonate. Shade: ABS. Wall support: Aluminum.	<b>Packaging</b> 1 Box 0,51 x 0,51 x 0,26 m Vol 0,0676 m <sup>3</sup> Gross weight 4,75 Kg Net weight 2,25 Kg
<b>Light Source and electronics</b> 1 x LED STRIP 12,6 W 700 mA Constant Current 700 mA / _ 1 110~240V 50/60Hz Bi-volt / _ 3 110~240V 50/60Hz Bi-volt / _ 5 110~240V 50/60Hz Bi-volt / _ 4 220~240V 50/60Hz / _ Z 220~240V 50/60Hz	<b>Notes</b> A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system LED  IP20  CE  UK  ENEC  Bi-volt 

5474

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 15/ __ Grey L2 (NCS S 2500-N)</li> <li>● 21/ __ Black Grey (NCS S 7000-N)</li> <li>● 28/ __ Brown M1 (NCS S 4020-Y60R)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 952 lm          /3_ 3500 K - 1017 lm</p> <p></p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p>5474 __ / __</p> <hr/> <p>__ / 1 DALI-2          __ / 3 1-10V          __ / 4 Triac          __ / 5 Push          __ / Z Casambi</p>
---	--	---




<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 71/ __ Grey Felt L1 &amp; Grey Felt D1</li> <li>● 76/ __ Grey Felt L1</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 952 lm          /3_ 3500 K - 1017 lm</p> <p></p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p>5474 __ / __</p> <hr/> <p>__ / 1 DALI-2          __ / 3 1-10V          __ / 4 Triac          __ / 5 Push          __ / Z Casambi</p>
--	--	---

<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate.          Shade: ABS.          Wall support: Aluminum.          Ring: Steel.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 8,4 W 700 mA          Constant Current 700 mA</p> <p>/ _ 1 110~240V 50/60Hz Bi-volt          / _ 3 110~240V 50/60Hz Bi-volt          / _ 5 110~240V 50/60Hz Bi-volt          / _ 4 220~240V 50/60Hz          / _ Z 220~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,51 x 0,51 x 0,26 m          Vol 0,0676 m<sup>3</sup>          Gross weight 4,75 Kg Net weight 2,25 Kg</p> <p><b>Notes</b></p> <p>A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system</p> <p>     </p>
---	--

5476

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 15/ __ Grey L2 (NCS S 2500-N)</li> <li>● 21/ __ Black Grey (NCS S 7000-N)</li> <li>● 28/ __ Brown M1 (NCS S 4020-Y60R)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 1435 lm          /3_ 3500 K - 1533 lm</p> <p></p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p>5476 __ / __</p> <hr/> <p>__ / 1 DALI-2          __ / 3 1-10V          __ / 4 Triac          __ / 5 Push          __ / Z Casambi</p>
---	---	---



<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 71/ __ Grey Felt L1 &amp; Grey Felt D1</li> <li>● 76/ __ Grey Felt L1</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 1435 lm          /3_ 3500 K - 1533 lm</p> <p></p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p>5476 __ / __</p> <hr/> <p>__ / 1 DALI-2          __ / 3 1-10V          __ / 4 Triac          __ / 5 Push          __ / Z Casambi</p>
--	---	---

<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate.          Shade: ABS.          Wall support: Aluminum.          Ring: Steel.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 12,6 W 700 mA          Constant Current 700 mA</p> <p>/ _ 1 110~240V 50/60Hz Bi-volt          / _ 3 110~240V 50/60Hz Bi-volt          / _ 5 110~240V 50/60Hz Bi-volt          / _ 4 220~240V 50/60Hz          / _ Z 220~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,66 x 0,66 x 0,235 m          Vol 0,1024 m<sup>3</sup>          Gross weight 6,3 Kg Net weight 2,9 Kg</p> <p><b>Notes</b></p> <p>A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system</p> <p>     </p>
--	---

5480

- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 28/ \_\_ Brown M1 (NCS S 4020-Y60R)
  - 72/ \_\_ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

**LED Colour Temperature**

/1\_ 2700 K - 2388 lm  
/3\_ 3500 K - 2551 lm

☞


CRI >90

**Control**

5480 \_\_ / \_\_

---

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ 3 1-10V  
\_\_ / \_\_ 4 Triac  
\_\_ / \_\_ 5 Push  
\_\_ / \_\_ Z Casambi



- Finishes**
- 71/ \_\_ Grey Felt L1 & Grey Felt D1
  - 76/ \_\_ Grey Felt L1

**LED Colour Temperature**

/1\_ 2700 K - 2388 lm  
/3\_ 3500 K - 2551 lm

☞

CRI >90

**Control**

5480 \_\_ / \_\_

---

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ 3 1-10V  
\_\_ / \_\_ 4 Triac  
\_\_ / \_\_ 5 Push  
\_\_ / \_\_ Z Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Shade: ABS.  
Wall support: Aluminum.

**Light Source and electronics**

1 x LED STRIP 8,4 W 700 mA  
1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA

/ \_ 1 110~240V 50/60Hz Bi-volt  
/ \_ 3 110~240V 50/60Hz Bi-volt  
/ \_ 5 110~240V 50/60Hz Bi-volt  
/ \_ 4 220~240V 50/60Hz  
/ \_ Z 220~240V 50/60Hz

**Packaging**

1 Box 0,46 x 0,46 x 0,4 m  
Vol 0,0846 m<sup>3</sup>  
Gross weight 6,1 Kg Net weight 3,4 Kg

**Notes**

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5481

- Finishes**
- 15/ \_\_ Grey L2 (NCS S 2500-N)
  - 28/ \_\_ Brown M1 (NCS S 4020-Y60R)
  - 72/ \_\_ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

**LED Colour Temperature**

/1\_ 2700 K - 2871 lm  
/3\_ 3500 K - 3067 lm

☞


CRI >90

**Control**

5481 \_\_ / \_\_

---

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ 3 1-10V  
\_\_ / \_\_ 4 Triac  
\_\_ / \_\_ 5 Push  
\_\_ / \_\_ Z Casambi



- Finishes**
- 71/ \_\_ Grey Felt L1 & Grey Felt D1
  - 76/ \_\_ Grey Felt L1

**LED Colour Temperature**

/1\_ 2700 K - 2871 lm  
/3\_ 3500 K - 3067 lm

☞

CRI >90

**Control**

5481 \_\_ / \_\_

---

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ 3 1-10V  
\_\_ / \_\_ 4 Triac  
\_\_ / \_\_ 5 Push  
\_\_ / \_\_ Z Casambi

**Materials**

Diffuser: PC- Polycarbonate.  
Shade: ABS.  
Wall support: Aluminum.

**Light Source and electronics**

1 x LED STRIP 8,4 W 700 mA  
1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA


/ \_ 1 110~240V 50/60Hz Bi-volt  
/ \_ 3 110~240V 50/60Hz Bi-volt  
/ \_ 5 110~240V 50/60Hz Bi-volt  
/ \_ 4 220~240V 50/60Hz  
/ \_ Z 220~240V 50/60Hz

**Packaging**

1 Box 0,46 x 0,46 x 0,4 m  
Vol 0,0846 m<sup>3</sup>  
Gross weight 6,1 Kg Net weight 3,4 Kg



5485



<b>Finishes</b> ● 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N) ● 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	<b>LED Colour Temperature</b> /1_ 2700 K - 2388 lm /3_ 3500 K - 2551 lm E CRI >90	<b>Control</b> 5485 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
---	---	---

<b>Finishes</b> ● 71/ _ _ Grey Felt L1 & Grey Felt D1	<b>LED Colour Temperature</b> /1_ 2700 K - 2388 lm /3_ 3500 K - 2551 lm E CRI >90	<b>Control</b> 5485 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
--	---	---


**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade: ABS.  
 Wall support: Aluminum.  
 Ring: Steel.

**Light Source and electronics**  
 1 x LED STRIP 8,4 W 700 mA  
 1 x LED STRIP 12,6 W 700 mA  
 Constant Current 700 mA  
 / \_ 1 110~240V 50/60Hz Bi-volt  
 / \_ 3 110~240V 50/60Hz Bi-volt  
 / \_ 5 110~240V 50/60Hz Bi-volt  
 / \_ 4 220~240V 50/60Hz  
 / \_ Z 220~240V 50/60Hz

**Packaging**  
 1 Box 0,51 x 0,51 x 0,43 m  
 Vol 0,1118 m<sup>3</sup>  
 Gross weight 8,42 Kg Net weight 4,22 Kg

LED IP20 CE UK ENEC Bi-volt

5486



<b>Finishes</b> ● 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N) ● 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	<b>LED Colour Temperature</b> /1_ 2700 K - 2871 lm /3_ 3500 K - 3067 lm E CRI >90	<b>Control</b> 5486 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
---	---	---

<b>Finishes</b> ● 71/ _ _ Grey Felt L1 & Grey Felt D1	<b>LED Colour Temperature</b> /1_ 2700 K - 2871 lm /3_ 3500 K - 3067 lm E CRI >90	<b>Control</b> 5486 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi
--	---	---

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade: ABS.  
 Wall support: Aluminum.  
 Ring: Steel.


**Light Source and electronics**  
 2 x LED STRIP 12,6 W 700 mA  
 Constant Current 700 mA  
 / \_ 1 110~240V 50/60Hz Bi-volt  
 / \_ 3 110~240V 50/60Hz Bi-volt  
 / \_ 5 110~240V 50/60Hz Bi-volt  
 / \_ 4 220~240V 50/60Hz  
 / \_ Z 220~240V 50/60Hz

**Packaging**  
 1 Box 0,66 x 0,66 x 0,5 m  
 Vol 0,2178 m<sup>3</sup>  
 Gross weight 11,35 Kg Net weight 5,45 Kg

LED IP20 CE UK ENEC Bi-volt

5487

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>21/</b> __ Black Grey (NCS S 7000-N)</li> <li>● <b>73/</b> __ Brown M1 &amp; Black Grey (NCS S 4020-Y60R, NCS S 7000-N)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> 2700 K - 2388 lm  <b>/3</b> 3500 K - 2551 lm</p> <p><b>E</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5487</b> __ / __</p> <hr/> <p>__ / <b>1</b> DALI-2              __ / <b>3</b> 1-10V              __ / <b>4</b> Triac              __ / <b>5</b> Push              __ / <b>Z</b> Casambi</p>
---	--	---



<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>71/</b> __ Grey Felt L1 &amp; Grey Felt D</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> 2700 K - 2388 lm  <b>/3</b> 3500 K - 2551 lm</p> <p><b>E</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5487</b> __ / __</p> <hr/> <p>__ / <b>1</b> DALI-2              __ / <b>3</b> 1-10V              __ / <b>4</b> Triac              __ / <b>5</b> Push              __ / <b>Z</b> Casambi</p>
---	--	---

**Materials**

Diffuser: PC- Polycarbonate.  
 Shade: ABS.  
 Wall support: Aluminum.  
 Ring: Steel.

**Light Source and electronics**

1 x LED STRIP 8,4 W 700 mA  
 1 x LED STRIP 12,6 W 700 mA  
 Constant Current 700 mA  
 / **1** 110-240V 50/60Hz Bi-volt  
 / **3** 110-240V 50/60Hz Bi-volt  
 / **5** 110-240V 50/60Hz Bi-volt  
 / **4** 220-240V 50/60Hz  
 / **Z** 220-240V 50/60Hz


**Packaging**

1 Box 0,66 x 0,66 x 0,5 m  
 Vol 0,2178 m<sup>3</sup>  
 Gross weight 11,52 Kg Net weight 5,62 Kg



5491

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>72/</b> __ Black Grey &amp; Grey L2 (NCS S 7000-N, NCS S 2500-N)</li> <li>● <b>73/</b> __ Brown M1 &amp; Black Grey (NCS S 4020-Y60R, NCS S 7000-N)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> 2700 K - 4307 lm  <b>/3</b> 3500 K - 4601 lm</p> <p><b>E</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5491</b> __ / __</p> <hr/> <p>__ / <b>1</b> DALI-2              __ / <b>3</b> 1-10V              __ / <b>4</b> Triac              __ / <b>5</b> Push              __ / <b>Z</b> Casambi</p>
---	--	---

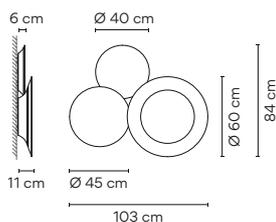

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>71/</b> __ Grey Felt L1 &amp; Grey Felt D1</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> 2700 K - 4307 lm  <b>/3</b> 3500 K - 4601 lm</p> <p><b>E</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5491</b> __ / __</p> <hr/> <p>__ / <b>1</b> DALI-2              __ / <b>3</b> 1-10V              __ / <b>4</b> Triac              __ / <b>5</b> Push              __ / <b>Z</b> Casambi</p>
--	--	---

**Materials**

Diffuser: PC- Polycarbonate.  
 Shade: ABS.  
 Wall support: Aluminum.  
 Ring: Steel.

**Light Source and electronics**

3 x LED STRIP 12,6 W 700 mA  
 Constant Current 700 mA  
 / **1** 110-240V 50/60Hz Bi-volt  
 / **3** 110-240V 50/60Hz Bi-volt  
 / **5** 110-240V 50/60Hz Bi-volt  
 / **4** 220-240V 50/60Hz  
 / **Z** 220-240V 50/60Hz

**Packaging**

1 Box 0,66 x 0,66 x 0,67 m  
 Vol 0,2919 m<sup>3</sup>  
 Gross weight 14,85 Kg Net weight 7,35 Kg





# Mayfair Mini

Design by Diego Fortunato

The perfect lighting companion, Mayfair Mini is a small-scale design that casts a contained pool of diffuse, downlight for an intimate atmosphere. A light to grab and go that can be moved where needed -indoors or out- via its slender stem.

## Table



**5495**

Ø 20 x 38 cm

Portable



**5496**

Ø 20 x 38 cm

Bolt-down



**5497**

Ø 20 x 38 cm

Bolt-down

**5495**

### Finishes

- **23 Warm White**  
(NCS S 0502-Y50R)
- **25 Beige D1**  
(NCS S 4005-Y50R)
- **38 Terra Dark**  
(NCS S 5040-Y70R)
- **47 Green L1**  
(NCS S 6005-G80Y)

### LED Colour Temperature


/1\_ 2700 K - 223 lm

E

CRI >90

### Control

**5495 \_\_ / 16** Touch sensor



### Materials

Base and shade: ABS + PC- Polycarbonate.  
Diffuser: PC- Polycarbonate.  
Stem: Stainless steel.

### Light Source and electronics

1 x LED PLATE 5V 2,5 W  
Constant Voltage 5V  
100~240V 50/60Hz

### Packaging

1 Box 0,25 x 0,26 x 0,50 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 1,62 Kg Net weight 0,73 Kg


### Notes

Rechargeable battery autonomy:  
6h at 100% Intensity.  
12h at 50% Intensity.  
18h at 25% Intensity.

USB-C cable: length 1,20 m  
(from the base to the USB charger).

LED IP20 CE UK ENE Bi-volt

5496



- Finishes**
- 23 Warm White (NCS S 0502-Y50R)
  - 25 Beige D1 (NCS S 4005-Y50R)
  - 38 Terra Dark (NCS S 5040-Y70R)
  - 47 Green L1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 223 lm  
 E →  
 CRI >90

**Control**  
 5496 \_\_ / 16 Touch sensor  
 (with or without memory)

**Materials**

Base and shade: ABS + PC- Polycarbonate  
 Diffuser: PC- Polycarbonate.  
 Stem: Stainless steel.

**Light Source and electronics**

1 x LED PLATE 5V 2,5 W  
 Constant Voltage 5V  
 100-240V 50/60Hz

**Packaging**


1 Box 0,25 x 0,26 x 0,50 m  
 Vol 0,033 m<sup>3</sup>  
 Gross weight 1,84 Kg Net weight 0,94 Kg

**Notes**

Cable length: 1 m  
 (from the base to the USB charger)



5497



- Finishes**
- 23 Warm White (NCS S 0502-Y50R)
  - 25 Beige D1 (NCS S 4005-Y50R)
  - 38 Terra Dark (NCS S 5040-Y70R)
  - 47 Green L1 (NCS S 6005-G80Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 223 lm  
 E →  
 CRI >90

**Control**  
 5497 \_\_ / \_\_  
 \_\_ / 10 On/ Off  
 \_\_ / 11 DALI-2  
 \_\_ / 13 1-10V

**Materials**

Base and shade: ABS + PC- Polycarbonate  
 Diffuser: PC- Polycarbonate.  
 Stem: Stainless steel.

**Light Source and electronics**

1 x LED PLATE 5V 2,5 W  
 Constant Voltage 5V  
 100-240V 50/60Hz

**Packaging**

1 Box 0,25 x 0,26 x 0,50 m  
 Vol 0,033 m<sup>3</sup>  
 Gross weight 1,45 Kg Net weight 0,54 Kg

**Notes**

Cable length: 1 m. (the cable connects directly to the remote driver)



# Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

## Table Floor



**5500**

Ø 30 x 52 cm



**5505**

Ø 30 x 52 cm



**5510**

Ø 30 x 147 cm



**5515**


Ø 30 x 147 cm

### 5500

- Finishes**
- **07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
  - **08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

**LED Colour Temperature**  
**/1** \_ 2700 K - 2027 lm  
 **D**  
CRI >90

**Control**  
**5500** \_\_ / \_\_  
\_\_ / **16** Optical sensor  
\_\_ / **18** Push 2 (without memory)



**Materials**  
Diffuser: PC- Polycarbonate.  
Shade: PMMA.  
Tube: Steel. Base: Zinc Alloy.


**Light Source and electronics**  
1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
100~240V 50/60Hz

**Packaging**  
1 Box 0,22 x 0,35 x 0,61 m  
Vol 0,0470 m<sup>3</sup>  
Gross weight 3,6 Kg Net weight 3,4 Kg

**Notes**  
Touch dimmer on base. Electric cable 2 m.

LED  IP20 CE UK ENE  Dimmer  Bi-volt

5505



Finishes	LED Colour Temperature	Control
● 18/ __ Graphite (RAL 7016)	/1_ 2700 K - 2027 lm	5505 __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)		__ / 16 Optical sensor
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90	__ / 18 Push 2 (without memory)

Finish customization  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

Finishes	LED Colour Temperature	Control
● 20/ __ Gold	/1_ 2700 K - 2027 lm	5505 __ / __
● 67/ __ Copper		__ / 16 Optical sensor
	CRI >90	__ / 18 Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.  
 Shade and tube: Steel.  
 Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m  
 Vol 0,0470 m<sup>3</sup>  
 Gross weight 3,6 Kg Net weight 3,4 Kg


Notes

Touch dimmer on base. Electric cable 2 m.




5510

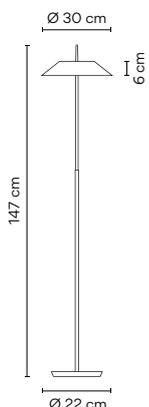

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>07/</b> __ Graphite and green (RAL 7016, RAL 6026)</li> <li>● <b>08/</b> __ Graphite and orange (RAL 7016, RAL 2009)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>☐</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5510</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m<sup>3</sup> Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p><b>Notes</b></p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED ☐ IP20 CE UK ENE Dimmer Bi-volt</p>

5515

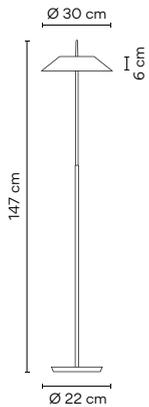


<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>18/</b> __ Graphite (RAL 7016)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> <li>● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)</li> <li>● <b>38/</b> __ Terra Dark (NCS S 5040-Y70R)</li> <li>● <b>47/</b> __ Green L1 (NCS S 4005-G80Y)</li> </ul> <p><b>Finish customization</b> (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)</p>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>☐</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5515</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>20/</b> __ Gold</li> <li>● <b>67/</b> __ Copper</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>☐</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5515</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Shade and tube: Steel. Base: Zinc Alloy.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m<sup>3</sup> Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p><b>Notes</b></p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED ☐ IP20 CE UK ENE Dimmer Bi-volt</p>



## Pendant

### INDIVIDUAL MODEL

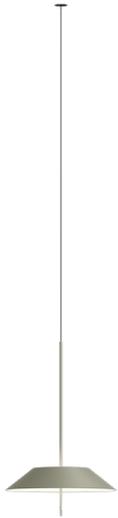

**5520**    **5525**  
 Ø 30 cm    Ø 30 cm

### MULTIPLE MODELS




### INDIVIDUAL MODEL

#### 5520

- Finishes**
-  **07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
  -  **08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

**LED Colour Temperature**  
 /1\_ 2700 K - 2027 lm  
  
 CRI >90

**Control**  
**5520** \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_B Push; 1-10V  
 \_\_ / \_Z Casambi

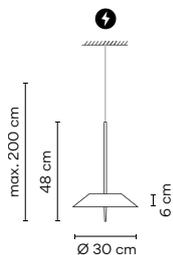

#### Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade: PMMA.  
 Tube and canopy: Steel.

**Light Source and electronics**  
 1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,50 x 0,31 x 0,31 m  
 Vol 0,0500 m<sup>3</sup>  
 Gross weight 2,8 Kg Net weight 1,8 Kg

**Notes**  
 Extra cable length.



5525

- Finishes**
- **18/** \_\_ Graphite (RAL 7016)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
  - **47/** \_\_ Green L1 (NCS S 4005-G80Y)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)


**LED Colour Temperature**  
/1 \_\_ 2700 K - 2027 lm  
D >

**CRI >90**

**Control**  
**5525** \_\_ / \_\_

---

\_\_ / \_\_ **1** DALI-2  
\_\_ / \_\_ **B** Push; 1-10V  
\_\_ / \_\_ **Z** Casambi

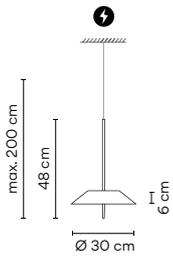

- Finishes**
- **20/** \_\_ Gold
  - **67/** \_\_ Copper

**LED Colour Temperature**  
/1 \_\_ 2700 K - 2027 lm  
D >

**CRI >90**

**5525** \_\_ / \_\_

---

\_\_ / \_\_ **1** DALI-2  
\_\_ / \_\_ **B** Push; 1-10V  
\_\_ / \_\_ **Z** Casambi

**Select Electrical connection**



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
Diffuser: PC- Polycarbonate.  
Shade, tube and canopy: Steel.

**Light Source and electronics**  
1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
220-240V 50/60Hz

**Packaging**  
1 Box 0,50 x 0,31 x 0,31 m  
Vol 0,0500 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,9 Kg

**Notes**  
Extra cable length.

LED IP20 CE UK ENEC




MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 5525



3 x 5525



4 x 5525




4 x 5525



5 x 5525



7 x 5525



8 x 5525



10 x 5525



22 x 5525



16 x 5525

See more  
multiple models  
at [vibia.com](http://vibia.com)

## Finishes

### 5520

-  **07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
-  **08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

## Finishes

### 5525

-  **20/** \_\_ Gold
-  **67/** \_\_ Copper
-  **18/** \_\_ Graphite (RAL 7016)
-  **23/** \_\_ Warm White (NCS S 0502-Y50R)
-  **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
-  **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
-  **47/** \_\_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

## LED Colour Temperature

/1\_ 2700 K  
CRI >90

## Control

Model \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_B Push; 1-10V  
\_\_ / \_Z Casambi

## Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

### Drop ceiling

**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.


**\_23**  
Built-in XS



Ø 8 cm  
height 6 cm

match with fixture finish.

#### Remote



#### Built-in



### Regular ceiling

**\_10**  
Surface



Ø 16 cm

match with fixture finish.

**\_18**  
Free Wire



1 wire

Ø 20 cm



2 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

## Materials

### 5520

Diffuser: PC- Polycarbonate. Shade: PMMA.  
Tube and canopy: Steel.

### 5525

Diffuser: PC- Polycarbonate.  
Shade, tube and canopy: Steel.

## Notes

Additional cable length  
from 2 m. 16,00 €/m



# Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that combines richness of form and materiality with high performance lighting capabilities. A holistic exploration of beauty and functionality.

## Table



**5580**

Ø 5 x 45 cm

Portable



**5585**

Ø 5 x 40 cm

Portable



**5590**

Ø 5 x 45 cm

Bolt-down




**5595**

Ø 5 x 40 cm

Bolt-down

### 5580



#### Finishes

- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
- **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
- **29/** \_\_ Brown D1 (NCS S 8005-Y50R)
- **38/** \_\_ Terra Dark (NCS S 5040-Y70R)

#### Materials

Body: Aluminium.  
Diffuser: PC- Polycarbonate

#### Light Source and electronics

1 x LED 4,5W 500 mA  
Output: DC 5.0 V 2.0 A 10.0W  
Input: 100~240V 50/60Hz

#### LED Colour Temperature

/1 \_ 2700 K - 520 lm  
E →  
CRI >90

#### Control

**5580** \_\_ / 15 Push

#### Packaging


1 Box 0,08 m x 0,53 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 1,23 Kg Net weight 0,9 Kg

#### Notes

Battery capacity 10,000mAh.  
Battery voltage 3,7V.  
Rechargeable battery autonomy:  
6,5h at 100% Intensity.  
10h at 66% Intensity.  
20h at 33% Intensity.

LED IP20 CE UK ENEC Bi-volt

5585

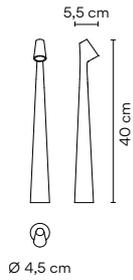

- Finishes**
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)
  - 38/ \_ \_ Terra Dark (NCS S 5040-Y70R)

**LED Colour Temperature**  
/1\_ 2700 K - 520 lm  
E  
CRI >90

**Control**  
5585 \_ \_ / 15 Push

**Materials**  
Body: Aluminium.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED 4,5W 500 mA  
Output: DC 5.0 V 2.0 A 10.0W  
Input: 100~240V 50/60Hz

**Packaging**  
1 Box 0,08 m x 0,53 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 1,23 Kg Net weight 0,9 Kg

**Notes**  
Battery capacity 10.000mAh.  
Battery voltage 3,7V.  
Rechargeable battery autonomy:  
6,5h at 100% Intensity.  
10h at 66% Intensity.  
20h at 33% Intensity.

LED IP20 CE UK ENEC ENEC Bi-volt

5590

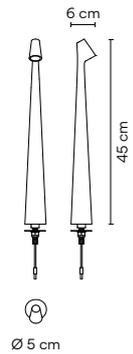

- Finishes**
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)
  - 38/ \_ \_ Terra Dark (NCS S 5040-Y70R)

**LED Colour Temperature**  
/1\_ 2700 K - 520 lm  
E  
CRI >90

**Control**  
5590 \_ \_ / 15 Push

**Materials**  
Body: Aluminium.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED 4,5W 500 mA 9V  
Output: DC 5.0 V 2.0 A 10.0W

**Packaging**  
1 Box 0,08 m x 0,53 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 1,3 Kg Net weight 0,950 Kg

**Notes**  
Electric cable 2 m

LED IP20 CE UK ENEC ENEC

5595

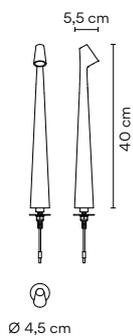

- Finishes**
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)
  - 29/ \_ \_ Brown D1 (NCS S 8005-Y50R)
  - 38/ \_ \_ Terra Dark (NCS S 5040-Y70R)

**LED Colour Temperature**  
/1\_ 2700 K - 520 lm  
E  
CRI >90

**Control**  
5595 \_ \_ / 15 Push

**Materials**  
Body: Aluminium.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED 4,5W 500 mA 9V  
Output: DC 5.0 V 2.0 A 10.0W

**Packaging**  
1 Box 0,08 m x 0,53 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 1,3 Kg Net weight 0,950 Kg

**Notes**  
Electric cable 2 m


LED IP20 CE UK ENEC ENEC



**A439**  
Ø 27 cm



**A440**  
Ø 27 cm

**A439****Finishes**

● 83/ \_\_ Walnut (Tray)

**Materials**

Tray: Wood (Rustic Walnut)  
Output: DC 5.0V 4.0 A.  
Input: 100-240V 50/60Hz

**Control**


**A439 83 / 00** On/ Off

**Packaging**

1 Box 0,350 x 0,350 x 0,090 m  
Vol 0,0110 m<sup>3</sup>  
Gross weight 1,2 Kg Net weight 0,750 Kg

**Notes**

Electric cable with plug.  
Electric cable 2 m

**A440****Finishes**

● 83/ \_\_ Walnut (Tray)

**Materials**

Tray: Wood (Rustic Walnut).  
Output: DC 5.0V 4.0 A.  
Input: 100-240V 50/60Hz

**Control**

**A440 83 / 00** On/ Off

**Packaging**

1 Box 0,350 x 0,350 x 0,090 m  
Vol 0,0110 m<sup>3</sup>  
Gross weight 1,2 Kg Net weight 0,750 Kg

**Notes**

Electric cable with plug.  
Electric cable 2 m





# North


Design by Arik Levy

North features a base, stem, and shade that are disconnected from one another in a dynamic system of adjustable parts. Protruding arms hold triangular shades that direct the light where needed.

## Floor



### 5605

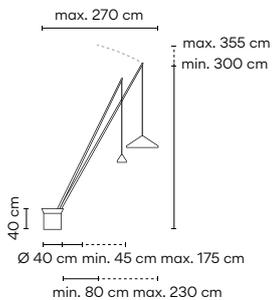

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500 N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_\_ Blue M1 (NCS S 5010-B10G)

**Materials**  
 Rods: Carbon fiber.  
 Shade: Aluminum.  
 Diffuser: PMMA.  
 Base: Steel.

**Light Source and electronics**  
 2 x LED 9 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**LED Colour Temperature**  
 /1\_ 2700 K - 2538,0 lm  
 CRI >90


**Control**  
 5605 \_\_ / 15 Push

**Packaging**  
 10 Boxes  
 Total Vol 0,35 m³  
 Gross weight 91 Kg Net weight 79,8 Kg

**Notes**  
 Can be connected with or without plug.  
 Electric cable 2,5 m

LED IP20 CE ENEC EAC Dimmer

5620



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500 N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_\_ Blue M1 (NCS S 5010-B10G)

**LED Colour Temperature**

/1 \_ 2700 K - 3807 lm  
 D

CRI >90

**Control**

5620 \_\_ / 15 Push

**Materials**

Rods: Carbon fiber.  
 Shade: Aluminum.  
 Diffuser: PMMA.  
 Base: Steel.

**Light Source and electronics**

3 x LED 9W 350mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

**Packaging**


12 Boxes  
 Total Vol 0,36 m<sup>3</sup>  
 Gross weight 94,85 Kg Net weight 81,25 Kg

**Notes**

Can be connected with or without plug.  
 Electric cable 2,5 m



5666

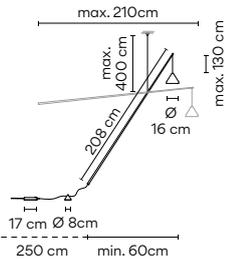

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500 N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_\_ Blue M1 (NCS S 5010-B10G)

**LED Colour Temperature**

/1 \_ 2700 K - 1269 lm  
 D

CRI >90

/2 \_ 3000 K - 1123 lm  
 D

CRI >80

/3 \_ 3500 K - 1374,9 lm  
 G

CRI >90

**Control**

5666 \_\_ / \_ 5 Push

**Materials**

Rods: Carbon fiber.  
 Shade: Aluminum.  
 Diffuser: PMMA.  
 Counterweight: Aluminum.

**Light Source and electronics**

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

**Packaging**

2 Boxes 0,24 x 0,217 x 0,21 m  
 Total Vol 0,0464 m<sup>3</sup>  
 Gross weight 6,2 Kg Net weight 4,05 Kg

**Notes**

Electric cable with plug.  
 Electric cable 2,5 m  
 Extra cable length.



Height-adjustable shade.



Adjustable-angle rods.  
 Can be connected with or without plug.



## Wall

**5630**


150 x 195 cm

**5630****Finishes**

- **10/** \_\_ White  
(NCS S 0300-N)
- **11/** \_\_ Black  
(NCS S 8500 N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
- **42/** \_\_ Blue M1  
(NCS S 5010-B10G)

**LED Colour Temperature**

- /1** \_ 2700 K - 1269 lm
  - /2** \_ 3000 K - 1123 lm
  - /3** \_ 3500 K - 1374,9 lm
- CRI >90  
CRI >80

**Control****5630** \_\_ / \_\_ **5** Push**Materials**

Rods: Carbon fiber.  
Shade: Aluminum.  
Diffuser: PMMA.  
Wall Plate: Steel.

**Light Source and electronics**

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

3 Boxes  
Total Vol 0,24 m<sup>3</sup>  
Gross weight 11,05 Kg Net weight 5,85 Kg

**Notes**

Height-adjustable shade.  
Push-button on the wall plate.  
Can be connected with or without plug.  
Electric cable 2,5 m

LED IP20 CE ENEC ENEC

Dimmer Bi-volt



---

Pendant

INDIVIDUAL MODEL



**5660**

Ø 16 x 200 cm



**5662**

Ø 40 x 200 cm



**5664**

Ø 60 x 200 cm



**5670**

Ø 16 x 200 cm



**5672**



Ø 40 x 200 cm



**5674**


Ø 60 x 200 cm

MULTIPLE MODELS

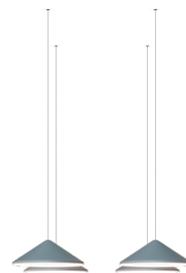

INDIVIDUAL MODEL

5660



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500 N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_\_ Blue M1 (NCS S 5010-B10G)
- Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1269 lm
  - CRI >90
  - /2\_ 3000 K - 1123 lm
  - CRI >80
  - /3\_ 3500 K - 1374,9 lm
  - CRI >90

- Control**
- 5660 \_\_ / \_\_
- \_\_ / \_1 DALI-2
  - \_\_ / \_B Push; 1-10V
  - \_\_ / \_Z Casambi

⚡ Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**

Shade: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.

**Light Source and electronics**

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**


1 Box 0,24 x 0,217 x 0,217 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,3 Kg Net weight 1,25 Kg

**Notes**

Extra cable length.



5662



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500 N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_\_ Blue M1 (NCS S 5010-B10G)
- Finish customization**  
 (Available options: Vibia colour palette.  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1269 lm
  - CRI >90
  - /2\_ 3000 K - 1123 lm
  - CRI >80
  - /3\_ 3500 K - 1374,9 lm
  - CRI >90

- Control**
- 5662 \_\_ / \_\_
- \_\_ / \_1 DALI-2
  - \_\_ / \_B Push; 1-10V
  - \_\_ / \_Z Casambi

⚡ Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**

Shade: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.

**Light Source and electronics**

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Packaging**

1 Box 0,36 x 0,537 x 0,537 m  
 Vol 0,10 m<sup>3</sup>  
 Gross weight 4,8 Kg Net weight 2,25 Kg

**Notes**

Extra cable length.



5664

Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500 N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ Blue M1 (NCS S 5010-B10G)


Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature


- /1 \_ 2700 K - 1269 lm
- D
- CRI >90
- /2 \_ 3000 K - 1123 lm
- D
- CRI >80
- /3 \_ 3500 K - 1374,9 lm
- G
- CRI >90

Control

- 5664 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- 
- \_\_ / \_ Z Casambi



Select Electrical connection

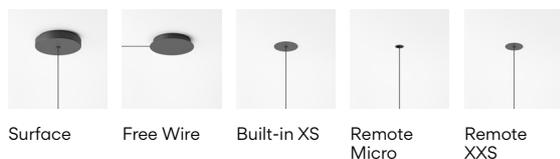

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Shade: Aluminum.  
Diffuser: PMMA.  
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727  
Vol 0,17 m<sup>3</sup>  
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

Extra cable length.



Height-adjustable shade.



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 5660



2 x 5660



3 x 5660/5662/5664




4 x 5664



4 x 5660



5 x 5660



6 x 5660




8 x 5664



8 x 5660



8 x 5660



10 x 5664



20 x 5662



24 x 5660




7 x 5660




9 x 5660



29 x 5660



10 x 5660



13 x 5660



5 x 5662

See more  
multiple models  
at [vibia.com](http://vibia.com)

- Finishes**
- **10/ \_ \_ White**  
(NCS S 0300-N)
  - **11/ \_ \_ Black**  
(NCS S 8500 N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)
  - **42 / \_ \_ Blue M1**  
(NCS S 5010-B10G)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**LED Colour Temperature**  
/1 \_ 2700 K  
ID   
CRI >90  
/2 \_ 3000 K  
ID   
CRI >80  
/3 \_ 3500 K  
ID   
CRI >90

**Control**  
Model \_ \_ / \_ \_  
\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ B Push; 1-10V  
\_ \_ / \_ Z Casambi

**Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5660 / 5662 / 5664

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
--	---	--

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 18 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire 2 wires 3 - 6 wires 7 - 8 wires</p> <p>Ø 20 cm    Ø 22 cm    Ø 36 cm    Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
---	--




**Materials**  
Shade: Aluminum  
Diffuser: PMMA. Canopy: Steel.

**Notes**  
Additional cable length  
from 2 m. 16,00 €/m



5670

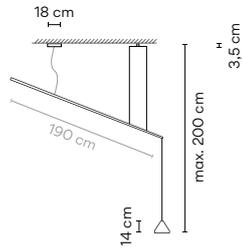


Finishes	LED Colour Temperature	Control
10/ __ White (NCS S 0300-N)	/1 _ 2700 K - 1269 lm	5670 __ / __
11/ __ Black (NCS S 8500 N)	/2 _ 3000 K - 1123 lm	__ / _ 1 DALI-2
24/ __ Beige M1 (NCS S 2005-Y50R)	CRI >90 CRI >80	__ / _ B Push; 1-10V
42 / _ Blue M1 (NCS S 5010-B10G)	/3 _ 3500 K - 1374 lm	__ / _ Z Casambi
	CRI >90	

Materials	Packaging
Rods: Carbon fiber. Shade: Aluminum. Diffuser: PMMA. Canopy: Steel.	2 Boxes Total Vol 0,06 m <sup>3</sup> Gross weight 5,75 Kg Net weight 2 Kg
Light Source and electronics	Notes
1 x LED 9 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Extra cable length.



5672

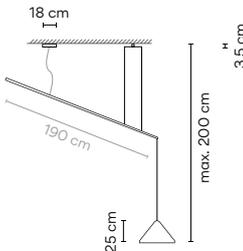


Finishes	LED Colour Temperature	Control
10/ __ White (NCS S 0300-N)	/1 _ 2700 K - 1269 lm	5672 __ / __
11/ __ Black (NCS S 8500 N)	/2 _ 3000 K - 1123 lm	__ / _ 1 DALI-2
24/ __ Beige M1 (NCS S 2005-Y50R)	CRI >90 CRI >80	__ / _ B Push; 1-10V
42 / _ Blue M1 (NCS S 5010-B10G)	/3 _ 3500 K - 1374 lm	__ / _ Z Casambi
	CRI >90	

Materials	Packaging
Rods: Carbon fiber. Shade: Aluminum. Diffuser: PMMA. Canopy: Steel.	2 Boxes Total Vol 0,14 m <sup>3</sup> Gross weight 8,25 Kg Net weight 3 Kg
Light Source and electronics	Notes
1 x LED 9W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Extra cable length.



5674

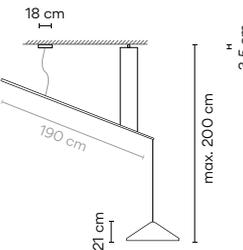

Finishes	LED Colour Temperature	Control
10/ __ White (NCS S 0300-N)	/1 _ 2700 K - 1269 lm	5674 __ / __
11/ __ Black (NCS S 8500 N)	/2 _ 3000 K - 1123 lm	__ / _ 1 DALI-2
24/ __ Beige M1 (NCS S 2005-Y50R)	CRI >90 CRI >80	__ / _ B Push; 1-10V
42 / _ Blue M1 (NCS S 5010-B10G)	/3 _ 3500 K - 1374 lm	__ / _ Z Casambi
	CRI >90	

Materials	Packaging
Rods: Carbon fiber. Shade: Aluminum. Diffuser: PMMA. Canopy: Steel.	2 Boxes Total Vol 0,21 m <sup>3</sup> Gross weight 9,7 Kg Net weight 3,7 Kg
Light Source and electronics	Notes
1 x LED 9 W 350 mA Constant Current 350 mA 110-240V 50/60Hz	Extra cable length.





# Lily


Design by Ludovica+Roberto Palomba

The simplicity of Lily's refined silhouette makes this fixture ideal for an elegant interior with a relaxed ambience. Its graceful glass diffuser radiates brings a sense of warmth and wellbeing.

## Table Floor Pendant



### 5720



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

**LED Colour Temperature**  
/1\_ 2700 K - 2170 lm  
E →  
CRI >90

#### Control

5720 \_\_ / \_\_

- \_\_ / 15 Push
- \_\_ / 1Y ProtoPixel\*
- \_\_ / 1Z Casambi

#### Materials

Body: Steel.  
Diffuser: Triple opal blown glass.

**Light Source and electronics**  
1 x LED STRIP 16,7 W 900 mA  
Constant Voltage 24V  
100-240V 50/60Hz

#### Packaging

1 Box 0,59 x 0,68 x 0,54 m  
Vol 0,21 m<sup>3</sup>  
Gross weight 10 Kg Net weight 5 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Electric cable 2,5 m.

LED □ IP20 CE UK ENEC Bi-volt

5725



- Finishes**
- 11/ \_ \_ Black (NCS S 8500-N)
  - 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)

**LED Colour Temperature**  
 /1 \_ 2700 K - 2170 lm  
 E  
 CRI >90

**Control**

5725 \_ \_ / \_ \_

- \_ \_ / 15 Push
- \_ \_ / 1Y ProtoPixel\*
- \_ \_ / 1Z Casambi

**Materials**

Body: Steel.  
 Diffuser: Triple opal blown glass.

**Light Source and electronics**  
 1 x LED STRIP 16,7 W 900 mA  
 Constant Voltage 24V  
 100-240V 50/60Hz

**Packaging**


1 Box 1,57 x 0,49 x 0,49 m  
 Vol 0,277 m<sup>3</sup>  
 Gross weight 14,2 Kg Net weight 8,20 Kg

**Notes**


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Electric cable 2,5 m.

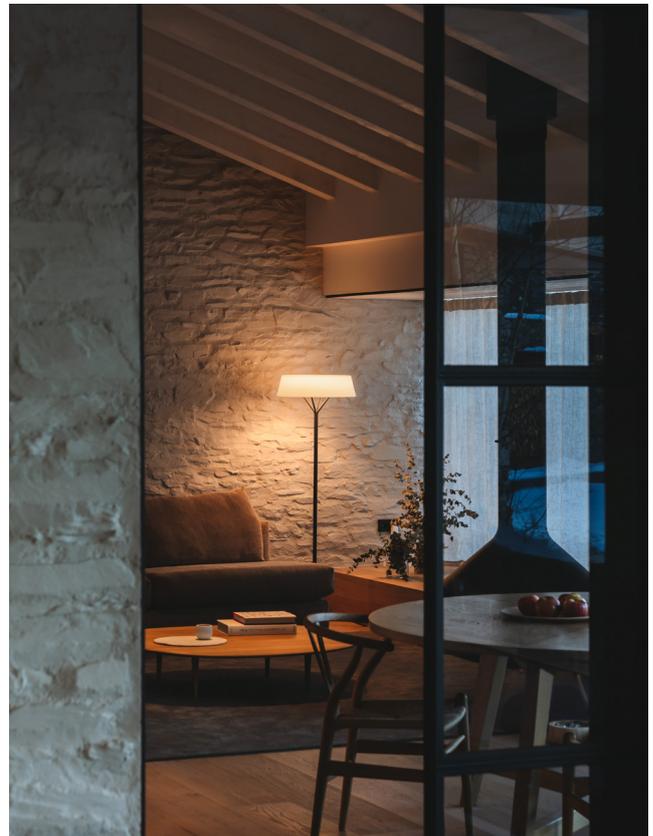

5730

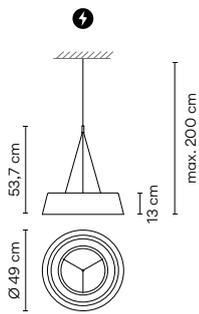

- Finishes**
- 11/ \_ \_ Black (NCS S 8500-N)
  - 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)

**LED Colour Temperature**  
 /1\_ 2700 K - 2170 lm  
 E  
 CRI >90

**Control**  
 5730 \_ \_ / \_ \_

- \_ \_ / 11 DALI-2
- \_ \_ / 1B Push; 1-10V
- \_ \_ / 1Z Casambi

⚡ Select Electrical connection



Surface Built-in XS Remote Micro Remote XXS

- \_10 Surface
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**

Body: Aluminium.  
 Shade: Triple opal blown glass.

**Light Source and electronics**  
 1 x LED STRIP 16,2 W 900 mA  
 Constant Current 900mA  
 110-240V 50/60Hz

**Packaging**

1 Box 0,27 x 0,60 x 0,60 m  
 Vol 0,972 m<sup>3</sup>  
 Gross weight 6 Kg Net weight 2 Kg

**Notes**



⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5730


**Drop ceiling**

<b>_31</b> Remote Micro	<b>_32</b> Remote XXS	<b>_23</b> Built-in XS
Ø 3 cm height 7 cm	Ø 6 cm height 6 cm	Ø 8 cm height 6 cm
for plaster ceilings. Black finish.	for all types of drop ceilings. Match with fixture finish.	match with fixture finish.


**Regular ceiling**

<b>_10</b> Surface
Ø 17,3 cm
match with fixture finish.

**Remote**



**Built-in**





# Tempo

Design by Lievore, Altherr

The Tempo collection reclaims our collective memory of light, distilling lighting archetypes to their most basic forms. Vibia presents three designs in two sizes: the disc, the diamond and the milk glass oval - all inspired by the interplay of opacity, translucence and transparency.

## Wall



**5756 5757**

122,5 x 80 cm



**5758 5759**

116,5 x 80 cm



**5760 5761**

120 x 80 cm



**5762 5763**

42,5 x 140 cm




**5764 5765**

36,5 x 140 cm




**5766 5767**

40 x 140 cm

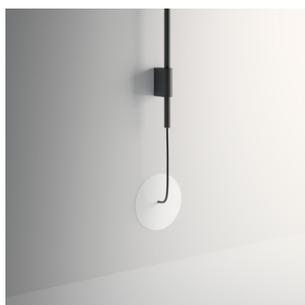


Ref.  
5757, 5759, 5761, 5763, 5765, 5767.  
Recessed dimmable driver.

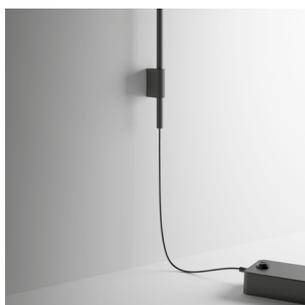

Ref.  
5756, 5758, 5760, 5762, 5764, 5766.  
Push dimmer on the cable.  
With plug.

5756

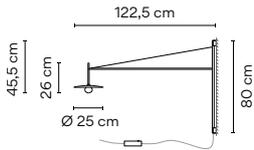

- Finishes**
- 18/ \_\_ Graphite (ADAPTA RF9913WX)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_\_ Cream (RAL 7044)
  - 62/ \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1 \_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
 5756 \_\_ / 15 Push

**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.  
 Shade: Aluminum.


**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,082 m<sup>3</sup>  
 Gross weight 4,3 Kg Net weight 2,5 Kg

**Notes**  
 Push dimmer on the cable. With plug (4 m)



5757

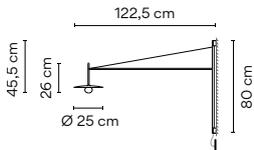

- Finishes**
- 18/ \_\_ Graphite (ADAPTA RF9913WX)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_\_ Cream (RAL 7044)
  - 62/ \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1 \_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
 5757 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi

**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.  
 Shade: Aluminum.


**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,082 m<sup>3</sup>  
 Gross weight 4,3 Kg Net weight 2,5 Kg

**Notes**  
 Recessed dimmable driver (2,5 m)



5758

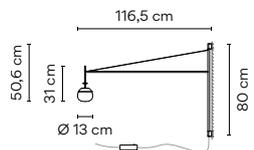

- Finishes**
- 18/ \_\_ Graphite (ADAPTA RF9913WX)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_\_ Cream (RAL 7044)
  - 62/ \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1 \_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
 5758 \_\_ / 15 Push

**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.


**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 3,5 Kg Net weight 1,7 Kg

**Notes**  
 Push dimmer on the cable. With plug (4 m).



**5759**



**Finishes**

- **18/** \_\_ Graphite (ADAPTA RF9913WX)
- **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- **58/** \_\_ Cream (RAL 7044)
- **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**

/1\_ 2700 K - 415 lm  
E

**Control**

**5759** \_\_ / \_\_

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ B Push; 1-10V  
\_\_ / \_\_ Z Casambi

**Materials**

Diffuser: Blown-glass.  
LED support: Aluminum.  
Structures: Steel.

**Light Source and electronics**

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,088 m<sup>3</sup>  
Gross weight 3,5 Kg Net weight 1,7 Kg

**Notes**

Recessed dimmable driver (2,5 m)

LED IP20 CE UK ENEC Ø 7,5 cm

**5760**



**Finishes**

- **18/** \_\_ Graphite (ADAPTA RF9913WX)
- **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- **58/** \_\_ Cream (RAL 7044)
- **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**

/1\_ 2700 K - 415 lm  
E

**Control**

**5760** \_\_ / 15 Push

**Materials**

Diffuser: Blown-glass.  
LED support: Aluminum.  
Structures: Steel.

**Light Source and electronics**

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,088 m<sup>3</sup>  
Gross weight 3,7 Kg Net weight 1,9 Kg

**Notes**

Push dimmer on the cable. With plug (4 m)

LED IP20 CE UK ENEC Dimmer

**5761**



**Finishes**

- **18/** \_\_ Graphite (ADAPTA RF9913WX)
- **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- **58/** \_\_ Cream (RAL 7044)
- **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**

/1\_ 2700 K - 415 lm  
E

**Control**

**5761** \_\_ / \_\_

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ B Push; 1-10V  
\_\_ / \_\_ Z Casambi

**Materials**

Diffuser: Blown-glass.  
LED support: Aluminum.  
Structures: Steel.

**Light Source and electronics**

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,088 m<sup>3</sup>  
Gross weight 3,7 Kg Net weight 1,9 Kg

**Notes**

Recessed dimmable driver (2,5 m)

LED IP20 CE UK ENEC Ø 7,5 cm

5762



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 \_ 2700 K - 415 lm  
  
 CRI >90

Control

5762 \_ \_ / 15 Push

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.  
 Shade: Aluminum.

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz


Packaging

2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 3,2 Kg Net weight 2 Kg

Notes

Push dimmer on the cable. With plug (4 m)

5763

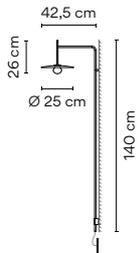

Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 \_ 2700 K - 415 lm  
  
 CRI >90

Control

5763 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.  
 Shade: Aluminum.

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

Packaging


2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 3,2 Kg Net weight 2 Kg

Notes

Recessed dimmable driver (2,5 m)

Ø 7,5 cm

5764



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 \_ 2700 K - 415 lm  
  
 CRI >90

Control

5764 \_ \_ / 15 Push

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz


Packaging

2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 2,45 Kg Net weight 1,25 Kg

Notes

Push dimmer on the cable. With plug (4 m)

5765

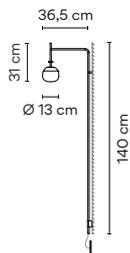

- Finishes**
- **18/** \_\_ Graphite (ADAPTA RF9913WX)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_\_ Cream (RAL 7044)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
**5765** \_\_ / \_\_  
 \_\_ / \_\_ 1 DALI-2  
 \_\_ / \_\_ B Push; 1-10V  
 \_\_ / \_\_ Z Casambi


**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.

**Packaging**  
 2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 2,45 Kg Net weight 1,25 Kg

**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Notes**  
 Recessed dimmable driver (2,5 m)  
  
 Ø 7,5 cm

5766

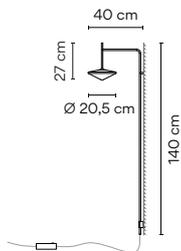

- Finishes**
- **18/** \_\_ Graphite (ADAPTA RF9913WX)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_\_ Cream (RAL 7044)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
**5766** \_\_ / 15 Push


**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.

**Packaging**  
 2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 2,65 Kg Net weight 1,45 Kg

**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Notes**  
 Push dimmer on the cable. With plug (4 m)

5767

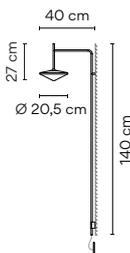

- Finishes**
- **18/** \_\_ Graphite (ADAPTA RF9913WX)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_\_ Cream (RAL 7044)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
 /1\_ 2700 K - 415 lm  
 E

CRI >90

**Control**  
**5767** \_\_ / \_\_  
 \_\_ / \_\_ 1 DALI-2  
 \_\_ / \_\_ B Push; 1-10V  
 \_\_ / \_\_ Z Casambi

**Materials**  
 Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Structures: Steel.

**Packaging**  
 2 Boxes  
 Total Vol 0,088 m<sup>3</sup>  
 Gross weight 2,65 Kg Net weight 1,45 Kg

**Light Source and electronics**  
 1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz


**Notes**  
 Recessed dimmable driver (2,5 cm)  
  
 Ø 7,5 cm



---

Pendant

INDIVIDUAL MODEL

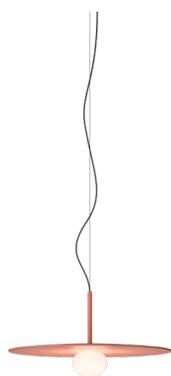

**5776**  
Ø 40 cm




**5770**  
Ø 25 cm



**5778**  
Ø 24 cm



**5772**  
Ø 13 cm


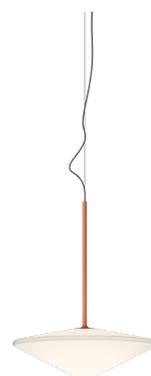


**5780**  
Ø 34,5 cm




**5774**  
Ø 20,5 cm

MULTIPLE MODELS

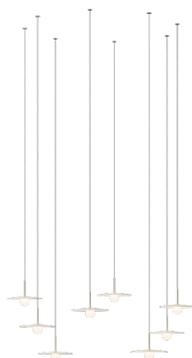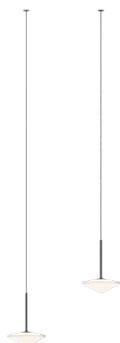

INDIVIDUAL MODEL

5770



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)


LED Colour Temperature

/1\_ 2700 K - 415 lm  
 E

Control

5770 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

Select Electrical connection

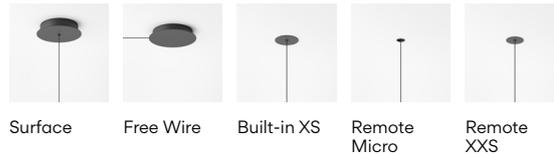

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Shade: Aluminum.  
 Canopy: Steel.

Packaging

1 Box 0,28 x 0,26 x 0,13 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,5 Kg Net weight 2 Kg

Light Source and electronics


1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Notes

Extra cable length.



5772



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)


LED Colour Temperature

/1\_ 2700 K - 415 lm  
 E

Control

5772 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

Select Electrical connection

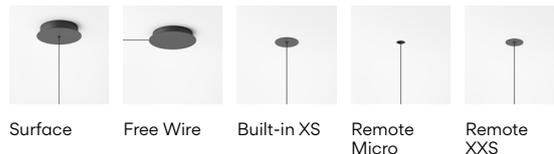

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Shade: Aluminum.  
 Canopy: Steel.

Packaging

1 Box 0,28 x 0,2 x 0,27 m  
 Vol 0,015 m<sup>3</sup>  
 Gross weight 1,8 Kg Net weight 1,2 Kg

Light Source and electronics


1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Notes

Extra cable length.



5774



- Finishes**
- **18/** \_ \_ Graphite (ADAPTA RF9913WX)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_ \_ Cream (RAL 7044)
  - **62/** \_ \_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
/1\_ 2700 K - 415 lm  
E

CRI >90

**Control**  
**5774** \_ \_ / \_ \_

- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ B Push; 1-10V
- \_ \_ / \_ Z Casambi

**Select Electrical connection**



Surface    Free Wire    Built-in XS    Remote Micro    Remote XXS

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**

Diffuser: Blown-glass.  
LED support: Aluminum.  
Shade: Aluminum.  
Canopy: Steel.

**Light Source and electronics**

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,28 x 0,2 x 0,27 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,4 Kg

**Notes**

Extra cable length.



5776



- Finishes**
- **18/** \_ \_ Graphite (ADAPTA RF9913WX)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_ \_ Cream (RAL 7044)
  - **62/** \_ \_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
/1\_ 2700 K - 415 lm  
E

CRI >90

**Control**  
**5776** \_ \_ / \_ \_

- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ B Push; 1-10V
- \_ \_ / \_ Z Casambi

**Select Electrical connection**



Surface    Built-in XS    Remote Micro    Remote XXS

- \_10 Surface
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**

Diffuser: Blown-glass.  
LED support: Aluminum.  
Shade: Aluminum.  
Canopy: Steel.

**Light Source and electronics**

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,45 x 0,45 x 0,12 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 4 Kg

**Notes**

Extra cable length.



5778

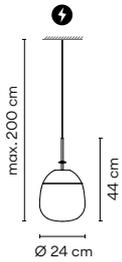

Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)


LED Colour Temperature

/1 \_ 2700 K - 415 lm  
 E

Control

5778 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

Select Electrical connection

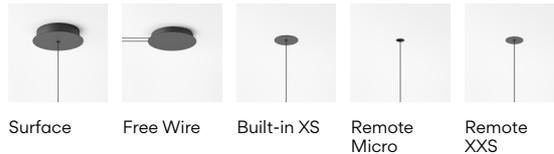

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Canopy: Steel.

Packaging

1 Box 0,33 x 0,33 x 0,42 m  
 Vol 0,045 m<sup>3</sup>  
 Gross weight 4 Kg Net weight 2,5 Kg

Light Source and electronics


1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Notes

Extra cable length.



5780



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 58/ \_ \_ Cream (RAL 7044)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 \_ 2700 K - 415 lm  
 E

Control

5780 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

Select Electrical connection



- \_10 Surface
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Blown-glass.  
 LED support: Aluminum.  
 Shade: Aluminum.  
 Canopy: Steel.

Packaging

1 Box 0,41 x 0,41 x 0,23 m  
 Vol 0,038 m<sup>3</sup>  
 Gross weight 4 Kg Net weight 2,5 Kg

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Notes

Extra cable length.



# Tempo

## MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 5774



3 x 5772



4 x 5770



4 x 5772



5 x 5774



8 x 5770



15 x 5772




8 x 5770



10 x 5774



20 x 5772



16 x 5774




3 x 5770



5 x 5774



6 x 5774

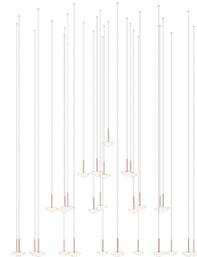


29 x 5774



10 x 5772



16 x 5774



5 x 5774



8 x 5774

See more  
multiple models  
at [vibia.com](http://vibia.com)

- Finishes**
- **18/** \_ \_ Graphite (ADAPTA RF9913WX)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_ \_ Cream (RAL 7044)
  - **62/** \_ \_ Green (NCS S 3010-G20Y)

**LED Colour Temperature**  
/1\_ 2700 K  
CRI >90

**Control**  
Model \_ \_ / \_ \_  
\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ B Push; 1-10V  
\_ \_ / \_ Z Casambi

**Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.

**For Ref. 5770, 5772, 5774**

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	--	--	--

**For Ref. 5778**

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

<p><b>_10</b> Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>2 - 3 wires</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p> <p>1-10V; DALI-2 Casambi</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	---	--	---

**For Ref. 5776, 5780**

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---


**\_10**  
Surface



Ø 20 cm

match with fixture finish.

**Remote**



**Built-in**



**Materials**

Diffuser: Blown-glass. LED support: Aluminum.  
Shade: Aluminum. Canopy: Steel.

**Notes**

Additional cable length from 2 m. 16,00 €/m



# Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

---

## Ceiling



**5920**

Ø 40 cm



**5915**

Ø 55 cm



**5926**

Ø 90 cm



**5905**

101 x 88 cm



**5910**

106 x 90 cm



**5922**


178 x 149 cm



**5924**

186 x 149 cm

5905

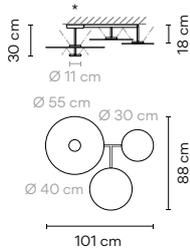

Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 71/ \_ \_ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

- /1\_ 2700 K - 5906 lm
- E
- /3\_ 3500 K - 6344 lm
- F
- CRI >90

Control

5905 \_ \_ / \_ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics  
 4 x LED PLATE 13,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,75 x 0,45 x 0,25 m  
 Vol 0,0844 m<sup>3</sup>  
 Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

\* Electrical connection point



5910



Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 72/ \_ \_ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- 73/ \_ \_ White, Off-White (NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

- /1\_ 2700 K - 4430 lm
- E
- /3\_ 3500 K - 4758 lm
- F
- CRI >90

Control

5910 \_ \_ / \_ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics  
 3 x LED PLATE 13,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,80 x 0,70 x 0,30 m  
 Vol 0,1680 m<sup>3</sup>  
 Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

\* Electrical connection point



5915



Finishes

- 10/ \_ \_ White (NCS S 0300-N)

LED Colour Temperature

- /1\_ 2700 K - 2953 lm
- E
- /3\_ 3500 K - 3172 lm
- F
- CRI >90

Control

5915 10 / \_ A Push; 1-10V; DALI-2

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics  
 2 x LED PLATE 13,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,65 x 0,65 x 0,25 m  
 Vol 0,0106 m<sup>3</sup>  
 Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

\* Electrical connection point



5920



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 13/ \_\_ Off-White (NCS S 1000-N)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**

/1 \_ 2700 K - 1740 lm  
/3 \_ 3500 K - 1868 lm

**E**

CRI >90

**Control**

5920 \_\_ / \_\_

\_\_ / \_\_ 1 DALI-2  
\_\_ / \_\_ B Push; 1-10V

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**

1 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,45 x 0,45 x 0,25 m  
Vol 0,0051 m<sup>3</sup>  
Gross weight 3,10 Kg Net weight 1,91 Kg


**Notes**

\* Electrical connection point

LED IP20

Dimmer Bi-volt

5922

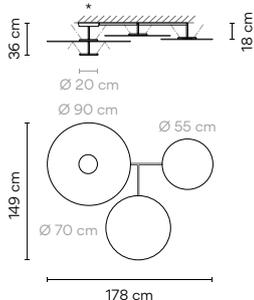

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 71/ \_\_ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

**LED Colour Temperature**

/1 \_ 2700 K - 13920 lm  
/3 \_ 3500 K - 14951 lm

**D**

CRI >90

**Control**

5922 \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2  
\_\_ / \_\_ Z Casambi

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**

4 x LED PLATE 25 W 700mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**


1 Box 1,35 x 1,20 x 0,30 m  
Vol 0,0486 m<sup>3</sup>  
Gross weight 26,60 Kg Net weight 19,98 Kg

**Notes**

\* Electrical connection point

LED IP20 Dimmer

5924

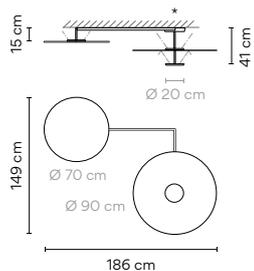

- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 72/ \_\_ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
  - 73/ \_\_ White, Off-White (NCS S 0300-N, NCS S 1000-N)

**LED Colour Temperature**

/1 \_ 2700 K - 9897 lm  
/3 \_ 3500 K - 10630 lm

**E**

CRI >90

**Control**

5924 \_\_ / \_\_

\_\_ / \_\_ A Push; 1-10V; DALI-2  
\_\_ / \_\_ Z Casambi

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**

3 x LED PLATE 25 W 700mA  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**


1 Box 1,45 x 1,10 x 0,25 m  
Vol 0,0399 m<sup>3</sup>  
Gross weight 27 Kg Net weight 20,80 Kg

**Notes**

\* Electrical connection point

LED IP20 Dimmer

5926

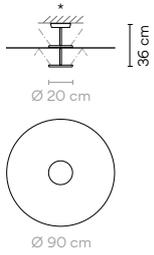

**Finishes**  
 ● 10/ \_ \_ White  
 (NCS S 0300-N)

**LED Colour Temperature**  
 /1\_ 2700 K - 6598 lm  
 [D]  
 /3\_ 3500 K - 7086 lm  
 [E]  
 CRI >90

**Control**  
 5926 10 / \_ A Push; 1-10V; DALI-2

**Materials**  
 Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

**Light Source and electronics**  
 2 x LED PLATE 25 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 1,05 x 1,05 x 0,25 m  
 Vol 0,0276 m<sup>3</sup>  
 Gross weight 14,60 Kg Net weight 10,08 Kg


**Notes**  
 \* Electrical connection point



---

Pendant

INDIVIDUAL MODEL

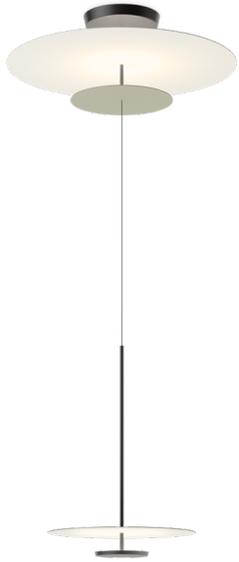

**5930**  
Ø 90 cm








**5935**  
Ø 40 cm




**5940**  
Ø 55 cm

MULTIPLE MODELS

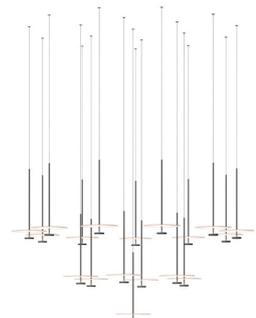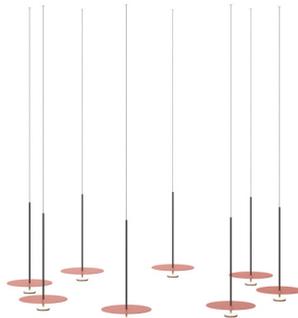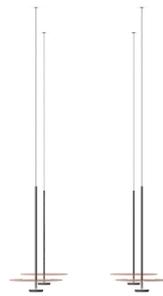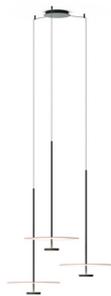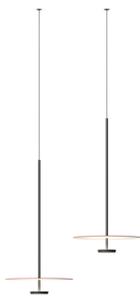

INDIVIDUAL MODEL

5930

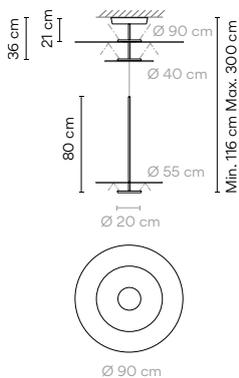

Finishes

- 13/ \_\_ Off-White (NCS S 1000-N)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 9897 lm
- /3\_ 3500 K - 10630 lm
- CRI >90

Control

- 5930 \_\_ / \_\_
- \_\_ / \_\_ A Push; 1-10V; DALI-2
  - \_\_ / \_\_ Z Casambi

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 25 W 700mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,96x0,96x0,50 m  
 Vol 0,4608 m<sup>3</sup>  
 Gross weight 27,9 Kg Net weight 22 Kg

Notes

Adjust the height on installation



5935

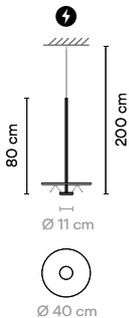

Finishes

- 13/ \_\_ Off-White (NCS S 1000-N)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 1740 lm
- /3\_ 3500 K - 1868 lm
- CRI >90

Control

- 5935 \_\_ / \_\_
- \_\_ / \_\_ 1 DALI-2
  - \_\_ / \_\_ B Push; 1-10V
  - \_\_ / \_\_ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging


1 Box 0,71 x 0,13 x 0,71 m  
 Vol 0,0655 m<sup>3</sup>  
 Gross weight 6,10 Kg Net weight 5 Kg

Notes

Extra cable length.



5940

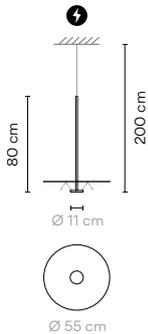

Finishes

- 13/ \_\_ Off-White (NCS S 1000-N)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 1740 lm
- /3\_ 3500 K - 1868 lm
- CRI >90

Control

- 5940 \_\_ / \_\_
- \_\_ / \_\_ 1 DALI-2
  - \_\_ / \_\_ B Push; 1-10V
  - \_\_ / \_\_ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

Packaging

1 Box 0,71 x 0,13 x 0,71 m  
 Vol 0,0665 m<sup>3</sup>  
 Gross weight 7 Kg Net weight 6 Kg

Notes

Extra cable length.



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 5935



2 x 5935



3 x 5935



3 x 5935



4 x 5935



4 x 5935



4 x 5935




5 x 5935



8 x 593



8 x 5935




9 x 5935



9 x 5935



18 x 5935



16 x 5935

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

- **13/** \_ \_ Off-White  
(NCS S 1000-N)
- **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
- **47/** \_ \_ Green L1  
(NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature

- /1 \_ 2700 K
- /3 \_ 3500 K
- CRI >90

Control

Model \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ B Push; 1-10V  
 \_ \_ / \_ Z Casambi

⚡ Select Electrical connection


For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5935

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 16,7 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	--	---	---	--

For Ref. 5940


**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 16,7 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
--	--	---	--

**Remote**



**Built-in**



Materials

Shade: Aluminum Diffuser: PC- Polycarbonate.  
Structures: Steel. Canopy: Aluminum

Notes

Additional cable length  
from 2 m. 16,00 €/m



Floor



**5945**  
76 x 64 x 90 cm



**5950**  
Ø 55 x 43 cm




**5955**  
46 x 25 x 100 cm




**5957**  
48 x 35 x 96 cm

**5945**

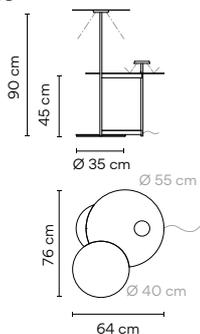

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 13/ _ _ Off-White (NCS S 1000-N)</li> <li>● 47/ _ _ Green L1 (NCS S 4005-G80Y)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1 _ 2700 K - 1365 lm /3 _ 3500 K - 1467 lm</p> <p><b>F</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5945 _ _ / _ 5</b> Push (with or without memory)</p>
<hr/>		
<p><b>Materials</b></p> <p>Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel.</p>	<p><b>Light Source and electronics</b></p> <p>2 x LED PLATE 7 W 400 mA Constant Voltage 24V 110-240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,65 x 1,00 x 0,25 m Vol 0,0163 m<sup>3</sup> Gross weight 15,85 Kg Net weight 15,25 Kg</p> <p><b>Notes</b></p> <p>Electric cable 2 m</p>
<p>LED IP20 CE UK ENE Dimmer Bi-volt</p>		

**5950**



<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● 10/ _ _ White (NCS S 0300-N)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p>/1 _ 2700 K - 682 lm /3 _ 3500 K - 733 lm</p> <p><b>F</b> →</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5950 10 / _ 5</b> Push (with or without memory)</p>
<hr/>		
<p><b>Materials</b></p> <p>Shade: Aluminum. Diffuser: PC- Polycarbonate. Structures: Steel.</p>	<p><b>Light Source and electronics</b></p> <p>1 x LED PLATE 7 W 400 mA Constant Voltage 24V 110-240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 0,65 x 0,65 x 0,20 m Vol 0,0085 m<sup>3</sup> Gross weight 14,60 Kg Net weight 12,71 Kg</p> <p><b>Notes</b></p> <p>Electric cable 2 m</p>
<p>LED IP20 CE UK ENE Dimmer Bi-volt</p>		



Table



**5965**  
35 x Ø 30 x 16 cm



**5970**  
29 x 17 x 30 cm




**5972**  
11 x 30 cm

Bolt-down



5965

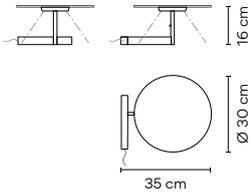

- Finishes**
- 13/ \_\_ Off-White (NCS S 1000-N)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**  
/1 \_ 2700 K - 682 lm  
F >

CRI >90

**Control**  
5965 \_\_ /15 Push  
(with or without memory)

**Materials**  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.


**Light Source and electronics**  
1 x LED PLATE 7W 400mA  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
1 Box 0,50 x 0,50 x 0,7 m  
Vol 0,0018 m<sup>3</sup>  
Gross weight 4 Kg Net weight 3,11 Kg

**Notes**  
Electric cable 2 m

LED IP20 CE UK ENEC Dimmer Bi-volt

5970



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**  
/1 \_ 2700 K - 682 lm  
F >

CRI >90

**Control**  
5970 \_\_ /15 Push  
(with or without memory)

**Materials**  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.


**Light Source and electronics**  
1 x LED PLATE 7W 400mA  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
1 Box 0,20 x 0,40 x 0,07 m  
Vol 0,0072 m<sup>3</sup>  
Gross weight 4 Kg Net weight 3,11 Kg

**Notes**  
Electric cable 2 m

LED IP20 CE UK ENEC Dimmer Bi-volt

5972



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)

**LED Colour Temperature**  
/1 \_ 2700 K - 682 lm  
F >

CRI >90

**Control**  
5972 \_\_ /15 Push  
(with or without memory)

**Materials**  
Shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.

**Light Source and electronics**  
1 x LED PLATE 7W 400mA  
Constant Voltage 24V  
110-240V 50/60Hz

**Packaging**  
1 Box 0,15 x 0,13 x 0,36 m  
Vol 0,00702 m<sup>3</sup>  
Gross weight 0,9 Kg Net weight 0,6 Kg

**Notes**  
Electric cable 2 m

LED IP20 CE UK ENEC Dimmer

# Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

## Ceiling Wall



**5975**

121 x 4,7 x 6,5 cm



**5977**

201 x 4,7 x 6,5 cm



**5979**

301 x 4,7 x 6,5 cm



**5981**

253 x 4,8 x 6,6 cm



**5983**


413 x 4,8 x 6,6 cm



**5985**

613 x 4,8 x 6,6 cm


5975



<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 1560 lm	<b>5975</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 1290 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

<b>Materials</b>	<b>Packaging</b>
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 1,5 x 0,1 x 0,1 m Vol 0,015 m <sup>3</sup> Gross weight 3,1 Kg Net weight 1,6 Kg
<b>Light Source and electronics</b>	<b>LED</b> <b>IP44</b> <b>Dimmer</b>
1 x LED STRIP 10,8 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	


5977



<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 2560 lm	<b>5977</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 3360 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

<b>Materials</b>	<b>Packaging</b>
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 2,3 x 0,1 x 0,1 m Vol 0,023 m <sup>3</sup> Gross weight 4,9 Kg Net weight 2,6
<b>Light Source and electronics</b>	<b>LED</b> <b>IP44</b> <b>Dimmer</b>
1 x LED STRIP 21,6 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	


5979



<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 3840 lm	<b>5979</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 5040 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

<b>Materials</b>	<b>Packaging</b>
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 3,3 x 0,1 x 0,1 m Vol 0,033 m <sup>3</sup> Gross weight 6,9 Kg Net weight 3,6 Kg
<b>Light Source and electronics</b>	<b>LED</b> <b>IP44</b> <b>Dimmer</b>
1 x LED STRIP 32,4 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	

5981



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 3120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 3840 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5981 \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_3 1-10V  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA.

**Light Source and electronics**


2 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,030 m<sup>3</sup>  
Gross weight 5,8 Kg Net weight 2,8 Kg

LED ⓘ IP44 CE UK ENEC Dimmer

5983



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 5120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 6720 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5983 \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_3 1-10V  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA.

**Light Source and electronics**


2 x LED STRIP 21,6 W 600 mA  
Constant Current 1200 mA  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,046 m<sup>3</sup>  
Gross weight 9,4 Kg Net weight 4,8 Kg

LED ⓘ IP44 CE UK ENEC Dimmer

5985



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 7680 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 10080 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5985 \_\_ / \_\_

\_\_ / \_1 \_30 DALI-2 (Remote)  
\_\_ / \_3 \_30 1-10V (Remote)  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA..

**Light Source and electronics**

2 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA Remote  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,066 m<sup>3</sup>  
Gross weight 13,5 Kg Net weight 6,9 Kg

LED ⓘ IP44 CE UK ENEC Dimmer

## Wall Vanity light



**5987**  
L 121 cm




**5989**  
L 201 cm



**5991**  
L 301 cm

### 5987



#### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED Colour Temperature

- /1** \_ 2700 K - 1560 lm
  - /3** \_ 3500 K - 1920 lm
- E** >
- CRI >90

#### Control

- 5987** \_ \_ / \_ \_
- 
- \_ \_ / \_ **1** DALI-2
- \_ \_ / \_ **3** 1-10V
- \_ \_ / \_ **Z** \_ **30** Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging


1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 3,1 Kg Net weight 1,6 Kg

#### Notes

Central canopy with module LED inclined 30°



### 5989



#### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED Colour Temperature

- /1** \_ 2700 K - 2560 lm
  - /3** \_ 3500 K - 3360 lm
- E** >
- CRI >90

#### Control

- 5989** \_ \_ / \_ \_
- 
- \_ \_ / \_ **1** DALI-2
- \_ \_ / \_ **3** 1-10V
- \_ \_ / \_ **Z** \_ **30** Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging


1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 4,9 Kg Net weight 2,6 Kg

#### Notes

Central canopy with module LED inclined 30°



5991

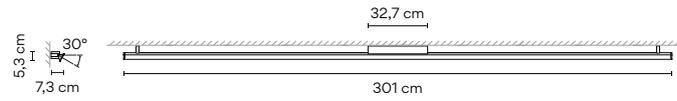

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 3840 lm /3_ 3500 K - 5040 lm	<b>5991</b> __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	E >	__ / _1 DALI-2
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90	__ / _3 1-10V
		__ / _Z _30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

Light Source and electronics  
1 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging

1 Box 3,3 x 0,1 x 0,1 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 6,9 Kg Net weight 3,6 Kg

#### Notes

Central canopy with module LED inclined 30°

LED IP44 CE UK ENE Dimmer



## Vertical Wall



5993


6,6 x 4,7 x 132 cm



5995

6,6 x 4,7 x 212 cm

### 5993

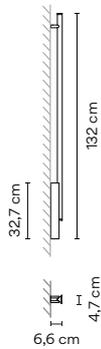

#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

#### LED Colour Temperature

- /1\_ 2700 K - 1560 lm
  - /3\_ 3500 K - 1920 lm
- E →
- CRI >90

#### Control

- 5993 \_\_ / \_\_
- 
- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z \_30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
 Difuser: PMMA.

#### Light Source and electronics


1 x LED STRIP 10,8W 600 mA  
 Constant Current 600 mA  
 220~240V 50/60Hz

#### Packaging

1 Box 1,5 x 0,1 x 0,1 m  
 Vol 0,015 m<sup>3</sup>  
 Gross weight 3,1 Kg Net weight 1,6 Kg



### 5995

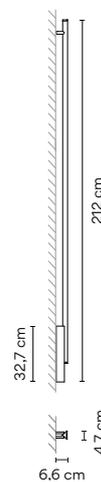

#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

#### LED Colour Temperature

- /1\_ 2700 K - 2560 lm
  - /3\_ 3500 K - 3360 lm
- E →
- CRI >90

#### Control

- 5995 \_\_ / \_\_
- 
- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z \_30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
 Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
 Constant Current 600 mA  
 220~240V 50/60Hz

#### Packaging

1 Box 2,3 x 0,1 x 0,1 m  
 Vol 0,023 m<sup>3</sup>  
 Gross weight 4,9 Kg Net weight 2,6 Kg



# Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

## Floor Table



**6006**

46 x 46 x 133 cm



**6007**

46 x 46 x 133 cm



**6011**


46 x 39 x 97 cm



**6012**

46 x 39 x 112 cm

### 6006

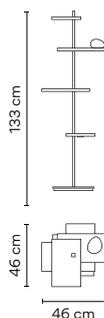

#### Finishes

● **14/** \_ \_ Chocolate  
(RAL 8019)

● Finish customi-  
zation

(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### LED Colour Temperature

/1\_ 2700 K - 1539 lm

F >

CRI >90

#### Control

**6006** \_ \_ /15 Push

(with or without memory)

#### Materials

Shelf: Aluminum.  
Diffuser: PC- Polycarbonate.  
Vertical tube: Steel.  
Base: Steel.  
Lid: ABS with fiberglass.

#### Light Source and electronics

8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220-240V 50Hz

#### Packaging


1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,4513 m<sup>3</sup>  
Gross weight 34,3 Kg Net weight 16,7 Kg

#### Notes

Glass diffuser mounted on shelf with dimmable light.  
USB charging connection.  
LED On/ Off switch under the shelf.  
Electric cable 2,5 m.

LED IP20 CE UK ENE Dimmer

### 6007

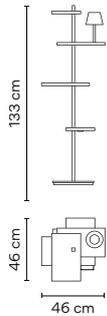

- Finishes**
- **14/** \_\_ Chocolate (RAL 8019)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**Materials**  
Shelf: Aluminum.  
Diffuser: PC- Polycarbonate.  
Vertical tube: Steel.  
Base: Steel.  
Lid: ABS with fiberglass.

**Light Source and electronics**  
8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220~240V 50Hz

**LED Colour Temperature**  
**/1** \_\_ 2700 K - 1539 lm  
F →  
CRI >90


**Control**  
**6007** \_\_ \_\_ /15 Push  
(with or without memory)

**Packaging**  
1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,4513 m<sup>3</sup>  
Gross weight 34,3 Kg Net weight 17 Kg

**Notes**  
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.  
USB charging connection.  
LED On/ Off switch under the shelf.  
Electric cable 2,5 m.

LED IP20 CE UK ENEC Dimmer

### 6011

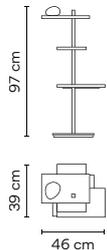

- Finishes**
- **14/** \_\_ Chocolate (RAL 8019)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**Materials**  
Shelf: Aluminum.  
Diffuser: PC- Polycarbonate.  
Vertical tube: Steel.  
Base: Steel.  
Lid: ABS with fiberglass.

**Light Source and electronics**  
6 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220~240V 50Hz

**LED Colour Temperature**  
**/1** \_\_ 2700 K - 790 lm  
F →  
CRI >90


**Control**  
**6011** \_\_ \_\_ /15 Push  
(with or without memory)

**Packaging**  
1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 32,4 Kg Net weight 15,7 Kg

**Notes**  
Glass diffuser mounted on shelf with dimmable light.  
USB charging connection.  
LED On/ Off switch under the shelf.  
Electric cable 2,5 m

LED IP20 CE UK ENEC Dimmer

### 6012

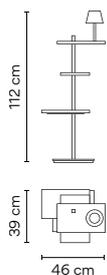

- Finishes**
- **14/** \_\_ Chocolate (RAL 8019)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**Materials**  
Shelf: Aluminum.  
Diffuser: PC- Polycarbonate.  
Vertical tube: Steel.  
Base: Steel.  
Lid: ABS with fiberglass.

**Light Source and electronics**  
6 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220~240V 50Hz

**LED Colour Temperature**  
**/1** \_\_ 2700 K - 1275 lm  
F →  
CRI >90

**Control**  
**6012** \_\_ \_\_ /15 Push  
(with or without memory)

**Packaging**  
1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 33,6 Kg Net weight 16 Kg

**Notes**  
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.  
USB charging connection.  
LED On/ Off switch under the shelf.  
Electric cable 2,5 m

LED IP20 CE UK ENEC Dimmer

Wall



**6040**

32 x 14 x 16 cm



**6041**

32 x 14 x 16 cm



**6045**


32 x 29 x 16 cm



**6046**

32 x 29 x 16 cm

**6040**



Finishes

- **14/** \_ \_ Chocolate (RAL 8019)
- **23/** \_ \_ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

Materials

Shelf: Aluminum.  
Diffuser: Blown-glass.  
Lid: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
220-240V 50Hz

LED Colour Temperature

**/1** \_ 2700 K - 485 lm



CRI >90

**/3** \_ 3500 K - 184 lm



CRI >80

Control


**6040** \_ / \_ 0 On/ Off

Packaging

1 Box 0,21 x 0,48 x 0,21 m  
Vol 0,0212 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,6 Kg



**6041**



Finishes

- **14/** \_ \_ Chocolate (RAL 8019)
- **23/** \_ \_ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

Materials

Shelf: Aluminum.  
Diffuser: Blown-glass.  
Lid: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

LED Colour Temperature

**/1** \_ 2700 K - 485 lm



CRI >90

**/3** \_ 3500 K - 184 lm



CRI >80

Control


**6041** \_ \_ / \_ 0 On/ Off

Packaging

1 Box 0,21 x 0,48 x 0,21 m  
Vol 0,0212 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,6 Kg



6045



**Finishes**  
 ● **14/** \_\_ Chocolate (RAL 8019)  
 ● **23/** \_\_ Warm White (NCS S 0502-Y50R)  
**Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%

**LED Colour Temperature**  
 /1\_ 2700 K - 616 lm  
 E  
 CRI >90  
 /3\_ 3500 K - 184 lm  
 F  
 CRI >80

**Control**  
**6045** \_\_ / \_\_ 0 On/ Off


**Materials**  
 Shelf: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Lid: Steel.

**Packaging**  
 1 Box 0,29 x 0,38 x 0,38 m  
 Vol 0,418 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 1,8 Kg

**Light Source and electronics**  
 1 x LED STRIP 24V 1,63W.  
 1 x LED 4,5W 350mA.  
 Constant Current / Constant Voltage 350 24V  
 220-240V 50Hz



6046



**Finishes**  
 ● **14/** \_\_ Chocolate (RAL 8019)  
 ● **23/** \_\_ Warm White (NCS S 0502-Y50R)  
**Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%

**LED Colour Temperature**  
 /1\_ 2700 K - 616 lm  
 E  
 CRI >90  
 /3\_ 3500 K - 184 lm  
 F  
 CRI >80

**Control**  
**6046** \_\_ / \_\_ 0 On/ Off

**Materials**  
 Shelf: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Lid: Steel.

**Packaging**  
 1 Box 0,29 x 0,38 x 0,38 m  
 Vol 0,418 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 1,8 Kg

**Light Source and electronics**  
 1 x LED STRIP 24V 1,63W.  
 1 x LED 4,5W 350mA.  
 Constant Current / Constant Voltage 350 24V  
 220-240V 50Hz




## Wall



**6050**  
 12 x 12 x 10 cm

6050



**Finishes**  
 ● **23/** \_\_ Warm White (NCS S 0502-Y50R)

**LED Colour Temperature**  
 /1\_ 2700 K - 485 lm  
 E  
 CRI >90

**Control**  
**6050** 23 / 10 On/ Off

**Materials**  
 Wall support: Aluminum.  
 Diffuser: Blown-glass

**Packaging**  
 1 Box 0,13 x 0,20 x 0,21 m  
 Vol 0,00055 m<sup>3</sup>  
 Gross weight 0,6 Kg Net weight 0,4 Kg

**Light Source and electronics**  
 1 x LED 4,5W 350 mA  
 Constant Current 350 mA  
 100-240V 50/60Hz



# Tube Free

Design by Ichiro Iwasaki


With the Tube ceiling collection, Ichiro Iwasaki endeavours to create a lighting system capable of forming distinctive expressions by reconfiguring the different constituent parts. By combining three different diameter shades, six colour tones and a rhythm of differing heights, Tube creates a unique landscape of luminaires overhead.

## Ceiling

### Built-in

**6095**

Ø 22 cm

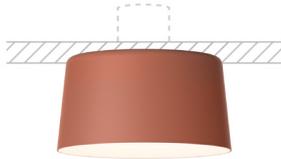

**6100**

Ø 28,5 cm



**6105**

Ø 41 cm



### 6095

#### Finishes

- **15/** \_ \_ Grey L2 (NCS S 2500-N)
- **16/** \_ \_ Grey M1 (NCS S 4500-N)
- **21/** \_ \_ Black Grey (NCS S 7000-N)
- **23/** \_ \_ Warm White (NCS S 0502-Y50R)
- **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_ \_ Terra Red (NCS S 4040-Y70R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### LED Colour Temperature

- /1 \_ 2700 K - 1170 lm
- /2 \_ 3000 K - 1251 lm
- /3 \_ 3500 K - 1251 lm




CRI >90

#### Control

**6095** \_ \_ / \_ \_

\_ \_ / \_ **A** \_ **32** Push; 1-10V;  
DALI-2 (Remote)

\_ \_ / \_ **Z** \_ **32** Casambi (Remote)



#### Materials

Diffuser: PC- Polycarbonate.  
Led support: Aluminum.  
Shade: Aluminum.  
Canopy: ABS.

#### Light Source and electronics


2700 K - 3000 K - 3500K:  
1 x LED 10,5 W 15 V  
Constant Current 700 mA  
110-240V 50/60Hz

#### Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,017576 m<sup>3</sup>  
Gross weight 1,6 Kg Net weight 0,8 Kg



## 6100



- Finishes**
- **15/** \_\_ Grey L2 (NCS S 2500-N)
  - **16/** \_\_ Grey M1 (NCS S 4500-N)
  - **21/** \_\_ Black Grey (NCS S 7000-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1476 lm
  - /2\_ 3000 K - 1521 lm
  - /3\_ 3500 K - 1550 lm
- CRI >90

- Control**
- 6100** \_\_ / \_\_ A Push; 1-10V;  
DALI-2

### Materials

Diffuser: PC- Polycarbonate.  
Led support: Aluminum.  
Shade: Aluminum.  
Canopy: Steel.

### Light Source and electronics


2700 K - 3000 K - 3500K:  
1 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,40 x 0,40 x 0,35 m  
Vol 0,056 m<sup>3</sup>  
Gross weight 4,5 Kg Net weight 2,5 Kg



## 6105

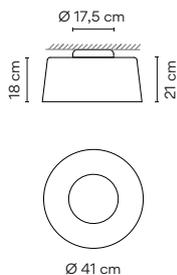

- Finishes**
- **15/** \_\_ Grey L2 (NCS S 2500-N)
  - **16/** \_\_ Grey M1 (NCS S 4500-N)
  - **21/** \_\_ Black Grey (NCS S 7000-N)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 2413 lm
  - /2\_ 3000 K - 2485 lm
  - /3\_ 3500 K - 2533 lm
- CRI >90

- Control**
- 6105** \_\_ / \_\_ A Push; 1-10V;  
DALI-2

### Materials

Diffuser: PC- Polycarbonate.  
Led support: Aluminum.  
Shade: Aluminum.  
Canopy: Steel.

### Light Source and electronics

2700 K - 3000 K - 3500K:  
1 x LED PLATE 20 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,60 x 0,60 x 0,40 m  
Vol 0,144 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 3,5 Kg



---

Pendant

INDIVIDUAL MODEL





**6160**  
Ø 22 cm




**6165**  
Ø 28,5 cm

MULTIPLE MODELS

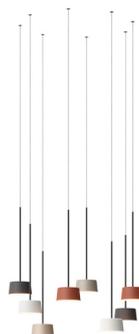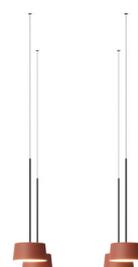

INDIVIDUAL MODEL

6160




- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 15/ \_ \_ Grey L2 (NCS S 2500-N)
  - 16/ \_ \_ Grey M1 (NCS S 4500-N)
  - 21/ \_ \_ Black Grey (NCS S 7000-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%

- LED Colour Temperature**
- /1 \_ 2700 K - 1170 lm
  - /2 \_ 3000 K - 1251 lm
  - /3 \_ 3500 K - 1251 lm
- LED icon:
- CRI >90

- Control**
- 6160 \_ \_ / \_ \_
- \_ \_ / \_ 1 DALI-2
  - \_ \_ / \_ B Push; 1-10V
  - \_ \_ / \_ Z Casambi

Select Electrical connection

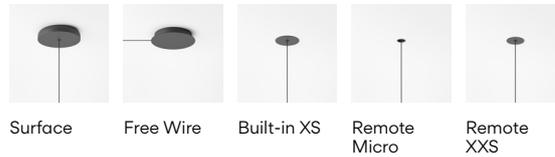

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Diffuser: PC- Polycarbonate. Shade: Aluminum.  
 Led support: Aluminum. Tube: Steel. Canopy: Steel.


**Packaging**  
 Total Vol 0,04 m3  
 Gross weight 4,40 Kg Net weight 2,15 Kg

**Light Source and electronics**  
 1 x LED PLATE 10,5 W 15 V  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Notes**  
 Extra cable length.

LED icon IP20 CE UK ENEC Bi-volt

6165




- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 15/ \_ \_ Grey L2 (NCS S 2500-N)
  - 16/ \_ \_ Grey M1 (NCS S 4500-N)
  - 21/ \_ \_ Black Grey (NCS S 7000-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%

- LED Colour Temperature**
- /1 \_ 2700 K - 1170 lm
  - /2 \_ 3000 K - 1251 lm
  - /3 \_ 3500 K - 1251 lm
- LED icon:
- CRI >90

- Control**
- 6165 \_ \_ / \_ \_
- \_ \_ / \_ 1 DALI-2
  - \_ \_ / \_ B Push; 1-10V
  - \_ \_ / \_ Z Casambi

Select Electrical connection

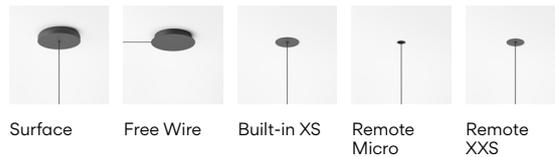

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Diffuser: PC- Polycarbonate. Shade: Aluminum.  
 Led support: Aluminum. Tube: Steel. Canopy: Steel.

**Packaging**  
 Total Vol 0,04 m3  
 Gross weight 4,40 Kg Net weight 2,15 Kg

**Light Source and electronics**  
 1 x LED PLATE 10,5 W 15 V  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Notes**  
 Extra cable length.

LED icon IP20 CE UK ENEC Bi-volt


# Tube Free

## MULTIPLE MODELS


Select your model at [vibia.com](http://vibia.com) and adjust



2 x 6160



2 x 6165 + 1 x 6160

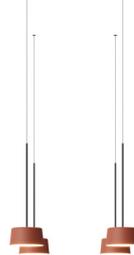

4 x 6165



4 x 6160




5 x 6165



7 x 6165



8 x 6160



8 x 6165



10 x 6160



19 x 6160



24 x 6165




3 x 6165



5 x 6165



6 x 6165

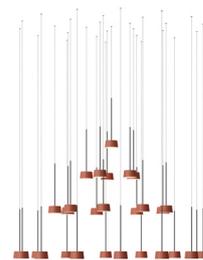

29 x 6160



10 x 6160



16 x 6160 From: 8.240,00 €



5 x 6165 From: 3.100,00 €



8 x 6160 From: 4.120,00 €

See more  
multiple models  
at [vibia.com](http://vibia.com)

- Finishes**
- **10/** \_\_ White  
(NCS S 0300-N)
  - **15/** \_\_ Grey L2  
(NCS S 2500-N)
  - **16/** \_\_ Grey M1  
(NCS S 4500-N)
  - **21/** \_\_ Black Grey  
(NCS S 7000-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**LED Colour Temperature**  
/1 2700 K  
/2 3000 K  
/3 3500 K  
CRI >90

**Control**  
Model \_\_ / \_\_  
\_\_\_\_ / \_ 1 DALI-2  
\_\_\_\_ / \_ B Push; 1-10V  
\_\_\_\_ / \_ Z Casambi


**⚡ Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.


**For Ref. 6160, 6165**

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
--	---	--

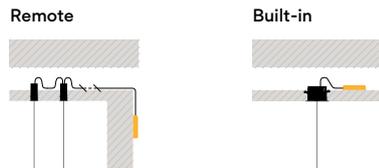

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 16,8 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>	 <p>2 - 3 wires</p> <p>Ø 22 cmv</p>	 <p>4 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
---	--	--	--	--

**Materials**  
Diffuser: PC- Polycarbonate. Shade: Aluminum.  
Led support: Aluminum. Tube: Steel. Canopy: Steel.

**Notes**  
Additional cable length from 2 m. **16,00 €/m**



# Plusminus

Design by Diez Office

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level.

The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.






## Easy to design and install


Compose a personalised Plusminus at [vibia.com](http://vibia.com)

### From scratch

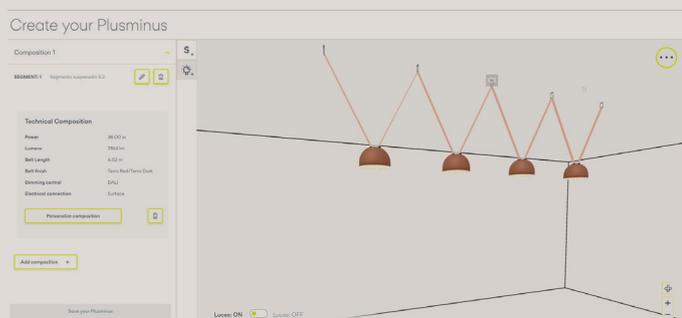

- + Create and compose projects in detail.
- + Draw and customise in 3D to see it in space.
- + Or customise it step by step without drawing.

### From a layout

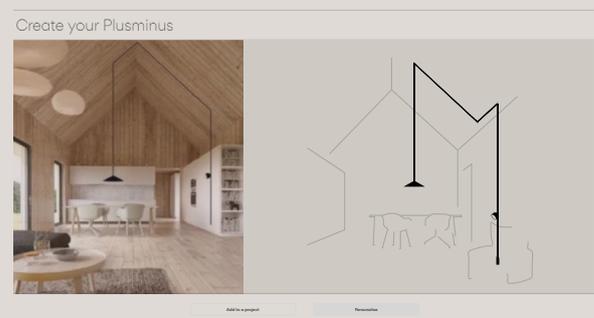

- + Customise and adapt it to the needs of your project.
- + Add it to your project and edit it at any time.
- + More than 100 creations for you.




## Easy connection Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

# Luminaire types and lighting effects



## Sphere



### **Volumetric Diffuser**

distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



## Semisphere



### **Hidden Diffuser**

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



## Cone



### **Hidden Diffuser**


emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

## Spotlight



### Flat diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



### Accent light

emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



## Linear Diffuser



### General lighting

provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



## Linear Low UGR



### Linear High Efficiency Low Glare

offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

### Linear High Comfort Low Glare

provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.



# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)

## Sphere




**6230**  
Ø 20 cm



**6235**  
Ø 30 cm

### 6230



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 \_ 2700 K - 846 lm
  - /2 \_ 3000 K - 884 lm
  - /3 \_ 3500 K - 916 lm
- E** >
- CRI >90

- Control**
- 6230** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** On/Off
  - \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
  - \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)


**Materials**  
Diffuser: Triplex opal glass.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED 7,9 W 450 mA

**Packaging**  
1 Box 0,26 x 0,26 x 0,260 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,56 Kg Net weight 0,93 Kg



### 6235

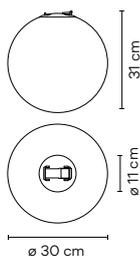

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 \_ 2700 K - 1492 lm
  - /2 \_ 3000 K - 1569 lm
  - /3 \_ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6235** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** On/Off
  - \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
  - \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**  
Diffuser: Triplex opal glass.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED 16 W 850 mA

**Packaging**  
1 Box 0,364 x 0,364 x 0,364 m  
Vol 0,0482 m<sup>3</sup>  
Gross weight 2,50 Kg Net weight 1,80 Kg



## Semisphere




**6220**  
Ø 20 cm



**6225**  
Ø 30 cm

### 6220



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 846 lm
  - /2** \_ 3000 K - 884 lm
  - /3** \_ 3500 K - 916 lm
- E** >
- CRI >90

**Control**

**6220** \_ \_ / \_ \_

- \_ \_ / \_ **O** On/Off
- \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED 7,9 W 450 mA

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE ENEC ETL Bi-volt Dimmer

### 6225



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 1492 lm
  - /2** \_ 3000 K - 1569 lm
  - /3** \_ 3500 K - 1606 lm
- F** >
- CRI >90

**Control**

**6225** \_ \_ / \_ \_

- \_ \_ / \_ **O** On/Off
- \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED 16 W 850 mA

**Packaging**

1 Box 0,364 x 0,364 x 0,364 m  
Vol 0,0482 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ETL Bi-volt Dimmer

# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)

## Cone




**6240**  
Ø 60 cm



**6245**  
Ø 80 cm

### 6240



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 1492 lm
  - /2** \_ 3000 K - 1569 lm
  - /3** \_ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6240** \_ \_ / \_ \_

- \_ \_ / \_ **O** On/Off
- \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: Triplex opal glass.


**Light Source and electronics**  
1 x LED 16 W 850 mA

**Packaging**

0,727 x 0,727 x 0,32 m  
Vol 0,1691 m<sup>3</sup>  
Gross weight 5 Kg Net weight 2,5 Kg



### 6245

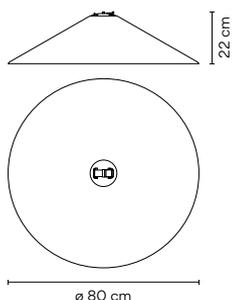

- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 1492 lm
  - /2** \_ 3000 K - 1569 lm
  - /3** \_ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6245** \_ \_ / \_ \_

- \_ \_ / \_ **O** On/Off
- \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: Triplex opal glass.

**Light Source and electronics**  
1 x LED 16 W 850 mA

**Packaging**

1 Box 0,96 x 0,96 x 0,27 m  
Vol 0,2488 m<sup>3</sup>  
Gross weight 7 Kg Net weight 3,5 Kg



## Spotlight



Spot Accent Light  
**6200 Narrow**  
Ø 10 cm




Spot Accent Light  
**6205 Medium**  
**6210 Wide**  
Ø 10 cm



Spot Flat Diffuser  
**6215**  
Ø 10 cm

### 6200 Narrow



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1\_ 2700 K - 846 lm
- /2\_ 3000 K - 884 lm
- /3\_ 3500 K - 916 lm

**E** >

CRI >90

#### Control

**6200** \_\_ / \_\_

- \_\_ / \_\_ **O** On/Off
- \_\_ / \_\_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_\_ / \_\_ **Z** Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
1 x LED 7,9 W 450 mA

#### Packaging

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,719 Kg Net weight 0,51 Kg

LED <img alt="LED icon" data-bbox="615 691 628 701"/> <img alt="IP20 icon" data-bbox="631 691 644 701"/> IP20 <img alt="CE icon" data-bbox="668 691 681 701"/> <img alt="UKCA icon" data-bbox="684 691 697 701"/> <img alt="EAC icon" data-bbox="700 691 713 701"/> <img alt="Bi-volt icon" data-bbox="754 691 767 701"/> Bi-volt <img alt="Dimmer icon" data-bbox="794 691 807 701"/> Dimmer

### 6205 Medium



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1\_ 2700 K - 846 lm
- /2\_ 3000 K - 884 lm
- /3\_ 3500 K - 916 lm

**E** >

CRI >90

#### Control

**6205** \_\_ / \_\_

- \_\_ / \_\_ **O** On/Off
- \_\_ / \_\_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_\_ / \_\_ **Z** Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED 7,9 W 450 mA

#### Packaging

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,719 Kg Net weight 0,51 Kg


LED <img alt="LED icon" data-bbox="615 896 628 906"/> <img alt="IP20 icon" data-bbox="631 896 644 906"/> IP20 <img alt="CE icon" data-bbox="668 896 681 906"/> <img alt="UKCA icon" data-bbox="684 896 697 906"/> <img alt="EAC icon" data-bbox="700 896 713 906"/> <img alt="Bi-volt icon" data-bbox="754 896 767 906"/> Bi-volt <img alt="Dimmer icon" data-bbox="794 896 807 906"/> Dimmer

# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)

## 6210

Wide



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1\_ 2700 K - 846 lm
  - /2\_ 3000 K - 884 lm
  - /3\_ 3500 K - 916 lm
- LED symbol:
- CRI >90

**Control**

- 6210 \_\_ / \_\_
- \_\_ / \_ 0 On/Off
  - \_\_ / \_ F Simultaneous line Push; 1-10V; Casambi; DALI
  - \_\_ / \_ Z Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED 7,9 W 450 mA


**Packaging**

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,719 Kg Net weight 0,51 Kg



## 6215

Flat Diffuser



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1\_ 2700 K - 491 lm
  - /2\_ 3000 K - 513 lm
  - /3\_ 3500 K - 532 lm
- LED symbol:
- CRI >90

**Control**

- 6215 \_\_ / \_\_
- \_\_ / \_ 0 On/Off
  - \_\_ / \_ F Simultaneous line Push; 1-10V; Casambi; DALI
  - \_\_ / \_ Z Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
1 x LED 4,2 W 250 mA

**Packaging**

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,719 Kg Net weight 0,51 Kg



## Spotlight - Accent

Narrow


Medium

Wide



Spot Accent Light


Spot Flat Diffuser

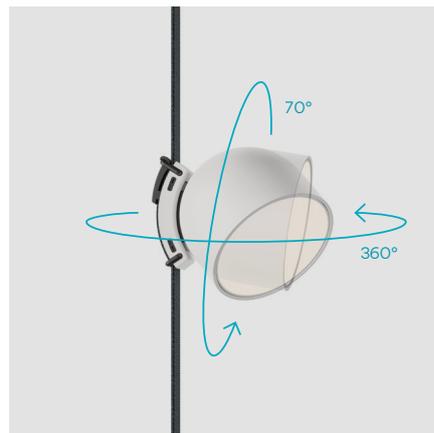

## Linear diffuser



### 6250



#### Finishes

- **11/** \_ \_ Black (NCS S 8500-N)
- **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
- **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
- **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED Colour Temperature

- /1** \_ 2700 K - 2544 lm
  - /2** \_ 3000 K - 2628 lm
  - /3** \_ 3500 K - 2712 lm
- C** >90

#### Control

- 6250** \_ \_ / \_ \_
- \_ \_ / \_ **O** On/Off
  - \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
  - \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics  
1 x LED STRIP 20,6 W 24 V

#### Packaging

1 Box 0,06 x 0,06 x 1,25 m  
Vol 0,0057 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 0,72 Kg

LED  IP20  CE  ENEC  ENEC  Bi-volt  Dimmer

### 6255



#### Finishes

- **11/** \_ \_ Black (NCS S 8500-N)
- **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
- **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
- **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED Colour Temperature

- /1** \_ 2700 K - 5088 lm
  - /2** \_ 3000 K - 5256 lm
  - /3** \_ 3500 K - 5424 lm
- D** >90

#### Control

- 6255** \_ \_ / \_ \_
- \_ \_ / \_ **O** On/Off
  - \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
  - \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics  
1 x LED STRIP 41,3 W 24 V

#### Packaging

1 Box 0,06 x 0,06 x 2,24 m  
Vol 0,0103 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,45 Kg

LED  IP20  CE  ENEC  ENEC  Bi-volt  Dimmer


Linear Low UGR - High-Comfort



**6260**  
26,8 x 7 x 3 cm




**6265**  
52,5 x 7 x 3 cm

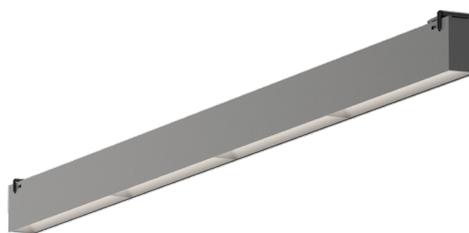

**6270**  
103,7 x 7 x 3 cm



6260



Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **42/** \_\_ Blue M1  
(NCS S 5010-B10G)
- **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** \_ 2700 K - 1281 lm
  - /2** \_ 3000 K - 1323 lm
  - /3** \_ 3500 K - 1366 lm
- ☐ >
- CRI >90

Control

- 6260** \_\_ / \_\_
- 
- \_\_ / **O** On/Off
  - \_\_ / **F** Simultaneous line  
Push; 1-10V;  
Casambi; DALI
  - \_\_ / **Z** Casambi integrated  
on each individual  
luminaire (P2P)

Materials

Shade: Aluminum.  
Diffuser: PET.

Light Source and electronics  
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m  
Vol 0,0028 m<sup>3</sup>  
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19



6265



- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1  
(NCS S 5010-B10G)
  - **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 2562 lm
  - /2** \_ 3000 K - 2647 lm
  - /3** \_ 3500 K - 2731 lm
- CRI >90**

**Control**

**6265** \_\_ / \_\_

- \_\_ / **O** On/Off
- \_\_ / **F** Simultaneous line  
Push; 1-10V;  
Casambi; DALI
- \_\_ / **Z** Casambi integrated  
on each individual  
luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PET.

**Light Source and electronics**  
1 x LED STRIP 20,6 W 24 V

**Packaging**


1 Box 0,08 x 0,11 x 0,57 m  
Vol 0,0050 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 0,89 Kg

**Notes**

UGR <19



6270



- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1  
(NCS S 5010-B10G)
  - **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 5124 lm
  - /2** \_ 3000 K - 5293 lm
  - /3** \_ 3500 K - 5462 lm
- CRI >90**

**Control**

**6270** \_\_ / \_\_

- \_\_ / **O** On/Off
- \_\_ / **F** Simultaneous line  
Push; 1-10V;  
Casambi; DALI
- \_\_ / **Z** Casambi integrated  
on each individual  
luminaire (P2P)

**Materials**

Shade: Aluminum.  
Diffuser: PET.

**Light Source and electronics**  
1 x LED STRIP 41,3 W 24 V

**Packaging**

1 Box 0,08 x 0,11 x 1,10 m  
Vol 0,0096 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 1,5 Kg

**Notes**

UGR <19




Linear Low UGR - High-Efficiency




**6275**  
26,8 x 7 x 3 cm




**6280**  
52,5 x 7 x 3 cm

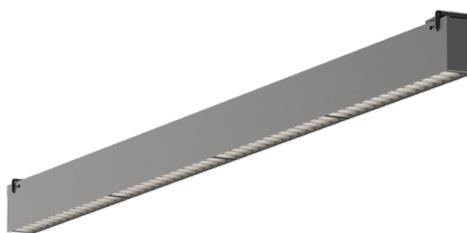

**6285**  
103,7 x 7 x 3 cm

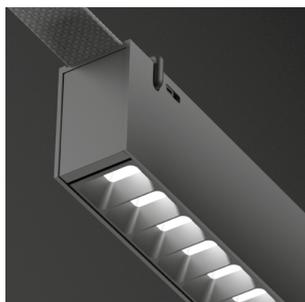

**6275**



**Finishes**

- **11/** \_ \_ Black (NCS S 8500-N)
- **24/** \_ \_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_ \_ Terra Red (NCS S 4040-Y70R)
- **42/** \_ \_ Blue M1 (NCS S 5010-B10G)
- **53/** \_ \_ Green M1 (NCS S 6005-G80Y)

**LED Colour Temperature**

- /1** \_ 2700 K - 1281 lm
  - /2** \_ 3000 K - 1323 lm
  - /3** \_ 3500 K - 1366 lm
- CRI >90**

**Control**

- 6275** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** On/Off
  - \_ \_ / \_ **F** Simultaneous line Push; 1-10V; Casambi; DALI
  - \_ \_ / \_ **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.

**Light Source and electronics**

1 x LED STRIP 10,3 W 24 V

**Packaging**


1 Box 0,08 x 0,11 x 0,32 m  
Vol 0,0028 m<sup>3</sup>  
Gross weight 0,8 Kg Net weight 0,41 Kg

**Notes**

UGR <19



6280



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 2562 lm
  - /2** \_ 3000 K - 2647 lm
  - /3** \_ 3500 K - 2731 lm
- D** >
- CRI >90

**Control**

**6280** \_\_ / \_\_

- \_\_ / **O** On/Off
- \_\_ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_\_ / **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
 Light Source and electronics  
 1 x LED STRIP 20,6 W 24 V

**Packaging**


1 Box 0,08 x 0,11 x 0,57 m  
 Vol 0,0050 m<sup>3</sup>  
 Gross weight 1,5 Kg Net weight 0,89 Kg

**Notes**

UGR <19



6285



- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **42/** \_\_ Blue M1 (NCS S 5010-B10G)
  - **53/** \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 5124 lm
  - /2** \_ 3000 K - 5293 lm
  - /3** \_ 3500 K - 5462 lm
- D** >
- CRI >90

**Control**

**6285** \_\_ / \_\_

- \_\_ / **O** On/Off
- \_\_ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- \_\_ / **Z** Casambi integrated on each individual luminaire (P2P)

**Materials**

Shade: Aluminum.  
 Light Source and electronics  
 1 x LED STRIP 41,3 W 24V

**Packaging**

1 Box 0,08 x 0,11 x 1,102 m  
 Vol 0,0096 m<sup>3</sup>  
 Gross weight 2,5 Kg Net weight 1,5 Kg

**Notes**

UGR <19




# Accessories Toolbox

Thought out to the smallest detail.  
Receive your personalised accessories  
toolbox for a quick and easy installation.




# Installation accessories

You will receive a personalised accessories toolbox per every composition made at **vibia.com**. The Toolbox includes some extra units for on-site adjustments.

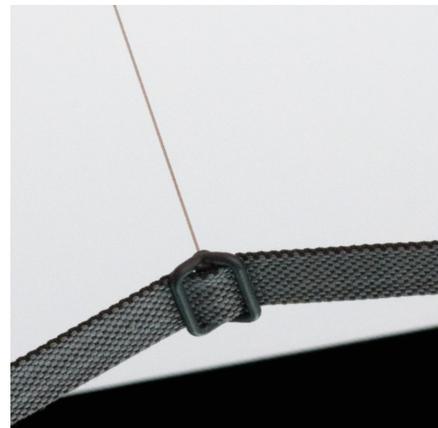


## Belt terminations options



**B3**  
Belt End Cap



**B4**  
Double End Cap




**B5**  
Pendant End Cap

## Fasten accessories options



**F1**  
Circular Ratchet




**F2**  
Circular Anchor



**F3**  
Belt Support



**F4**  
Counterweight



**F5**  
Corner Support



**F6**  
Freestyle Bar  
2 m. bar length  
5 m. maximum tensor cable

## Tension clips options



**T1**  
Suspension Clip



**T2**  
V-Tension Clip



**T3**  
Parallel Tension Clip S



**T4**  
Parallel Tension Clip M



**T5**  
Cable End Cap



**T6**  
Pendant Cable S



**T7**  
Pendant Cable M

### Materials

Counterweight: Cast iron

### Finishes

**11** Black (NCS S 0300-N)

# Electrical connection options

Choose your preferred installation option according to your needs.



# Dimming control options

Choose your preferred installation option according to your needs.


Dimming Control	Electrical Connection			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	—	—	—	✓
Push Simultaneous	✓	✓	✓	—
1-10V Simultaneous	✓	✓	✓	—
DALI Simultaneous	✓	✓	✓	—
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓
ProtoPixel Simultaneous	✓	✓	✓	✓
ProtoPixel integrated on each individual luminaire (P2P)	✓	✓	✓	✓

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

# Belt Options Surface Canopy

Choose your preferred installation option according to your needs.





**Surface Canopy S**  
E1 Ø 205 mm.  
**Wattage options:**  
< 60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.


**Dimming options:**  
On/ Off.  
Simultaneous line DALI; 1-10V; Push; Casambi;  
ProtoPixel\*; Casambi (P2P); ProtoPixel\* (P2P).

**Body:** ABS.  
Net weight 0,9 Kg.

**11** Black  
(NCS S 8500-N)

**Notes**

\*Available from January 2025.



**Surface Canopy M**  
E2 Ø 260 mm.  
**Wattage options:**  
>60W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.


**Dimming options:**  
On/ Off.  
Simultaneous line DALI; 1-10V; Push; Casambi;  
ProtoPixel\*; Casambi (P2P); ProtoPixel\* (P2P).

**Body:** ABS.  
Net weight 1,8 Kg.

**11** Black  
(NCS S 8500-N)

**Notes**

\*Available from January 2025.



**Built-in Canopy**  
E3 Ø 120 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI; 1-10V; Push; Casambi;  
ProtoPixel\*; Casambi (P2P); ProtoPixel\* (P2P).

**Body:** ABS.  
Net weight 1,08 - 1,860 Kg.

**11** Black  
(NCS S 8500-N)


**Notes**

\*Available from January 2025.

25/40/60W



120/240W



**Remote Built-in Canopy**  
E4 Ø 60 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI; 1-10V; Push; Casambi;  
ProtoPixel\*; Casambi (P2P); ProtoPixel\* (P2P).

**Body:** ABS.  
Net weight 0,87 - 1,65 Kg.

**11** Black  
(NCS S 8500-N)


**Notes**

\*Available from January 2025.

25/40/60W



120/240W



**Remote Surface Canopy**  
E5 Ø 60 mm.  
**Wattage options:**  
>25W.  
<240W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Simultaneous line DALI; 1-10V; Push; Casambi;  
ProtoPixel\*; Casambi (P2P); ProtoPixel\* (P2P).

**Body:** Aluminum.  
Net weight 0,95 - 1,73 Kg.

**11** Black  
(NCS S 8500-N)


**Notes**

\*Available from January 2025.

25/40/60W



120/240W



**Plug-in Floor Switch**  
E6 Ø 90 mm.  
**Wattage options:**  
< 60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 100-240V. 50/60Hz.

**Dimming options:**  
On/ Off.  
Push.  
Simultaneous line Casambi; ProtoPixel\*.  
Casambi (P2P); ProtoPixel\* (P2P).

**Body:** ABS.


**11** Black  
(NCS S 8500-N)

25/40/60W



**Notes**

\*Available from January 2025.



**Wire Connector**  
E8 Ø 3,1 mm.  
**Wattage options:**  
< 60W.

**Driver** Constant Voltage 42V.  
90-305 VAC. 50/60Hz.

**Body:** ABS.

**11** Black  
(NCS S 8500-N)





**Wire connector**  
E8 Ø 5,8 mm.  
**Wattage options:**  
< 60W.  
<240W.

# Belt

Maximum 60 metres per electrical connection, belt length personalised for each composition on [www.vibia.com](http://www.vibia.com)

---



<b>Finishes</b>	<b>Belt</b>	<b>Fire Hazard Testing. GW-960.</b>
Black Terra Red Blue Green Beige	Polyester	fulfills the requirements of: standards EN 60695-2-10:2013; EN 60695-2-11:2015; EN 60695-2-12:2011 / A1:2014

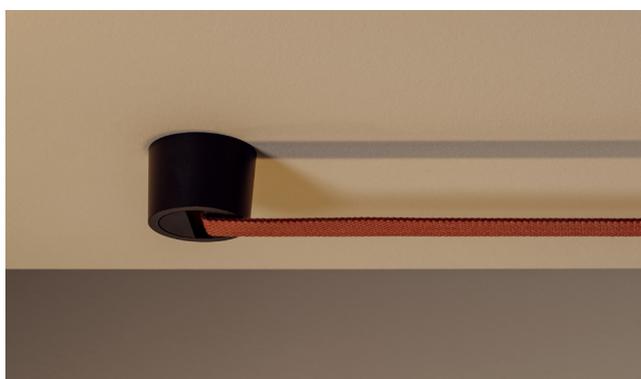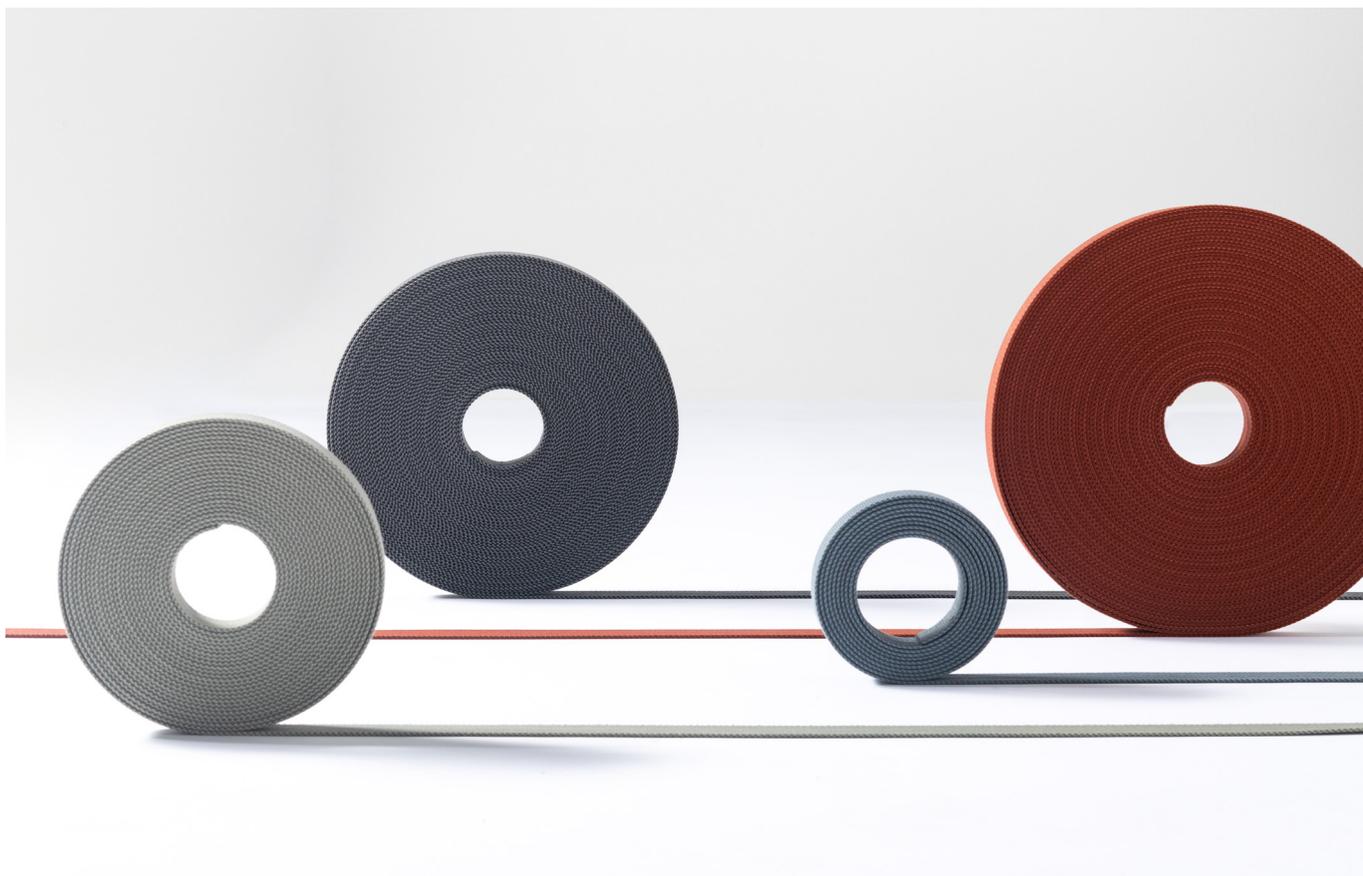

The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

# Belt terminations

Belt terminations can be adjusted during the installation process according to your preference.

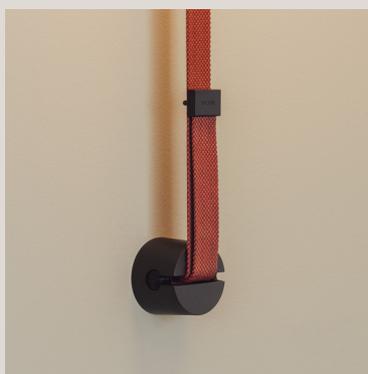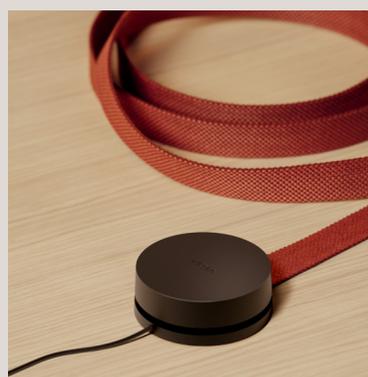


# Composition examples for orientative prices

The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.


## Composition examples for orientative prices

---

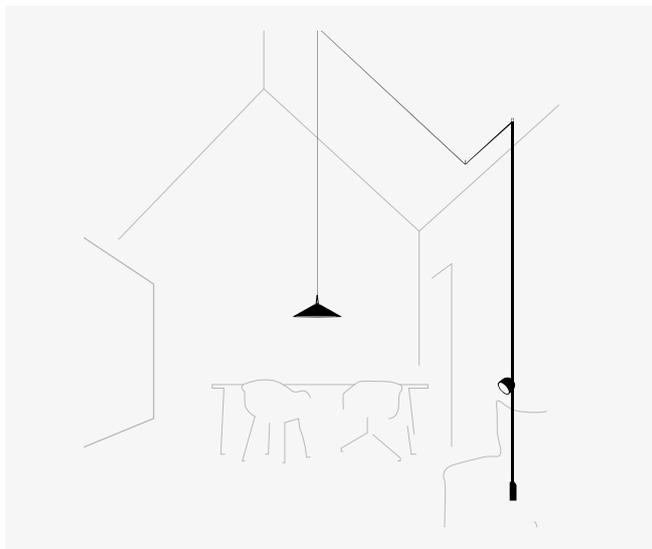


Sketch composed by one composition.  
2 luminaires: Cone 6240, Spotlight 6215.

---

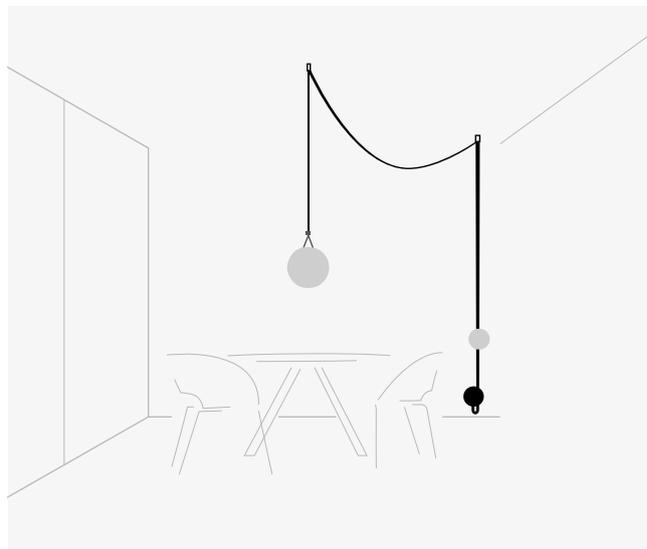


Sketch composed by one composition.  
2 luminaires: Sphere 6230, Sphere 6235.

---

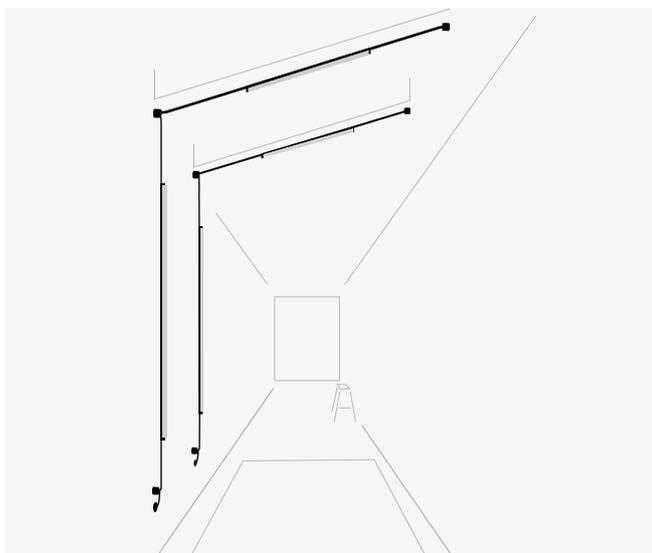

Sketch composed by two identical compositions.  
2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

---

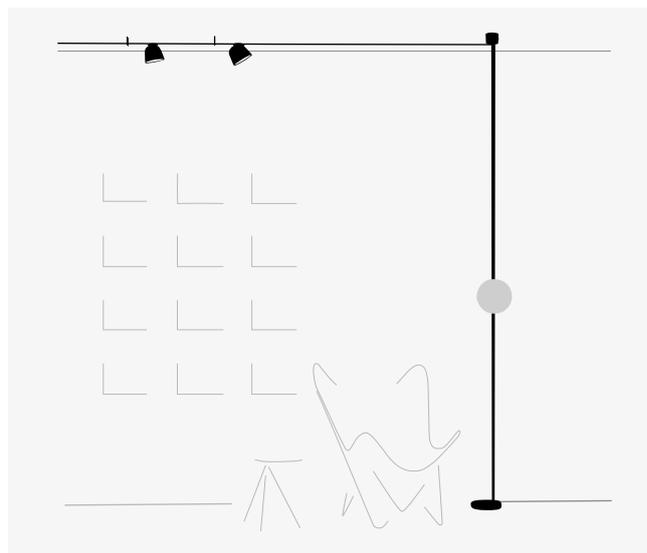


Sketch composed by one composition.  
3 luminaires: Spotlight 6205 x 2, Sphere 6230.

---




Sketch composed by one composition.

1 luminaire: Sphere 6230.

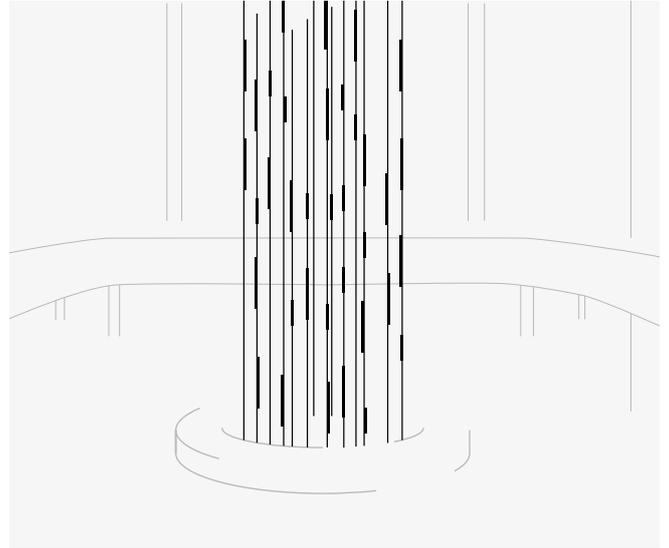


Sketch composed by several compositions.

3 luminaires: Linear Diffuser 6255.

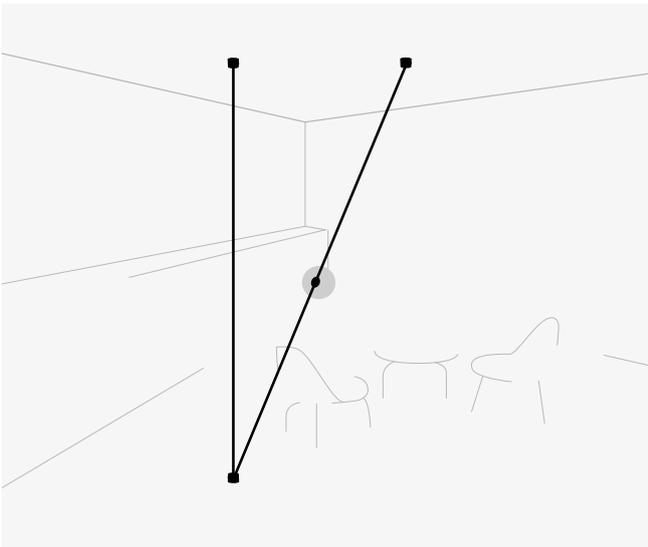

Sketch composed by one composition.

1 luminaire: Sphere 6230.

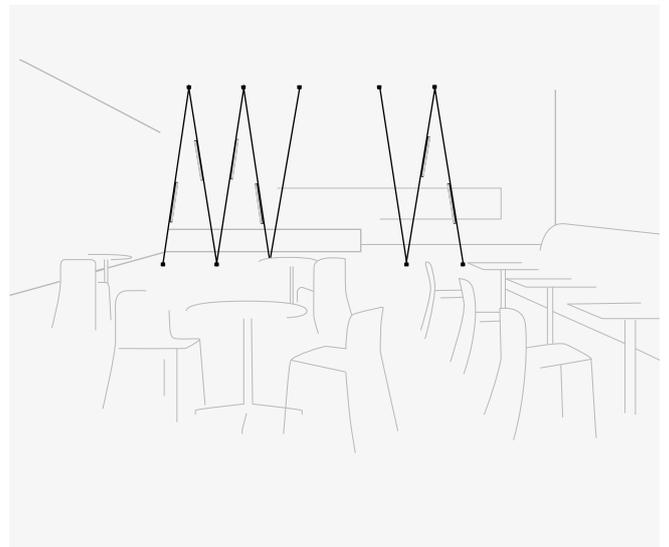


Sketch composed by two compositions.

2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices


---

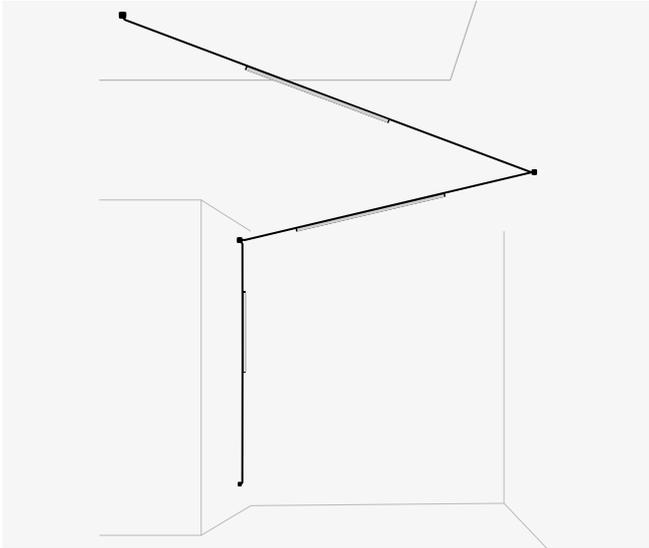

Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.


---

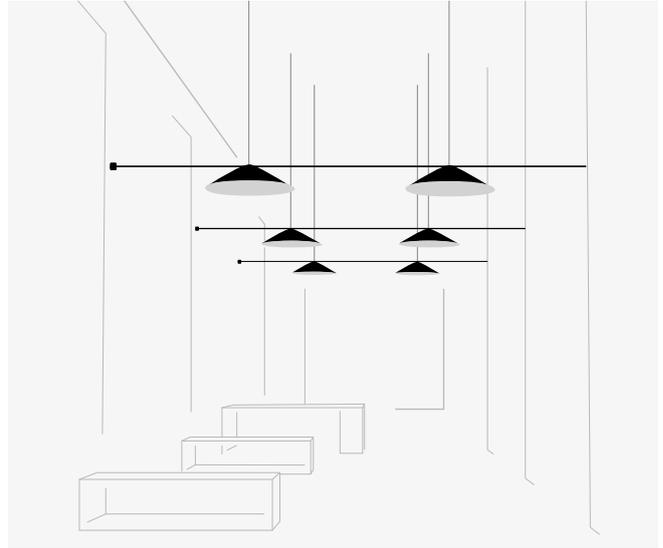

Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.


---

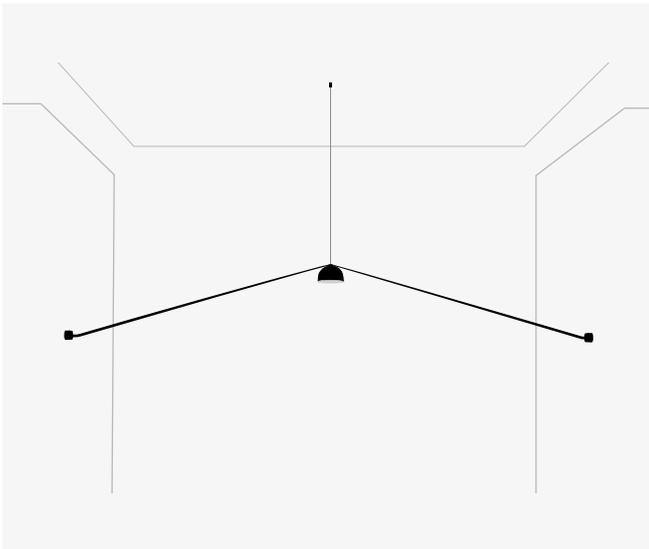

Sketch composed by one composition.

1 luminaire: Semisphere 6225.


---

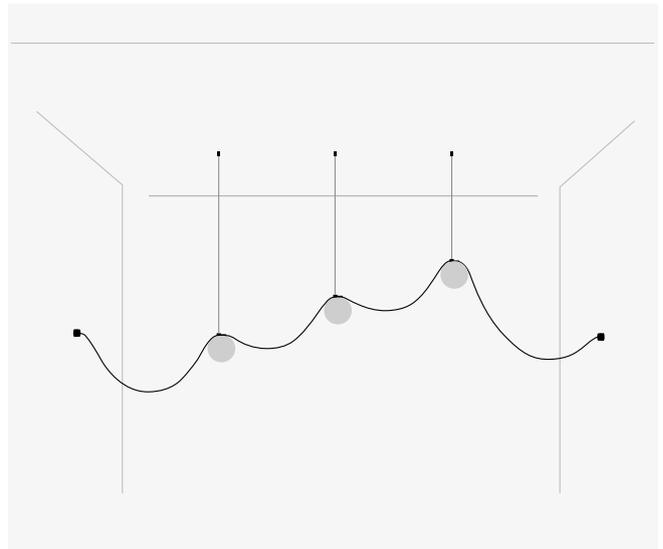

Sketch composed by one composition.


3 luminaires: Sphere 6230 x 3.

---

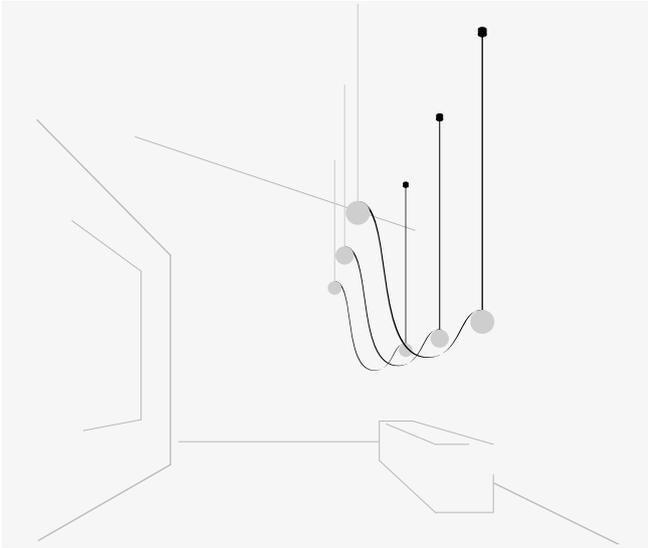


Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

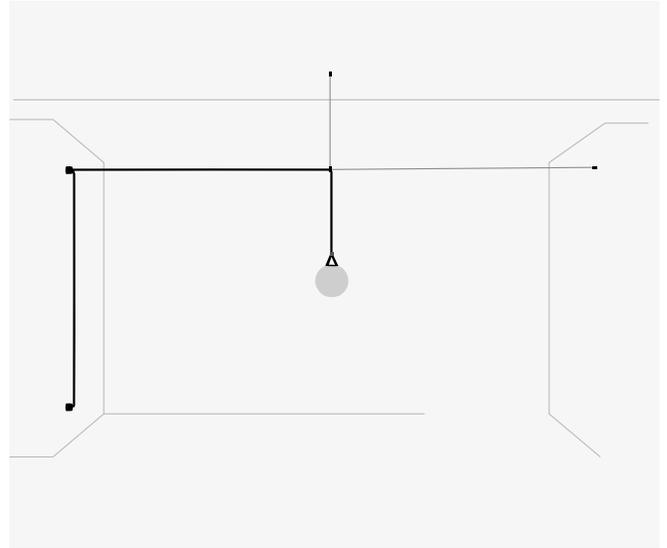


Sketch composed by one composition.

1 luminaire: Sphere 6235.

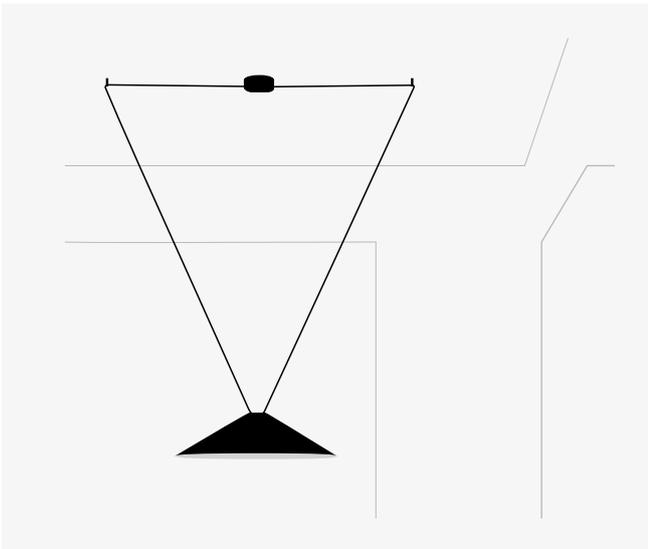

Sketch composed by one composition.

1 luminaire: Cone 6245.

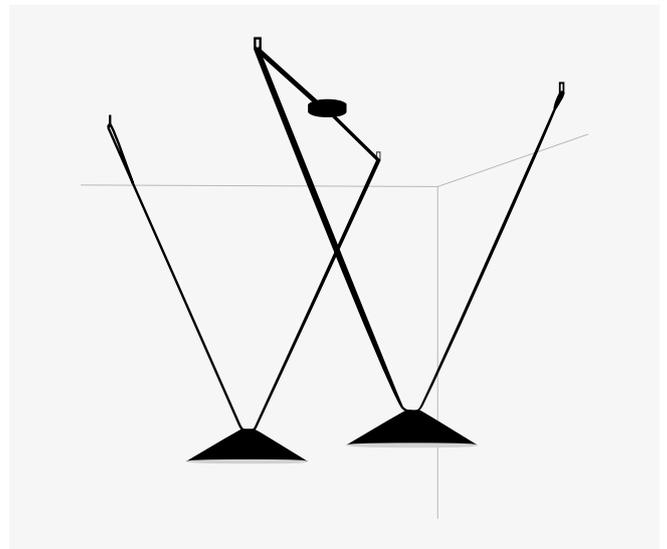


Sketch composed by one composition.

2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

---

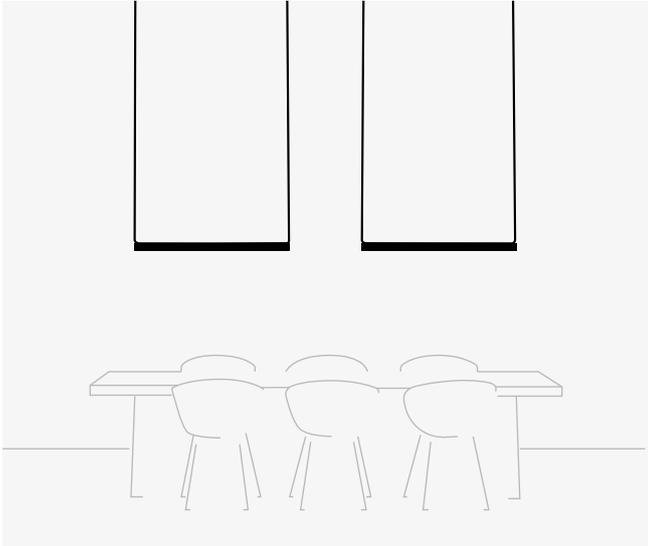

Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.


---



Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.


---

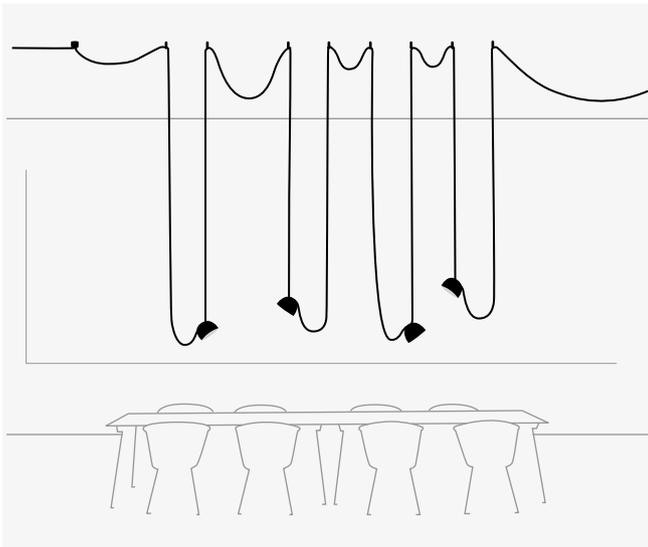

Sketch composed by one composition.

4 luminaires: Semisphere 6220 x 4.


---

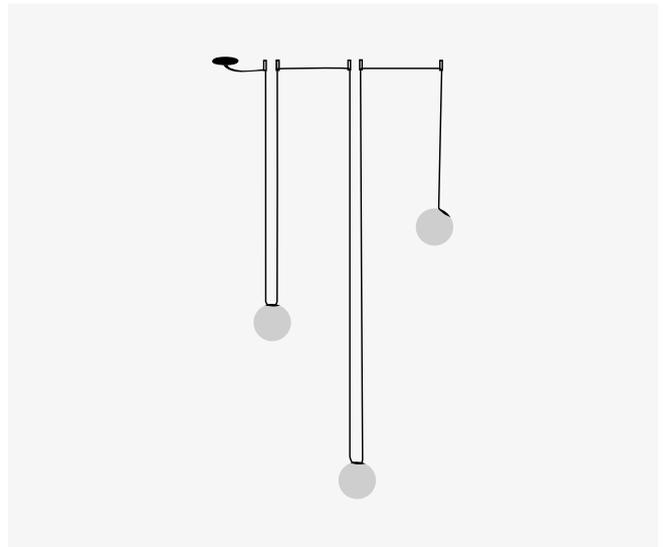

Sketch composed by one composition.


3 luminaires: Sphere 6230 x 3.

---

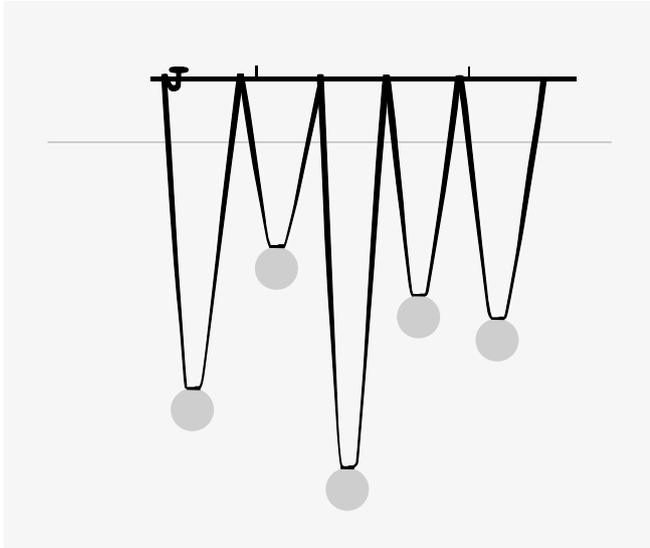

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

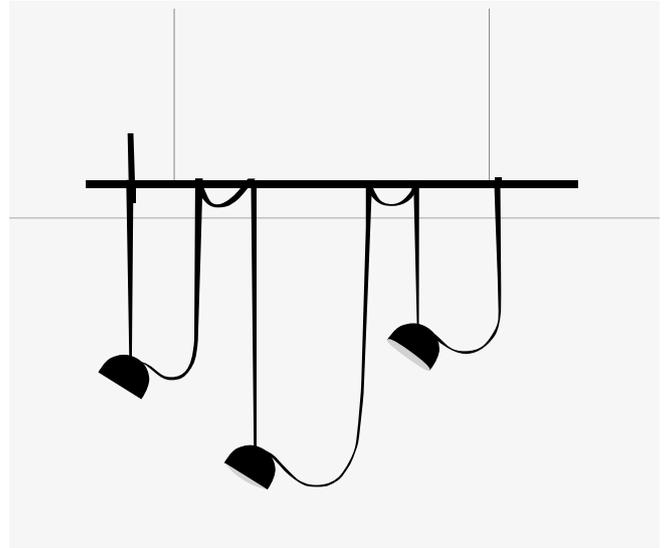

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and chose among  
multiple compositions designed  
and adapted to your project needs.

Personalise your own Plusminus composition  
quick and easy at [vibia.com](http://vibia.com)

# Plusminus Solo

Design by Diez Office

Plusminus Solo introduces a collection of versatile semi-spherical luminaires that adapt to the surrounding space. Easily adjustable, the Plusminus wall range features semi-spherical directed flat diffusers in different sizes, as well as an accent spotlight for more precise illumination.

## Ceiling Wall

### Spot Accent Light

6330 Narrow  
6331 Medium  
6332 Wide  
Ø 10 cm



### Spot Flat Diffuser

6333  
Ø 10 cm



### Spot Flat Diffuser

6335  
Ø 20 cm



### Spot Flat Diffuser

6340  
Ø 30 cm



### 6330

Narrow

6331

Medium

6332

Wide

### 6330 Narrow

Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_\_ Terra Red (NCS S 4040-Y70R)
- 42/ \_\_ Blue M1 (NCS S 5010-B10G)
- 53/ \_\_ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 916 lm
- /2\_ 3000 K - 925 lm
- /3\_ 3500 K - 959 lm



CRI >90

Control

6330 \_\_ / \_\_

- \_\_ / \_\_ 0 On/ Off (Remote)
- \_\_ / \_\_ 1 DALI-2 (Remote)
- \_\_ / \_\_ B Push; 1-10V (Remote)
- \_\_ / \_\_ Z Casambi (Remote)

Materials

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics

**2700 K:**  
1 x LED 7,9 W 450 mA


**3000 K - 3500K:**  
1 x LED 7,7 W 450 mA  
Constant Current 450 mA  
220-240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,67 Kg Net weight 0,49 Kg

LED IP20 CE UK ENE Dimmer

Ø 3 cm



### 6331 Medium

<b>Finishes</b> <ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)</li> <li>● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)</li> <li>● <b>42/</b> __ Blue M1 (NCS S 5010-B10G)</li> <li>● <b>53/</b> __ Green M1 (NCS S 6005-G80Y)</li> </ul>	<b>LED Colour Temperature</b> <b>/1</b> 2700 K - 916 lm <b>/2</b> 3000 K - 925 lm <b>/3</b> 3500 K - 959 lm  CRI >90	<b>Control</b> <b>6331</b> __ / __ <hr/> __ / <b>0</b> On/ Off (Remote) __ / <b>1</b> DALI-2 (Remote) __ / <b>B</b> Push; 1-10V (Remote) __ / <b>Z</b> Casambi (Remote)
---	--	--

<b>Materials</b> Body: Aluminum. Diffuser: PC- Polycarbonate.  <b>Light Source and electronics</b> <b>2700 K:</b> 1 x LED 7,9 W 450 mA <b>3000 K - 3500K:</b> 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	<b>Packaging</b> 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m <sup>3</sup> Gross weight 0,67 Kg Net weight 0,49 Kg          Ø 3 cm
---	---

### 6332 Wide

<b>Finishes</b> <ul style="list-style-type: none"> <li>● <b>11/</b> __ Black (NCS S 8500-N)</li> <li>● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)</li> <li>● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)</li> <li>● <b>42/</b> __ Blue M1 (NCS S 5010-B10G)</li> <li>● <b>53/</b> __ Green M1 (NCS S 6005-G80Y)</li> </ul>	<b>LED Colour Temperature</b> <b>/1</b> 2700 K - 916 lm <b>/2</b> 3000 K - 925 lm <b>/3</b> 3500 K - 959 lm  CRI >90	<b>Control</b> <b>6332</b> __ / __ <hr/> __ / <b>0</b> On/ Off (Remote) __ / <b>1</b> DALI-2 (Remote) __ / <b>B</b> Push; 1-10V (Remote) __ / <b>Z</b> Casambi (Remote)
---	--	--


<b>Materials</b> Body: Aluminum. Diffuser: PC- Polycarbonate.  <b>Light Source and electronics</b> <b>2700 K:</b> 1 x LED 7,9 W 450 mA <b>3000 K - 3500K:</b> 1 x LED 7,7 W 450 mA Constant Current 450 mA 220~240Vac 50/60Hz	<b>Packaging</b> 1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m <sup>3</sup> Gross weight 0,67 Kg Net weight 0,49 Kg          Ø 3 cm
---	---

### Spotlight - Accent



6333

Flat Diffuser



- |  |   |
|--|---|
| <b>Finishes</b>                                | <b>LED Colour Temperature</b>   |
| ● <b>11/</b> __ Black<br>(NCS S 8500-N)        | <b>/1</b> _ 2700 K - 491 lm   |
| ● <b>24/</b> __ Beige M1<br>(NCS S 2005-Y50R)  | <b>/2</b> _ 3000 K - 546 lm   |
| ● <b>37/</b> __ Terra Red<br>(NCS S 4040-Y70R) | <b>/3</b> _ 3500 K - 566 lm   |
| ● <b>42/</b> __ Blue M1<br>(NCS S 5010-B10G)   |  |
| ● <b>53/</b> __ Green M1<br>(NCS S 6005-G80Y)  | CRI >90   |

- Control**
- 6333** \_\_ / \_\_
- 
- \_\_ / **0** On/ Off (Remote)
- \_\_ / **1** DALI-2 (Remote)
- \_\_ / **B** Push; 1-10V (Remote)
- 
- \_\_ / **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

**2700 K:**  
1 x LED 4,2 W 250 mA


**3000 K - 3500K:**  
1 x LED 4,1 W 250 mA  
Constant Current 250 mA  
220-240Vac 50/60Hz

**Packaging**

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,67 Kg Net weight 0,49 Kg



6335



- |  |   |
|--|---|
| <b>Finishes</b>                                | <b>LED Colour Temperature</b>   |
| ● <b>11/</b> __ Black<br>(NCS S 8500-N)        | <b>/1</b> _ 2700 K - 941 lm   |
| ● <b>24/</b> __ Beige M1<br>(NCS S 2005-Y50R)  | <b>/2</b> _ 3000 K - 987 lm   |
| ● <b>37/</b> __ Terra Red<br>(NCS S 4040-Y70R) | <b>/3</b> _ 3500 K - 1022 lm  |
| ● <b>42/</b> __ Blue M1<br>(NCS S 5010-B10G)   |  |
| ● <b>53/</b> __ Green M1<br>(NCS S 6005-G80Y)  | CRI >90   |

- Control**
- 6335** \_\_ / \_\_
- 
- \_\_ / **0** On/ Off (Remote)
- \_\_ / **1** DALI-2 (Remote)
- \_\_ / **B** Push; 1-10V (Remote)
- 
- \_\_ / **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**


1 x LED 7,9 W 450 mA  
Constant Current 450 mA  
220-240Vac 50/60Hz

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,31 Kg Net weight 0,89 Kg



6340

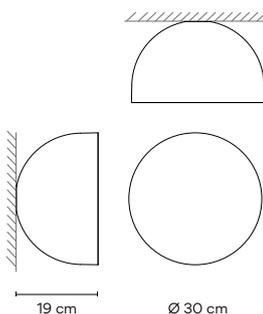

- |  |   |
|--|---|
| <b>Finishes</b>                                | <b>LED Colour Temperature</b>   |
| ● <b>11/</b> __ Black<br>(NCS S 8500-N)        | <b>/1</b> _ 2700 K - 1673 lm  |
| ● <b>24/</b> __ Beige M1<br>(NCS S 2005-Y50R)  | <b>/2</b> _ 3000 K - 1752 lm  |
| ● <b>37/</b> __ Terra Red<br>(NCS S 4040-Y70R) | <b>/3</b> _ 3500 K - 1817 lm  |
| ● <b>42/</b> __ Blue M1<br>(NCS S 5010-B10G)   |  |
| ● <b>53/</b> __ Green M1<br>(NCS S 6005-G80Y)  | CRI >90   |

- Control**
- 6340** \_\_ / \_\_
- 
- \_\_ / **0** On/ Off (Remote)
- \_\_ / **1** DALI-2 (Remote)
- \_\_ / **B** Push; 1-10V (Remote)
- 
- \_\_ / **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

**Light Source and electronics**

1 x LED 16 W 850 mA  
Constant Current 850 mA  
220-240Vac 50/60Hz

**Packaging**

1 Box 0,364 x 0,364 x 0,364 m  
Vol 0,0482 m<sup>3</sup>  
Gross weight 2,20 Kg Net weight 1,70 Kg



## Table Floor



**6341** Accent medium / Surface

**6343** Flat diffuser / Surface

Ø 10 x 50 cm

**6346** Accent medium / Bolt-down

**6348** Flat diffuser / Bolt-down


Ø 10 x 50 cm

### 6341

Accent medium / Surface

### 6343

Flat diffuser / Surface

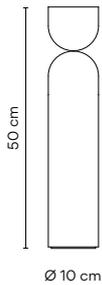

#### 6341 Accent medium / Surface

##### Finishes

- **11/** \_\_ Black (NCS S 8500-N)
- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- **42/** \_\_ Blue M1 (NCS S 5010-B10G)
- **53/** \_\_ Green M1 (NCS S 6005-G80Y)

##### LED Colour Temperature

- /1\_ 2700 K - 941 lm
- /2\_ 3000 K - 987 lm
- /3\_ 3500 K - 1022 lm



CRI >90

##### Control

**6341** \_\_ / \_\_

\_\_ / \_\_ 5 Push

\_\_ / \_\_ Y ProtoPixel\*

\_\_ / \_\_ Z Casambi

##### Materials

Body: Aluminum.  
Base: Steel / Zinc Alloy.  
Diffuser: PC- Polycarbonate.

##### Light Source and electronics

1 x LED 7,9 W 450 mA  
Constant Current 450 mA  
220~240Vac 50/60Hz

##### Packaging

1 Box 0,78 x 0,13 x 0,13 m  
Vol 0,0326 m<sup>3</sup>  
Gross weight 3,8 Kg Net weight 2,8 Kg

##### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Cable with plug included.

LED IP20 Dimmer

#### 6343 Flat diffuser / Surface

##### Finishes

- **11/** \_\_ Black (NCS S 8500-N)
- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
- **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- **42/** \_\_ Blue M1 (NCS S 5010-B10G)
- **53/** \_\_ Green M1 (NCS S 6005-G80Y)

##### LED Colour Temperature

- /1\_ 2700 K - 531 lm
- /2\_ 3000 K - 557 lm
- /3\_ 3500 K - 557 lm



CRI >90

##### Control

**6343** \_\_ / \_\_

\_\_ / \_\_ 5 Push

\_\_ / \_\_ Y ProtoPixel\*

\_\_ / \_\_ Z Casambi

##### Materials

Body: Aluminum.  
Base: Steel.  
Spot: Aluminum.  
Diffuser: PC- Polycarbonate.

##### Light Source and electronics

1 x LED 4,2 W 250 mA  
Constant Current 250 mA  
220~240Vac 50/60Hz

##### Packaging

1 Box 0,78 x 0,13 x 0,13 m  
Vol 0,0326 m<sup>3</sup>  
Gross weight 3,8 Kg Net weight 2,8 Kg

##### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

LED IP20 Dimmer

**6346**

Accent medium / Bolt-down

**6348**

Flat diffuser / Bolt-down

**6346 Accent medium / Bolt-down**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **42/** \_\_ Blue M1  
(NCS S 5010-B10G)
- **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 941 lm
- /2\_ 3000 K - 987 lm
- /3\_ 3500 K - 1022 lm



CRI >90

Control

**6346** \_\_ / \_\_

\_\_ / \_\_ 1 DALI-2

\_\_ / \_\_ Z\_40 Casambi

Materials

Body: Aluminum,  
Spot: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA  
Constant Current 450 mA  
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m  
Vol 0,0326 m<sup>3</sup>  
Gross weight 3,8 Kg Net weight 2,8 Kg



**6348 Flat diffuser / Bolt-down**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **42/** \_\_ Blue M1  
(NCS S 5010-B10G)
- **53/** \_\_ Green M1  
(NCS S 6005-G80Y)

LED Colour Temperature

- /1\_ 2700 K - 531 lm
- /2\_ 3000 K - 557 lm
- /3\_ 3500 K - 557 lm



CRI >90

Control

**6348** \_\_ / \_\_

\_\_ / \_\_ 1 DALI-2

\_\_ / \_\_ Z\_40 Casambi

Materials

Body: Aluminum,  
Spot: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA  
Constant Current 250 mA  
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m  
Vol 0,0326 m<sup>3</sup>  
Gross weight 3,8 Kg Net weight 2,8 Kg



Wall Table Floor



Accent medium  
**6361** Surface / Bolt-down  
 Ø 10 cm

Flat diffuser  
**6363** Surface / Bolt-down  
 Ø 10 cm


Flat diffuser  
**6365** Surface / Bolt-down  
 Ø 20 cm

Flat diffuser  
**6370** Surface / Bolt-down  
 Ø 30 cm



**6361**  
Accent medium  
Surface / Bolt down

**6363**  
Flat diffuser Surface /  
Bolt-down



**6361 Accent medium Surface / Bolt-down**

Finishes	LED Colour Temperature
● <b>11/</b> __ Black (NCS S 8500-N)	/1_ 2700 K - 941 lm
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	/2_ 3000 K - 987 lm
● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)	/3_ 3500 K - 1022 lm
● <b>42/</b> __ Blue M1 (NCS S 5010-B10G)	E
● <b>53/</b> __ Green M1 (NCS S 6005-G80Y)	CRI >90

Control

<b>6361</b> __ / __
__ / <b>5</b> Push
__ / <b>Y</b> ProtoPixel*
__ / <b>Z</b> Casambi (Remote)

Materials

Body: Aluminum.  
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA  
Constant Current 250 mA  
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\*Available from January 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.



**6363 Flat diffuser Surface / Bolt-down**

Finishes	LED Colour Temperature
● <b>11/</b> __ Black (NCS S 8500-N)	/1_ 2700 K - 531 lm
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	/2_ 3000 K - 557 lm
● <b>37/</b> __ Terra Red (NCS S 4040-Y70R)	/3_ 3500 K - 557 lm
● <b>42/</b> __ Blue M1 (NCS S 5010-B10G)	E
● <b>53/</b> __ Green M1 (NCS S 6005-G80Y)	CRI >90

Control

<b>6363</b> __ / __
__ / <b>5</b> Push
__ / <b>Y</b> ProtoPixel*
__ / <b>Z</b> Casambi (Remote)

Materials

Body: Aluminum.  
Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA  
Constant Current 250 mA  
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m<sup>3</sup>  
Gross weight 0,98 Kg Net weight 0,73 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).


\*Available from January 2025.

Cable with plug included. Electric cable 2 m.

Base: Ø 6 cm. Height 2,3 cm.



**6365**  
 Flat diffuser Surface / Bolt-down



- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 \_ 2700 K - 941 lm
  - /2 \_ 3000 K - 987 lm
  - /3 \_ 3500 K - 1022 lm
- LED E  
 CRI >90

- Control**
- 6365** \_\_ / \_\_
- 
- \_\_ / \_\_ 5 Push
- \_\_ / \_\_ Y ProtoPixel\*
- \_\_ / \_\_ Z Casambi

**Materials**  
 Body: Aluminum.  
 Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate.


**Light Source and electronics**  
 1 x LED 7,9 W 450 mA  
 Constant Current 450 mA  
 220~240Vac 50/60Hz

**Packaging**  
 1 Box 0,26 x 0,26 x 0,26 m  
 Vol 0,0175 m<sup>3</sup>  
 Gross weight 1,31 Kg Net weight 0,89 Kg

**Notes**  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Cable with plug included. Electric cable 2 m.  
 Base: Ø 8,2 cm. Height 2,3 cm.



**6370**  
 Flat diffuser Surface / Bolt-down

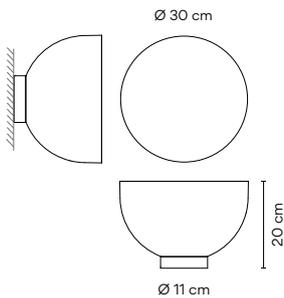

- Finishes**
- 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_\_ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 \_ 2700 K - 1673 lm
  - /2 \_ 3000 K - 1752 lm
  - /3 \_ 3500 K - 1817 lm
- LED E  
 CRI >90


- Control**
- 6370** \_\_ / \_\_
- 
- \_\_ / \_\_ 5 Push
- \_\_ / \_\_ Y ProtoPixel\*
- \_\_ / \_\_ Z Casambi

**Materials**  
 Body: Aluminum.  
 Base: Zinc Alloy.  
 Diffuser: PC- Polycarbonate.

**Light Source and electronics**  
 1 x LED 16 W 850 mA  
 Constant Current 850 mA  
 220~240Vac 50/60Hz

**Packaging**  
 1 Box 0,364 x 0,364 x 0,364 m  
 Vol 0,0482 m<sup>3</sup>  
 Gross weight 2,20 Kg Net weight 1,70 Kg

**Notes**  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Cable with plug included. Electric cable 2 m.  
 Base: Ø 11 cm. Height 2,8 cm.



# Kontorno

Design by Sebastian Herkner

Consisting of an elegant linear framework complemented by a cylindrical diffuser or curved reflector, the Kontorno collection envelops the light source it contains, offering diffuse, balanced illumination.

## Wall



**6414**  
20 x 92 cm



**6416**  
20 x 122 cm



**6418**  
20 x 162 cm




**6444**  
19 x 92 cm



**6446**  
19 x 122 cm

### 6414

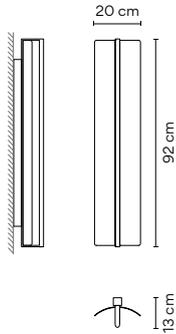

Finishes  
● **11/** \_\_ Black  
(NCS S 8500-N)

LED Colour Temperature  
/1 \_ 2700 K - 2381 lm  
E →  
/2 \_ 3000 K - 2381 lm  
F →  
/3 \_ 3500 K - 2551 lm  
E →  
/7 \_ 2200 K - 2041 lm  
F →  
CRI >90

#### Control

**6414** \_\_ / \_\_

\_\_ / \_ 1 DALI-2  
\_\_ / \_ 3 1-10V  
\_\_ / \_ 5 Push  
\_\_ / \_ Z Casambi

#### Materials

Concave shade: Aluminum. Diffuser: PC- Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

#### Light Source and electronics

1 x LED STRIP 20,8 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz


#### Packaging

1 Box 0,30 x 0,30 x 1,05 m  
Vol 0,095 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 CE UK ENEC

Dimmer Multi-volt

### 6416

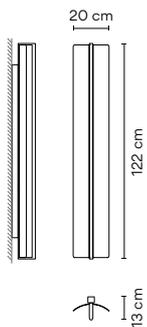

Finishes  
● **11/** \_\_ Black  
(NCS S 8500-N)

LED Colour Temperature  
/1 \_ 2700 K - 3154 lm  
E →  
/2 \_ 3000 K - 3154 lm  
F →  
/3 \_ 3500 K - 3380 lm  
E →  
/7 \_ 2200 K - 2703 lm  
F →  
CRI >90

#### Control

**6416** \_\_ / \_\_

\_\_ / \_ 1 DALI-2  
\_\_ / \_ 3 1-10V  
\_\_ / \_ 5 Push  
\_\_ / \_ Z Casambi

#### Materials

Concave shade: Aluminum. Diffuser: PC- Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

#### Light Source and electronics

1 x LED STRIP 27,9 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz


#### Packaging

1 Box 0,30 x 0,30 x 1,35 m  
Vol 0,122 m<sup>3</sup>  
Gross weight 5,8 Kg Net weight 3,8 Kg

LED IP20 CE UK ENEC

Dimmer Multi-volt

6418

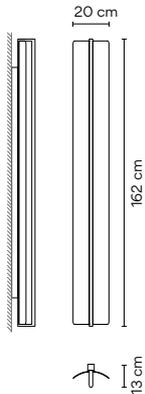

Finishes  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1\_ 2700 K - 4205 lm  
 E  
 /2\_ 3000 K - 4205 lm  
 F  
 /3\_ 3500 K - 4506 lm  
 E  
 /7\_ 2200 K - 3604 lm  
 F  
 CRI >90

Control

6418 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_3 1-10V  
 \_\_ / \_5 Push  
 \_\_ / \_Z Casambi

Materials

Concave shade: Aluminum.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.


Light Source and electronics  
 1 x LED STRIP 37,2 W 750 mA  
 Constant Current 750 mA  
 90-305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 0,175 m  
 Vol 0,1580 m<sup>3</sup>  
 Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE UK ENEC  
 Dimmer Multi-volt

6444

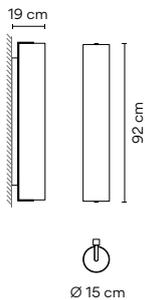

Finishes  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1\_ 2700 K - 2381 lm  
 E  
 /2\_ 3000 K - 2381 lm  
 F  
 /3\_ 3500 K - 2551 lm  
 E  
 /7\_ 2200 K - 2041 lm  
 F  
 CRI >90

Control

6444 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_3 1-10V  
 \_\_ / \_5 Push  
 \_\_ / \_Z Casambi

Materials

Glass shade: Opal triplex.  
 Diffuser: PC- Polycarbonate.  
 Canopy: Aluminum.


Light Source and electronics  
 1 x LED STRIP 20,8 W 750 mA  
 Constant Current 750 mA  
 90-305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m  
 Vol 0,095 m<sup>3</sup>  
 Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE UK ENEC  
 Dimmer Multi-volt

6446

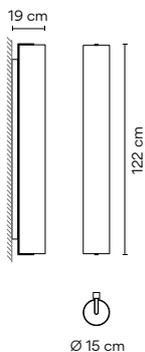

Finishes  
 ● 11/ \_\_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1\_ 2700 K - 3154 lm  
 E  
 /2\_ 3000 K - 3154 lm  
 F  
 /3\_ 3500 K - 3380 lm  
 E  
 /7\_ 2200 K - 2703 lm  
 F  
 CRI >90

Control

6446 \_\_ / \_\_  
 \_\_ / \_1 DALI-2  
 \_\_ / \_3 1-10V  
 \_\_ / \_5 Push  
 \_\_ / \_Z Casambi

Materials

Glass shade: Opal triplex.  
 Diffuser: PC- Polycarbonate.  
 Canopy: Aluminum.


Light Source and electronics  
 1 x LED STRIP 27,9 W 750 mA  
 Constant Current 750 mA  
 90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,35 m  
 Vol 0,122 m<sup>3</sup>  
 Gross weight 9 Kg Net weight 6 Kg

LED IP20 CE UK ENEC  
 Dimmer Multi-volt

Pendant

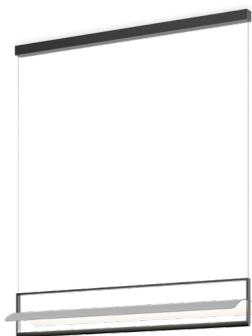

**6434**  
92 x max. 200 cm

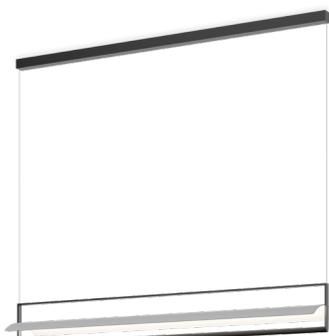

**6436**  
122 x max. 200 cm



**6438**  
162 x max. 200 cm



**6474**  
92 x max. 200 cm



**6476**  
122 x max. 200 cm

**6434**

Finishes


- 11/ \_ \_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 2381 lm
  - /2 \_ 3000 K - 2381 lm
  - /3 \_ 3500 K - 2551 lm
  - /7 \_ 2200 K - 2041 lm
- CRI >90

Control

- 6434** \_ \_ / \_ \_
- 
- \_ \_ / \_ 1 DALI-2
  - \_ \_ / \_ 3 1-10V
  - \_ \_ / \_ 5 Push
  - \_ \_ / \_ Z Casambi



Materials

Concave shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,05 m  
Vol 0,095 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

Extra cable length.



6436



- |                                  |                               |
|----------------------------------|-------------------------------|
| <b>Finishes</b>                  | <b>LED Colour Temperature</b> |
| ● 11/ __ Black<br>(NCS S 8500-N) | /1 _ 2700 K - 3154 lm<br>E    |
|                                  | /2 _ 3000 K - 3154 lm<br>F    |
|                                  | /3 _ 3500 K - 3380 lm<br>E    |
|                                  | /7 _ 2200 K - 2703 lm<br>F    |
|                                  | CRI >90                       |

- |                  |
|------------------|
| <b>Control</b>   |
| 6436 __ / __     |
| __ / _ 1 DALI-2  |
| __ / _ 3 1-10V   |
| __ / _ 5 Push    |
| __ / _ Z Casambi |

**Materials**

Concave shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 27,9 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

**Packaging**

1 Box 0,30 x 0,30 x 1,35 m  
Vol 0,122 m<sup>3</sup>  
Gross weight 5,8 Kg Net weight 3,8 Kg


**Notes**

Extra cable length.



Dimmer Multi-volt

6438

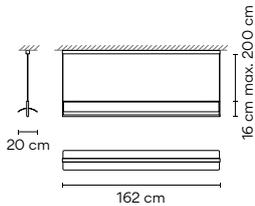

- |                                  |                               |
|----------------------------------|-------------------------------|
| <b>Finishes</b>                  | <b>LED Colour Temperature</b> |
| ● 11/ __ Black<br>(NCS S 8500-N) | /1 _ 2700 K - 4205 lm<br>E    |
|                                  | /2 _ 3000 K - 4205 lm<br>F    |
|                                  | /3 _ 3500 K - 4505 lm<br>E    |
|                                  | /7 _ 2200 K - 3604 lm<br>F    |
|                                  | CRI >90                       |

- |                  |
|------------------|
| <b>Control</b>   |
| 6438 __ / __     |
| __ / _ 1 DALI-2  |
| __ / _ 3 1-10V   |
| __ / _ 5 Push    |
| __ / _ Z Casambi |

**Materials**

Concave shade: Aluminum.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 37,2 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

**Packaging**

1 Box 0,30 x 0,30 x 1,75 m  
Vol 0,158 m<sup>3</sup>  
Gross weight 6,5 Kg Net weight 4 Kg


**Notes**

Extra cable length.



Dimmer Multi-volt

6474



- |                                  |                               |
|----------------------------------|-------------------------------|
| <b>Finishes</b>                  | <b>LED Colour Temperature</b> |
| ● 11/ __ Black<br>(NCS S 8500-N) | /1 _ 2700 K - 2381 lm<br>E    |
|                                  | /2 _ 3000 K - 2381 lm         |
|                                  | /7 _ 2200 K - 2041 lm<br>F    |
|                                  | CRI >90                       |

- |                  |
|------------------|
| <b>Control</b>   |
| 6474 __ / __     |
| __ / _ 1 DALI-2  |
| __ / _ 3 1-10V   |
| __ / _ 5 Push    |
| __ / _ Z Casambi |

**Materials**

Glass shade: Opal triplex.  
Diffuser: PC- Polycarbonate.  
Structures: Steel.  
Canopy: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 20,8 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

**Packaging**

1 Box 0,30 x 0,30 x 1,05 m  
Vol 0,095 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 3,7 Kg

**Notes**

Extra cable length.




Dimmer Multi-volt

6476

Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1\_ 2700 K - 3154 lm  
 [E]   
 /2\_ 3000 K - 3154 lm  
 /7\_ 2200 K - 2703 lm  
 [F]   
 CRI >90

Control  
**6476** \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ 5 Push  
 \_ \_ / \_ Z Casambi



Materials  
 Glass shade: Opal triplex.  
 Diffuser: PC- Polycarbonate.  
 Structures: Steel.  
 Canopy: Aluminum.

Light Source and electronics  
 1 x LED STRIP 27,9 W 750 mA  
 Constant Current 750 mA  
 90-305V 50/60Hz

Packaging  
 1 Box 0,75 x 0,45 x 1,35 m  
 Vol 0,122 m<sup>3</sup>  
 Gross weight 9 Kg Net weight 6 Kg

Notes  
 Extra cable length.

LED  IP20      
 Dimmer  Multi-volt 





# Bind

Design by Martín Azúa

Bind is a hybrid lighting system designed to create multiple atmospheres to suit a range of spaces, uses and moods. The connective quality, ease of installation and versatility of this fully modular system guarantees a harmonious balance between technical and decorative lighting, promising new holistic lighting solutions.

## Pendant Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

**6500** Narrow  
**6504** Medium  
Ø 3 x 15 cm




DOWNLIGHT Ø 4 cm

**6520** Narrow  
**6524** Medium  
**6528** Wide  
Ø 4 x 17,5 cm



**6525** Medium  
**6529** Wide  
Ø 4 x 20 cm



## Pendant Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

**6510** Narrow  
**6514** Medium  
Ø 3 x 20 cm



SPOTLIGHT Ø 4 cm

**6530** Narrow  
**6534** Medium  
**6538** Wide  
Ø 4 x 22,5 cm




## Pendant Ceiling - Wide Accent Downlight

DOMO Ø 18,5 cm

**6540** Medium  
**6542** Wide



**6500**  
Narrow  
**6504**  
Medium



**6500 Narrow**

Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	<b>6500</b> __ / __
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	__ / _ <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	__ / _ <b>Y</b> ProtoPixel* (P2P)
	<b>F</b> >	__ / _ <b>Z</b> Casambi (P2P)
	CRI >90	

**Materials**

Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED 4,3 W 250 mA

**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,6 Kg Net weight 0,12 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.



**6504 Medium**

Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	/1 _ 2700 K - 451 lm	<b>6504</b> __ / __
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	/2 _ 3000 K - 471 lm	__ / _ <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	/3 _ 3500 K - 489 lm	__ / _ <b>Y</b> ProtoPixel* (P2P)
	<b>F</b> >	__ / _ <b>Z</b> Casambi (P2P)
	CRI >90	

**Materials**

Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED 4,3 W 250 mA


**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,6 Kg Net weight 0,12 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.

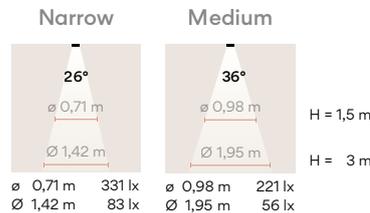

**6520**  
Narrow  
**6524**  
Medium  
**6528**  
Wide



**6520 Narrow**

<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>11/ _ _ Black</b> (NCS S 8500-N)	<b>/1_ 2700 K - 530 lm</b>
● <b>24/ _ _ Beige M1</b> (NCS S 2005-Y50R)	<b>/2_ 3000 K - 554 lm</b>
	<b>/3_ 3500 K - 574 lm</b>
	<b>☐ F</b>
	<b>CRI &gt;90</b>

**Control**

<b>6520</b> _ _ / _ _
_ _ / _ _ <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ _ <b>Y</b> ProtoPixel* (P2P)
_ _ / _ _ <b>Z</b> Casambi (P2P)

**Materials**

Lens: PMMA.  
Body: Aluminum.


**Light Source and electronics**  
1 x LED LED 5,2 W 300 mA

**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,18 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



**6524 Medium**

<b>Finishes</b>	<b>LED Colour Temperature</b>
● <b>11/ _ _ Black</b> (NCS S 8500-N)	<b>/1_ 2700 K - 530 lm</b>
● <b>24/ _ _ Beige M1</b> (NCS S 2005-Y50R)	<b>/2_ 3000 K - 554 lm</b>
	<b>/3_ 3500 K - 574 lm</b>
	<b>☐ F</b>
	<b>CRI &gt;90</b>

**Control**

<b>6524</b> _ _ / _ _
_ _ / _ _ <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ _ <b>Y</b> ProtoPixel* (P2P)
_ _ / _ _ <b>Z</b> Casambi (P2P)

**Material**

Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED LED 5,2 W 300 mA

**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,18 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



### 6528 Wide

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/ __ Black</b> (NCS S 8500-N)	<b>/1 _ 2700 K - 530 lm</b>	<b>6528 __ / __</b>
● <b>24/ __ Beige M1</b> (NCS S 2005-Y50R)	<b>/2 _ 3000 K - 554 lm</b>	<b>_ _ / _ F On/Off; Push; 1-10V; DALI-2;</b>
	<b>/3 _ 3500 K - 574 lm</b>	<b>Casambi Simultaneous Line</b>
	<b>F</b>	<b>_ _ / _ Y ProtoPixel* (P2P)</b>
	<b>CRI &gt;90</b>	<b>_ _ / _ Z Casambi (P2P)</b>

### Materials

Lens: PMMA.  
Body: Aluminum.

### Light Source and electronics

1x LED LED 5,2 W 300 mA


### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,18 Kg


### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.

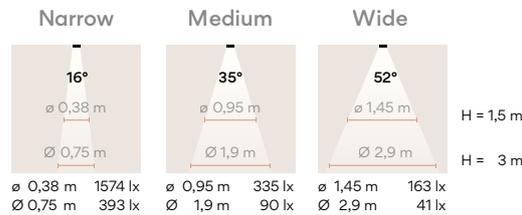

### 6525 Medium 6529 Wide



### 6525 Medium

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/ __ Black</b> (NCS S 8500-N)	<b>Tunable White</b>	<b>6525 __ / __</b>
● <b>24/ __ Beige M1</b> (NCS S 2005-Y50R)	<b>/8 _ (1800 K - 4000 K)</b>	<b>_ _ / 8Y ProtoPixel* (P2P)</b>
	<b>308 lm - 504 lm</b>	<b>_ _ / 8Z Casambi (P2P)</b>
	<b>E</b>	
	<b>CRI &gt;90</b>	

### Materials

Lens: Polycarbonate.  
Body: Aluminum.

### Light Source and electronics

1x LED 5,5 W 150 mA

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,8 Kg Net weight 0,2 Kg

### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.



### 6529 Wide

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/ __ Black</b> (NCS S 8500-N)	<b>Tunable White</b>	<b>6529 __ / __</b>
● <b>24/ __ Beige M1</b> (NCS S 2005-Y50R)	<b>/8 _ (1800 K - 4000 K)</b>	<b>_ _ / 8Y ProtoPixel* (P2P)</b>
	<b>308 lm - 504 lm</b>	<b>_ _ / 8Z Casambi (P2P)</b>
	<b>E</b>	
	<b>CRI &gt;90</b>	

### Materials

Lens: Polycarbonate.  
Body: Aluminum.

### Light Source and electronics

1x LED 5,5 W 150 mA

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,8 Kg Net weight 0,2 Kg


### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.



**6510**  
Narrow  
**6514**  
Medium



**6510 Narrow**

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 451 lm	<b>6510</b> __ / __
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	<b>/2</b> _ 3000 K - 471 lm	__ / <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	<b>/3</b> _ 3500 K - 489 lm	__ / <b>Y</b> ProtoPixel* (P2P)
	<b>F</b> >	__ / <b>Z</b> Casambi (P2P)
	<b>CRI &gt;90</b>	

**Materials**  
Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**  
1 x LED 4,3 W 250 mA

**Packaging**  
1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,18 Kg

**Notes**  
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



**6514 Medium**


<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 451 lm	<b>6514</b> __ / __
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	<b>/2</b> _ 3000 K - 471 lm	__ / <b>F</b> On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
	<b>/3</b> _ 3500 K - 489 lm	__ / <b>Y</b> ProtoPixel* (P2P)
	<b>F</b> >	__ / <b>Z</b> Casambi (P2P)
	<b>CRI &gt;90</b>	

**Materials**  
Lens: PMMA.  
Body: Aluminum.


**Light Source and electronics**  
1 x LED 4,3 W 250 mA

**Packaging**  
1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,18 Kg

**Notes**  
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.

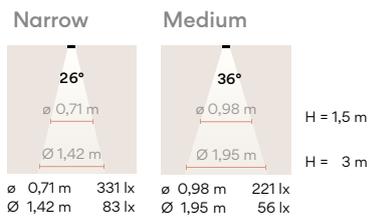

**6530**  
Narrow  
**6534**  
Medium  
**6538**  
Wide



### 6530 Narrow

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**F** >

CRI >90

**Control**

**6530** \_\_ / \_\_

- \_\_ / \_\_ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- \_\_ / \_\_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_\_ **Z** Casambi (P2P)

#### Materials

Lens: PMMA  
Body: Aluminum.


**Light Source and electronics**  
1 x LED 5,2 W 300 mA

#### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,87 Kg Net weight 0,27 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



### 6534 Medium

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K) 308 lm - 504 lm

**F** >

CRI >90

**Control**

**6534** \_\_ / \_\_

- \_\_ / \_\_ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- \_\_ / \_\_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_\_ **Z** Casambi (P2P)
- \_\_ / **8Y** Tunable White + ProtoPixel\* (P2P)
- \_\_ / **8Z** Tunable White + Casambi (P2P)

#### Materials

Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**  
**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
**Tunable White:**  
1 x LED 5,6 W 150 mA

#### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,87 Kg Net weight 0,27 Kg

#### Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



**6538 Wide**

- Finishes**
- **11/ \_ \_ Black**  
(NCS S 8500-N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 530 lm
  - /2 \_ 3000 K - 554 lm
  - /3 \_ 3500 K - 574 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
308 lm - 504 lm



CRI >90

**Control**

**6538** \_ \_ / \_ \_

\_ \_ / \_ **F** On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line

\_ \_ / \_ **Y** ProtoPixel\* (P2P)

\_ \_ / \_ **Z** Casambi (P2P)

\_ \_ / **8Y** Tunable White +  
ProtoPixel\* (P2P)

\_ \_ / **8Z** Tunable White +  
Casambi (P2P)

**Materials**

Lens: PMMA.  
Body: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**

1 x LED 5,2 W 300 mA

**Tunable White:**

1 x LED 5,6 W 150 mA

**Packaging**

1 Box 0,065 x 0,145 x 0,275 m


Vol 0,0026 m<sup>3</sup>

Gross weight 0,87 Kg Net weight 0,27 Kg


**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.

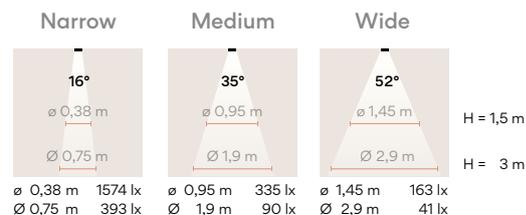

**6540**  
Medium  
**6542**  
Wide

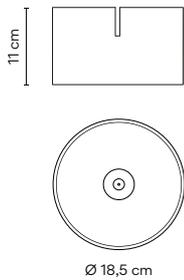

**6540 Medium**

- Finishes**
- **11/ \_\_ Black**  
(NCS S 8500-N)
  - **24/ \_\_ Beige M1**  
(NCS S 2005-Y50R)

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 1256 lm
  - /2 \_ 3000 K - 1313 lm
  - /3 \_ 3500 K - 1360 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
571 lm - 895 lm

**F** >

CRI >90

- Control**
- 6540** \_\_ / \_\_

- \_\_ / \_ **F** On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line
- \_\_ / \_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_ **Z** Casambi (P2P)
- \_\_ / **8Y** Tunable White +  
ProtoPixel\* (P2P)
- \_\_ / **8Z** Tunable White +  
Casambi (P2P)

**Materials**

Diffuser: PC- Polycarbonate.  
Body: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 12,4 W 700 mA

**Tunable White:**  
1 x LED 8,9 W 500 mA  
(max. combined)

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0176 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



**6542 Wide**

- Finishes**
- **11/ \_\_ Black**  
(NCS S 8500-N)
  - **24/ \_\_ Beige M1**  
(NCS S 2005-Y50R)

- LED Colour Temperature**
- Static White**
- /1 \_ 2700 K - 1256 lm
  - /2 \_ 3000 K - 1313 lm
  - /3 \_ 3500 K - 1360 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
571 lm - 895 lm

**F** >

CRI >90

- Control**
- 6542** \_\_ / \_\_

- \_\_ / \_ **F** On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line
- \_\_ / \_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_ **Z** Casambi (P2P)
- \_\_ / **8Y** Tunable White +  
ProtoPixel\* (P2P)
- \_\_ / **8Z** Tunable White +  
Casambi (P2P)

**Materials**

Diffuser: PC- Polycarbonate.  
Lens: Polycarbonate.  
Body: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 12,4 W 700 mA

**Tunable White:**  
1 x LED 8,9 W 500 mA  
(max. combined)

**Packaging**


1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0176 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.



**Medium**



∅ 0,62 m 1485 lx  
∅ 1,24 m 371 lx

**Wide**



∅ 1,55 m 360 lx  
∅ 3,1 m 90 lx

H = 1,5 m

H = 3 m

# Luminaire types

Bind track is compatible with the Skan, Slim, North, Tempo and Tube pendant collections, presenting a range of decorative silhouettes with multiple lighting effects. Single or multiple pendant can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendant.

## Pendant



**6560** (11 Black)  
**6561** (24 Beige)

**6570** (11 Black)  
**6571** (24 Beige)

**6575** (11 Black)  
**6576** (24 Beige)

**6590** (11 Black)  
**6591** (24 Beige)



**6580** (11 Black)  
**6581** (24 Beige)

**6583** (11 Black)  
**6584** (24 Beige)

**6586** (11 Black)  
**6587** (24 Beige)



Multiple fixtures can be connected at any point using a pincer.

● Black (NCS S 8500-N)

● Beige M1 (NCS S 2005-Y50R)

**6560**  
Black pincer  
**6561**  
Beige pincer



- Finishes (shade)**
- **10/** \_\_ White (NCS S 0300-N)
  - **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S4040-Y70R)
  - **42/** \_\_ Blue M1 (NCS S 1000-N)
  - **47/** \_\_ Green L1 (NCS S 4005-G80Y)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

- LED Colour Temperature**
- /1** \_ 2700 K - 1269 lm  
D
  - /2** \_ 3000 K - 1123 lm  
D
  - /3** \_ 3500 K - 1374,9 lm  
G
- CRI >90  
CRI >80  
CRI >90

**Control**  
**6560** \_\_ / \_\_  
**6561** \_\_ / \_\_

- / \_ F On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line
- / \_ Y ProtoPixel\* (P2P)
- / \_ Z Casambi (P2P)

### 6560

- Finishes (pincer)**
- Black (NCS S 8500-N)

### 6561

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

#### Materials

Body: Aluminum.  
Diffuser: PMMA.

#### Light Source and electronics

1 x LED 9,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

#### Packaging

1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,0418 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,4 Kg

#### Notes


ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

\* Available from January 2025.

Extra cable length.



**6570**  
Black pincer  
**6571**  
Beige pincer

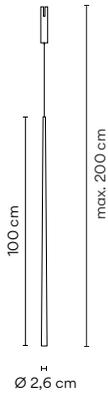

- Finishes (shade)**
- **10/** \_\_ White (NCS S 0300-N)
  - **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **47/** \_\_ Green L1 (NCS S 4005-G80Y)
  - **68/** \_\_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
(Available options:  
Vibia colour palette  
Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1** \_ 2700 K - 181,22 lm  
[F]
  - /2** \_ 3000 K - 163,2 lm  
[G]
  - /3** \_ 3500 K - 207,6 lm  
[F]
- CRI >90**

- Control**
- 6570** \_\_ / \_\_
  - 6571** \_\_ / \_\_
- 
- \_\_ / **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
  - \_\_ / **Y** ProtoPixel\* (P2P)
  - \_\_ / **Z** Casambi (P2P)

**6570**

- Finishes (pincer)**
- Black (NCS S 8500-N)

**6571**

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

**Materials**

Diffuser: Glass.  
Body: FG- Fiberglass.

**Light Source and electronics**

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**

1 Box 0,17 x 0,19 x 1,21 m  
Vol 0,0370 m<sup>3</sup>  
Gross weight 2,48 Kg Net weight 1,35 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.  
Extra cable length.



**6575**  
Black pincer  
**6576**  
Beige pincer



- Finishes (shade)**
- **10/** \_\_ White (NCS S 0300-N)
  - **11/** \_\_ Black (NCS S 8500 N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **42 /** \_\_ Blue M1 (NCS S 5010-B10G)
- Finish customization**  
(Available options:  
Vibia colour palette  
Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1** \_ 2700 K - 1269 lm  
[D]
  - /2** \_ 3000 K - 1123 lm  
[D]
  - /3** \_ 3500 K - 1374,9 lm  
[G]
- CRI >90**

- Control**
- 6575** \_\_ / \_\_
  - 6576** \_\_ / \_\_
- 
- \_\_ / **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
  - \_\_ / **Y** ProtoPixel\* (P2P)
  - \_\_ / **Z** Casambi (P2P)

**6575**

- Finishes (pincer)**
- Black (NCS S 8500-N)

**6576**

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

**Materials**

Shade: Aluminum.  
Diffuser: PMMA.

**Light Source and electronics**

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**


1 Box 0,24 x 0,217 x 0,217 m  
Vol 0,01 m<sup>3</sup>  
Gross weight 2,3 Kg Net weight 1,25 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.  
Extra cable length.



**6590**  
Black pincer  
**6591**  
Beige pincer

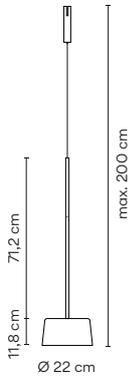

- Finishes (shade)**
- **10/** \_\_ White (NCS S 0300-N)
  - **15/** \_\_ Grey L2 (NCS S 2500-N)
  - **16/** \_\_ Grey M1 (NCS S 4500-N)
  - **21/** \_\_ Black Grey (NCS S 7000-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
- Finish customization**  
(Available options:  
Vibia colour palette  
Minimum quantity  
10 units. Price + 10%)

- LED Colour Temperature**
- /1** \_ 2700 K - 1170 lm
  - /2** \_ 3000 K - 1251 lm
  - /3** \_ 3500 K - 1251 lm
- ☰ **E** >
- CRI >90

- Control**
- 6590** \_\_ / \_\_
- 6591** \_\_ / \_\_

- \_\_ / \_ **F** On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line
- \_\_ / \_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_ **Z** Casambi (P2P)

**6590**

- Finishes (pincer)**
- Black (NCS S 8500-N)

**6591**

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

**Materials**

Diffuser: PC- Polycarbonate.  
Shade: Aluminum.  
Led support: Aluminum.  
Tube: Steel.

**Light Source and electronics**

1 x LED PLATE 10,5 W 15 V  
Constant Current 700 mA  
110-240V 50/60Hz

**Packaging**


1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,0418 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,4 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.  
Extra cable length.



**6580**  
Black pincer  
**6581**  
Beige pincer

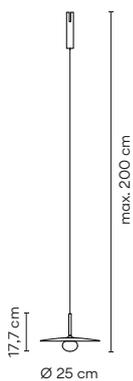

- Finishes (shade)**
- **18/** \_\_ Graphite (ADAPTA RF9913WX)
  - **37/** \_\_ Terra Red (NCS S 4040-Y70R)
  - **58/** \_\_ Cream (RAL 7044)
  - **62/** \_\_ Green (NCS S 3010-G20Y)

- LED Colour Temperature**
- /1** \_ 2700 K - 415 lm
- ☰ **E** >
- CRI >90

- Control**
- 6580** \_\_ / \_\_
- 6581** \_\_ / \_\_

- \_\_ / \_ **F** On/Off; Push; 1-10V; DALI-2;  
Casambi Simultaneous Line
- \_\_ / \_ **Y** ProtoPixel\* (P2P)
- \_\_ / \_ **Z** Casambi (P2P)

**6580**

- Finishes (pincer)**
- Black (NCS S 8500-N)

**6581**

- Finishes (pincer)**
- Beige M1 (NCS S 2005-Y50R)

**Materials**

Diffuser: Blown-glass.  
Body: Aluminum

**Light Source and electronics**


1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,28 x 0,26 x 0,13 m  
Vol 0,01 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 2 Kg

**Notes**

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
\* Available from January 2025.  
Extra cable length.



**6583**  
 Black pincer  
**6584**  
 Beige pincer



Finishes (shade)	LED Colour Temperature	Control
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K - 415 lm	<b>6583</b> _ / _ _
● 37/ __ Terra Red (NCS S 4040-Y70R)	E $\rightarrow$ CRI >90	<b>6584</b> _ / _ _
● 58/ __ Cream (RAL 7044)		_ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
● 62/ __ Green (NCS S 3010-G20Y)		_ / _ Y ProtoPixel* (P2P)
		_ / _ Z Casambi (P2P)

**6583**

Finishes (pincer)  
 ● Black (NCS S 8500-N)

**6584**

Finishes (pincer)  
 ● Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Blown-glass.  
 Body: Aluminum

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,5 Kg Net weight 2 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \* Available from January 2025.  
 Extra cable length.



**6586**  
 Black pincer  
**6587**  
 Beige pincer



Finishes (shade)	LED Colour Temperature	Control
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K - 415 lm	<b>6586</b> _ / _ _
● 37/ __ Terra Red (NCS S 4040-Y70R)	E $\rightarrow$ CRI >90	<b>6587</b> _ / _ _
● 58/ __ Cream (RAL 7044)		_ / _ F On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
● 62/ __ Green (NCS S 3010-G20Y)		_ / _ Y ProtoPixel* (P2P)
		_ / _ Z Casambi (P2P)

**6586**

Finishes (pincer)  
 ● Black (NCS S 8500-N)

**6587**

Finishes (pincer)  
 ● Beige M1 (NCS S 2005-Y50R)

Materials

Diffuser: Blown-glass.  
 Body: Aluminum

Light Source and electronics

1 x LED 4 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,5 Kg Net weight 2 Kg





Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \* Available from January 2025.  
 Extra cable length.



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



See more  
multiple models  
at [vibia.com](http://vibia.com)

# Tracks

## Ceiling Tracks

A491 120 cm  
A492 210 cm  
A493 300 cm



Ceiling Tracks 120 cm A491 \_\_ / OM

Ceiling Tracks 210 cm A492 \_\_ / OM

Ceiling Tracks 300 cm A493 \_\_ / OM

### Finishes

- 11/ OM Black (NCS S 8500-N)
- 24/ OM Beige M1 (NCS S 2005-Y50R)

### Materials

Track: Aluminum.  
Canopy: ABS + Polycarbonate.



### Packaging A491

1 Box  
0,068 x 0,068 x 1,25 m  
Vol 0,0058 m<sup>3</sup>  
Gross weight 1,75 Kg  
Net weight 0,90 Kg

### Packaging A492

1 Box  
0,068 x 0,068 x 2,4 m  
Vol 0,0111 m<sup>3</sup>  
Gross weight 3,24 Kg  
Net weight 1,62 Kg


### Packaging A493

1 Box  
0,068 x 0,068 x 3,15 m  
Vol 0,0146 m<sup>3</sup>  
Gross weight 4,36 Kg  
Net weight 2,17 Kg



# Pendant Tracks

- A419** 120 cm (H 9m)
- A422** 210 cm (H 9m)
- A425** 300 cm (H 9m)



Height 9 m 120 cm **A419** \_\_ / OM  
 Height 9 m 210 cm **A422** \_\_ / OM  
 Height 9 m 300 cm **A425** \_\_ / OM

#### Finishes

- **11/ OM** Black (NCS S 8500-N)
- **24/ OM** Beige M1 (NCS S 2005-Y50R)

#### Materials

Track: Aluminum.  
 Canopy: Aluminum.  
 Ceiling supports: Aluminum.



#### Packaging A419

1 Box  
 0,068 x 0,068 x 1,25 m  
 Vol 0,0058 m<sup>3</sup>  
 Gross weight 1,87 Kg  
 Net weight 1,02 Kg

#### Packaging A422

1 Box  
 0,068 x 0,068 x 2,4 m  
 Vol 0,0111 m<sup>3</sup>  
 Gross weight 3,24 Kg  
 Net weight 1,62 Kg

#### Packaging A425

1 Box  
 0,068 x 0,068 x 3,15 m  
 Vol 0,0146 m<sup>3</sup>  
 Gross weight 4,36 Kg  
 Net weight 2,17 Kg



# Electrical connection options

## Driver for ceiling

### A494 \_\_ / \_\_\_\_\_

__ / 00_10	48W + On/ Off + Surface
__ / 00_31	48W + On/ Off + Remote Micro
__ / 01_10	48W + DALI-2 + Surface
__ / 01_31	48W + DALI-2 + Remote Micro
__ / 03_10	48W + 1-10V + Surface
__ / 03_31	48W + 1-10V + Remote Micro
__ / 05_10	48W + Push + Surface
__ / 05_31	48W + Push + Remote Micro
__ / 0Z_10	48W + Casambi + Surface
__ / 0Z_31	48W + Casambi + Remote Micro

### A495 \_\_ / \_\_\_\_\_

__ / 00_10	84W + On/ Off + Surface
__ / 00_31	84W + On/ Off + Remote Micro
__ / 01_10	84W + DALI-2 + Surface
__ / 01_31	84W + DALI-2 + Remote Micro
__ / 03_10	84W + 1-10V + Surface
__ / 03_31	84W + 1-10V + Remote Micro
__ / 05_10	84W + Push + Surface
__ / 05_31	84W + Push + Remote Micro
__ / 0Z_10	84W + Casambi + Surface
__ / 0Z_31	84W + Casambi + Remote Micro

#### Finishes

- 11/ 0 \_ Black (NCS S 8500-N)
- 24/ 0 \_ Beige M1 (NCS S 2005-Y50R)

#### Materials

Aluminum.



#### Electrical connection

**Driver** Constant Voltage 48V  
220-240V 50/60Hz

#### Notes

Max. 5 luminaires with Simultaneous line 48 W.  
Max.10 luminaires with Simultaneous line 84 W.  
Select On/ Off if your luminaires are P2P.

#### Packaging

1 Box 0,12 x 0,10 x 0,37 m  
Vol 0,0273 m<sup>3</sup>  
Gross weight 0,95 Kg  
Net weight 0,53 Kg

### ⚡ Select Electrical connection



L 30 cm.

A494 \_\_ / 00 A495 \_\_ / 00

Surface



L 40 cm.

A494 \_\_ / 01 A495 \_\_ / 01

A494 \_\_ / 03 A495 \_\_ / 03

A494 \_\_ / 05 A495 \_\_ / 05

A494 \_\_ / 0Z A495 \_\_ / 0Z

Surface



Remote



### Included in tracks electrical connections



Remote  
1 x 9 m  
electrical cable  
included

## Driver for pendant

### A426 \_\_ / \_\_\_\_\_

\_\_ / 00\_10 48W + On/ Off + Surface  
 \_\_ / 00\_23 48W + On/ Off + Built-in XS  
 \_\_ / 00\_31 48W + On/ Off + Remote Micro  
 \_\_ / 01\_10 48W + DALI-2 + Surface  
 \_\_ / 01\_23 48W + DALI-2 + Built-in XS  
 \_\_ / 01\_31 48W + DALI-2 + Remote Micro  
 \_\_ / 03\_10 48W + 1-10V + Surface  
 \_\_ / 03\_23 48W + 1-10V + Built-in XS  
 \_\_ / 03\_31 48W + 1-10V + Remote Micro  
 \_\_ / 05\_10 48W + Push + Surface  
 \_\_ / 05\_23 48W + Push + Built-in XS  
 \_\_ / 05\_31 48W + Push + Remote Micro  
 \_\_ / 0Z\_10 48W + Casambi + Surface  
 \_\_ / 0Z\_23 48W + Casambi + Built-in XS  
 \_\_ / 0Z\_31 48W + Casambi + Remote Micro

### A427 \_\_ / \_\_\_\_\_

\_\_ / 00\_10 84W + On/ Off + Surface  
 \_\_ / 00\_23 84W + On/ Off + Built-in XS  
 \_\_ / 00\_31 84W + On/ Off + Remote Micro  
 \_\_ / 01\_10 84W + DALI-2 + Surface  
 \_\_ / 01\_23 84W + DALI-2 + Built-in XS  
 \_\_ / 01\_31 84W + DALI-2 + Remote Micro  
 \_\_ / 03\_10 84W + 1-10V + Surface  
 \_\_ / 03\_23 84W + 1-10V + Built-in XS  
 \_\_ / 03\_31 84W + 1-10V + Remote Micro  
 \_\_ / 05\_10 84W + Push + Surface  
 \_\_ / 05\_23 84W + Push + Built-in XS  
 \_\_ / 05\_31 84W + Push + Remote Micro  
 \_\_ / 0Z\_10 84W + Casambi + Surface  
 \_\_ / 0Z\_23 84W + Casambi + Built-in XS  
 \_\_ / 0Z\_31 84W + Casambi + Remote Micro

#### Finishes

- 11/ 0 \_ Black (NCS S 8500-N)
- 24/ 0 \_ Beige M1 (NCS S 2005-Y50R)
- 80/ 0 \_ Without finish for Built-in and Remote.

#### Materials

Surface: Aluminum.  
Built-in and Remote Driver box: Steel.



#### Electrical connection

**Driver** Constant Voltage 48V  
220-240V 50/60Hz

#### Notes

Max. 5 luminaires with Simultaneous line 48 W.  
Max.10 luminaires with Simultaneous line 84 W.  
Select On/ Off if your luminaires are P2P.

#### Packaging

1 Box 0,12 x 0,10 x 0,37 m  
Vol 0,0273 m<sup>3</sup>  
Gross weight 0,95 Kg  
Net weight 0,53 Kg

### Select Electrical connection

**L 25 cm.**

A426 \_\_ / 01 A427 \_\_ / 00  
 A426 \_\_ / 03 A427 \_\_ / 01  
 A426 \_\_ / 05 A427 \_\_ / 03  
 A426 \_\_ / 0Z A427 \_\_ / 05

Surface

**L 21 cm.**

A426 \_\_ / 00

Surface

Built-in XS

Remote Micro

\_10 Surface  
 \_23 Built-in XS  
 \_31 Remote  
 Micro

### Included in tracks electrical connections

Surface  
Feeder + 9 m  
electrical  
cable included

Built-in  
Canopy + 9 m  
electrical  
cable included

Remote  
Micro canopy + 9 m  
electrical  
cable included

# Bind Solo

Bind Solo provides a set of tools to play with contrasts, defining functional and transitional areas, as well as hybrid activity zones. The range can be mounted to the ceiling as desired, creating visual hierarchy by directing the gaze towards specific features and combining to form unique compositions overhead.

## Ceiling - Accent Downlight - Micro


6600 Narrow  
6604 Medium  
Ø 3 cm



6650 Narrow  
6654 Medium  
6658 Wide  
Ø 4cm



**6600**  
Narrow  
**6604**  
Medium



**6600 Narrow**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm

F

CRI >90

Control

**6600** \_\_ / \_\_

- \_\_ / \_\_ **O** On/ Off (Remote)
- \_\_ / \_\_ **D** Push; DALI-2 (Remote)
- \_\_ / \_\_ **M** Without driver
- \_\_ / \_\_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,63 Kg Net weight 0,15 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6604 Medium**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm

F

CRI >90

Control

**6604** \_\_ / \_\_

- \_\_ / \_\_ **O** On/ Off (Remote)
- \_\_ / \_\_ **D** Push; DALI-2 (Remote)
- \_\_ / \_\_ **M** Without driver
- \_\_ / \_\_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,63 Kg Net weight 0,15 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6650**  
Narrow  
**6654**  
Medium  
**6658**  
Wide



**6650 Narrow**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm



CRI >90

Control

**6650** \_\_ / \_\_

- \_\_ / **O** On/ Off (Remote)
- \_\_ / **D** Push; DALI-2 (Remote)
- \_\_ / **M** Without driver
- \_\_ / **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6654 Medium**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**
- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm



CRI >90

Control

**6654** \_\_ / \_\_

- \_\_ / **O** Static White +  
On/ Off (Remote)
  - \_\_ / **D** Static White +  
Push; DALI-2 (Remote)
  - \_\_ / **M** Static White +  
Without driver
  - \_\_ / **Z** Static White +  
Casambi (Remote)
- 
- \_\_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
  - \_\_ / **8M** Tunable White +  
Without driver
  - \_\_ / **8Z** Tunable White +  
Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

**Tunable White:**

1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



### 6658 Wide

- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1 \_ 2700 K - 530 lm
  - /2 \_ 3000 K - 554 lm
  - /3 \_ 3500 K - 574 lm

- Tunable White**
- /8 \_ (1800 K - 4000 K)  
308 lm - 504 lm

**F**   
CRI >90

**Control**

- 6658** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** Static White +  
On/ Off (Remote)
  - \_\_ / \_\_ **D** Static White +  
Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Static White +  
Without driver
  - \_\_ / \_\_ **Z** Static White +  
Casambi (Remote)
- 
- \_\_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
  - \_\_ / **8M** Tunable White +  
Without driver
  - \_\_ / **8Z** Tunable White +  
Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 350 mA  
220~240V 50/60Hz



**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,2 Kg

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

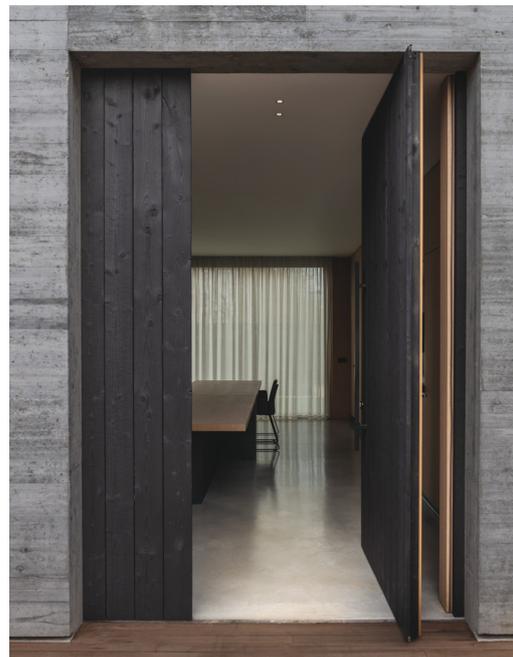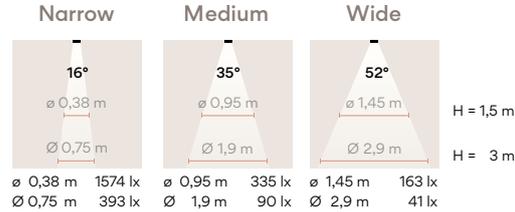

---

Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

**6610** Narrow  
**6614** Medium  
Ø 3 x 4 cm



**6630** Narrow  
**6634** Medium  
Ø 3 x 10 cm



DOWNLIGHT Ø 4 cm

**6660** Narrow  
**6664** Medium  
**6668** Wide  
Ø 4 x 7 cm



**6680** Narrow  
**6684** Medium  
**6688** Wide  
Ø 4 x 10 cm



---

Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

**6620** Narrow  
**6624** Medium  
Ø 3 x 11 cm



**6640** Narrow  
**6644** Medium  
Ø 3 x 11,5 cm



SPOTLIGHT Ø 4 cm

**6670** Narrow  
**6674** Medium  
**6678** Wide  
Ø 4 x 10 cm



**6690** Narrow  
**6694** Medium  
**6698** Wide  
Ø 4 x 14 cm



---


Ceiling - Wide Accent Downlight

Ø 18,5 cm

**6700** Medium  
**6702** Wide  
Ø 18,5 cm



**6610**  
Narrow  
**6614**  
Medium



**6610 Narrow**

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm

**F** →

CRI >90

**Control**

**6610** \_\_ / \_\_

---

\_\_ / \_\_ **O** On/ Off (Remote)

\_\_ / \_\_ **D** Push; DALI-2 (Remote)

\_\_ / \_\_ **M** Without driver

\_\_ / \_\_ **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz


**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,66 Kg Net weight 0,18 Kg

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6614 Medium**

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm

**F** →

CRI >90

**Control**

**6614** \_\_ / \_\_

---

\_\_ / \_\_ **O** On/ Off (Remote)

\_\_ / \_\_ **D** Push; DALI-2 (Remote)

\_\_ / \_\_ **M** Without driver

\_\_ / \_\_ **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz


**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,66 Kg Net weight 0,18 Kg


**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

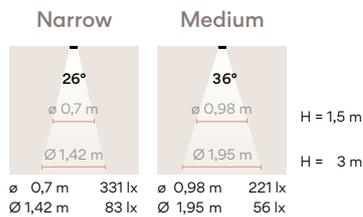

**6630**  
Narrow  
**6634**  
Medium



**6630 Narrow**

Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm



CRI >90

Control

**6630** \_ \_ / \_ \_

- \_ \_ / \_ **0** On/ Off (Remote)
- \_ \_ / \_ **D** Push; DALI-2 (Remote)
- \_ \_ / \_ **M** Without driver
- \_ \_ / \_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6634 Medium**

Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm



CRI >90

Control

**6634** \_ \_ / \_ \_

- \_ \_ / \_ **0** On/ Off (Remote)
- \_ \_ / \_ **D** Push; DALI-2 (Remote)
- \_ \_ / \_ **M** Without driver
- \_ \_ / \_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,67 Kg Net weight 0,19 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

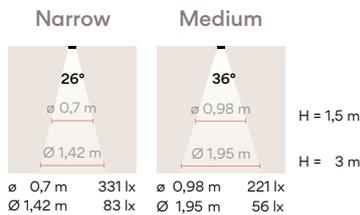

**6660**  
Narrow  
**6664**  
Medium  
**6668**  
Wide



### 6660 Narrow

- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**F**

CRI >90

### Control

**6660** \_\_ / \_\_

---

\_\_ / \_ **O** On/ Off (Remote)

\_\_ / \_ **D** Push; DALI-2 (Remote)

\_\_ / \_ **M** Without driver

\_\_ / \_ **Z** Casambi (Remote)

### Materials

Body: Aluminum  
Lens: PMMA.

### Light Source and electronics

1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,72 Kg Net weight 0,24 Kg

### Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



### 6664 Medium

- Finishes**
- **11/** \_\_ Black  
(NCS S 8500-N)
  - **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

**Static White**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm

**F**

CRI >90

### Control

**6664** \_\_ / \_\_

---

\_\_ / \_ **O** Static White +  
On/ Off (Remote)

\_\_ / \_ **D** Static White +  
Push; DALI-2 (Remote)

\_\_ / \_ **M** Static White +  
Without driver

\_\_ / \_ **Z** Static White +  
Casambi (Remote)

---

\_\_ / **81** Tunable White +  
DALI-2 DT8 (Remote)

\_\_ / **8M** Tunable White +  
Without driver

\_\_ / **8Z** Tunable White +  
Casambi (Remote)

### Materials

Body: Aluminum.  
Lens: PMMA.

### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,72 Kg Net weight 0,24 Kg

### Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



**6668 Wide**

**Finishes**

- **11/ \_ \_ Black**  
(NCS S 8500-N)
- **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1\_ 2700 K - 530 lm
  - /2\_ 3000 K - 554 lm
  - /3\_ 3500 K - 574 lm

- Tunable White**
- /8\_ (1800 K - 4000 K)  
308 lm - 504 lm



CRI >90

**Control**

**6668** \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White +  
On/ Off (Remote)
  - \_ \_ / \_ **D** Static White +  
Push; DALI-2 (Remote)
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi (Remote)
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi (Remote)

**Materials**

Body: Aluminim.  
Lens: PMMA.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110-240V 50/60Hz


**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,72 Kg Net weight 0,24 Kg


**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



**6680**  
Narrow  
**6684**  
Medium  
**6688**  
Wide



### 6680 Narrow

Finishes	LED Colour Temperature
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 530 lm
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	<b>/2</b> _ 3000 K - 554 lm
	<b>/3</b> _ 3500 K - 574 lm
	<b>F</b> >
	CRI >90

### Control

<b>6680</b> __ / __
__ / __ <b>O</b> On/ Off (Remote)
__ / __ <b>D</b> Push; DALI-2 (Remote)
__ / __ <b>M</b> Without driver
__ / __ <b>Z</b> Casambi (Remote)

### Materials

Body: Aluminum.  
Lens: PMMA.

### Light Source and electronics

1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220~240V 50/60Hz

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0072 m<sup>3</sup>  
Gross weight 0,73 Kg Net weight 0,25 Kg

### Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



### 6684 Medium

Finishes	LED Colour Temperature
● <b>11/</b> __ Black (NCS S 8500-N)	<b>Static White</b>
● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)	<b>/1</b> _ 2700 K - 530 lm
	<b>/2</b> _ 3000 K - 554 lm
	<b>/3</b> _ 3500 K - 574 lm
	<b>Tunable White</b>
	<b>/8</b> _ (1800 K - 4000 K) 308 lm - 504 lm
	<b>F</b> >
	CRI >90

### Control

<b>6684</b> __ / __
__ / __ <b>O</b> Static White + On/ Off (Remote)
__ / __ <b>D</b> Static White + Push; DALI-2 (Remote)
__ / __ <b>M</b> Static White + Without driver
__ / __ <b>Z</b> Static White + Casambi (Remote)
__ / <b>81</b> Tunable White + DALI-2 DT8 (Remote)
__ / <b>8M</b> Tunable White + Without driver
__ / <b>8Z</b> Tunable White + Casambi (Remote)

### Materials

Body: Aluminum.  
Lens: PMMA.

### Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220~240V 50/60Hz

### Tunable White:

1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0072 m<sup>3</sup>  
Gross weight 0,78 Kg Net weight 0,3 Kg

### Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



6688 Wide

- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**
- /1\_ 2700 K - 530 lm
  - /2\_ 3000 K - 554 lm
  - /3\_ 3500 K - 574 lm

- Tunable White**
- /8\_ (1800 K - 4000 K)  
308 lm - 504 lm

**F**   
CRI >90

**Control**

- 6688** \_ \_ / \_ \_
- 
- \_ \_ / \_ **O** Static White +  
On/ Off (Remote)
  - \_ \_ / \_ **D** Static White +  
Push; DALI-2 (Remote)
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi (Remote)
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 350 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110-240V 50/60Hz



**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0072 m<sup>3</sup>  
Gross weight 0,78 Kg Net weight 0,3 Kg


**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

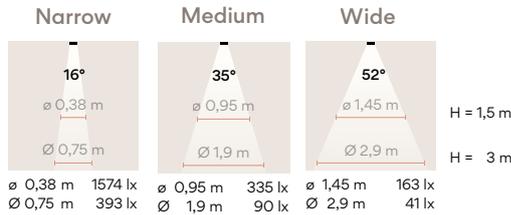

**6620**  
Narrow  
**6624**  
Medium

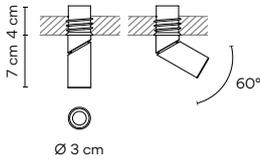

**6620 Narrow**

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1 \_ 2700 K - 451 lm
- /2 \_ 3000 K - 471 lm
- /3 \_ 3500 K - 489 lm

**F** →

CRI >90

**Control**

- 6620** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** On/ Off (Remote)
  - \_\_ / \_\_ **D** Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Without driver
  - \_\_ / \_\_ **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

**Packaging**

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,2 Kg

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6624 Medium**

- Finishes**
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

**LED Colour Temperature**

- /1 \_ 2700 K - 451 lm
- /2 \_ 3000 K - 471 lm
- /3 \_ 3500 K - 489 lm

**F** →

CRI >90

**Control**

- 6624** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** On/ Off (Remote)
  - \_\_ / \_\_ **D** Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Without driver
  - \_\_ / \_\_ **Z** Casambi (Remote)

**Materials**

Body: Aluminum.  
Lens: PMMA.

**Light Source and electronics**


1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220~240V 50/60Hz

**Packaging**


1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,68 Kg Net weight 0,2 Kg

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.  
Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.

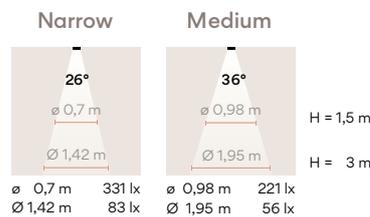

**6640**  
Narrow  
**6644**  
Medium

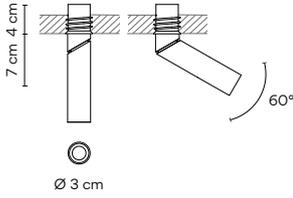

**6640 Narrow**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm



CRI >90

Control

**6640** \_\_ / \_\_

- \_\_ / \_\_ **O** On/ Off (Remote)
- \_\_ / \_\_ **D** Push; DALI-2 (Remote)
- \_\_ / \_\_ **M** Without driver
- \_\_ / \_\_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6644 Medium**

Finishes

- **11/** \_\_ Black  
(NCS S 8500-N)
- **24/** \_\_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- /1** \_ 2700 K - 451 lm
- /2** \_ 3000 K - 471 lm
- /3** \_ 3500 K - 489 lm



CRI >90

Control

**6644** \_\_ / \_\_

- \_\_ / \_\_ **O** On/ Off (Remote)
- \_\_ / \_\_ **D** Push; DALI-2 (Remote)
- \_\_ / \_\_ **M** Without driver
- \_\_ / \_\_ **Z** Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA  
Constant Current 250 mA  
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6670**  
Narrow  
**6674**  
Medium  
**6678**  
Wide

**6670 Narrow**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature


- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**F**

CRI >90

Control

- 6670** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** On/ Off (Remote)
  - \_\_ / \_\_ **D** Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Without driver
  - \_\_ / \_\_ **Z** Casambi (Remote)

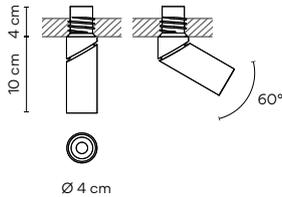

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED 4,1 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6674 Medium**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

**Static White**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K) 308 lm - 504 lm

**F**

CRI >90

Control

- 6674** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** Static White + On/ Off (Remote)
  - \_\_ / \_\_ **D** Static White + Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Static White + Without driver
  - \_\_ / \_\_ **Z** Static White + Casambi (Remote)
- 
- \_\_ / **81** Tunable White + DALI-2 DT8 (Remote)
  - \_\_ / **8M** Tunable White + Without driver
  - \_\_ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 350 mA  
220~240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



**6678 Wide**

Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **24/** \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**  
**/1** \_ 2700 K - 530 lm  
**/2** \_ 3000 K - 554 lm  
**/3** \_ 3500 K - 574 lm

- Tunable White**  
**/8** \_ (1800 K - 4000 K)  
 308 lm - 504 lm



CRI >90

Control

**6678** \_ \_ / \_ \_

- 
- \_ \_ / \_ **O** Static White +  
On/ Off (Remote)
  - \_ \_ / \_ **D** Static White +  
Push; DALI-2 (Remote)
  - \_ \_ / \_ **M** Static White +  
Without driver
  - \_ \_ / \_ **Z** Static White +  
Casambi (Remote)
- 
- \_ \_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
  - \_ \_ / **8M** Tunable White +  
Without driver
  - \_ \_ / **8Z** Tunable White +  
Casambi (Remote)
- 

Materials

Body: Aluminum.  
 Lens: PMMA.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
 1 x LED 5,2 W 300 mA  
 Constant Current 300 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 5,5 W 150 mA  
 Constant Current 150 mA  
 110-240V 50/60Hz


Packaging

1 Box 0,065 x 0,145 x 0,275 m  
 Vol 0,0026 m<sup>3</sup>  
 Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

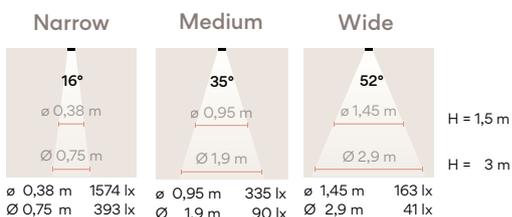

**6690**  
Narrow  
**6694**  
Medium  
**6698**  
Wide

**6690 Narrow**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature


- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**F** →

CRI >90

Control

- 6690** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** On/ Off (Remote)
  - \_\_ / \_\_ **D** Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Without driver
  - \_\_ / \_\_ **Z** Casambi (Remote)

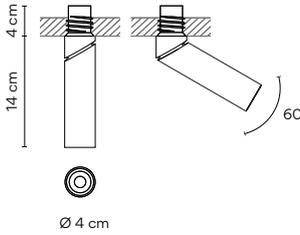

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

1 x LED PLATE 5,2 W 300 mA  
Constant Current 350 mA  
220-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point.



**6694 Medium**

- Finishes
- **11/** \_\_ Black (NCS S 8500-N)
  - **24/** \_\_ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

**Static White**

- /1** \_ 2700 K - 530 lm
- /2** \_ 3000 K - 554 lm
- /3** \_ 3500 K - 574 lm

**Tunable White**

- /8** \_ (1800 K - 4000 K)  
308 lm - 504 lm

**F** →

CRI >90

Control

- 6694** \_\_ / \_\_
- 
- \_\_ / \_\_ **O** Static White + On/ Off (Remote)
  - \_\_ / \_\_ **D** Static White + Push; DALI-2 (Remote)
  - \_\_ / \_\_ **M** Static White + Without driver
  - \_\_ / \_\_ **Z** Static White + Casambi (Remote)
- 
- \_\_ / **81** Tunable White + DALI-2 DT8 (Remote)
  - \_\_ / **8M** Tunable White + Without driver
  - \_\_ / **8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.  
Lens: PMMA.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
1 x LED 5,2 W 300 mA  
Constant Current 300 mA  
220-240V 50/60Hz

**Tunable White:**  
1 x LED 5,5 W 150 mA  
Constant Current 150 mA  
110-240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.



6698 Wide

Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature

- Static White**  
 /1\_ 2700 K - 530 lm  
 /2\_ 3000 K - 554 lm  
 /3\_ 3500 K - 574 lm

- Tunable White**  
 /8\_ (1800 K - 4000 K)  
 308 lm - 504 lm



CRI >90

Control

6698 \_ \_ / \_ \_

- \_ \_ / \_ **O** Static White +  
On/ Off (Remote)
- \_ \_ / \_ **D** Static White +  
Push; DALI-2 (Remote)
- \_ \_ / \_ **M** Static White +  
Without driver
- \_ \_ / \_ **Z** Static White +  
Casambi (Remote)

---

- \_ \_ / **81** Tunable White +  
DALI-2 DT8 (Remote)
- \_ \_ / **8M** Tunable White +  
Without driver
- \_ \_ / **8Z** Tunable White +  
Casambi (Remote)

Materials

Body: Aluminum.  
 Lens: PMMA.

Light Source and electronics

**2700 K - 3000 K - 3500K:**  
 1 x LED 5,2 W 300 mA  
 Constant Current 300 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 5,5 W 150 mA  
 Constant Current 150 mA  
 110-240V 50/60Hz



Packaging

1 Box 0,065 x 0,145 x 0,275 m  
 Vol 0,0026 m<sup>3</sup>  
 Gross weight 0,78 Kg Net weight 0,3 Kg


Notes

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

Visit [vibia.com](http://vibia.com) to group several pieces with just one electrical point, only for Static White.

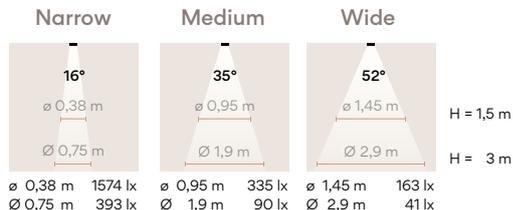

**6700**  
 Medium  
**6702**  
 Wide

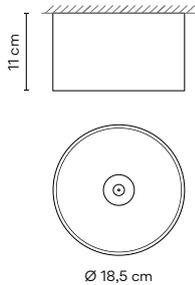

**6700 Medium**

- Finishes**  
 ● **11/** \_\_ Black  
 (NCS S 8500-N)  
 ● **24/** \_\_ Beige M1  
 (NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

- Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**F**   
 CRI >90

**Control**

- 6700** \_\_ / \_\_  
 \_\_ / \_\_ **D** Static White +  
 Push; DALI-2 (Remote)  
 \_\_ / \_\_ **Z** Static White +  
 Casambi (Remote)  
 \_\_ / **81** Tunable White +  
 DALI-2 DT8 (Remote)  
 \_\_ / **8Z** Tunable White +  
 Casambi (Remote)

**Materials**

Diffuser: PC- Polycarbonate.  
 Body: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 12,4 W 700 mA  
 Constant Current 700 mA  
 220-240V 50/60Hz

**Tunable White:**  
 1 x LED 8,9 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m  
 Vol 0,0176 m<sup>3</sup>  
 Gross weight 1,7 Kg Net weight 1,2 Kg

**Notes**

DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.



**6702 Wide**

- Finishes**  
 ● **11/** \_\_ Black  
 (NCS S 8500-N)  
 ● **24/** \_\_ Beige M1  
 (NCS S 2005-Y50R)

**LED Colour Temperature**

- Static White**  
 /1 \_ 2700 K - 1256 lm  
 /2 \_ 3000 K - 1313 lm  
 /3 \_ 3500 K - 1360 lm

- Tunable White**  
 /8 \_ (1800 K - 4000 K)  
 571 lm - 895 lm

**F**   
 CRI >90

**Control**

- 6702** \_\_ / \_\_  
 \_\_ / \_\_ **D** Static White +  
 Push; DALI-2 (Remote)  
 \_\_ / \_\_ **Z** Static White +  
 Casambi (Remote)  
 \_\_ / **81** Tunable White +  
 DALI-2 DT8 (Remote)  
 \_\_ / **8Z** Tunable White +  
 Casambi (Remote)

**Materials**

Diffuser: PC- Polycarbonate.  
 Body: Aluminum.

**Light Source and electronics**

**2700 K - 3000 K - 3500K:**  
 1 x LED 12,4 W 700 mA  
 Constant Current 700 mA  
 220-240V 50/60Hz



**Tunable White:**  
 1 x LED 8,9 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**

1 Box 0,26 x 0,26 x 0,26 m  
 Vol 0,0176 m<sup>3</sup>  
 Gross weight 1,7 Kg Net weight 1,2 Kg

**Notes**


DALI-2 products are compatible (via a designated gateway) with all ProtoPixel dynamic-light solution products.

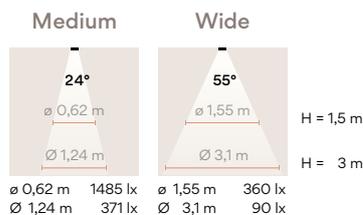

# Sticks

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

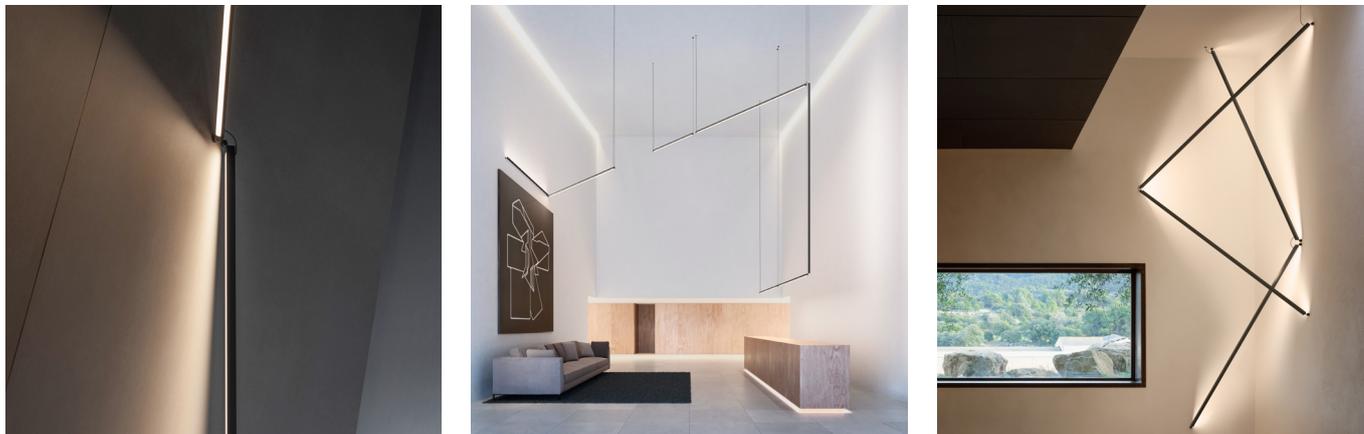


You can choose the desired composition through one of the following three options:

**A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 466).**



**B - Select one composition on [vibia.com](http://vibia.com) among multiple applications in spaces, and adjust it to your project by modifying:**

- + Length of the sticks.
- + Position of each stick in the space.
- + Colour temperature and dimming.
- + Installation type.

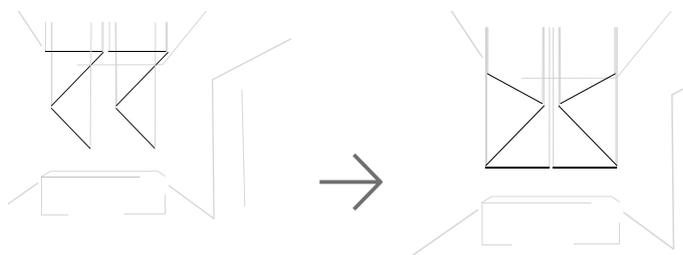

**C - Create your configuration on [vibia.com](http://vibia.com) from scratch in three easy steps, without sketches.**

1

Choose the location for your electrical connection point



2

Add connectable Sticks up to 6.5 meters



3

Configure  
+ Colour temperature  
+ Dimming control  
+ Installation type  
+ Pendant height



# Technical Specifications

(see page 474)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.

## Wall-Wall / Ceiling-Ceiling





**7306**  
Stick 300 x 3 x 2 cm

## Wall-Wall (corner) / Wall-Ceiling





**7336**  
Stick 306 x 3 x 2 cm

## Wall-Pendant

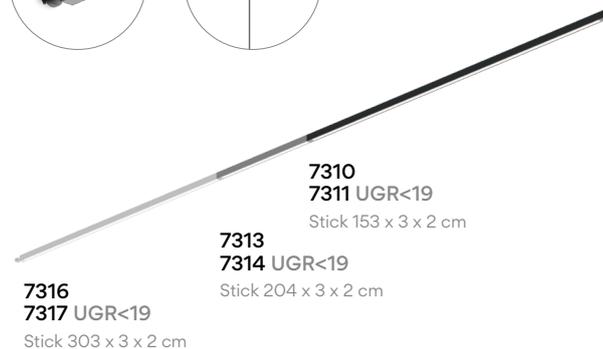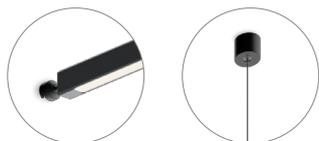

## Pendant-Pendant

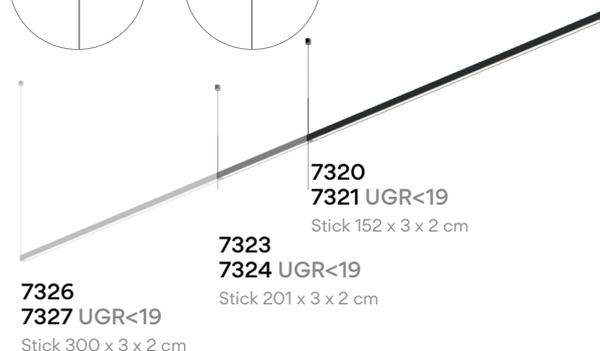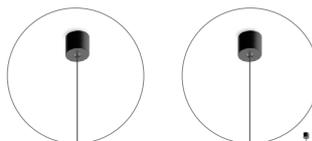

## Pendant



## Floor-Wall




# Sticks Connectable

Next sketches are composed by one or more compositions


## Pendant / Ceiling

---

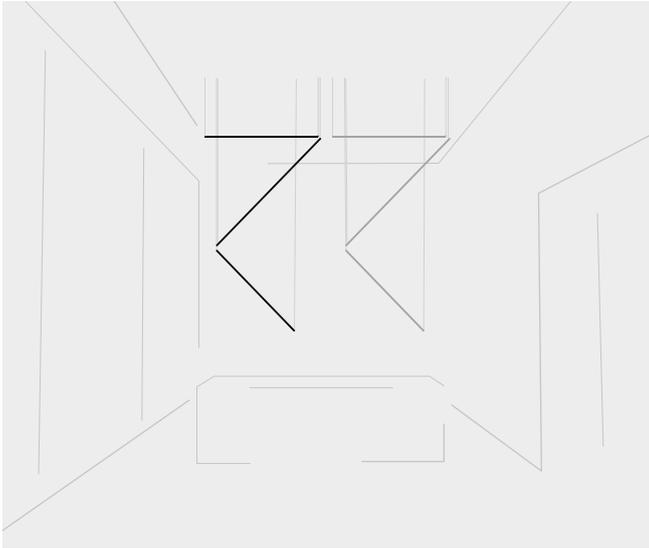


**ST1001**  
Sketch composed by two identical compositions.

Each composition:  
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.  
LED 3500 K. 11870 lm. 88 W.  
Remote driver Built-in Micro. 1-10V.

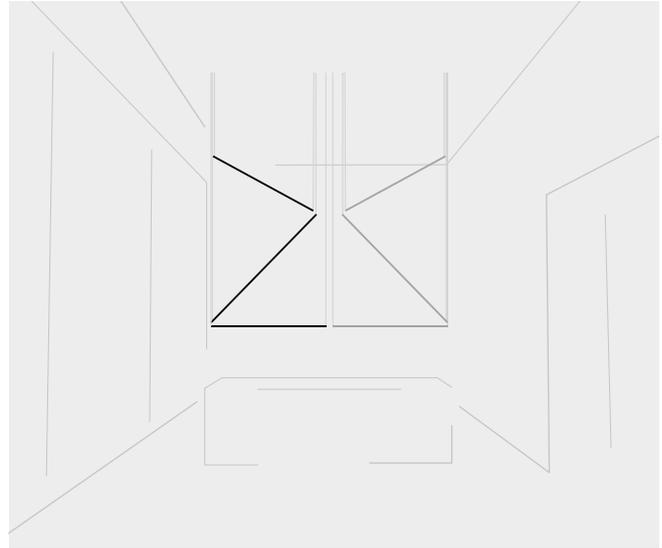

**ST1005**  
Sketch composed by two identical compositions.

Each composition:  
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.  
LED 3500 K. 11870 lm. 88 W.  
Remote driver Built-in Micro. 1-10V.

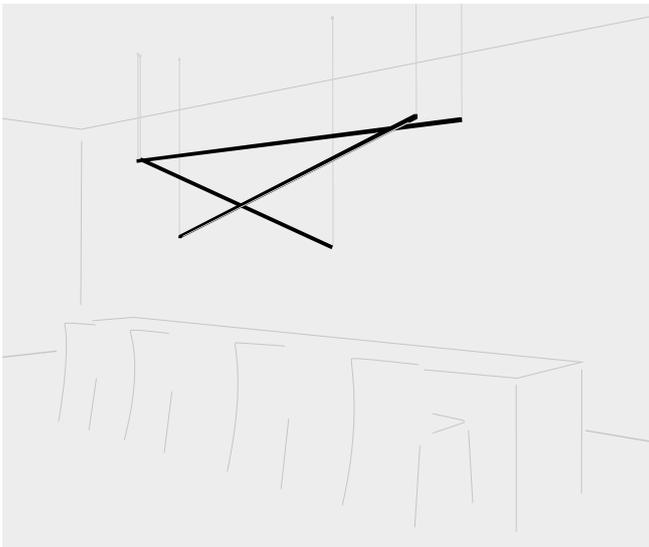

**ST1015**  
Sketch composed by two compositions.


Composition 1:  
2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.  
LED 2700 K. 9779 lm. 79,2 W.  
Built-in disc S canopy. 1-10V.

Composition 2:  
1 Stick: 1 x 300 cm. Total 3 m.  
LED 2700 K. 6519 lm. 52,8 W.  
Built-in disc S canopy. 1-10V.



**ST1021**  
Sketch composed by four identical compositions.

Each composition:  
2 Sticks: 2 x 200 cm. Total 4 m.  
LED 3500 K. 9496 lm. 140,8 W.  
Built-in disc S canopy. 1-10V.

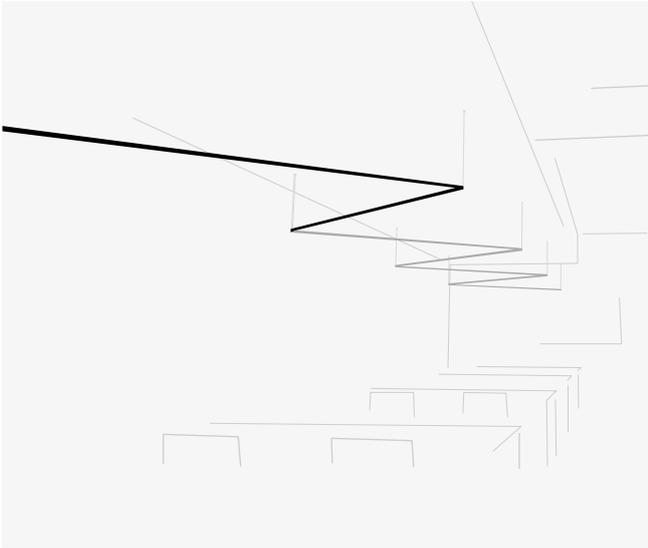


**ST1025**

Sketch composed by four identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.  
LED 3500 K. 14244 lm. 105,6 W.  
Built-in disc S canopy. 1-10V.

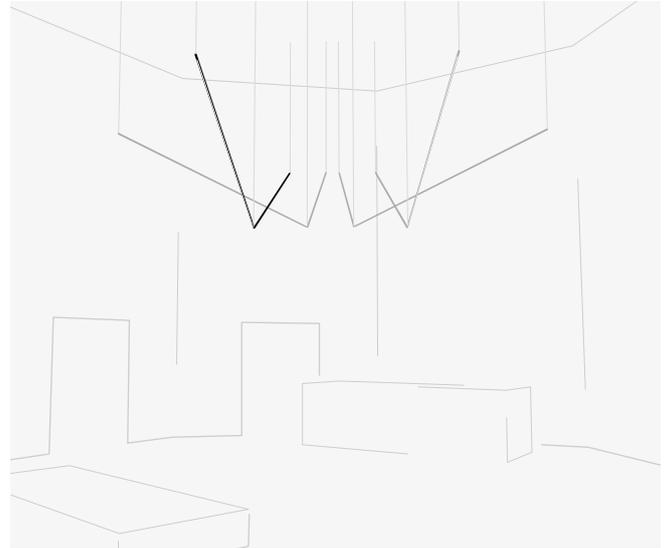


**ST1035**

Sketch composed by four identical compositions.

Each composition:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.  
LED 3500 K. 10683 lm. 79,2 W.  
Built-in disc S canopy. 1-10V.

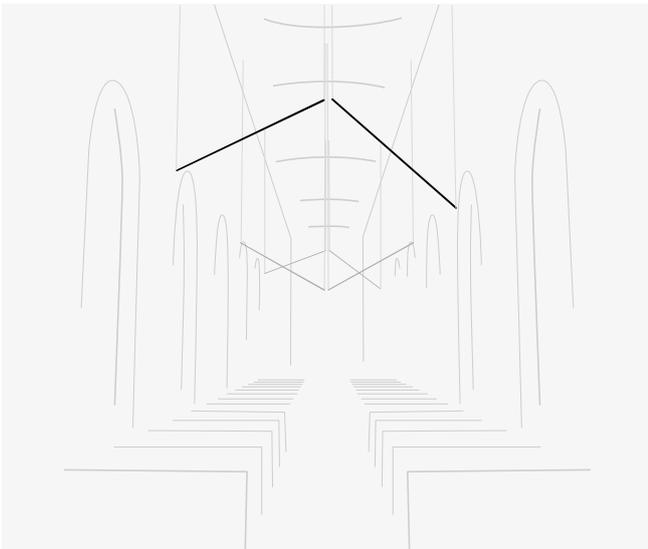


**ST1041**

Sketch composed by three identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.  
LED 3500 K. 14244 lm. 105,6 W.  
Built-in disc S canopy. 1-10V.

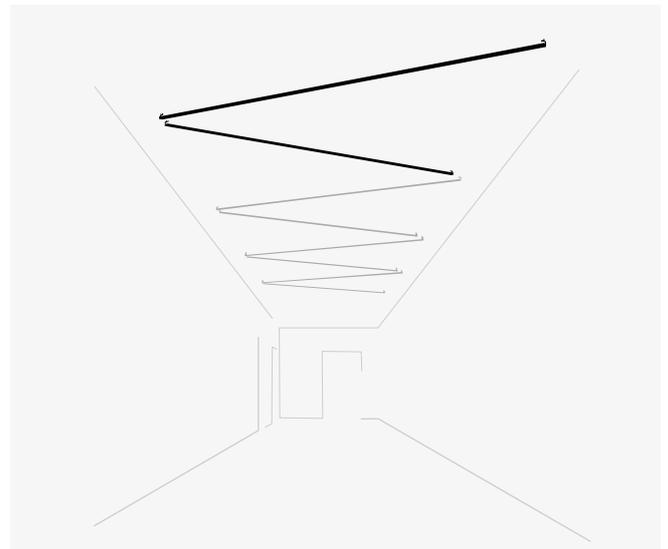

**ST1085**

Sketch composed by four identical compositions.


Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.  
LED 3500 K. 14244 lm. 105,6 W.  
Remote driver Built-in Micro. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions


## Some sticks are attached to the Wall

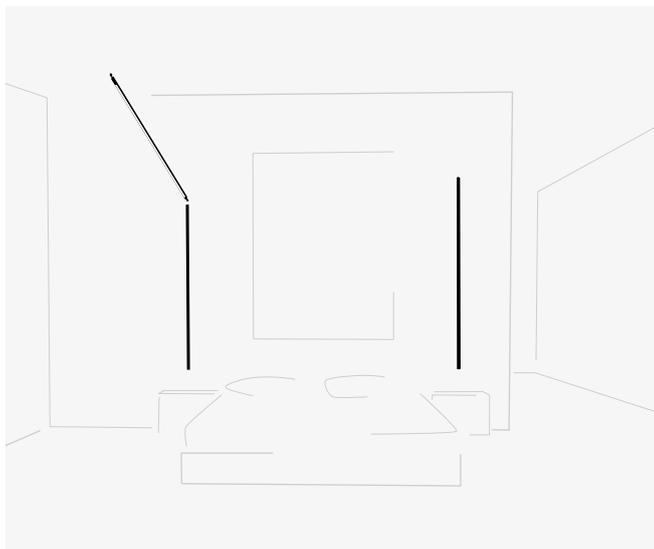

**STI051**  
Sketch composed by two compositions.


**Composition 1:**  
2 Sticks: 2 x 150 cm. Total 3 m.  
LED 2700 K. 6520 lm. 52,8 W.  
Floor base & plug. Push.

**Composition 2:**  
1 Stick: 1 x 200 cm. Total 2 m.  
LED 2700 K. 4346 lm. 35,2 W.  
Floor base & plug. Push.

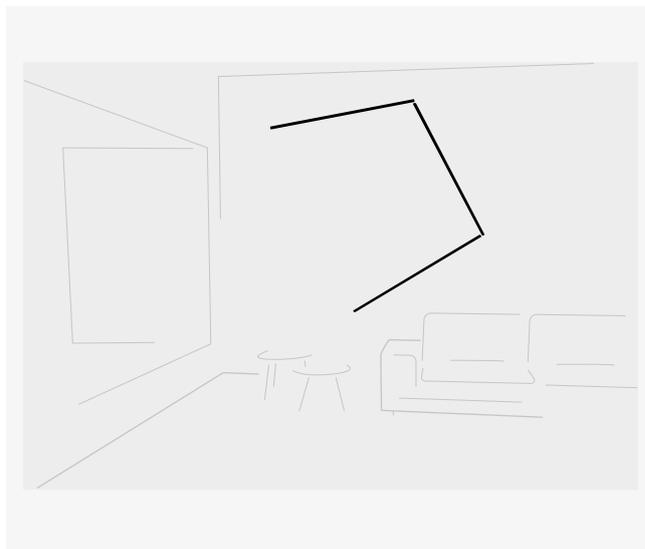


**STI055**  
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.  
LED 2700 K. 9780 lm. 79,2 W.  
Floor base & plug. Push.

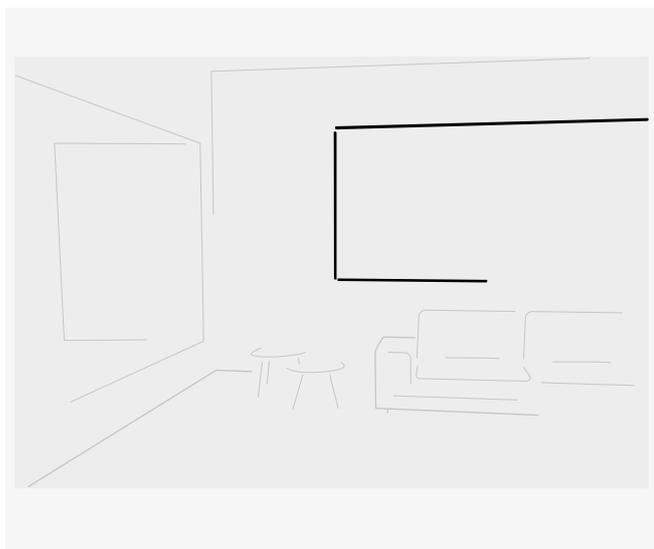


**STI061**  
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.  
LED 2700 K. 13039 lm. 105,6 W.  
Floor base & plug. Push.

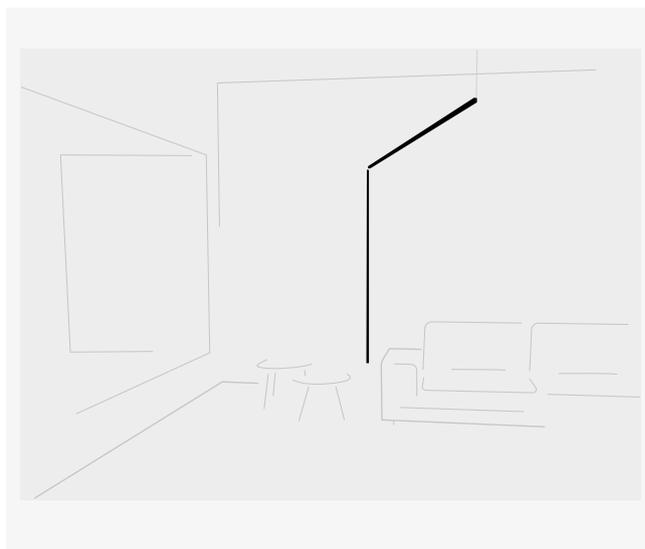

**STI065**  
Sketch composed by only one composition.


2 Sticks: 2 x 150 cm. Total 3 m.  
LED 2700 K. 6520 lm. 52,8 W.  
Floor base & plug. Push.

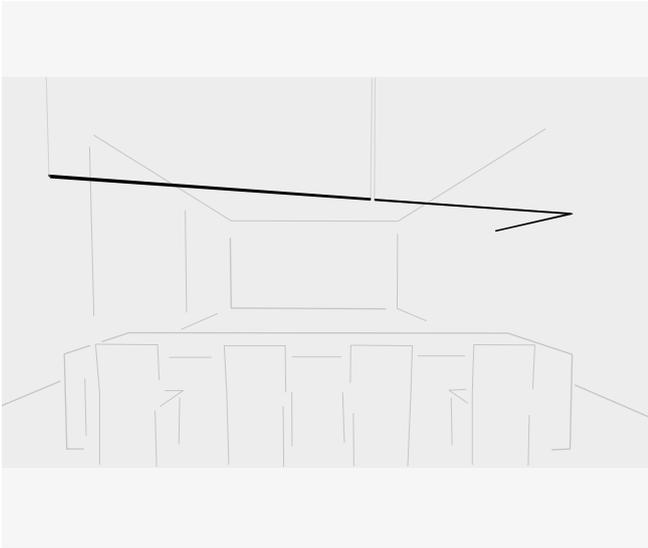

**ST1071**

Sketch composed by only one composition.


3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.  
 LED 2700 K. 11952 lm. 96,8 W.  
 Floor base & plug. Push.

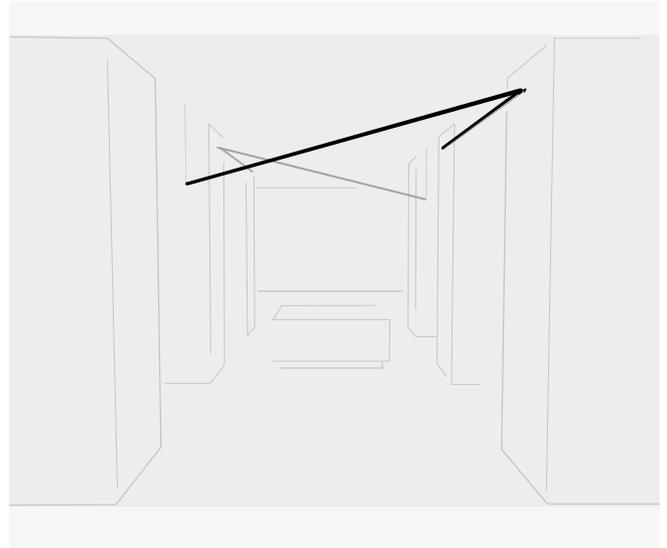

**ST1075**

Sketch composed by two identical compositions.

Each composition:  
 2 Sticks: 2 x 300 cm. Total 6 m.  
 LED 3500 K. 14244 lm. 105,6 W.  
 Remote driver Built-in Micro. 1-10V.

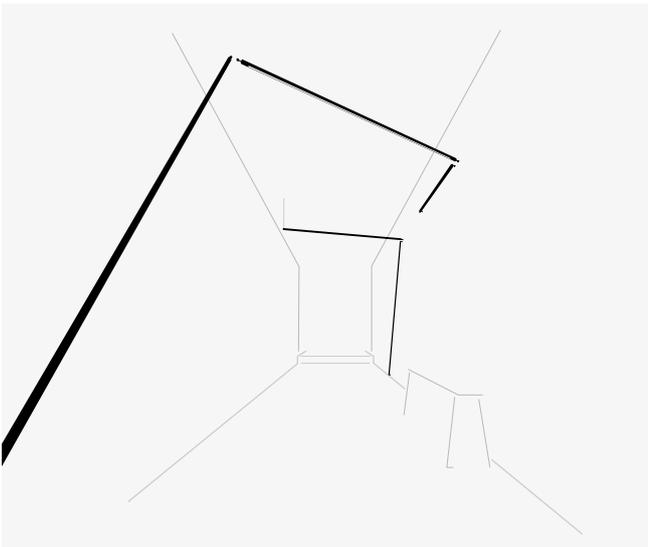


**ST1081**

Sketch composed by two compositions.

**Composition 1:**  
 3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.  
 LED 3500 K. 15431 lm. 114,4 W.  
 Remote driver Built-in Micro. 1-10V.

**Composition 2:**  
 2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.  
 LED 3500 K. 11870 lm. 88 W.  
 Remote driver Built-in Micro. 1-10V.

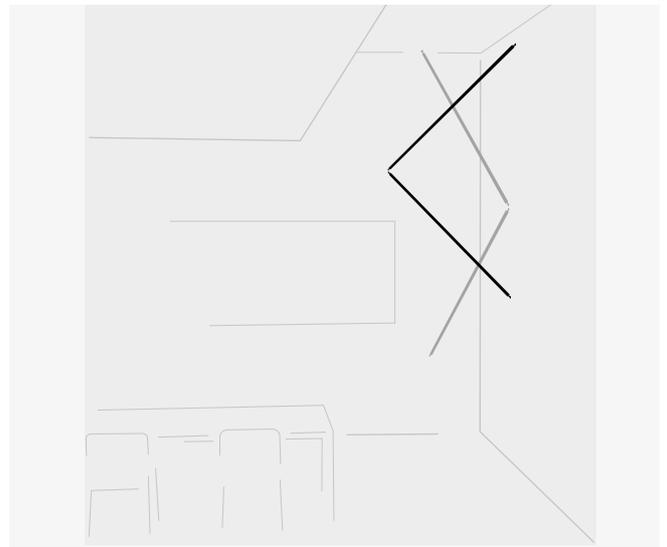

**ST1091**

Sketch composed by two identical compositions.


Each composition:  
 2 Sticks: 2 x 200 cm. Total 4 m.  
 LED 2700 K. 8692 lm. 70,4 W.  
 Remote driver Built-in Micro. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions

## Some sticks are attached to the Wall

---

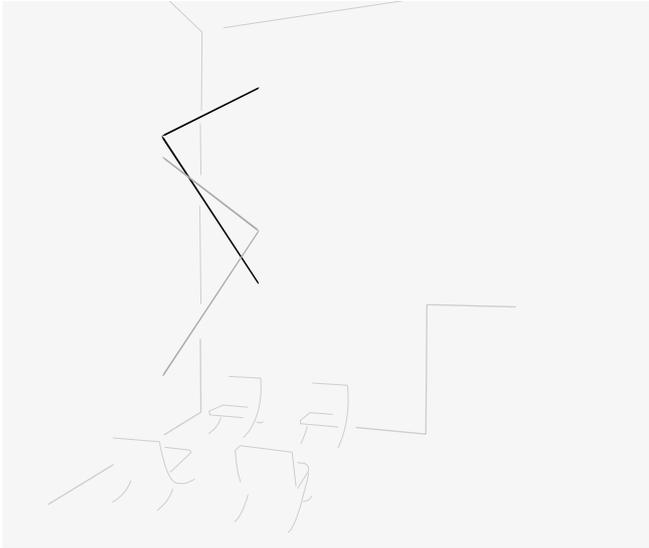


### ST1095

Sketch composed by two identical compositions.

#### Each composition:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.  
LED 3500 K. 11870 lm. 88 W.  
Remote driver Built-in Micro. 1-10V.

---

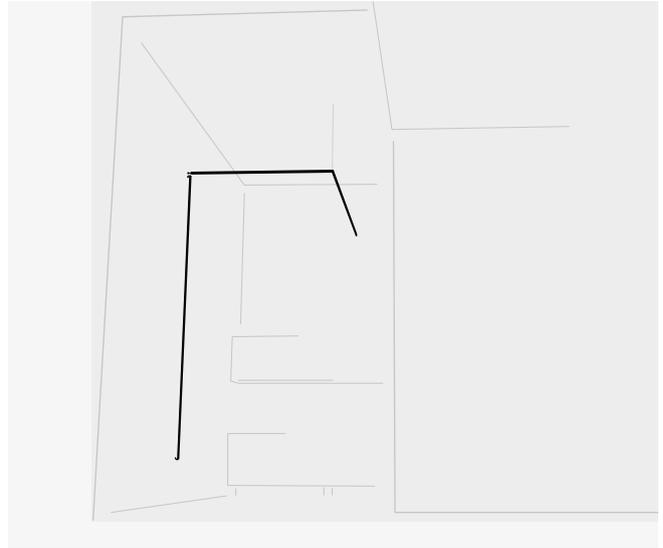

### ST1101

Sketch composed by two compositions.


#### Composition 1:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.  
LED 2700 K. 9779 lm. 79,2 W.  
Remote driver Built-in Micro. 1-10V.

#### Composition 2:

1 Stick: 1 x 300 cm. Total 3 m.  
LED 2700 K. 6519 lm. 52,8 W.  
Remote driver Built-in Micro. 1-10V.

---

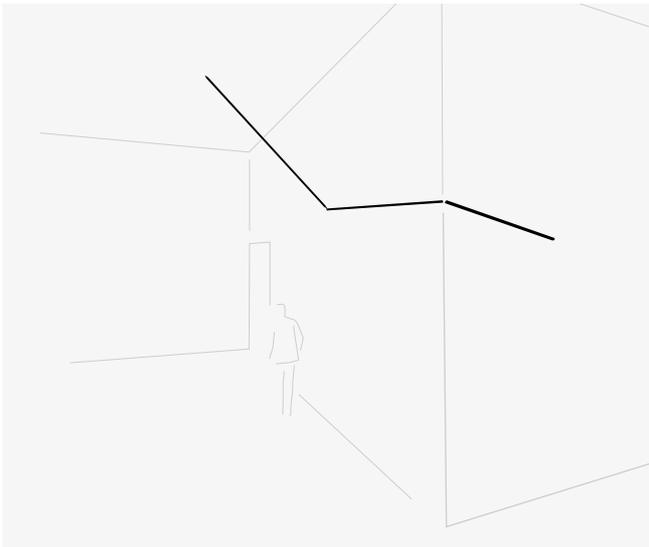


### ST1105

Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.  
LED 3500 K. 11870 lm. 88 W.  
Floor base & plug. Push.

---

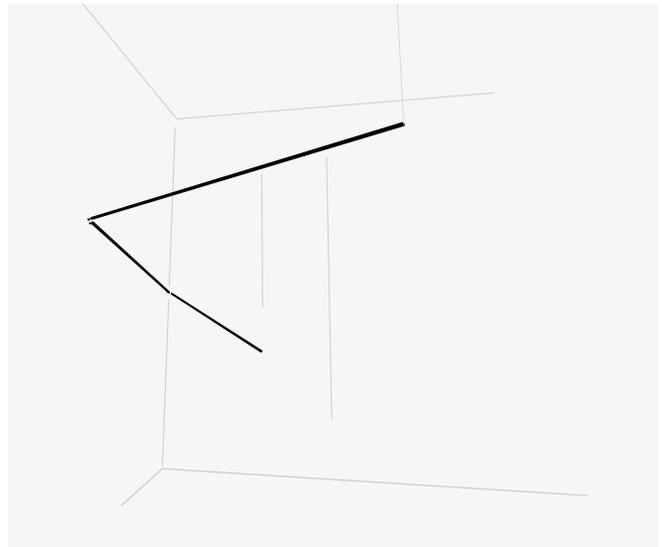


### ST1111

Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.  
LED 3500 K. 14244 lm. 105,6 W.  
Remote driver Built-in Micro. 1-10V.

---

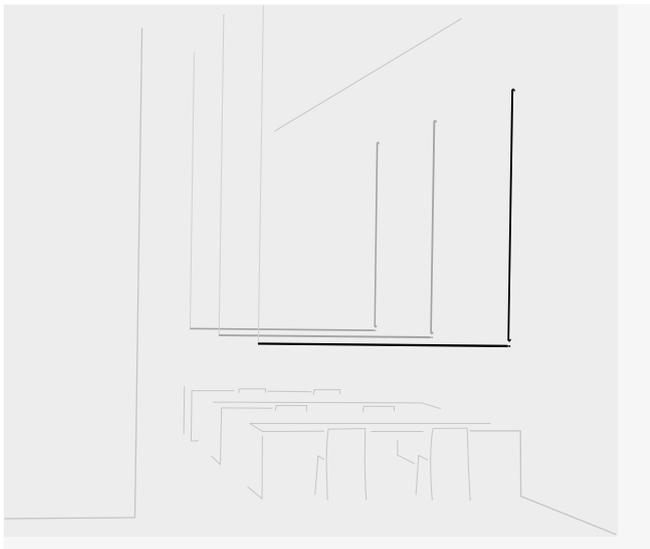


**ST115**

Sketch composed by three identical compositions.

**Each composition:**

2 Sticks: 2 x 200 cm. Total 4 m.  
 LED 3500 K. 9496 lm. 70,4 W.  
 Built-in disc S canopy. 1-10V.

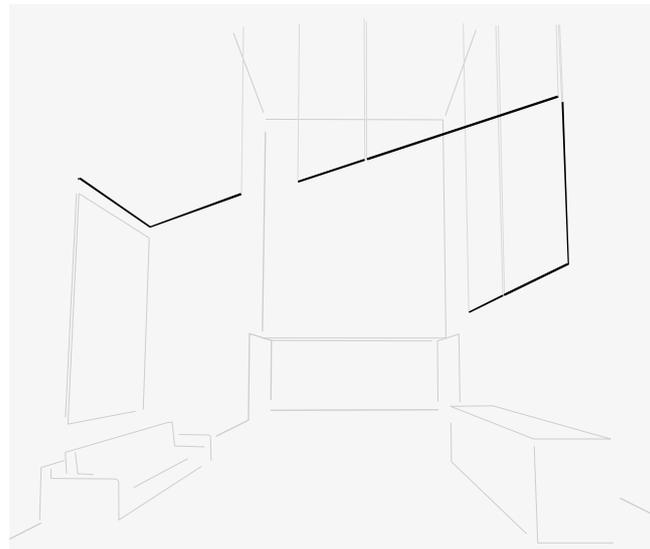

**ST1131**

Sketch composed by four compositions.

**Composition 1:**

2 Sticks: 2 x 300 cm. Total 6 m.  
 LED 3500 K. 14244 lm. 105,6 W.  
 Remote driver Built-in Micro. 1-10V.

**Composition 2:**

1 Stick: 1 x 150 cm. Total 1,5 m.  
 LED 3500 K. 3561 lm. 26,4 W.  
 Remote driver Built-in Micro. 1-10V.

**Composition 3:**

2 Sticks: 2 x 300 cm. Total 6 m.  
 LED 3500 K. 14244 lm. 105,6 W.  
 Remote driver Built-in Micro. 1-10V.

**Composition 4:**

2 Sticks: 2 x 300 cm. Total 6 m.  
 LED 3500 K. 14244 lm. 105,6 W.  
 Remote driver Built-in Micro. 1-10V.



**ST1141**

Sketch composed by two identical compositions.


**Each composition:**

2 Sticks: 2 x 300 cm. Total 6 m.  
 LED 3500 K. 14244 lm. 105,6 W.  
 Built-in disc S canopy. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions


## Some sticks are on the Floor

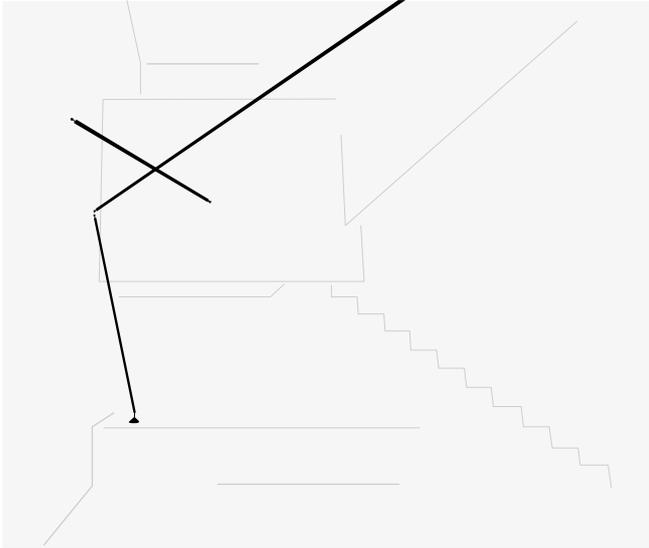

**ST1151**  
Sketch composed by two compositions.

**Composition 1:**  
1 Stick: 1 x 150 cm. Total 1,5 m.  
LED 2700 K. 3260 lm. 26,4 W.  
Remote driver Built-in Micro. 1-10V.

**Composition 2:**  
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.  
LED 2700 K. 10865 lm. 88 W.  
Remote driver Built-in Micro. 1-10V.

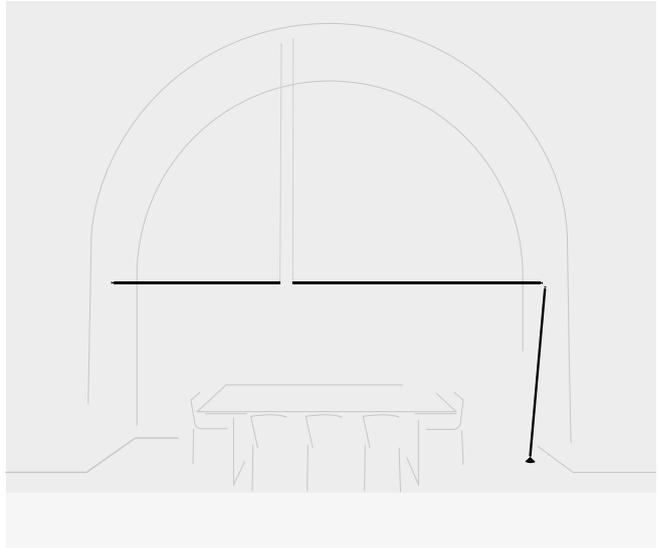

**ST1161**  
Sketch composed by two compositions.

**Composition 1:**  
1 Stick: 1 x 200 cm. Total 2 m.  
LED 2700 K. 4336 lm. 35,2 W.


**Composition 2:**  
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.  
LED 2700 K. 10865 lm. 88 W.  
Remote driver Built-in Micro. 1-10V.



**ST1171**  
Sketch composed by two compositions.

**Composition 1:**  
3 Sticks: 3 x 200 cm. Total 6 m.  
LED 3500 K. 14244 lm. 105,6 W.  
Surface canopy. 1-10V.

**Composition 2:**  
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.  
LED 3500 K. 11870 lm. 88 W.  
Surface canopy. 1-10V.

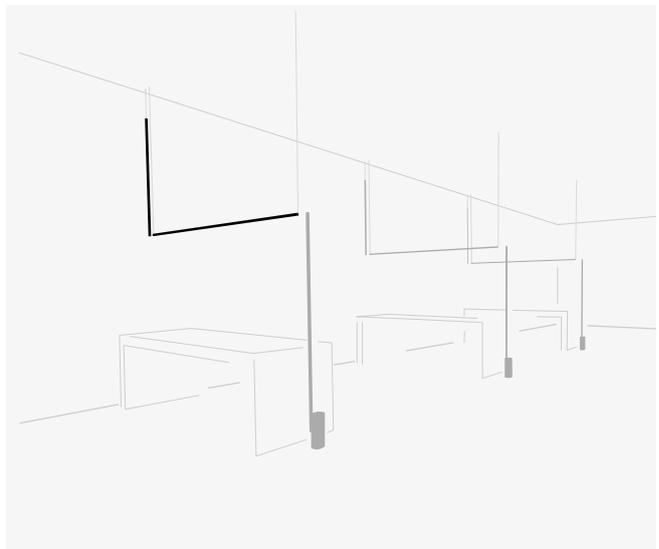


**ST1175**  
Sketch composed by three identical compositions.

**Each composition:**  
2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.  
LED 3500 K. 8309 lm. 61,6 W.  
Surface canopy. 1-10V.

## Some sticks are attached to the Wall

---

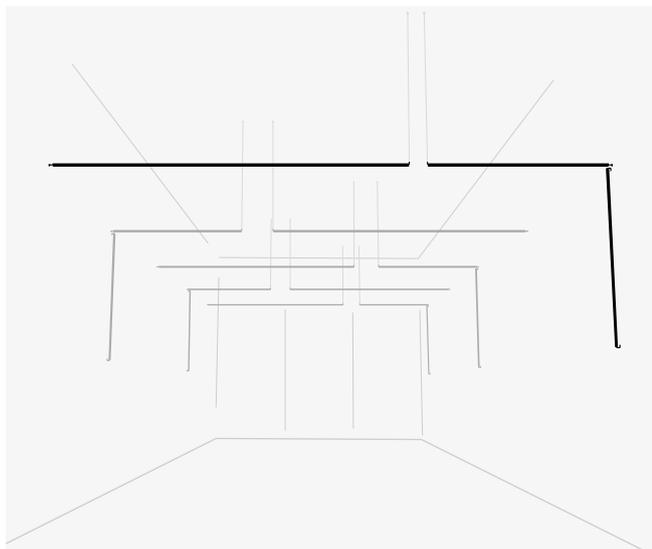

### ST1145

Sketch composed by five identical compositions.

#### Each composition:

3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.

LED 3500 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V

---

Each project is unique.  
Visit [vibia.com](http://vibia.com) and chose among  
multiple compositions designed  
and adapted to your project needs.

Personalize your own Sticks composition  
quick and easy at [vibia.com](http://vibia.com).

# Sticks Connectable

## Elements to be configured

Wall-Wall / Ceiling-Ceiling  
Wall-Wall (corner) / Wall-Ceiling  
Wall-Pendant  
Pendant-Pendant  
Pendant-Ceiling  
Pendant

### Sticks 1,5 m.

7300 7310 7311 7320 7321 7330 7350

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 3260 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 3510 lm 133 lm/W  
/3 \_ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

### Sticks 2 m.

7303 7313 7314 7323 7324 7333 7353

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 4346 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 4680 lm 133 lm/W  
/3 \_ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

### Sticks 3 m.

7306 7316 7317 7326 7327 7336 7356

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 6519 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 7020 lm 133 lm/W  
/3 \_ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.

Diffuser: PC- Polycarbonate.

**Driver and Dimming** depends on selected installation accessory (see page 475).

Suspension cables up to 3m. for Wall - Pendant and Pendant-Pendant.

#### Personalisation options available

- Extra cable length for Wall - Pendant and Pendant - Pendant.

Min. quantity, upcharge and extra lead time apply.

11 Black

(NCS S 8500-N)



Horizontal pendant version with a UGR index <19 available.

## Floor-Wall

### Sticks 1,5 m.

7340

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 3260 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 2644 lm 100,15 lm/W  
/3 \_ 3500 K  CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

### Sticks 2 m.

7343

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 4346 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 2644 lm 100,15 lm/W  
/3 \_ 3500 K  CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

### Sticks 3 m.

7346

#### Temperature Colour

- /1 \_ 2700 K  CRI >90 6519 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 5288 lm 100,15 lm/W  
/3 \_ 3500 K  CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.

Diffuser: PC- Polycarbonate.

**Driver and Dimming** depends on selected installation accessory (see page 475).

11 Black

(NCS S 8500-N)

# Electrical connection options



Floor base & plug




Surface canopy



Built-in disc S




Remote driver Built-in Micro



**Floor base & plug**  
ACST000001 ACST000002  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** Push.

**Materials**  
Body: Steel.  
**Packaging**  
1 Box.  
0,16 x 0,16 x 0,4 m.  
Vol. 0,01 m<sup>3</sup>.  
Gross weight 8,5 Kg.  
Net weight 7 Kg.


11 Black  
(NCS S 8500-N)



**Surface canopy**  
ACST000003 ACST000004  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.  
**Personalisation options available**  
- Dimming: DALI-2, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Steel.  
**Packaging**  
1 Box.  
0,50 x 0,25 x 0,25 m.  
Vol. 0,03 m<sup>3</sup>.  
Gross weight 2,9 Kg.  
Net weight 2,5 Kg.


11 Black  
(NCS S 8500-N)



**Built-in disc S**  
ACST000005 ACST000006  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.  
**Personalisation options available**  
- Dimming: DALI-2, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Steel.  
**Packaging**  
1 Box.  
0,25 x 0,25 x 0,25 m.  
Vol. 0,01 m<sup>3</sup>.  
Gross weight 1,8 Kg.  
Net weight 1,5 Kg.

11 Black  
(NCS S 8500-N)



**Remote driver Built-in Micro**  
ACST000007 ACST000008  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.  
**Personalisation options available**  
- Dimming: DALI-2, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Aluminum.  
**Packaging**  
1 Box.  
0,25 x 0,25 x 0,25 m.  
Vol. 0,01 m<sup>3</sup>.  
Gross weight 1,8 Kg.  
Net weight 1,5 Kg.

11 Black  
(NCS S 8500-N)




# Sticks Solo


Design by Arik Levy

A pure solution for a minimalist interior, Sticks Solo features a range of free-standing, arranged floor to wall, connecting two planes of the same space or horizontal pendant of various lengths and incorporates a range of electrical connection options for seamless integration with the surrounding architecture.

## Floor

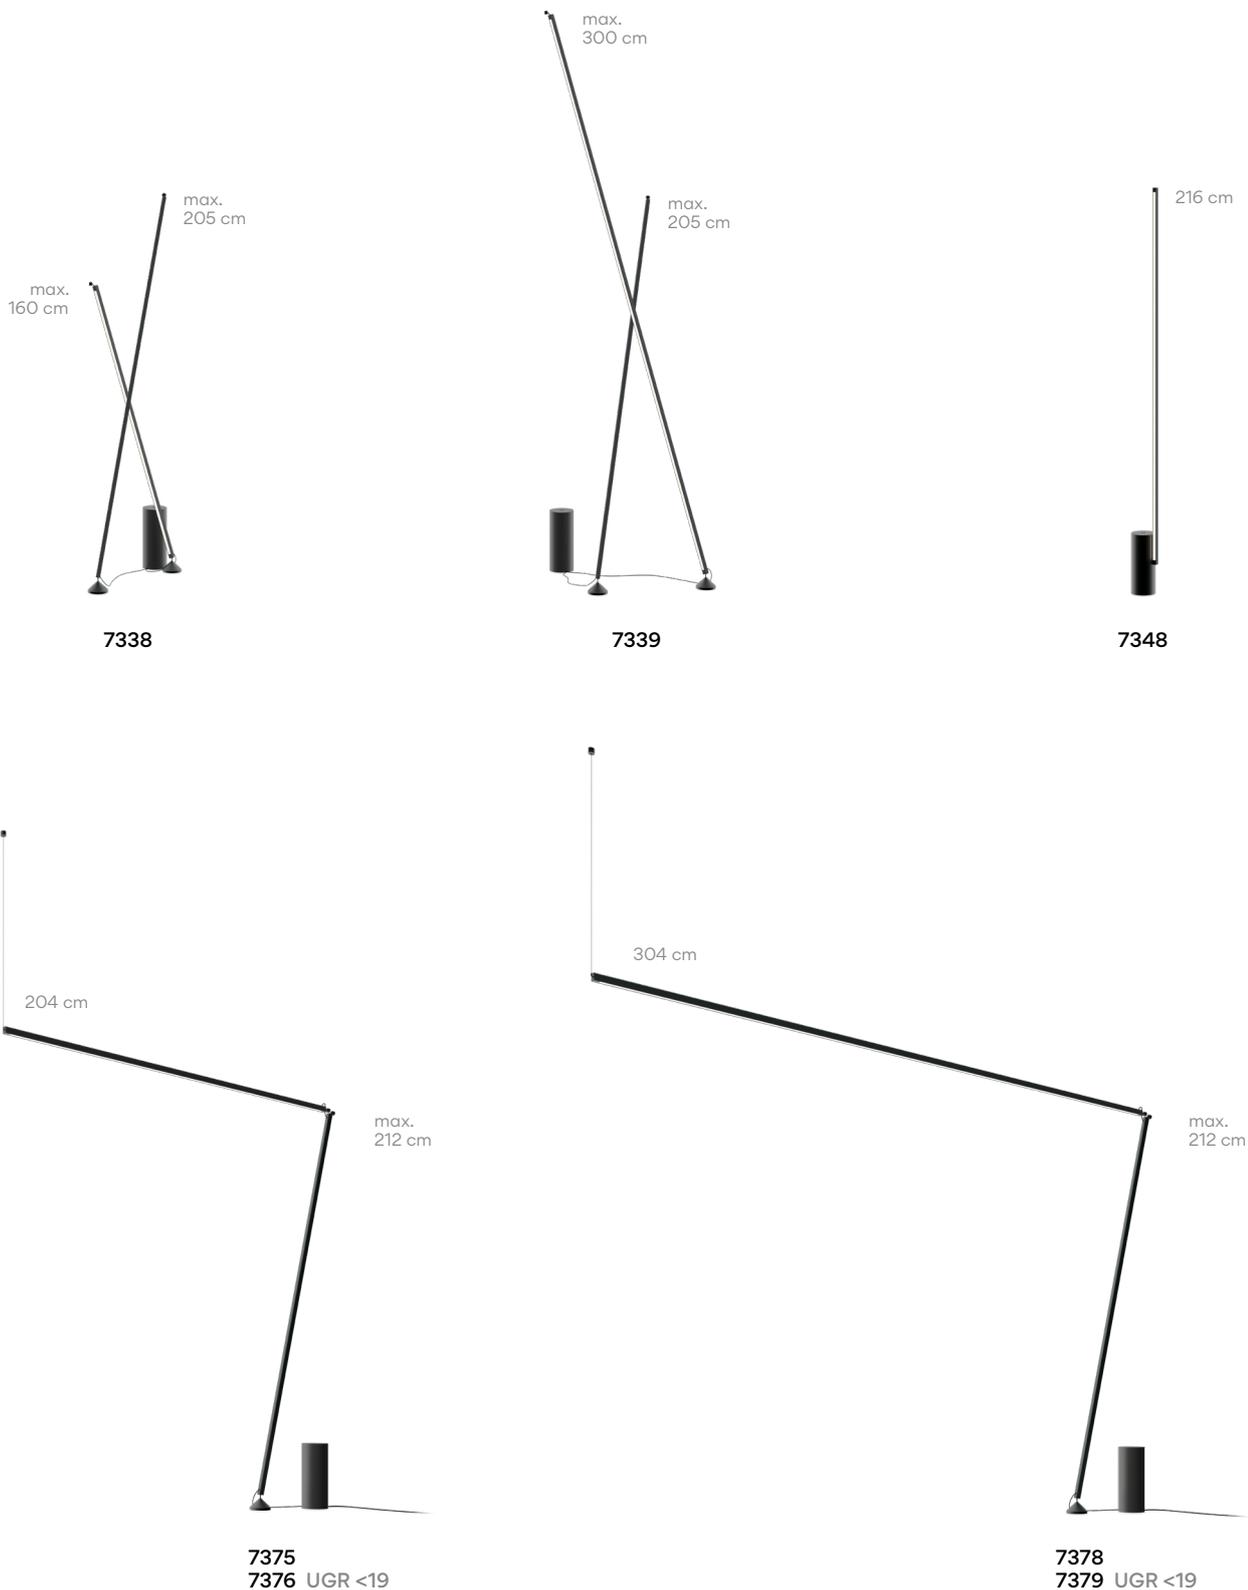

7338

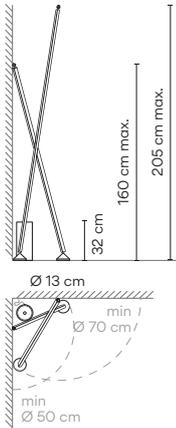

Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1 \_ 2700 K - 7604 lm  
 /2 \_ 3000 K - 8192 lm  
 /3 \_ 3500 K - 8286 lm  
 F  
 CRI >90

Control  
 7338 11 / \_ 5 Push


Materials  
 Sticks: Aluminum.  
 Diffuser: PC- Polycarbonate.

Light Source and electronics  
 1 x LED STRIP 26,4 W 24V  
 1 x LED STRIP 35,2 W 24V  
 Constant Voltage 24V  
 200~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,0414 m<sup>3</sup>  
 Gross weight 14,2 Kg Net weight 9,7 Kg



7339

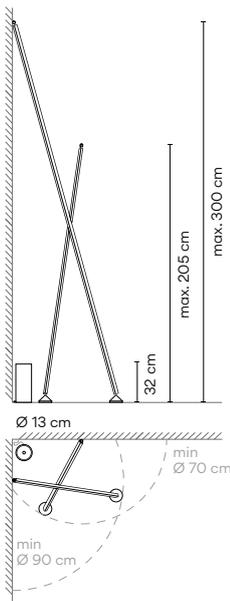

Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1 \_ 2700 K - 10868 lm  
 /2 \_ 3000 K - 11704 lm  
 /3 \_ 3500 K - 11836 lm  
 F  
 CRI >90

Control  
 7339 11 / \_ 5 Push


Materials  
 Sticks: Aluminum.  
 Diffuser: PC- Polycarbonate.

Light Source and electronics  
 1 x LED STRIP 35,2 W 24V  
 1 x LED STRIP 52,8 W 24V  
 Constant Voltage 24V  
 200~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,057 m<sup>3</sup>  
 Gross weight 16,6 Kg Net weight 10,6 Kg



7348



Finishes  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

LED Colour Temperature  
 /1 \_ 2700 K - 4346 lm  
 /2 \_ 3000 K - 4681 lm  
 /3 \_ 3500 K - 4734 lm  
 F  
 CRI >90

Control  
 7348 11 / \_ 5 Push


Materials  
 Sticks: Aluminum.  
 Diffuser: PC- Polycarbonate.

Light Source and electronics  
 1 x LED STRIP 35,2 W 24V  
 Constant Voltage 24V  
 200~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,0166 m<sup>3</sup>  
 Gross weight 8,8 Kg Net weight 8,4 Kg



7375  
7376  
UGR <19

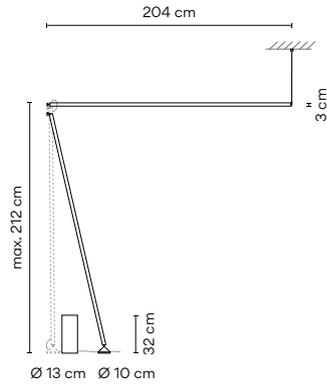

**7375**

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 8694 lm
- /2 \_ 3000 K - 9363 lm
- /3 \_ 3500 K - 9469 lm



CRI >90

Control

7375 11 / \_ 5 Push

Materials

Stick: Aluminium.  
Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2W 24V  
Constant voltage 24V  
200-240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25  
Vol 0,035 m<sup>3</sup>  
1 Tube 0,16 x 0,16 x 0,40  
Vol 0,01 m<sup>3</sup>  
Gross weight 13,6 Kg Net weight 9,4 Kg



**7376**

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 8694 lm
- /2 \_ 3000 K - 9363 lm
- /3 \_ 3500 K - 9469 lm



CRI >90

Control

7376 11 / \_ 5 Push

Materials

Stick: Aluminium.  
Diffuser: PC - Polycarbonate.

Light Source and electronics


2 x LED STRIP 35,2W 24V  
Constant voltage 24V  
200-240Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25  
Vol 0,035 m<sup>3</sup>  
1 Tube 0,16 x 0,16 x 0,40  
Vol 0,01 m<sup>3</sup>  
Gross weight 13,6 Kg Net weight 9,4 Kg



**7378**  
**7379**  
 UGR <19

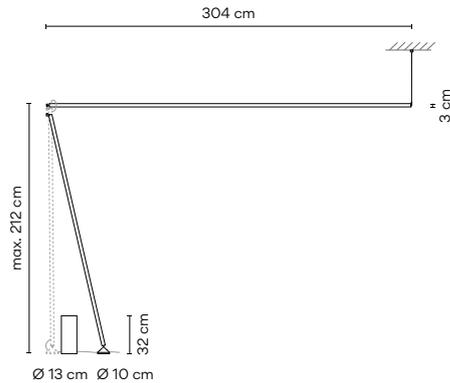

**7378**

**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 10868 lm  
 /2 \_ 3000 K - 11704 lm  
 /3 \_ 3500 K - 11836 lm

**Control**  
 7378 11/ \_ 5 Push



CRI >90

**Materials**

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

**Light Source and electronics**

1 x LED STRIP 35,2W 24V  
 1 x LED STRIP 52,8W 24V  
 Constant voltage 24V  
 200~240Vac 50/60Hz

**Packaging**

1 Tube 0,12 x 0,12 x 3,25  
 Vol 0,05 m<sup>3</sup>  
 1 Tube 0,16 x 0,16 x 0,40  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 15,7 Kg Net weight 9,4 Kg



**7379**

**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED Colour Temperature**  
 /1 \_ 2700 K - 10868 lm  
 /2 \_ 3000 K - 11704 lm  
 /3 \_ 3500 K - 11836 lm

**Control**  
 7379 11/ \_ 5 Push



CRI >90

**Materials**

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

**Light Source and electronics**

1 x LED STRIP 35,2W 24V  
 1 x LED STRIP 52,8W 24V  
 Constant voltage 24V  
 200~240Vac 50/60Hz


**Packaging**

1 Tube 0,12 x 0,12 x 3,25  
 Vol 0,05 m<sup>3</sup>  
 1 Tube 0,16 x 0,16 x 0,40  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 15,7 Kg Net weight 9,4 Kg




---


Pendant

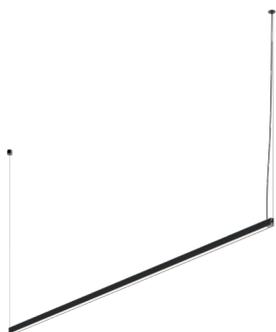


**7360**  
**7361 UGR <19**  
152 x 2 x 3 cm

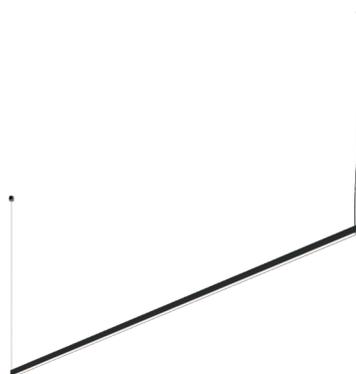

**7363**  
**7364 UGR <19**  
201 x 2 x 3 cm

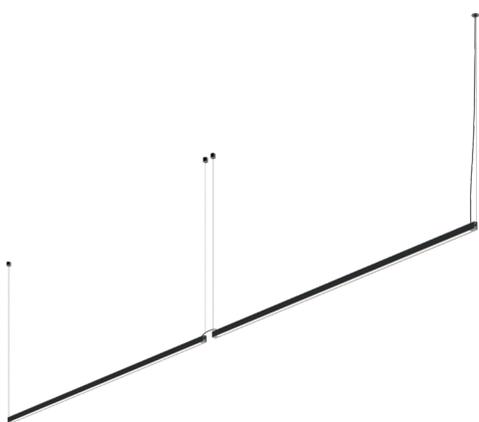


**3765**  
**3766 UGR <19**  
304 x 2 x 3 cm

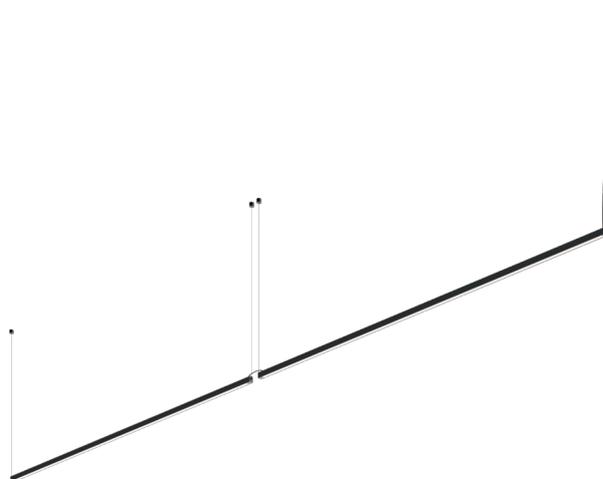

**3768**  
**3769 UGR <19**  
402 x 2 x 3 cm

7360  
 7361  
 UGR <19

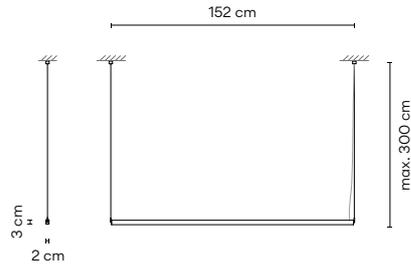

7360

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 3260 lm
- /2 \_ 3000 K - 3511 lm
- /3 \_ 3500 K - 3551 lm



CRI >90

Control

7360 11/ \_\_

- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z Casambi

Select Electrical connection



Surface

Built-in  
Disc S

Remote  
Micro

Remote  
XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 26,4 W 24V  
 Constant voltage 24V  
 90~305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 1,60 m  
 Vol 0,007 m<sup>3</sup>  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m<sup>3</sup>  
 Gross weight 4,6 Kg Net weight 3,4 Kg



Dimmer Multi-volt

7361

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 3260 lm
- /2 \_ 3000 K - 3511 lm
- /3 \_ 3500 K - 3551 lm



CRI >90

Control

7361 11/ \_\_

- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z Casambi

Select Electrical connection



Surface

Built-in  
Disc S

Remote  
Micro

Remote  
XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 26,4 W 24V  
 Constant voltage 24V  
 90~305Vac 50/60Hz


Packaging

1 Tube 0,07 x 0,07 x 1,60 m  
 Vol 0,007 m<sup>3</sup>  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m<sup>3</sup>  
 Gross weight 4,6 Kg Net weight 3,4 Kg



Dimmer Multi-volt

7363  
7364  
UGR <19

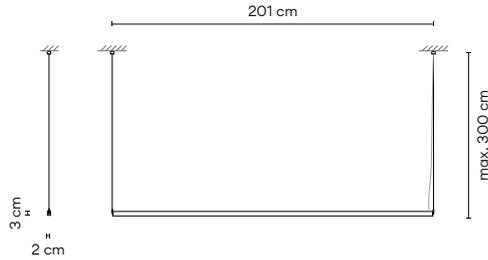

7363

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 4347 lm
- /2 \_ 3000 K - 4682 lm
- /3 \_ 3500 K - 4734 lm



CRI >90

Control

7363 11 / \_ \_

- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ 3 1-10V
- \_ \_ / \_ Z Casambi

Select Electrical connection



Surface

Built-in Disc S

Remote Micro

Remote XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V  
Constant voltage 24V  
90-305Vac 50/60Hz

Packaging

1 Tube 0,07 x 0,07 x 2,240 m  
Vol 0,011 m<sup>3</sup>  
1 Box 0,12 x 0,12 x 0,48 m  
Vol 0,007 m<sup>3</sup>  
Gross weight 5,3 Kg Net weight 3,7 Kg



Dimmer Multi-volt

7364

Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 4347 lm
- /2 \_ 3000 K - 4682 lm
- /3 \_ 3500 K - 4734 lm



CRI >90

Control

7364 11 / \_ \_

- \_ \_ / \_ 1 DALI-2
- \_ \_ / \_ 3 1-10V
- \_ \_ / \_ Z Casambi

Select Electrical connection



Surface

Built-in Disc S

Remote Micro

Remote XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED PLATE 35,2 W 24V  
Constant voltage 24V  
90-305Vac 50/60Hz


Packaging

1 Tube 0,07 x 0,07 x 2,240 m  
Vol 0,011 m<sup>3</sup>  
1 Box 0,12 x 0,12 x 0,48 m  
Vol 0,007 m<sup>3</sup>  
Gross weight 5,3 Kg Net weight 3,7 Kg



Dimmer Multi-volt

7365  
 7366  
 UGR <19

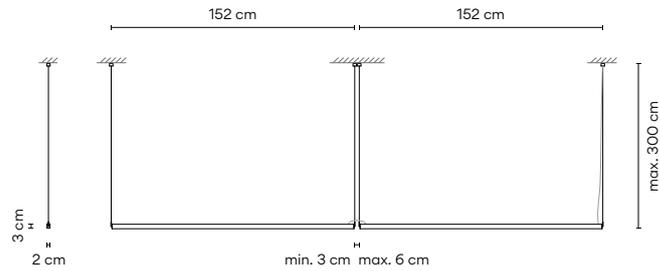

7365

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 6521 lm
- /2 \_ 3000 K - 7022 lm
- /3 \_ 3500 K - 7102 lm



CRI >90

Control

7365 11 / \_\_

- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z Casambi

Select Electrical connection



Surface

Built-in  
Disc S

Remote  
Micro

Remote  
XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V  
 Constant voltage 24V  
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,070 m  
 Vol 0,032 m<sup>3</sup>  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m<sup>3</sup>  
 Gross weight 7,9 Kg Net weight 4,3 Kg



Dimmer Multi-volt

7366

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 6521 lm
- /2 \_ 3000 K - 7022 lm
- /3 \_ 3500 K - 7102 lm



CRI >90

Control

7366 11 / \_\_

- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z Casambi

Select Electrical connection



Surface

Built-in  
Disc S

Remote  
Micro

Remote  
XXS

- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 26,4 W 24V  
 Constant voltage 24V  
 90-305Vac 50/60Hz


Packaging

1 Tube 0,12 x 0,12 x 2,070 m  
 Vol 0,032 m<sup>3</sup>  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m<sup>3</sup>  
 Gross weight 7,9 Kg Net weight 4,3 Kg



Dimmer Multi-volt

7368  
 7369  
 UGR <19

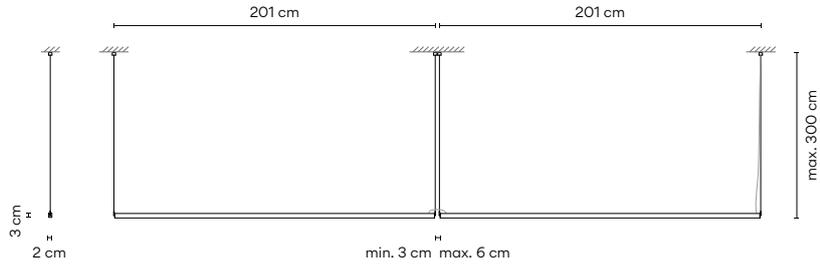

7368

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 8694 lm
- /2 \_ 3000 K - 9363 lm
- /3 \_ 3500 K - 9469 lm



CRI >90

Control

7368 11 / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

Select Electrical connection



- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V  
 Constant voltage 24V  
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m  
 Vol 0,035 m³  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m³  
 Gross weight 8,7 Kg Net weight 4,9 Kg



Dimmer Multi-volt

7369

Finishes

- 11/ \_\_ Black (NCS S 8500-N)

LED Colour Temperature

- /1 \_ 2700 K - 8694 lm
- /2 \_ 3000 K - 9363 lm
- /3 \_ 3500 K - 9469 lm



CRI >90

Control

7369 11 / \_\_

- \_\_ / \_ 1 DALI-2
- \_\_ / \_ 3 1-10V
- \_\_ / \_ Z Casambi

Select Electrical connection



- \_10 Surface
- \_24 Built-in Disc S
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Stick: Aluminium.  
 Diffuser: PC - Polycarbonate.

Light Source and electronics

2 x LED STRIP 35,2 24V  
 Constant voltage 24V  
 90-305Vac 50/60Hz

Packaging

1 Tube 0,12 x 0,12 x 2,25 m  
 Vol 0,035 m³  
 1 Box 0,12 x 0,12 x 0,48 m  
 Vol 0,007 m³  
 Gross weight 8,7 Kg Net weight 4,9 Kg



Dimmer Multi-volt

⚡ Select Electrical connection

For Ref. 7360, 7361, 7363, 7364, 7365, 7366, 7368, 7369

**Drop ceiling**

**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster  
ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types  
of drop  
ceilings.  
Black finish.

**\_24**  
Built-in Disc S



Ø 8 cm  
height 6 cm

Black finish.

**Regular ceiling**

**\_10**  
Surface




28 x 10 x 4 cm

**Ref. 3768, 3769**


40 x 10 x 4 cm

Black finish.

**Remote**



**Built-in**



# Musa

Design by Note Design Studio

Delicate elegance.  
It explores the delicacy of nature  
which is both strong and powerful,  
in a poetic expression of light.

## Table Wall



**7400**  
9 x Ø 26 cm



**7402**  
Ø 26 x 14 x 10 cm



**7404**  
Ø 26 x 14 x 10 cm



**7415**  
Ø 26 x 10 cm

Portable

### 7400

#### Finishes

- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)


Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### LED Colour Temperature

/1\_ 2700 K - 449 lm  
F →  
CRI >90

#### Control

7400 \_\_ / 15 Push  
(with or without memory)



#### Materials

Diffuser: Blown glass.  
Body: Aluminum.

#### Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Voltage 24V  
100~240V 50/60Hz


#### Packaging

1 Box 0,17 x 0,32 x 0,3 m  
Vol 0,0163 m<sup>3</sup>  
Gross weight 1,3 Kg Net weight 0,85 Kg

#### Notes

Electric cable with plug 3m.  
Push-button on the base.

LED IP20 CE ENEC ENEC Dimmer Bi-volt

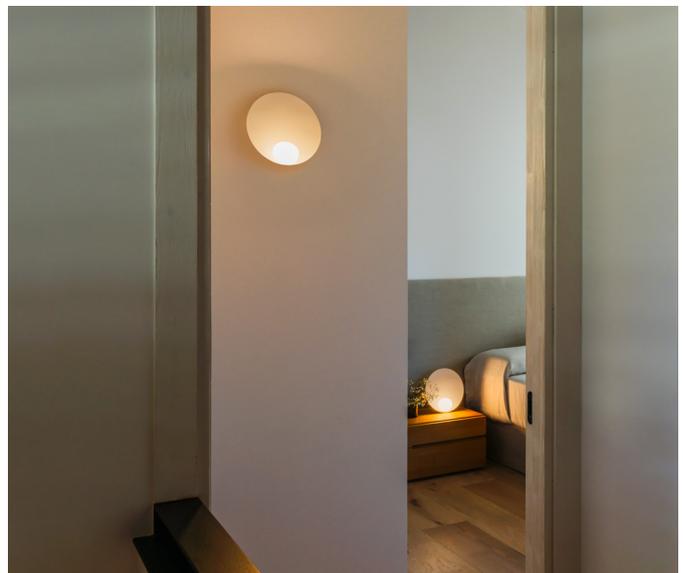

7402



**Finishes**

- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1 \_ 2700 K - 449 lm  
 F →  
 CRI >90

**Control**  
 7402 \_\_ / 15 Push  
 (with or without memory)

**Materials**

Diffuser: Blown glass.  
 Body: Aluminum.

**Light Source and electronics**

1 x LED 4,5 W 350 mA  
 Constant Voltage 24V  
 100-240V 50/60Hz

**Packaging**

1 Box 0,17 x 0,32 x 0,3 m  
 Vol 0,0163 m<sup>3</sup>  
 Gross weight 1,3 Kg Net weight 0,85 Kg

**Notes**

Electric cable with plug 3m.  
 Push-button on the base.



7404



**Finishes**

- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1 \_ 2700 K - 157 lm  
 G →  
 CRI >90

**Control**  
 7404 \_\_ / 15 Push  
 (with or without memory)

**Materials**

Diffuser: Blown glass.  
 Body: Aluminum.

**Light Source and electronics**

1 x LED 1,5 W 500 mA  
 Constant Voltage 5V  
 100-240V 50/60Hz

**Packaging**


1 Box 0,17 x 0,32 x 0,3 m  
 Vol 0,0163 m<sup>3</sup>  
 Gross weight 1,4 Kg Net weight 0,95 Kg

**Notes**

Portable version with battery.  
 Dimmer switch on the base. 3 step dimming.  
 Electric cable with plug. 3 m.  
 Push-button on the base.  
 Battery life: from 6 to 18 hours  
 (depending on intensity).



7415



**Finishes**

- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 36/ \_\_ Soft Pink (NCS S 1010-Y50R)

**Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1 \_ 2700 K - 449 lm  
 F →  
 CRI >90

**Control**  
 7415 \_\_ / 13 1-10V

**Materials**


Diffuser: Blown glass.  
 Body: Aluminum.

**Light Source and electronics**

1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Packaging**

1 Box 0,17 x 0,32 x 0,3 m  
 Vol 0,0163 m<sup>3</sup>  
 Gross weight 1,8 Kg Net weight 1,3 Kg



# Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.

## Pendant




### 7450

Finishes  
● 24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

LED Colour Temperature  
/1 \_ 2700 K - 4740 lm  
E →  
CRI >90

Control  
7450 \_ \_ / \_ \_  
\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ 3 1-10V  
\_ \_ / \_ Z Casambi

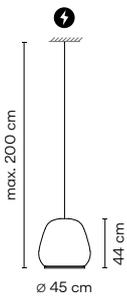

#### Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

\_10 Surface  
\_18 Free Wire  
\_23 Built-in XS  
\_31 Remote Micro  
\_32 Remote XXS

Materials  
Fabric shade: PES FR.  
Interior diffuser: PE- Polyethylene.  
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics  
6 x LED 5,9W 350 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

Packaging  
1 Box 0,55 x 0,55 x 0,65 m  
Vol 0,196 m<sup>3</sup>  
Gross weight 6 Kg Net weight 3,7 Kg

Notes  
Extra cable length.

LED □ IP20 CE UK ENE Bi-volt

7455



Finishes  
 ● 24/ \_ \_ Beige M1  
 (NCS S 2005-Y50R)

LED Colour Temperature  
 /1 \_ 2700 K - 4740 lm  
 E →  
 CRI >90

Control  
 7455 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ Z Casambi

⚡ Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics  
 6 x LED 5,9W 350 mA  
 Constant Current 1050 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,54 x 0,54 x 0,41 m  
 Vol 0,119 m<sup>3</sup>  
 Gross weight 5,9 Kg Net weight 3,2 Kg

Notes  
 Extra cable length.  
 LED  IP20  CE UK ENEC  Bi-volt

7460



Finishes  
 ● 24/ \_ \_ Beige M1  
 (NCS S 2005-Y50R)

LED Colour Temperature  
 /1 \_ 2700 K - 4740 lm  
 E →  
 CRI >90

Control  
 7460 \_ \_ / \_ \_  
 \_ \_ / \_ 1 DALI-2  
 \_ \_ / \_ 3 1-10V  
 \_ \_ / \_ Z Casambi

⚡ Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS


Materials  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics  
 6 x LED 5,9W 350 mA  
 Constant Current 1050 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,54 x 0,54 x 0,41 m  
 Vol 0,119 m<sup>3</sup>  
 Gross weight 5,2 Kg Net weight 3,4 Kg

Notes  
 Extra cable length.  
 LED  IP20  CE UK ENEC  Bi-volt

7470

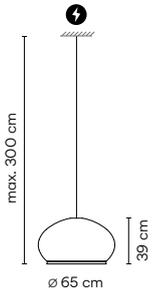


Finishes  
 ● 24/ \_\_ Beige M1  
 (NCS S 2005-Y50R)

LED Colour Temperature  
 /1 \_ 2700 K - 4740 lm  
 E →  
 CRI >90

Control  
**7470** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Select Electrical connection

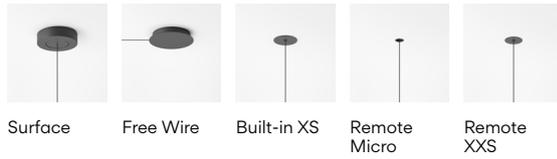

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Diffuser: PMMA. Diffuser ring: ABS.


Light Source and electronics  
 6 x LED 6,7W 400 mA  
 Constant Current 1200 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,59 x 0,78 x 0,78m  
 Vol 0,358 m<sup>3</sup>  
 Gross weight 9 Kg Net weight 5,5 Kg

Notes  
 Extra cable length.



7475

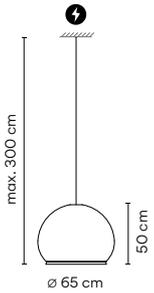


Finishes  
 ● 24/ \_\_ Beige M1  
 (NCS S 2005-Y50R)

LED Colour Temperature  
 /1 \_ 2700 K - 4740 lm  
 E →  
 CRI >90

Control  
**7475** \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ 3 1-10V  
 \_\_ / \_ Z Casambi

Select Electrical connection

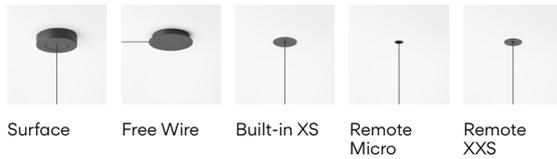

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics  
 6 x LED 6,7W 400 mA  
 Constant Current 1200 mA  
 110-240V 50/60Hz

Packaging  
 1 Box 0,80 x 0,80 x 0,77m  
 Vol 0,492 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 6 Kg

Notes  
 Extra cable length.



**Select Electrical connection**

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

**Drop ceiling**

**\_31 Remote Micro**



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32 Remote XXS**



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.

**\_23 Built-in XS**



Ø 8 cm  
height 6 cm

match with fixture finish.

**Regular ceiling**

**\_10 Surface**



Ø 16 cm

match with fixture finish.

**\_18 Free Wire**



1 wire

Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.



2-3 wires


Ø 36 cm




4 wires

Ø 40 cm

**Remote**



**Built-in**



---

Floor



**7480**  
Ø 45 x 178 cm



**7485**  
Ø 45 x 170 cm



**7487**  
Ø 65 x 195 cm



**7490**  
Ø 45 x 55 cm




**7492**  
Ø 65 x 51 cm



**7494**  
Ø 65 x 62 cm

7480



**Finishes**  
 ● 24/ \_ \_ Beige M1  
 (NCS S 2005-Y50R)

**LED Colour Temperature**  
 /1\_ 2700 K - 4740 lm  
 E  
 CRI >90

**Control**  
 7480 \_ \_ / \_ \_

\_ \_ / \_ 5 Push  
 \_ \_ / \_ Y ProtoPixel\*  
 \_ \_ / \_ Z Casambi

**Materials**  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Botom diffuser: PMMA.  
 Diffuser ring and support: ABS.  
 Stem: Iron.  
 Floor base: Zinc Alloy.


**Light Source and electronics**  
 6 x LED 5,9W 350 mA  
 Constant Voltage 42V 1,43mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 0,54 x 0,54 x 0,41 m  
 Box 2: 1,71 x 0,38 x 0,36 m  
 Total Vol. 0,4311 m<sup>3</sup>  
 Gross weight 21,9 Kg Net weight 11,3 Kg

**Notes**  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Electric cable 2,5 m.



7485



**Finishes**  
 ● 24/ \_ \_ Beige M1  
 (NCS S 2005-Y50R)

**LED Colour Temperature**  
 /1\_ 2700 K - 4740 lm  
 E  
 CRI >90

**Control**  
 7485 \_ \_ / \_ \_

\_ \_ / \_ 5 Push  
 \_ \_ / \_ Y ProtoPixel\*  
 \_ \_ / \_ Z Casambi

**Materials**  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Botom diffuser: PMMA.  
 Diffuser ring and support: ABS.  
 Stem: Iron.  
 Floor base: Zinc Alloy.


**Light Source and electronics**  
 6 x LED 5,9W 350 mA  
 Constant Voltage 42V 1,43mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 0,54 x 0,54 x 0,41 m  
 Box 2: 1,71 x 0,38 x 0,36 m  
 Total Vol. 0,353 m<sup>3</sup>  
 Gross weight 21,5 Kg Net weight 10,8 Kg

**Notes**  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Electric cable 2,5 m.



7487

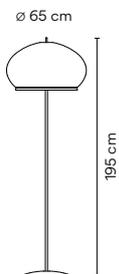

**Finishes**  
 ● 24/ \_ \_ Beige M1  
 (NCS S 2005-Y50R)

**LED Colour Temperature**  
 /1\_ 2700 K - 4740 lm  
 E  
 CRI >90

**Control**  
 7487 \_ \_ / \_ \_

\_ \_ / \_ 5 Push  
 \_ \_ / \_ Y ProtoPixel\*  
 \_ \_ / \_ Z Casambi




**Materials**  
 Fabric shade: PES FR.  
 Interior diffuser: PE- Polyethylene.  
 Botom diffuser: PMMA.  
 Diffuser ring and support: ABS.  
 Stem: Iron.  
 Floor base: Zinc Alloy.

**Light Source and electronics**  
 6 x LED 5,9W 350 mA  
 Constant Voltage 42V 1,43 mA  
 110-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 0,78 x 0,78 x 0,59 m  
 Box 2: 1,93 x 0,45 x 0,46 m  
 Total Vol. 0,7649 m<sup>3</sup>  
 Gross weight 30 Kg Net weight 18,5 Kg

**Notes**  
 ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).  
 \*Available from January 2025.  
 Electric cable 2,5 m



<p><b>7490</b></p>  <p>ø 45 cm 55 cm</p>	<p><b>Finishes</b></p> <p>● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)</p>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 4740 lm E CRI &gt;90</p>	<p><b>Control</b></p> <p><b>7490</b> __ / __ __ / _ 5 Push __ / _ Z Casambi</p>
<p><b>7492</b></p>  <p>ø 65 cm 51 cm</p>	<p><b>Finishes</b></p> <p>● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)</p>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 4740 lm E CRI &gt;90</p>	<p><b>Control</b></p> <p><b>7492</b> __ / __ __ / _ 5 Push __ / _ Z Casambi</p>
<p><b>7494</b></p>  <p>ø 65 cm 62 cm</p>	<p><b>Finishes</b></p> <p>● <b>24/</b> __ Beige M1 (NCS S 2005-Y50R)</p>	<p><b>LED Colour Temperature</b></p> <p>/1_ 2700 K - 4740 lm E CRI &gt;90</p>	<p><b>Control</b></p> <p><b>7494</b> __ / __ __ / _ 5 Push __ / _ Z Casambi</p>

**Materials**

Fabric shade: PES FR.  
Interior diffuser: PE- Polyethylene.  
Botom diffuser: PMMA.  
Diffuser ring and support: ABS.

**Light Source and electronics**

6 x LED 5,9 W 350 mA  
Constant Voltage 42V 1,43 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,65 x 0,55 x 0,55 m  
Vol 0,196 m<sup>3</sup>  
Gross Weight 5,4 Kg Net Weight 3,3 Kg

**Notes**

Push on the top of the luminaire.  
Electric cable 2,5 m

LED □ IP20 CE UK ENE EAC Bi-volt

**Materials**

Fabric shade: PES FR.  
Interior diffuser: PE- Polyethylene.  
Botom diffuser: PMMA.  
Diffuser ring and support: ABS.

**Light Source and electronics**

6 x LED 5,9 W 350 mA  
Constant Voltage 42V 1,43 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,78 x 0,78 x 0,59 m  
Vol 0,358 m<sup>3</sup>  
Gross Weight 7,3 Kg Net Weight 4,5 Kg

**Notes**

Push on the top of the luminaire.  
Electric cable 2,5 m.

LED □ IP20 CE UK ENE EAC Bi-volt

**Materials**

Fabric shade: PES FR.  
Interior diffuser: PE- Polyethylene.  
Botom diffuser: PMMA.  
Diffuser ring and support: ABS.

**Light Source and electronics**

6 x LED 5,9 W 350 mA  
Constant Voltage 42V 1,43 mA  
110-240V 50/60Hz

**Packaging**

1 Box 0,80 x 0,80 x 0,75 m  
Vol 0,48 m<sup>3</sup>  
Gross Weight 9,3 Kg Net Weight 5,9 Kg

**Notes**

Push on the top of the luminaire.  
Electric cable 2,5 m.

LED □ IP20 CE UK ENE EAC Bi-volt



# Set

Design by Xuclà

Set is a new concept of modular wall sconces that composes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising play of lights, shadows and volumes.

## Wall



**7749**

18 x 10 cm

**7750**

18 x 10 cm

**7751**

30 x 10 cm


**7752**

30 x 10 cm

**7753**

38 x 10 cm

### 7749



#### Finishes

- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
- 93/ \_\_ White (RAL 9003)

#### LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
  - /3 \_ 3500 K - 1374,9 lm
- CRI >90

#### Control

7749 \_\_ / \_ 2 0-10V

#### Materials

Main body: Aluminum.  
Diffuser: Borosilicate glass.  
Lid: PC- Polycarbonate.

#### Light Source and electronics


1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,67 Kg Net weight 0,52 Kg

LED IP20 CE UK ENE Bi-volt

### 7750



#### Finishes

- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
- 93/ \_\_ White (RAL 9003)

#### LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
  - /3 \_ 3500 K - 1374,9 lm
- CRI >90

#### Control

7750 \_\_ / \_ 2 0-10V

#### Materials

Main body: Aluminum.  
Diffuser: Borosilicate glass.  
Reflecting bodies: PVC.  
Lid: PC- Polycarbonate.

#### Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging


1 Box 0,15 x 0,132 x 0,36 m  
Vol 0,0071 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,8 Kg

#### Notes

LED placed on the lower element.

LED IP20 CE UK ENE Bi-volt

7751



- Finishes
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 93/ \_\_ White (RAL 9003)

LED Colour Temperature

/1 \_ 2700 K - 1269 lm  
 D

/3 \_ 3500 K - 1374,9 lm  
 G

CRI >90

Control

7751 \_\_ / \_ 2 0-10V

Materials

Main body: Aluminum.  
 Diffuser: Borosilicate glass.  
 Reflecting bodies: PVC.  
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging


1 Box 0,15 x 0,132 x 0,36 m  
 Vol 0,0071 m<sup>3</sup>  
 Gross weight 1,25 Kg Net weight 1,1 Kg

Notes

LED placed on the lower element.



7752



- Finishes
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 93/ \_\_ White (RAL 9003)

LED Colour Temperature

/1 \_ 2700 K - 1269 lm  
 D

/3 \_ 3500 K - 1374,9 lm  
 G

CRI >90

Control

7752 \_\_ / \_ 2 0-10V

Materials

Main body: Aluminum.  
 Diffuser: Borosilicate glass.  
 Reflecting bodies: PVC.  
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging


1 Box 0,15 x 0,132 x 0,36 m  
 Vol 0,0071 m<sup>3</sup>  
 Gross weight 1,6 Kg Net weight 1,4 Kg

Notes

LED placed on the lower element.



7753



- Finishes
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 93/ \_\_ White (RAL 9003)

LED Colour Temperature

/1 \_ 2700 K - 1269 lm  
 D

/3 \_ 3500 K - 1374,9 lm  
 G

CRI >90

Control

7753 \_\_ / \_ 2 0-10V

Materials

Main body: Aluminum.  
 Diffuser: Borosilicate glass.  
 Reflecting bodies: PVC.  
 Lid: PC- Polycarbonate.

Light Source and electronics

1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging

1 Box 0,15 x 0,193 x 0,36 m  
 Vol 0,0100 m<sup>3</sup>  
 Gross weight 2 Kg Net weight 1,5 Kg

Notes

LED placed on the lower element.



# Alpha

Design by Ramos & Bassols

A wall lamp with basic lines and advanced lighting performance, its diffuser emits a warm, comfortable light.

## Wall



Without switch

**7940**

12 x 12 cm

**7942**

12 x 12 cm

**7940**

### Finishes


- **18/** Graphite & Black (RAL 7016 & RAL 9005)
- **93/** White (RAL 9016)

### LED Colour Temperature

- /1** 2700 K - 181,22 lm
  - /3** 3500 K - 163,20 lm
- CRI >90

### Control

**7940** \_ \_ / \_ 0 On/ Off



### Materials

Diffuser: PC- Polycarbonate.  
Lid: Zinc Alloy.  
Body: Aluminum.  
Lid: Aluminum.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

### Packaging

1 Box 0,13 x 0,20 x 0,20 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 1,2 Kg Net weight 1 Kg

### Notes

#### Surface

On/ Off switch on the front cover

LED IP20 CE ENEC Bi-volt



7942


- Finishes
- 18/ \_ \_ Graphite & Black (RAL 7016 & RAL 9005)
  - 93/ \_ \_ White (RAL 9016)

LED Colour Temperature

- /1 \_ 2700 K - 181,22 lm
- /3 \_ 3500 K - 163,20 lm

CRI >90

Control  
 7942 \_ \_ / \_ 0 On/ Off



Materials  
 Diffuser: PC- Polycarbonate.  
 Lid: Zinc Alloy.  
 Body: Aluminum.  
 Lid: Aluminum.

Light Source and electronics  
 1 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

Packaging  
 1 Box 0,13 x 0,20 x 0,20 m  
 Vol 0,0055 m<sup>3</sup>  
 Gross weight 1,2 Kg Net weight 1 Kg



Notes  
 Surface  
 Without switch

LED IP20 CE ENEC ETL Bi-volt

# Match

Design by Jordi Vilardell & Meritxell Vidal

Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Characterised by unlimited configurations, Match's kinetic clusters exude a textured, sculptural presence.





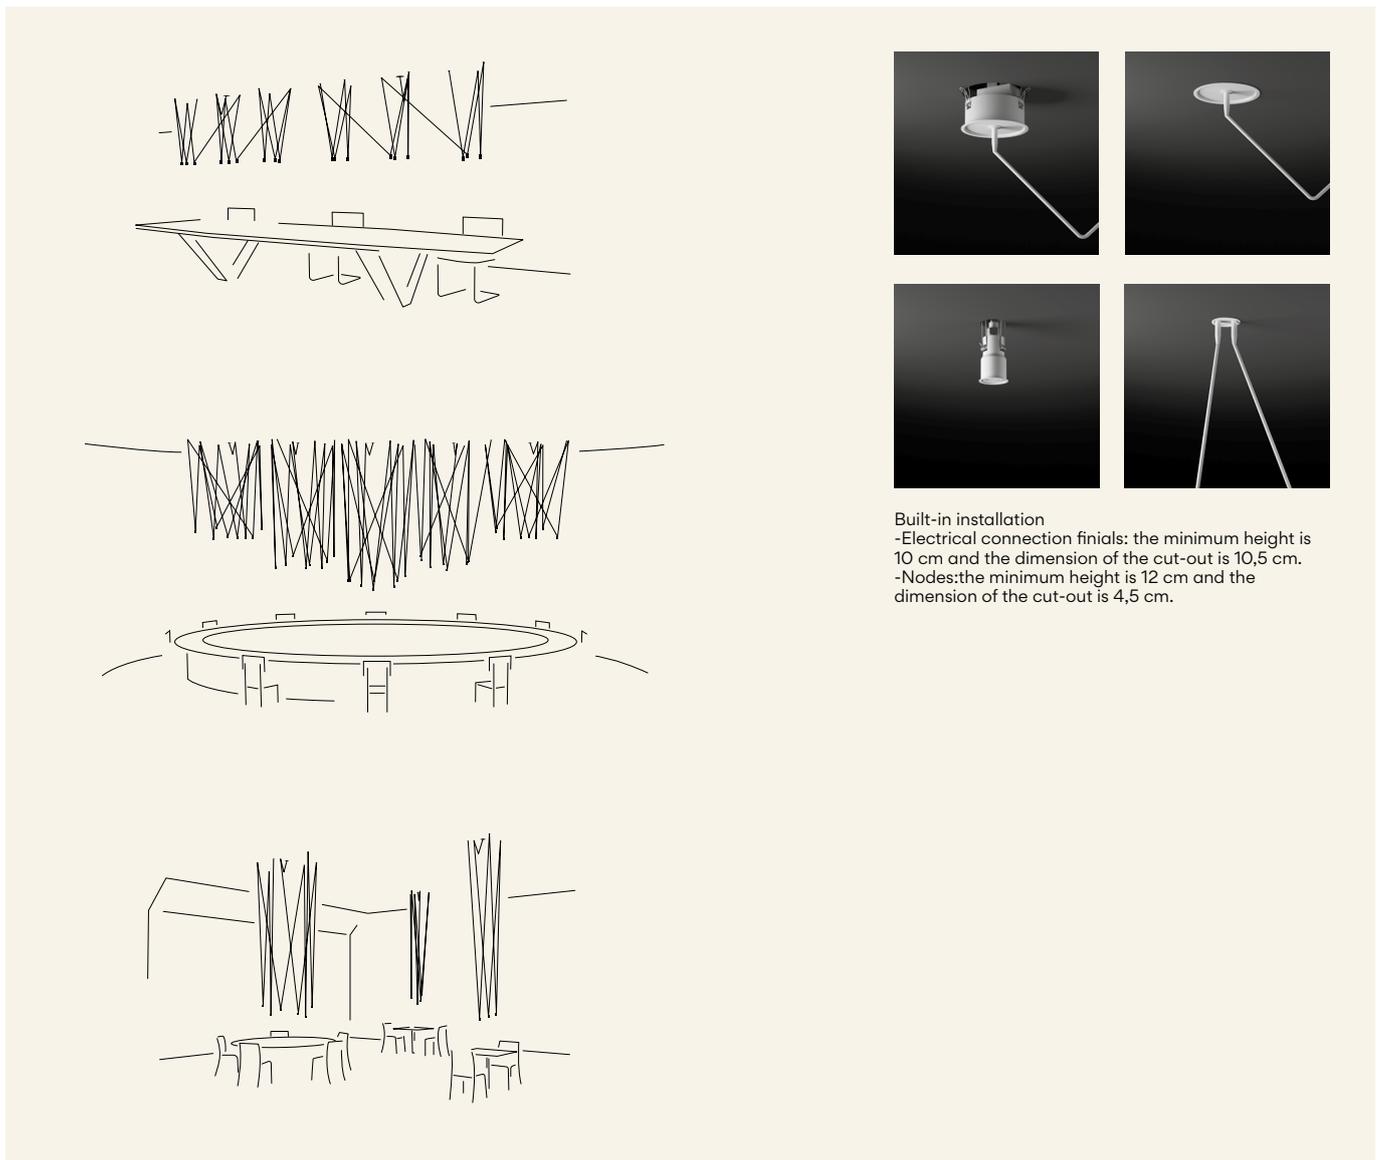
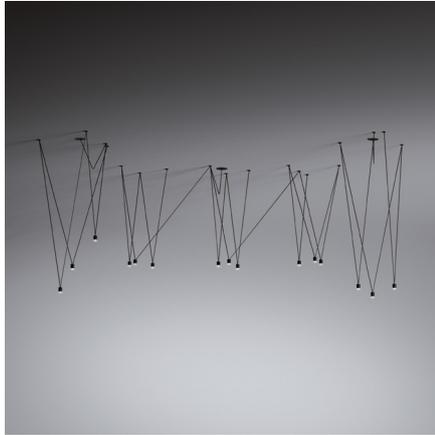


Built-in installation  
-Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.  
-Nodes: the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique. Visit [vibia.com](http://vibia.com) and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Match composition quick and easy at [vibia.com](http://vibia.com)

**It's necessary to make your personalized configuration on [vibia.com](http://vibia.com) to see prices and place orders.**

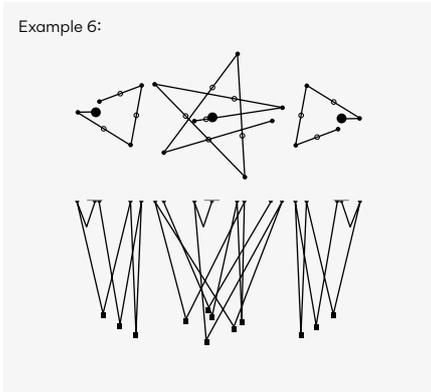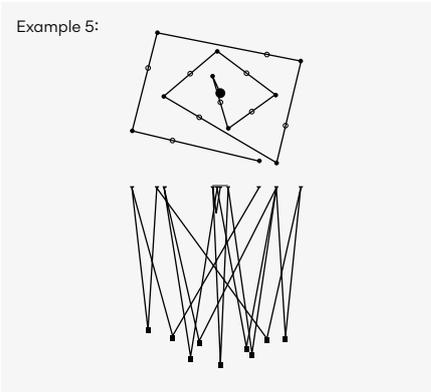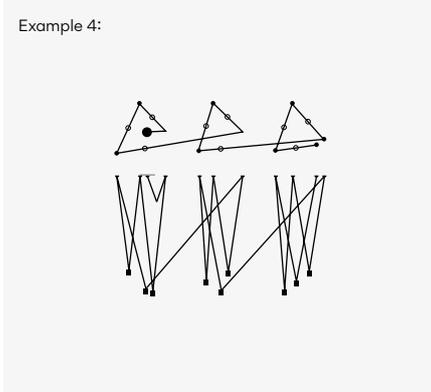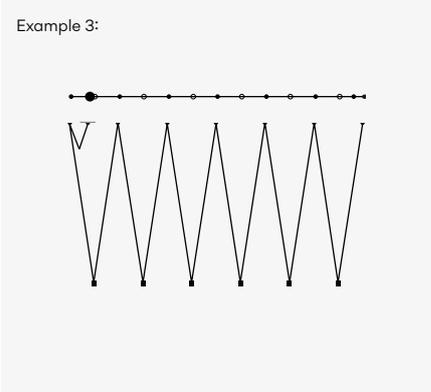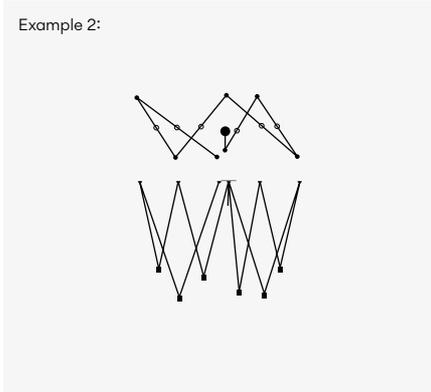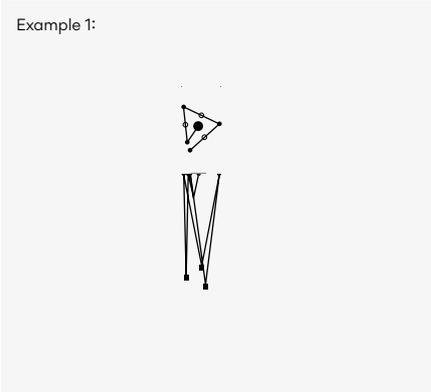

- Finishes**
- 03/ \_\_ White (RAL 9010)
  - 18/ \_\_ Graphite (RAL 7016)

- LED Colour Temperature**
- /1\_ 2700 K - 1269 lm
  - CRI >90
  - /2\_ 3000 K - 1269 lm
  - CRI >80
  - /3\_ 3500 K - 1446 lm
  - CRI >90

- Control**
- 
- / A Push; 1-10V- DALI-2
  - / Z Casambi

**Materials**  
 Head: Aluminum.  
 Canopy: Steel.  
 Rods: Steel.

**Light Source and electronics**  
 LED 2,1 W 700 mA  
 Constant Current 700 mA  
 110-240V 50/60Hz

**Notes**  
 Built-in

LED  IP20  CE  ENEC  EAC  Bi-volt

Ø 4,5 cm  Ø 10,5 cm

**PLACE ORDER ONLINE AT [WWW.VIBIA.COM](http://WWW.VIBIA.COM)**



# Light source

## Luminaire data

The information published in this technical catalog (lumens & watts) refers to the light source. Check luminaire data in the downloadable spec sheet at [vibia.com](http://vibia.com)

---

LED retrofit			
900018.	LED G9 4,2W 2700K 470 lm.		Puck and Warm
900102.	LED E27 230V 12W LED 2700 K 1520 lm		Balance and Warm

---

# Glossary

## CE

Product fulfills the requirements of the relevant European directives.

## UK

Product fulfills the requirements of Great Britain relevant legislation.

## ERC

Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation

## ☞

Product that complies with the law N24-09 of the current Moroccan legislation.

## IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids. The scale goes from IP20 to IP69.

### IP20

Product protected against solid object as big as or bigger than 12 mm. No protection against water.

### ↑ IP20 ↓ IP40

Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

### IP64

Dust-tight product. Protected against water spray.

### IP65

Dust-tight product. Protected against water trickles.

### IP66

Dust-tight product. Protected against water spurts.

## Insulation class



Class I. Product with an additional protection cable (grounds).



Class II. Product protected against electric shock having a double insulation. No grounds.



Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

### Bi-volt

Valid for the range 110V-230V, 50-60Hz.

### Multi-volt

Valid for the range 110-277V, 50-60Hz.

## Cut out



Property for embedding dimension.

## Integrated Dimmer

### Dimmer

Lamp that has a integrated dimmer.

## EU Energetic label

More Efficacy



Less Efficacy

## Light source information

CRI  
Colour rendering index.

K  
LED Colour Temperature.

lm  
Lumen, unit of measurement of luminous flux.


lm/W  
Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

### LED


LED included.

# Lighting control systems


1 Push control

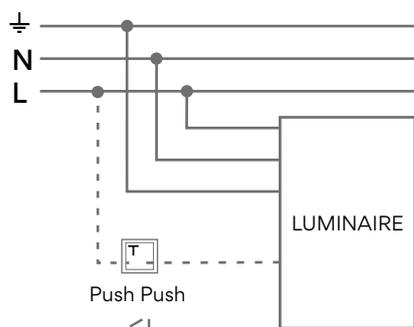


2 1-10V System control

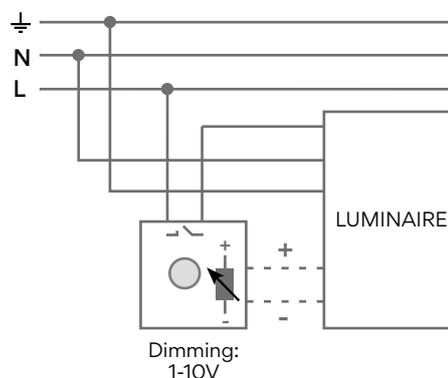


3 DALI System control

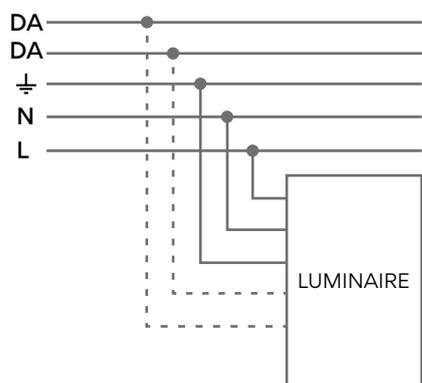


4 Casambi control

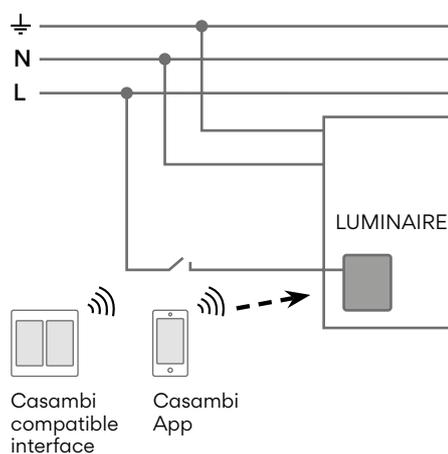

5 ProtoPixel control

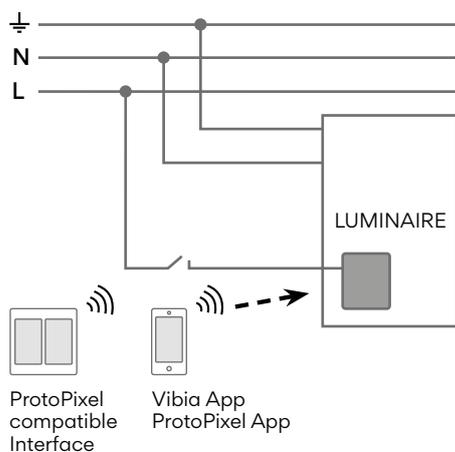

6 TRIAC control

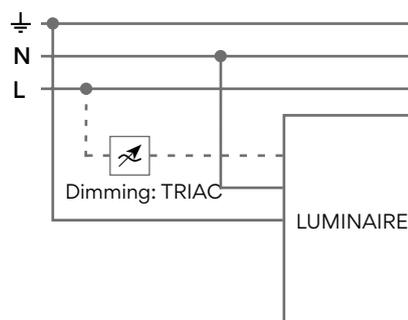

⊥	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal

**Very important**

Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

**Office**

Progrés 4-6.

08850 Gavà (Barcelona).

International Tel +34 934 796 971.

[customer.service@vibia.com](mailto:customer.service@vibia.com)

[vibia.com](http://vibia.com)

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.



