

BULBRITE®
turn life on

The Builder Book



Table of Contents

C E I L I N G

2' & 4' Wraps	4-5
5", 7", 9" Flush Mounts	6-7

D O W N L I G H T S

7", 10" Disc Lights	8-9
Retrofit Downlights for use in recessed cans	10
Retrofit Downlights for use without recessed cans	11

S E C U R I T Y L I G H T S


Dual head Security Lights	12-13
---------------------------	-------

F I L A M E N T S


A19 & A15	15
ST18 & G25	16
B11 & T9	17

G E N E R A L S E R V I C E

A19	18 -19
BR20, BR30, BR40	20
PAR20, PAR30, PAR38	21

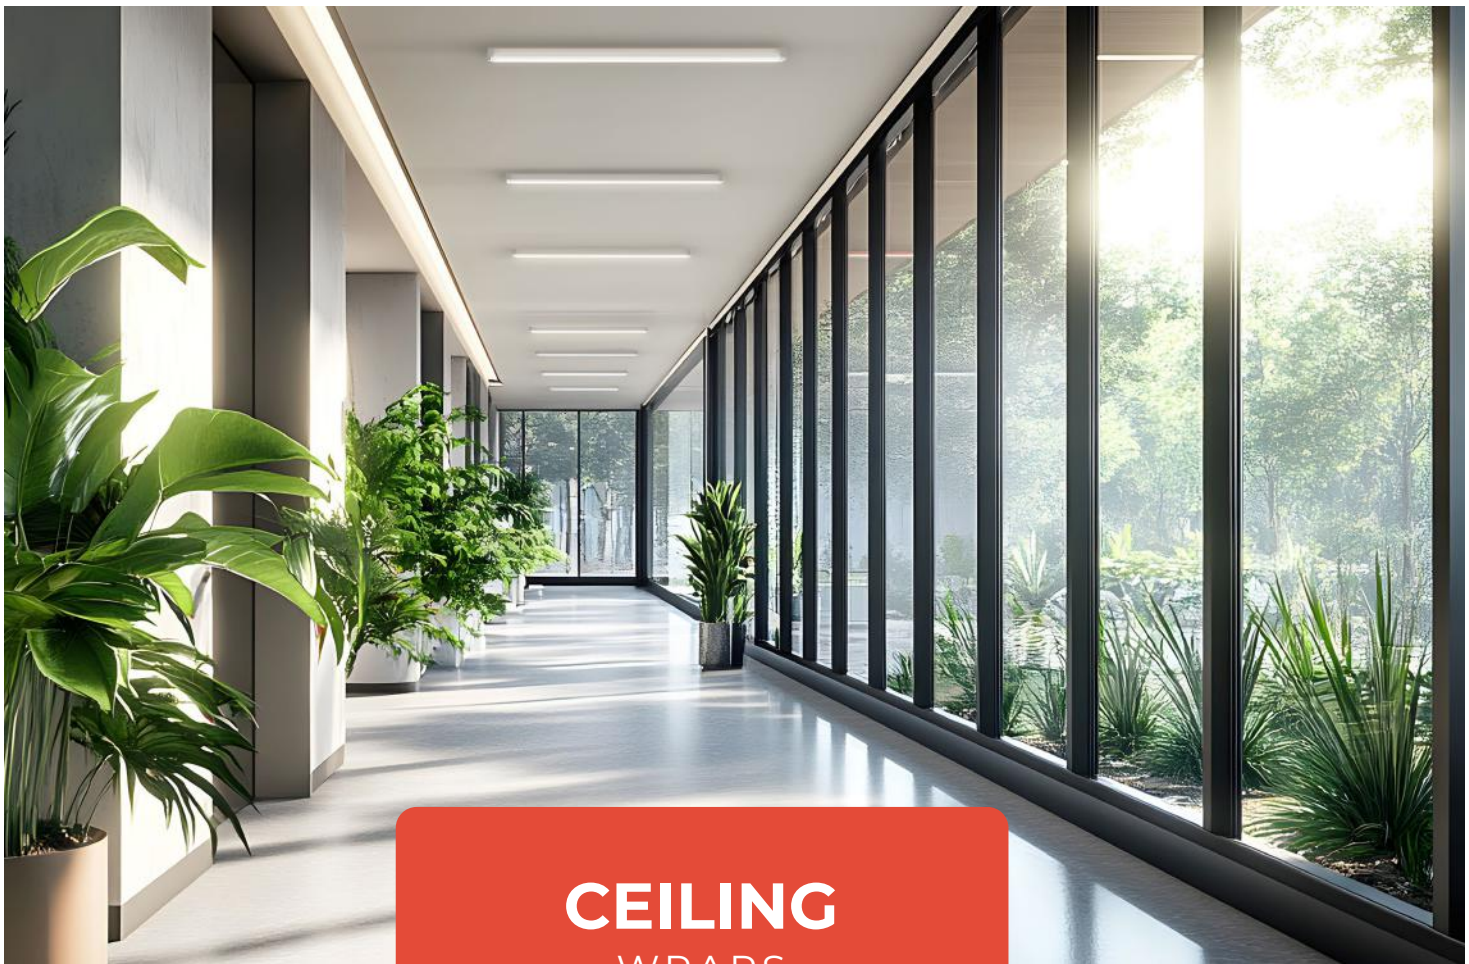

CEILING
WRAPS
FLUSH MOUNTS

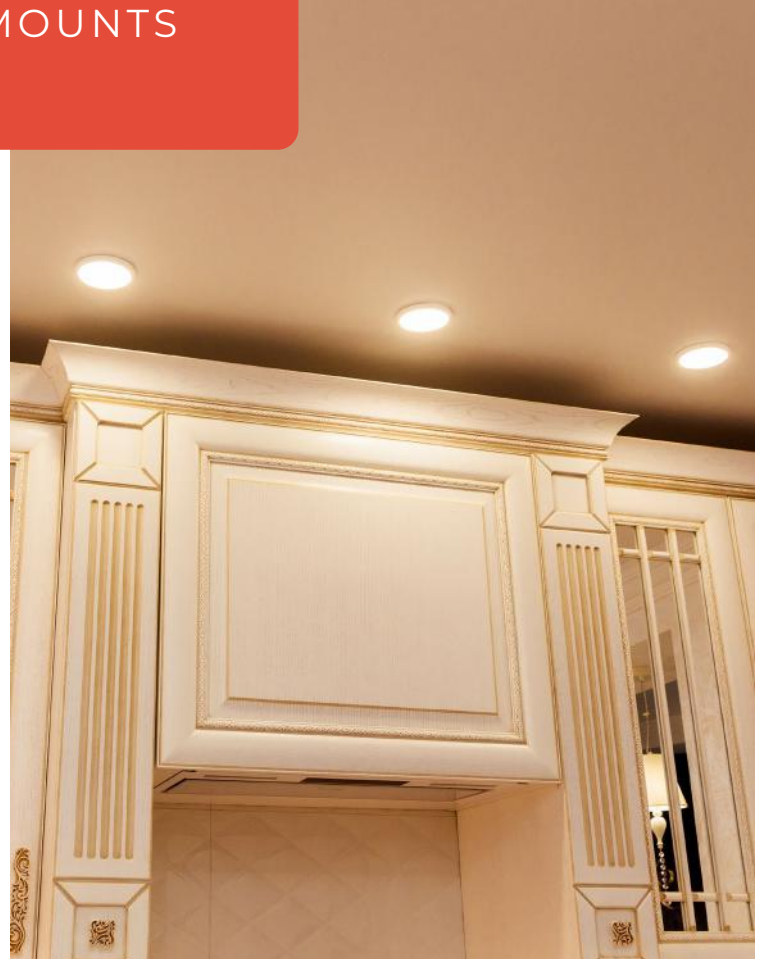

WRAPS

Easy to install integrated **slip tabs** for seamless lens removal and multiple keyholes / knockouts for wire connections

Thin profile design ideal for low clearance ceilings





NEW Emergency Battery Back Up Option Available

Up to 90-Minutes of emergency power during an outage, requires connection to a second unswitched hot line. (See instructions)


Feature available only for item # 773504, 773505, 773506, 773507

INTEGRATED LED lighting

Measuring Specifications

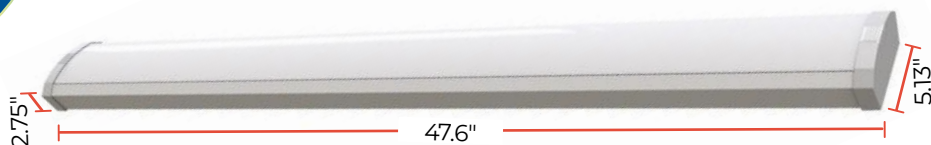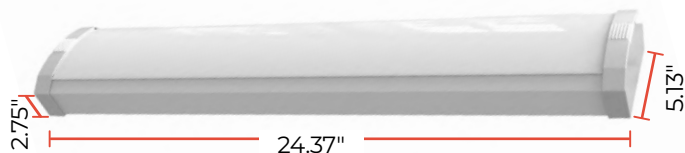

5CCT TEMPERATURE CONTROL



Featured available only for item# 773501, 773503, 773505, 773507



From Start to Finish, **We Make It Easy**

Ceiling Wrap Lights



- Available in 2' (2300 Lumens) and 4' (5300 Lumens)
- High light output, available in 3000K or 5CCT Selectable (2700K/3000K/3500K/4000K/5000K)
- Multi-Volt (120-277V) with universal dimming control for commercial and residential applications
- Ideal for residential and commercial applications such as garages, laundry rooms, hallways, workshops or other areas where utility lights are needed
- Up to 90-Minutes of emergency power during an outage, requires connection to a second unswitched hot line. (Select models)




Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	Length (in.)	Width (in.)	Height (in.)
773500	20	LED20WRAP/2FT/930/J/WH/D	White	3000K	90	2300	50000	24.37	5.13	2.75
773501	20	LED20WRAP/2FT/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	2300	50000	24.37	5.13	2.75
773502	46	LED46WRAP/4FT/930/J/WH/D	White	3000K	90	5300	50000	47.6	5.13	2.75
773503	46	LED46WRAP/4FT/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	5300	50000	47.6	5.13	2.75
BATTERY BACK UP OPTIONS										
773504	20	LED20WRAP/2FT-BB/930/J/WH/D	White	3000K	90	2300	50000	24.37	5.13	2.75
773505	20	LED20WRAP/2FT-BB/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	2300	50000	24.37	5.13	2.75
773506	46	LED46WRAP/4FT-BB/930/J/WH/D	White	3000K	90	5300	50000	47.6	5.13	2.75
773507	46	LED46WRAP/4FT-BB/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	5300	50000	47.6	5.13	2.75



FLUSH MOUNTS

Low profile design with dimmable edge lit technology for even light distribution

Long lasting, energy efficient integrated LED lighting

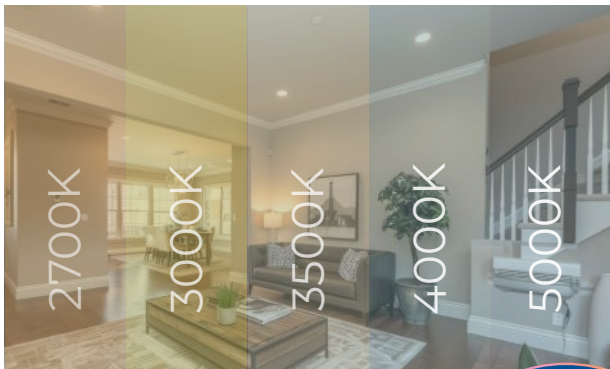

**5CCT
TEMPERATURE
CONTROL**

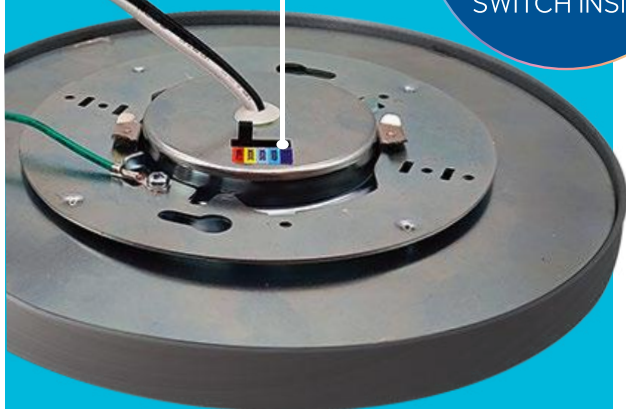

Featured available only for
item# 773603, 773607, 773611

Measuring Specifications



From Start to Finish, **We Make It Easy**

Ceiling Flush Mounts



Available in 5", 7" & 9" sizes in white, black, and nickel

Easy installation with interchangeable mounting bracket to J-Box

High light output, available in 3000K or 5CCT Selectable (2700K/3000K/3500K/4000K/5000K)

Ideal for residential bedrooms, living rooms, bathrooms, laundry rooms, offices or family rooms



Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	Length (in.)	Width. (in.)
773603	10.3	LED10FLUSH/5/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	850	50000	5	0.73
773600	10.3	LED10FLUSH/5/930/J/WH/D	White	3000K	90	850	50000	5	0.73
773601	10.3	LED10FLUSH/5/930/J/BL/D	Black	3000K	90	850	50000	5	0.73
773602	10.3	LED10FLUSH/5/930/J/NK/D	Nickel	3000K	90	850	50000	5	0.73
773607	14	LED14FLUSH/7/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	1150	50000	7	0.73
773604	14	LED14FLUSH/7/930/J/WH/D	White	3000K	90	1150	50000	7	0.73
773605	14	LED14FLUSH/7/930/J/BL/D	Black	3000K	90	1150	50000	7	0.73
773606	14	LED14FLUSH/7/930/J/NK/D	Nickel	3000K	90	1150	50000	7	0.73
773611	17	LED17FLUSH/9/5CCT/927-950/J/WH/D	White	5 CCT - 27/30/35/40/50K	90	1400	50000	9	0.73
773608	17	LED17FLUSH/9/930/J/WH/D	White	3000K	90	1400	50000	9	0.73
773609	17	LED17FLUSH/9/930/J/BL/D	Black	3000K	90	1400	50000	9	0.73
773610	17	LED17FLUSH/9/930/J/NK/D	Nickel	3000K	90	1400	50000	9	0.73


DISC LIGHTS

Wet rated and can be used in bathroom areas such as for overhead lighting in showers


Rust and corrosion resistant aluminum trim



**5CCT
TEMPERATURE
CONTROL**



Featured available only for
item# 773273, 773726

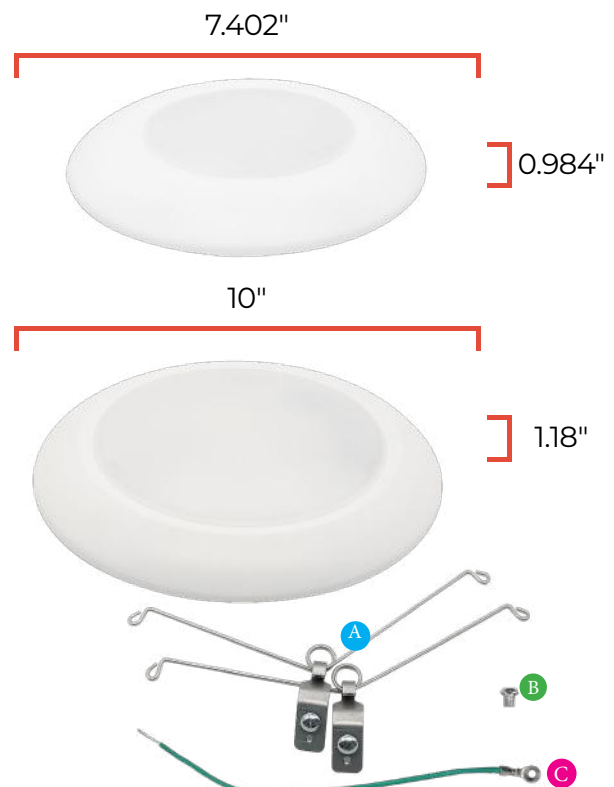

Item #
[773299](#)

- A** Spring Kit for Can Retrofitting
- B** 2 Pcs Springs with Screw
- C** 1 Pc Ground Wire

From Start to Finish, **We Make It Easy**

Downlights Disc Light




High output: 1100 lumens on 7" models and 2000 lumens on 10" models
Fits into a variety of standard ceiling junction boxes including 4" round/octagon and 3 1/2" round old or new construction



Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)
773273	14	LED14DISC/7/5CCT/927-950/J/WHRD/D	White	5 CCT - 27/30/35/40/50K	90	1100	50000	0.984	7.402
773274	14	LED14DISC/7/930/J/WHRD/D	White	3000K	90	1100	50000	0.984	7.402
773275	14	LED14DISC/7/930/J/BLRD/D	Black	3000K	90	1100	50000	0.984	7.402
773276	25	LED25DISC/10/5CCT/927-950/J/WHRD/D	White	5 CCT - 27/30/35/40/50K	90	2000	50000	1.18	10
773277	25	LED25DISC/10/930/J/WHRD/D	White	3000K	90	2000	50000	1.18	10
773278	25	LED25DISC/10/930/J/BLRD/D	Black	3000K	90	2000	50000	1.18	10
773299	-	LED7DISC/CAN-SPRINGS-50PK	-	-	-	-	-	-	-

Retrofit Downlights For Use in Recessed Cans



Regressed lens design with smooth finish to help reduce glare
 Easy to install: Can either be hardwired into a fixture or use the E26 Quick Connect Adapter to screw it into a recessed can
 Wet rated and can be used in bathroom areas such as for overhead lighting in showers



Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)
773170	14	LED9REC/4/927/WHRD-G/D	White	2700K	90	650	50000	2.559	4.961
773171	14	LED9REC/4/930/WHRD-G/D	White	3000K	90	650	50000	2.559	4.961
773180	14	LED14REC/5/6/927/WHRD-G/D	White	2700K	90	1100	50000	2.756	7.244
773181	14	LED14REC/5/6/930/WHRD-G/D	White	3000K	90	1100	50000	2.756	7.244
773108	12	LED12REC/4HL/827/WHRD/D	White	2700K	80	1100	50000	1.69	4.96
773109	12	LED12REC/4HL/830/WHRD/D	White	3000K	80	1100	50000	1.69	4.96
773110	12	LED12REC/4HL/840/WHRD/D	White	4000K	80	1100	50000	1.69	4.96
773165	14	LED14REC/5/6/927/WHRD/D	White	2700K	90	1100	50000	2.76	7.24
773166	14	LED14REC/5/6/930/WHRD/D	White	3000K	90	1100	50000	2.76	7.24
773167	14	LED14REC/5/6/940/WHRD/D	White	4000K	90	1100	50000	2.76	7.24
773190	12	LED12REC/4/5CCT/927-950/WHRD/D	White	5 CCT - 27/30/35/40/50K	90	1100	50000	1.69	4.96
773191	14	LED14REC/5/6/5CCT/927-950/WHRD/D	White	5 CCT - 27/30/35/40/50K	90	1100	50000	1.69	7.24

Downlights with J-Box For Use Without Recessed Cans



Regressed lens design with smooth finish to help reduce glare

Easy to install: Can either be hardwired into a fixture or use the E26 Quick Connect Adapter to screw it into a recessed can

Wet rated and can be used in bathroom areas such as for overhead lighting in showers



4"

773240 ^{2,3}
773241 ^{2,3}
773242 ^{2,3}



4"

773215 ¹
773216 ¹
773217 ¹



6"

773220 ²
773221 ²
773222 ²



6"

773301 ¹
773302 ¹

Metal Mounting Bracket



773300

Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)
773240	9	LED9JBOXDL/4/927/WHRD/D	White	2700K	90	650	50000	1.26	4.80
773241	9	LED9JBOXDL/4/930/WHRD/D	White	3000K	90	650	50000	1.26	4.80
773242	9	LED9JBOXDL/4/940/WHRD/D	White	4000K	90	650	50000	1.26	4.80
773215	12	LED12JBOXDL/4HL/827/WHRD/D	White	2700K	80	1100	50000	1.69	4.96
773216	12	LED12JBOXDL/4HL/830/WHRD/D	White	3000K	80	1100	50000	1.69	4.96
773217	12	LED12JBOXDL/4HL/840/WHRD/D	White	4000K	80	1100	50000	1.69	4.96
773220	14	LED14JBOXDL/6/827/WHRD/D	White	2700K	80	1100	50000	1.26	6.85
773221	14	LED14JBOXDL/6/830/WHRD/D	White	3000K	80	1100	50000	1.26	6.85
773222	14	LED14JBOXDL/6/840/WHRD/D	White	4000K	80	1100	50000	1.26	6.85
773301	12	LED12RECJBOXDL/4/5CCT/827-850/WHRD/D	White	5 CCT - 27/30/35/40/50K	80	1100	50000	1.69	5.51
773302	14	LED14RECJBOXDL/6/5CCT/827-850/WHRD/D	White	5 CCT - 27/30/35/40/50K	80	1100	50000	1.89	7.32

SECURITY LIGHTS

Wet Rated IP66-rated with premium aluminum body and stainless-steel fasteners for superior durability in all weather conditions

Ideal for illuminating your driveway, backyard, patio, or entryway

Advanced motion sensor with 180° detection range and 60-foot distance capability, automatically activating when movement is detected *(Motion Sensor Model Only)*

Measuring Specifications



Easy to Install

Single center screw mounting for ease of installation



From Start to Finish, **We Make It Easy**

Dual Head Security Lights



120W equivalent brightness delivering 2200 (*White Finish Models only*) and 2000 lumens (*Black Finish Models only*) of crystal-clear light to keep your property secure and well-lit

Wet Rated IP66-rated with premium aluminum body and stainless-steel fasteners for superior durability in all weather conditions

Ideal for illuminating your driveway, backyard, patio, or entryway



Item #	Watts	Ordering Code	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in)	Beam Angle(°)
LED DUAL HEAD SECURITY LIGHT										
773700	24	LED24SEC/2RHWH/40K	White	4000K	80	2200	50000	4.41	5.9	270
773701	24	LED24SEC/2RHBL/40K	Black	4000K	80	2000	50000	4.41	5.9	270
LED DUAL HEAD SECURITY LIGHT with MOTION SENSOR / DUSK TO DAWN										
773702	24	LED24SEC/2RHWH/MO/40K	White	4000K	80	2200	50000	6.1	5.9	270
773703	24	LED24SEC/2RHBL/MO/40K	Black	4000K	80	2000	50000	6.1	5.9	270



BULBS
DECORATIVE FILAMENTS
A19 - A15 - ST18 - G25 - B11 - T9

GENERAL SERVICE
A19 - BR20- BR30
PAR20 - PAR30 - PAR38



Filaments

A15 & A19



Full glass enclosure to provide the proper shape and size of the incandescent counterpart

Utilizes LED filaments to provide a decorative look and feel

Commonly used in ceiling fixtures and portables

Fully compatible with all dimmer types

A15 7.6W



[776208](#)
[776210](#)

A15 7.6W



[776209](#)
[776211](#)

A19 7.6W



[776212](#)
[776226](#) **4-PACK**

[776214](#)
[776227](#) **4-PACK**

[776216](#)
[776228](#) **4-PACK**

A19 7.6W



[776213](#)
[776215](#)

Item #	Watts	Ordering Code	Bulb Type	Base Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in)	Watt Equiv.
776208	7.6	LED7A15/27K/FIL/D/B/2	A15	E26	Clear	2700K	80	800	15000	3.39	1.89	60W
776209	7.6	LED7A15/27K/FIL/M/D/B/2	A15	E26	Milky	2700K	80	800	15000	3.39	1.89	60W
776210	7.6	LED7A15/30K/FIL/D/B/2	A15	E26	Clear	3000K	80	800	15000	3.39	1.89	60W
776211	7.6	LED7A15/30K/FIL/M/D/B/2	A15	E26	Milky	3000K	80	800	15000	3.39	1.89	60W
776212	7.6	LED7A19/27K/FIL/D/B/2	A19	E26	Clear	2700K	80	800	15000	4.17	2.36	60W
776226	7.6	LED7A19/27K/FIL/D/B/2/4P	A19	E26	Clear	2700K	80	800	15000	4.17	2.36	60W
776213	7.6	LED7A19/27K/FIL/M/D/B/2	A19	E26	Milky	2700K	80	800	15000	4.17	2.36	60W
776214	7.6	LED7A19/30K/FIL/D/B/2	A19	E26	Clear	3000K	80	800	15000	4.17	2.36	60W
776227	7.6	LED7A19/30K/FIL/D/B/2/4P	A19	E26	Clear	3000K	80	800	15000	4.17	2.36	60W
776215	7.6	LED7A19/30K/FIL/M/D/B/2	A19	E26	Milky	3000K	80	800	15000	4.17	2.36	60W
776216	7.6	LED7A19/40K/FIL/D/B/2	A19	E26	Clear	4000K	80	800	15000	4.17	2.36	60W
776228	7.6	LED7A19/40K/FIL/D/B/2/4P	A19	E26	Clear	4000K	80	800	15000	4.17	2.36	60W

Filaments

ST18 & G25



- Full glass enclosure to provide the proper shape and size of the incandescent counterpart
- Utilizes LED filaments to provide a decorative look and feel
- Commonly used in pendants, chandeliers, and vanities
- Fully compatible with all dimmer types

ST18 7.6W



- [776223](#)
[776242](#) 4-PACK
- [776224](#)
[776243](#) 4-PACK
- [776225](#)
[776244](#) 4-PACK

G25 7.6W



- [776217](#)
[776239](#) 4-PACK
- [776219](#)
[776240](#) 4-PACK
- [776221](#)
[776241](#) 4-PACK

G25 7.6W



- [776218](#)
[776220](#)
[776222](#)

Item #	Watts	Ordering Code	Bulb Type	Base Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)	Watt Equiv.
776223	7.6	LED7ST18/27K/FIL/D/B/2	ST18	E26	Clear	2700K	80	800	15000	5.03	2.28	60W
776242	7.6	LED7ST18/27K/FIL/D/B/2/4P	ST18	E26	Clear	2700K	80	800	15000	5.03	2.28	60W
776224	7.6	LED7ST18/30K/FIL/D/B/2	ST18	E26	Clear	3000K	80	800	15000	5.03	2.28	60W
776243	7.6	LED7ST18/30K/FIL/D/B/2/4P	ST18	E26	Clear	3000K	80	800	15000	5.03	2.28	60W
776225	7.6	LED7ST18/40K/FIL/D/B/2	ST18	E26	Clear	4000K	80	800	15000	5.03	2.28	60W
776244	7.6	LED7ST18/40K/FIL/D/B/2/4P	ST18	E26	Clear	4000K	80	800	15000	5.03	2.28	60W
776217	7.6	LED7G25/27K/FIL/D/B/2	ST18	E26	Clear	2700K	80	800	15000	4.72	3.15	60W
776239	7.6	LED7G25/27K/FIL/D/B/2/4P	G25	E26	Clear	2700K	80	800	15000	4.72	3.15	60W
776218	7.6	LED7G25/27K/FIL/M/D/B/2	G25	E26	Milky	2700K	80	800	15000	4.72	3.15	60W
776219	7.6	LED7G25/30K/FIL/D/B/2	G25	E26	Clear	3000K	80	800	15000	4.72	3.15	60W
776240	7.6	LED7G25/30K/FIL/D/B/2/4P	G25	E26	Clear	3000K	80	800	15000	4.72	3.15	60W
776220	7.6	LED7G25/30K/FIL/M/D/B/2	G25	E26	Milky	3000K	80	800	15000	4.72	3.15	60W
776221	7.6	LED7G25/40K/FIL/D/B/2	G25	E26	Clear	4000K	80	800	15000	4.72	3.15	60W
776241	7.6	LED7G25/40K/FIL/D/B/2/4P	G25	E26	Clear	4000K	80	800	15000	4.72	3.15	60W
776222	7.6	LED7G25/40K/FIL/M/D/B/2	G25	E26	Milky	4000K	80	800	15000	4.72	3.15	60W

Filaments

B11 & T9



Full glass enclosure to provide the proper shape and size of the incandescent counterpart

Utilizes LED filaments to provide a decorative look and feel

Commonly used in sconces and chandeliers

Fully compatible with all dimmer types

B11 4.1W



[776200](#)
[776229](#)
[776235](#)

6-PACK
25-PACK

[776201](#)
[776230](#)
[776236](#)

6-PACK
25-PACK

[776202](#)
[776231](#)

6-PACK

B11 5.1W



[776203](#)
[776232](#)
[776237](#)

6-PACK
25-PACK

[776204](#)
[776233](#)
[776238](#)

6-PACK
25-PACK

[776205](#)
[776234](#)

6-PACK

T9 5.1W



Item #
[776206](#)
[776207](#)

Item #	Watts	Ordering Code	Bulb Type	Base Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)	Watt Equiv.
776200	4.1	LED4B11/27K/FIL/D/B/2	B11	E12	Clear	2700K	80	400	15000	3.94	1.38	40W
776229	4.1	LED4B11/27K/FIL/D/B/2/6P	B11	E12	Clear	2700K	80	400	15000	3.94	1.38	40W
776235	4.1	LED4B11/27K/FIL/D/B/2/25P	B11	E12	Clear	2700K	80	400	15000	3.94	1.38	40W
776201	4.1	LED4B11/30K/FIL/D/B/2	B11	E12	Clear	3000K	80	400	15000	3.94	1.38	40W
776230	4.1	LED4B11/30K/FIL/D/B/2/6P	B11	E12	Clear	3000K	80	400	15000	3.94	1.38	40W
776236	4.1	LED4B11/30K/FIL/D/B/2/25P	B11	E12	Clear	3000K	80	400	15000	3.94	1.38	40W
776202	4.1	LED4B11/40K/FIL/D/B/2	B11	E12	Clear	4000K	80	400	15000	3.94	1.38	40W
776231	4.1	LED4B11/40K/FIL/D/B/2/6P	B11	E12	Clear	4000K	80	400	15000	3.94	1.38	40W
776203	5.1	LED5B11/27K/FIL/D/B/2	B11	E12	Clear	2700K	80	500	15000	3.94	1.38	60W
776232	5.1	LED5B11/27K/FIL/D/B/2/6P	B11	E12	Clear	2700K	80	500	15000	3.94	1.38	60W
776237	5.1	LED5B11/27K/FIL/D/B/2/25P	B11	E12	Clear	2700K	80	500	15000	3.94	1.38	60W
776204	5.1	LED5B11/30K/FIL/D/B/2	B11	E12	Clear	3000K	80	500	15000	3.94	1.38	60W
776233	5.1	LED5B11/30K/FIL/D/B/2/6P	B11	E12	Clear	3000K	80	500	15000	3.94	1.38	60W
776238	5.1	LED5B11/30K/FIL/D/B/2/25P	B11	E12	Clear	3000K	80	500	15000	3.94	1.38	60W
776205	5.1	LED5B11/40K/FIL/D/B/2	B11	E12	Clear	4000K	80	500	15000	3.94	1.38	60W
776234	5.1	LED5B11/40K/FIL/D/B/2/6P	B11	E12	Clear	4000K	80	500	15000	3.94	1.38	60W
776206	5.1	LED5T9/27K/FIL/D/B/2	T9 5"	E26	Clear	2700K	80	500	15000	4.92	1.26	60W
776207	5.1	LED5T9/30K/FIL/D/B/2	T9 5"	E26	Clear	3000K	80	500	15000	4.92	1.26	60W

General Service

A19



True shape A19 that closely resembles incandescents and halogens

Damp location rated and long-lasting

Commonly used in ceiling fixtures and portables

A19 8.5W



[774243](#)
[774247](#)
[774251](#)

4-PACK

25-PACK

[774244](#)
[774248](#)
[774252](#)

4-PACK

25-PACK

[774245](#)
[774249](#)

4-PACK

[774246](#)
[774250](#)

4-PACK

Item #	Watts	Ordering Code	Bulb Type	Base Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in)	Watt Equiv.
774243	8.5	LED8A19/B60W/827/1P	A19	E26	Frost	2700K	80	750	10000	4.25	2.36	60W
774247	8.5	LED8A19/B60W/827/4P	A19	E26	Frost	2700K	80	750	10000	4.25	2.36	60W
774251	8.5	LED8A19/B60W/827/25P	A19	E26	Frost	2700K	80	750	10000	4.25	2.36	60W
774244	8.5	LED8A19/B60W/830/1P	A19	E26	Frost	3000K	80	750	10000	4.25	2.36	60W
774248	8.5	LED8A19/B60W/830/4P	A19	E26	Frost	3000K	80	750	10000	4.25	2.36	60W
774252	8.5	LED8A19/B60W/830/25P	A19	E26	Frost	3000K	80	750	10000	4.25	2.36	60W
774245	8.5	LED8A19/B60W/840/1P	A19	E26	Frost	4000K	80	750	10000	4.25	2.36	60W
774249	8.5	LED8A19/B60W/840/4P	A19	E26	Frost	4000K	80	750	10000	4.25	2.36	60W
774246	8.5	LED8A19/B60W/850/1P	A19	E26	Frost	5000K	80	750	10000	4.25	2.36	60W
774250	8.5	LED8A19/B60W/850/4P	A19	E26	Frost	5000K	80	750	10000	4.25	2.36	60W

General Service A19



True shape A19 that closely resembles incandescents and halogens

Damp location rated and long-lasting

Commonly used in ceiling fixtures and portables

Dimmable with a wide range of dimmer type

A19 9W



[774262](#)

[774253](#)

[774257](#)

4-PACK

25-PACK

[774263](#)

[774254](#)

[774258](#)

4-PACK

25-PACK

[774264](#)

[774255](#)

4-PACK

[774265](#)

[774256](#)

4-PACK

A19 11W



[774266](#)

[774267](#)

Item #	Watts	Ordering Code	Bulb Type	Base Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in.)	Watt Equiv.
774262	9	LED9A19/PF60W/927/D/2/1P	A19	E26	Frost	2700K	90	800	15000	4.25	2.36	60W
774253	9	LED9A19/PF60W/927/D/2/4P	A19	E26	Frost	2700K	90	800	15000	4.25	2.36	60W
774257	9	LED9A19/PF60W/927/D/2/25P	A19	E26	Frost	2700K	90	800	15000	4.25	2.36	60W
774263	9	LED9A19/PF60W/927/D/2/1P	A19	E26	Frost	3000K	90	800	15000	4.25	2.36	60W
774254	9	LED9A19/PF60W/930/D/2/4P	A19	E26	Frost	3000K	90	800	15000	4.25	2.36	60W
774258	9	LED9A19/PF60W/930/D/2/25P	A19	E26	Frost	3000K	90	800	15000	4.25	2.36	60W
774264	9	LED9A19/PF60W/940/D/2/1P	A19	E26	Frost	4000K	90	800	15000	4.25	2.36	60W
774255	9	LED9A19/PF60W/940/D/2/4P	A19	E26	Frost	4000K	90	800	15000	4.25	2.36	60W
774265	9	LED9A19/PF60W/950/D/2/1P	A19	E26	Frost	5000K	90	800	15000	4.25	2.36	60W
774256	9	LED9A19/PF60W/950/D/2/4P	A19	E26	Frost	5000K	90	800	15000	4.25	2.36	60W
774266	11	LED11A19/PF75W/927/D/2/1P	A19	E26	Frost	2700K	90	1100	15000	4.331	2.362	75W
774267	11	LED11A19/PF75W/930/D/2/1P	A19	E26	Frost	3000K	90	1100	15000	4.331	2.362	75W

General Service

BR20, BR30, BR40



Shape and size emulates halogen replacement bulbs
Commonly used in track and recessed lighting
Fully compatible with all dimmer types



Item #	Watts	Ordering Code	Base Type	Bulb Type	Volts	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in)	Watt Equiv.
772854	7	LED7BR20/827/D/5	E26	BR20	120	Frost	2700K	80	525	25000	3.86	2.48	50W
772855	7	LED7BR20/830/D/5	E26	BR20	120	Frost	3000K	80	525	25000	3.86	2.48	50W
772856	8	LED8BR30/827/D/5	E26	BR30	120	Frost	2700K	80	650	25000	5.19	3.76	65W
772857	8	LED8BR30/830/D/5	E26	BR30	120	Frost	3000K	80	650	25000	5.19	3.76	65W
772858	11	LED11BR30/827/D/5	E26	BR30	120	Frost	2700K	80	1000	25000	5.03	3.77	75W
772859	11	LED11BR30/830/D/5	E26	BR30	120	Frost	3000K	80	1000	25000	5.03	3.77	75W
772860	15	LED15BR40/827/D/5	E26	BR40	120	Frost	2700K	80	1400	25000	6.22	4.94	90W
772861	15	LED15BR40/830/D/5	E26	BR40	120	Frost	3000K	80	1400	25000	6.22	4.94	90W

General Service PAR20, PAR30, PAR38



UL wet location rated and may be suitable in totally enclosed fixtures

Commonly used in track and recessed lighting

Compatible with a wide range of dimmer types



Item #	Watts	Ordering Code	Base Type	Bulb Type	Finish	Color Temp.	CRI	Lumens	Avg Rated Life	M.O.L (in.)	M.O.D (in)	Watt Equiv.
772242	7	LED7PAR20/B-FL40/830/WD/2	E26	PAR20	White	3000K	80	500	25000	3.14	2.48	50W
772243	7	LED7PAR20/B-FL40/840/WD/2	E26	PAR20	White	4000K	80	500	25000	3.14	2.48	50W
772245	10	LED10PAR30S/B-FL40/830/WD/2	E26	PAR30SN	White	3000K	80	650	25000	3.6	3.69	75W
772246	10	LED10PAR30S/B-FL40/840/WD/2	E26	PAR30SN	White	4000K	80	800	25000	3.6	3.69	75W
772248	10	LED10PAR30L/B-FL40/830/WD/2	E26	PAR30LN	White	3000K	80	800	25000	4.53	3.74	75W
772249	10	LED10PAR30L/B-FL40/840/WD/2	E26	PAR30LN	White	4000K	80	800	25000	4.53	3.74	75W
772253	15	LED15PAR38/B-FL40/830/WD/2	E26	PAR38	White	3000K	80	1200	25000	5.30	4.68	90W
772254	15	LED15PAR38/B-FL40/840/WD/2	E26	PAR38	White	4000K	80	1200	25000	5.30	4.68	90W



NEW JERSEY | SOUTH CAROLINA | TEXAS

800-528-5555 - SERVICE@BULBRITE.COM - BULBRITE.COM

BUILDER BOOK 2025 | 10.14

©2025 Bulbrite Industries, Inc. All rights reserved. All brand names are trademarks or registered trademarks of Bulbrite Industries, Inc. Printed in USA.