



SIGN UP FOR QUICK SHIP

WOOD FINISHES

CAD MODELS

WATCH THE VIDEO

ASSEMBLY AND WARRANTY

Back Office Mercato Italia ordini@horm.it 0434 1979 102

Back Office Export Markets orders@horm.it +39 0434 1979 101


IT – Top in tamburato di abete impiallacciato in frassino tinto mocha e rinforzato con barre in alluminio. Gambe in frassino massello tinto mocha.

EN – Spruce honeycomb top, veneered with mocha stained ash and reinforced with internal aluminium bars. Legs in mocha stained solid ash.

FR – Tableau en nid d'abeille d'épinette, plaqué de frêne teinté mocha et renforcé avec des barres internes en aluminium. Pieds en frêne massif teinté mocha.

DE – Platte aus Tannenhohlkern furniert mit Esche. Innere Längsstützen aus Metall. QuaDror™ Beine aus massiver Esche.

ES – Sobre de estructura alveolar de abeto, chapada en fresno teñido mocha y reforzado con barras internas de aluminio. Patas en mocha de fresno macizo teñido mocha.

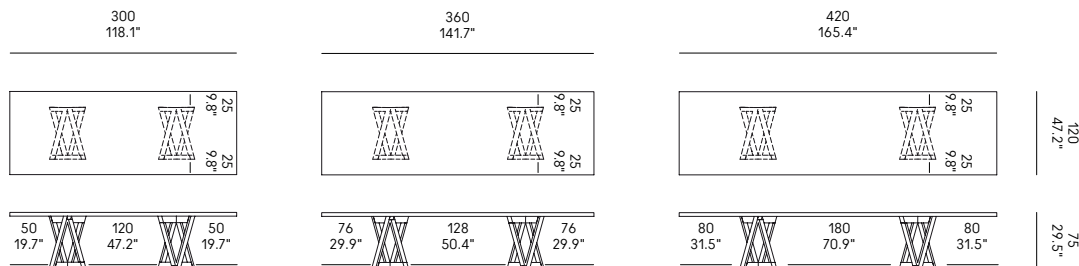

A QUADROR™ 03 L. 300	QD300LM
B QUADROR™ 03 L. 360	QD360LM
C QUADROR™ 03 L. 420	QD420LM

CABLATURA

Su richiesta il tavolo può essere cablato. La cablatura si compone di un binario installato tra le due gambe e di adattatori "user-friendly" che l'utente può agganciare al binario.

WIRING

The table can be wired on request. The wiring consists of a rail installed between the two legs and user-friendly adapters that the user can hook to the rail.

CÂBLAGE

La table peut être câblée sur demande. Le câblage se compose d'un rail installé entre les deux pieds et d'adaptateurs conviviaux que l'utilisateur peut accrocher au rail.







VERKABELUNG

Auf Wunsch kann der Tisch verdrahtet werden. Die Verkabelung besteht aus einer zwischen den beiden Schenkeln installierten Schiene und benutzerfreundlichen Adaptern, die der Benutzer an der Schiene befestigen kann.

CABLAJE

La mesa se puede cablear a petición. El cableado consiste en un riel instalado entre las dos patas y adaptadores fáciles de usar que el usuario puede fijar al riel.



<p>Binario Rail Binär Schiene</p>	 <p>EUBIQ-RH1</p>				
<p>Voltage: 250 V single phase / Current: maximum 32 A at 25° C ambient temperature / Frequency: 50 - 60 Hertz / Material: Aluminum / Insulation material: Polycarbonate. Built in dimensions: 70 mm x 57 mm (width x depth) / Weight: 2.6 kg (per meter).</p>					
<p>Adattatori Adapters Adaptateurs Adaptarn Adaptadores</p>	 <p>Italia UAUT149-TT</p>	 <p>Schuko UAUE75-TT</p>	 <p>International UAUX121-TT</p>	 <p>USB UACX68-TT</p>	<p>Supporto voce e dati Voice-data support Support voix-données Sprach-/Datensupport Soporte voz y datos</p>  <p>5501-0030-0004</p>