

# **EASY-KLEEN**

## **PRESSURE SYSTEMS LTD.**

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# **OPTIONS & ACCESSORIES**



MANUFACTURED IN NORTH AMERICA

**1-800-315-5533**  
**easykleen.com**



**sales@easykleen.com**




Ask us! We stock all brands and models of rotary nozzles for your preference.

**ROTARY NOZZLES - COMMERCIAL DUTY**



Rotating nozzles increases the force in which you clean. It easily cuts through tough cleaning jobs in half the time. Rated at 212° F



NOZ-RN365##	UP TO <b>3600 PSI</b>
NOZ-RN400##C	ECONOMICAL - UP TO <b>4000 PSI</b> - 212° F 1/4 FNPT INLET BRASS
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**GIANT™ ROTARY NOZZLES**



Giant's original Turbo Laser™ nozzles takes the power of a zero-degree nozzle and rotate it in either a circular or linear fashion. This allows the user to clean up to 70% faster than with a conventional zero-degree nozzle.

NOZ-RN360##G	<b>3600 PSI</b> , 195° F
NOZ-RN600##G	<b>5800 PSI</b> , 195° F
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**ROTARY SEWER / CULVERT NOZZLES**



These rotating nozzles add extra agitation speeding up your work, as the reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4000 PSI

NOZ-SWR18-5.5R	1/8", 5.5 ORIFICE - 3 BACK
NOZ-SWR14-5.5R	1/4", 5.5 ORIFICE - 3 BACK
NOZ-SWR38-6R	3/8", 6.0 ORIFICE - 3 BACK

**QUICK COUPLER NOZZLES**



Contains complete set of 5 quick coupler nozzles for various spray patterns. Includes one black soap nozzle. Rated @ 4000 PSI max

KIT-NZPKO##	ORIFICE SIZE (5 PACK) - 0°/15°/25°/45°/SOAP
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

IDENTIFICATION KEY - REFER TO PAGE 1 FOR SIZING	
°	DEGREE
##	ORIFICE SIZE

**ROTARY NOZZLES - HEAVY-DUTY**



The fully stainless steel model works at a higher pressure. Rated at 190° F

NOZ-RN510##	UP TO <b>5100 PSI</b>
NOZ-RN870##	UP TO <b>8700 PSI</b>
NOZ-RN110##	UP TO <b>11,000 PSI</b>
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**MEG NOZZLE**



Hardened stainless steel nozzle for high pressure washes. A great, standard, high pressure, high heat multi-job nozzle.

NOZ-1/4MEG°##	5000 PSI RATED TO 7000 PSI MAX
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**SEWER / CULVERT NOZZLES**



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4200 PSI

NOZ-SWR18-5.5	1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR14-5.5	1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR38-5.5	3/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK

**ROTARY TIP FILTER**



Protect your turbo nozzle from damage caused by debris in the water flow and prolongs the life of your tip.

NOZ-RNF5000-14	1/4" INLET/ OUTLET, 5000 PSI, 300° F
NOZ-RNF5000-14QC	1/4" QC PLUG X 1/4" MNPT - 5000 PSI

**BARRACUDA ROTARY NOZZLE**



Considered industry standard for speed controlled rotary shotgunning.

NOZ-AP4-##	ATTACK TIP, 1/4" MVPT
NOZ-RN-BC-K	4.4-11 GPM, 2000 TO 21,750 PSI, 1/4" PORT (REQUIRES ATTACK TIPS)
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**NOZZLES & WAND ACCESSORIES**

**PIT BOSS**



Sludge sucker uses a high pressure water stream (1000-3000 PSI) to suck the sludge off the bottom of pits or tanks and ejects it through a 1-1/2" (15' long) hose to a disposal tank. The base unit attaches to the end of a pressure washer lance with a quick coupler for extension to the bottom of the pit. Uses a 0° tip for suction/power ejection.

ACC-PBSK	SLUDGE SUCKER KIT WITH NOZZLE, 5.5 NOZZLE 4000 PSI, 104° F
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

**WET SANDBLAST KIT**



Suction fed injection of sand and water to peel paint and rust from metal effortlessly with no dust. Leaves surface ready to prime. For 3 GPM up to 10 GPM flow.



ACC-SNDBLKT	FOR MACHINES 3000 PSI +, MUST SIZE NOZZLE. 0° UP TO 5500 PSI
-------------	--


# NOZZLES & WAND ACCESSORIES

## - CONTINUED

### HYDRO EXCAVATION NOZZLE



Dig faster, save water! The Ripsaw Rotating Turbo nozzle is specifically designed and engineered for the rugged Hydro-Excavation industry. It's cone shaped flow pattern (18°) is ideal for potholing applications. 35% Faster than Regular Rotary Tips.



NOZ-RS32040	RIPSAW - 3200 PSI, 4.0, 180°F
-------------	-------------------------------

### GUTTER CLEANER



This accessory allows you to clean your gutters from the ground. No more getting up and down the ladder with gloved hands!



ACC-GC12	12" GUTTER POLE, 4000 PSI, 200°F
----------	----------------------------------

### WATER BROOM



Fits 1/4" wand  
Ideal for cleaning floors, decks, driveway, and great for industrial flat surfaces.



ACC-WTRBRM4	4 NOZZLE 1/4" - 24" BROOM (MUST ADD NOZZLES) 4000 PSI RATED @ 140°F
-------------	---

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES (Spray Nozzles Needed For Operation)

### SURFACE CLEANER



Used for removing dirt and grime from brick, concrete, sidewalks, driveways, shop floors in a contained fashion. Rated at 194°F, 12 GPM  
Two nozzles required

ACC-SRFLNR24	STAINLESS STEEL - 24" 4000 PSI RATED
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

### STEAM NOZZLES



For cleaning and thawing operations. Great for de-icing. For installation on steam wand WAN-STM see page 60.

NOZ-STM14-1.5F	FLAT, 1.5 MM, BRASS
NOZ-STM38-BLK	BRASS, BLANK STEAM

### FOAM CANNONS



Allows full chemical coverage and activation. Ideal for vehicle and house washing.

NOZ-FMR4830	C/W 1.5 MM INJECTOR, 4.8 GPM @ 3000 PSI, 1/4" FEMALE CONNECT
NOZ-FMR4830T	WITH INJECTOR C/W BOTTLE, 4.8 GPM @ 3000 PSI, 1/4" FEMALE CONNECT
NOZ-FMR-COM	COMPACT FOAMER, 1-5 GPM @ 2500 PSI, 1/4" FEMALE CONNECT

### UNDERCARRIAGE CLEANER



Used for cleaning under cars, trucks and equipment. Ideal for detailing, rust check, vehicle repair centers, and firehouses. Rated at 194°F, 4000 PSI  
5'5" Reach, Two nozzles required

ACC-UCC	UP TO 4000 PSI RATED
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

# GUN & WAND ASSEMBLIES

### TRIGGER GUNS



Easy-Kleen offers a variety of pressure washer trigger guns.

GUN-TG5010	GENERAL PUMP GUN, 300°F, <b>5000 PSI</b> , 10 GPM, 3/8" INLET, 1/4" OUTLET
GUN-TG5010V	PA VEGA 250, 300°F, <b>5000 PSI</b> , 10 GPM, 3/8" INLET, 1/4" OUTLET
GUN-TG5012RX	RELAXED TRIGGER GUN, 300°F, <b>5000 PSI</b> , 12 GPM, EASY PULL, <b>HEAVY-DUTY</b> , 3/8" INLET, 1/4" OUTLET
GUN-TG5680RX	RELAXED TRIGGER GUN, <b>5600 PSI</b> , 8 GPM, EASY PULL, <b>RELOAD GUN</b> , 3/8" INLET, 1/4" OUTLET
GUN-TG7221-12	PA BIG GUN, 210°F, <b>8100 PSI</b> , 21 GPM, <b>RELOAD GUN</b> , 1/2" INLET/OUTLET
GUN-TG4010W	TRIGGER GUN, WEEPING, 300°F, <b>4000 PSI</b> , 10 GPM, <b>FOR COIN OPERATED CAR WASHES</b> , 3/8" INLET, 1/4" OUTLET
GUN-HV1732	TRIGGER GUN, HIGH VOLUME, 300°F, <b>1950 PSI</b> , 32 GPM, 1/2" INLET/OUTLET
GUN-WG1635S	WASH DOWN GUN, 16 GPM, <b>350 PSI</b> , HIGH FLOW LOW PRESSURE
GUN-LG3216-12-HE	TRIGGER GUN, HYDRO EXCAVATION, <b>3200 PSI</b> , 16 GPM, 1/2" INLET/OUTLET

**WANDS**



Zinc coated, molded grip.  
 1/4" Male pipe thread.  
 Also available in stainless steel.  
 Rated at 300°F

WAN-SLH	SIDE HANDLE GRIP FOR 1/4" PIPE WAND
WAN-SL12	12" INSULATED SINGLE LANCE
WAN-SL24	24" INSULATED SINGLE LANCE
WAN-SL36	36" INSULATED SINGLE LANCE
WAN-SL48	48" INSULATED SINGLE LANCE
WAN-SL36-SS	36" INSULATED SINGLE LANCE, STAINLESS STEEL
WAN-SL40SS-12	40" SINGLE LANCE, STAINLESS STEEL, 1/2" MNPT
WAN-SL59	59" INSULATED SINGLE LANCE
WAN-SL79	79" INSULATED SINGLE LANCE
WAN-SL48SS-SH-12	48" SINGLE LANCE C/W SIDE HANDLE, STAINLESS STEEL

**GUN/WAND/QUICK COUPLER ASSEMBLY**



Complete assembly for pressure washing. Quick attach for quick assembly with the GUN-TG5010 or GUN-TG5010V. Rated at 10 GPM @ 5000 PSI. (Add "V" to upgrade to Vega Gun)

KIT-GW12	KIT - 5000 PSI GUN, 12" WAND, QC & NIPPLE
KIT-GW24	KIT - 5000 PSI GUN, 24" WAND, QC & NIPPLE
GUN-GW36	KIT - 4000 PSI GUN, 36" WAND, QC & NIPPLE
KIT-GW36V	KIT - 5000 PSI VEGA GUN, 36" WAND, QC & NIPPLE
GUN-GW48	KIT - 5000 PSI GUN, 48" WAND, QC & NIPPLE
KIT-GW59	KIT - 5000 PSI GUN, 59" WAND, QC & NIPPLE
KIT-GW79	KIT - 5000 PSI GUN, 79" WAND, QC & NIPPLE

**O-RINGS**



O-Rings for AP, Hansen, Foster, Parker, and other quick-coupler brands. Viton to 300°F

ORG-QC14HT	QC, 1/4", HIGH TEMP
ORG-QC38HT	QC, 3/8", HIGH TEMP
ORG-QC12HT	QC, 1/2", HIGH TEMP

**HARNESS**




Used with extension wands to help stabilize and support the wand for ease of use.

WAN-HRNS	SUPPORT BELT
----------	--------------

IT IS RECOMMENDED TO PAIR THIS ITEM WITH THE EXTENSION WANDS FOR SAFETY & CONTROL

**STEAM WAND**



WAN-STM

Must be used in steam application. Safety guard around wand.

GUN-STM12-38SW

GUN-STM12-38 SW	STEAM TRIGGER GUN. 0 GPM @ 1500 PSI & 350°. INLET: 1/2" FPT OUTLET: 3/8" FPT DUE TO LIABILITY WE DO NOT INSTALL ON STEAM SYSTEMS
WAN-STM38	3/8" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM12	1/2" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM34	3/4" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM1	1" STEAM WAND WITH EXPANDED METAL GRIP

**BRASS QUICK COUPLERS**



For speedy and sturdy interchanging of tools and attachments. Disconnect coupler band rated at 5000 PSI, 210°F

**STANDARD QUICK COUPLER**

FIT-QC14F/M	1/4" FNPT/MNPT, BRASS
FIT-QC38F/M	3/8" FNPT/MNPT, BRASS
FIT-QC12F/M	1/2" FNPT/MNPT, BRASS

**STANDARD QUICK COUPLER NIPPLES**

FIT-QCN14F/M	1/4" FNPT/MNPT, BRASS
FIT-QCN38F/M	3/8" FNPT/MNPT, BRASS
FIT-QCN12F/M	1/2" FNPT/MNPT, BRASS

**STAINLESS STEEL QUICK COUPLERS**



For speedy and sturdy interchanging of tools and attachments. Disconnect coupler band rated at 5000 PSI, 210°F

**STAINLESS STEEL QUICK COUPLER**

FIT-QC14F/M-SS	1/4" FNPT/MNPT, STAINLESS STEEL
FIT-QC38F/M-SS	3/8" FNPT/MNPT, STAINLESS STEEL
FIT-QC12F/M-SS	1/2" FNPT/MNPT, STAINLESS STEEL
FIT-QC12F-SS-L	1/2" FNPT, STAINLESS STEEL, LOCKING TYPE

**STAINLESS STEEL QUICK COUPLER NIPPLES**


FIT-QCN14F/M-SS	1/4" FNPT/MNPT, STAINLESS STEEL
FIT-QCN38F/M-SS	3/8" FNPT/MNPT, STAINLESS STEEL
FIT-QCN12F/M-SS	1/2" FNPT/MNPT, STAINLESS STEEL
FIT-QCN12F-SS-L	1/2" FNPT, STAINLESS STEEL, LOCKING TYPE

**FITTINGS**



FIT-S1003-B	HEX COUPLING, 1/4", FNPT
FIT-S1022-C	HEX NIPPLE, 3/8", STEEL (WMM0003GS)
FIT-S1022-CB	HEX NIPPLE, REDUCING, 3/8" X 1/4", STEEL (WMM0302GS)
FIT-S1022-D	HEX NIPPLE, 1/2", STEEL (WMM0004GS)
FIT-S1022-DB	HEX NIPPLE, REDUCING, 1/2" X 1/4", STEEL (RCF0402SS)
FIT-S1022-DC	HEX NIPPLE, REDUCING, 1/2" X 3/8", STEEL (WMM0403GS)
FIT-S1022-EC	HEX NIPPLE, REDUCING, 3/4" X 3/8", STEEL

**EXTENSION WANDS**

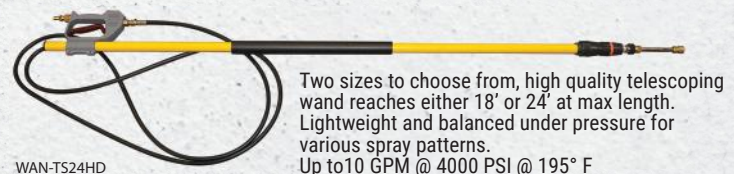

WAN-TS24HD

Two sizes to choose from, high quality telescoping wand reaches either 18' or 24' at max length. Lightweight and balanced under pressure for various spray patterns. Up to 10 GPM @ 4000 PSI @ 195° F

WAN-TS18HD	18', EXTENSION WAND
WAN-TS24HD	24', EXTENSION WAND

**DUAL LANCE WANDS**



WAN-DL38SN

Controls soap at handle for low pressure application.

WAN-DL38SN	36", WITH KNOB & SOAP NOZZLE
WAN-DL38SN-SH	36", WITH SIDE HANDLE & SOAP NOZZLE
NOZZLE 1/4" TIP EXTRA - HIGH PRESSURE	
SPECIFY PSI & GPM	

# GUN & WAND ASSEMBLIES

## - CONTINUED

### GUN & WAND COMBOS



GUN-GW30-HDI

GUN-GW36-XHP	PA VEGA, <b>7000 PSI</b> (7207 - 38" GUN/WAND/QUICK COUPLER ASSEMBLY - 36" STAINLESS STEEL)
GUN-GW48HT-XHP	48" WAND, <b>7250 PSI</b> , 21 GPM, 1/2", 210°F
GUN-GW30-HDI	GUN/WAND COMBO, <b>22,000 PSI</b> , HEAVY-DUTY INDUSTRIAL, 10.6 GPM. W/ 30" WAND
NOZZLE EXTRA	

### FLEX WANDS & PUSH PULL LANCE



Flexes for hard to clean areas. Ideal for car washes.

WAN-FLX18G2B	18", <b>2500 PSI</b> , 1/4" MNPT INLET/OUTLET, 200°F (AVAILABLE IN BLUE, RED, & BLACK)
WAN-FLX90-5	90° FLEXIBILITY, <b>5000 PSI</b>
WAN-PPL345S	34" PUSH/PULL LANCE, STAINLESS STEEL, <b>3050 PSI</b>

## HOSES

### JOINER HOSE - 4000 PSI



HOS-JNR6

Single Braid  
Connects short distances.  
Rated at 4500 PSI and 250° F

HOS-JNR2	3/8" X 2' (BETWEEN PUMP & COIL, COMMERCIAL UNITS)
HOS-JNR3	3/8" X 3' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR4	3/8" X 4' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR6	3/8" X 6' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR10	1/2" X 10' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
AVAILABLE AT CUSTOM LENGTH - 3000 TO 6000 PSI	

### HOSE - 1/2" 15,000 PSI



HOS-XXHP50-12

Double Braided  
Rated at 15,000 PSI  
250° F

HOS-XXHP50-12	1/2" X 50' C/W MALE ENDS, 15,000 PSI
HOS-XXHP100-12	1/2" X 100' C/W MALE ENDS, 15,000 PSI
HOS-XXHP250-12	1/2" X 250' C/W MALE ENDS, 15,000 PSI, 250°F

### SWIVEL



FIT-HPS38MFSS

FIT-HPS38MF

Allows your hose to swivel under high pressure. No more tangled hose!

### STANDARD HOSE - 4000 PSI



Single Braid  
Rated at 4000 PSI  
250° F

3/8"		1/2"	
HOS-HW25	3/8" X 25'	HOS-HW50-12	1/2" X 50'
HOS-HW50	3/8" X 50'	HOS-HW100-12	1/2" X 100'
HOS-HW100	3/8" X 100'	HOS-HW150-12	1/2" X 150'
HOS-HW150	3/8" X 150'	HOS-HW200-12	1/2" X 200'
HOS-HW200	3/8" X 200'		

### BRASS

FIT-HPS14MF	1/4", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 194°F
FIT-HPS38MF	3/8", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 194°F
FIT-HPS12MF	1/2", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 325°F

### STAINLESS STEEL

FIT-HPS14MFSS	1/4", MALE X FEMALE, 10.5 GPM @ <b>5600 PSI</b> , 194°F
FIT-HPS38MFSS	3/8", MALE X FEMALE, 10.5 GPM @ <b>5600 PSI</b> , 194°F
FIT-HPS12MFSS	1/2", MALE X FEMALE, 27 GPM @ <b>3500 PSI</b> , 180°F

### BLUE (B), GREY (G), & YELLOW (Y) NON-MARKING HOSE - 4500 PSI



HOS-HW50B

HOS-HW50Y

HOS-HW150G

Single Braid  
Hose that does not mark.  
Rated at 4500 PSI  
250° F

Insert color initial for color choice "(-)"

HOS-HW50(-)	3/8" X 50'
HOS-HW100(-)	3/8" X 100'
HOS-HW150(-)	3/8" X 150'
HOS-HW200(-)	3/8" X 200'
HOS-HWREEL650(-)	3/8" X 650
HOS-HW25-14(-)	1/4" X 25'
HOS-HW50-14(-)	1/4" X 50'
HOS-HW100-14(-)	1/4" X 100'

### HOSE - 3/8"



HOS-HP100

Double Braided



HOS-XHP50-38

6000 PSI - 250° F	
HOS-HP50	3/8" X 50'
HOS-HP75	3/8" X 75'
HOS-HP100	3/8" X 100'
HOS-HP150	3/8" X 150'
HOS-HP200	3/8" X 200'

8000 PSI - 250° F	
HOS-XHP50-38	3/8" X 50'
HOS-XHP100-38	3/8" X 100'
HOS-XHP200-38	3/8" X 200'

### HOSE - 1/2"



Double Braided  
Rated at 6000 PSI  
250° F

6000 PSI - 250° F	
HOS-HP50-12	1/2" X 50'
HOS-HP100-12	1/2" X 100'

10,000 PSI - 250° F	
HOS-XHP50-12	1/2" X 50'
HOS-XHP100-12	1/2" X 100'

### WET STEAM HOSE



Hoses used for wet steam.  
Rated at 325° F

3/8" - 3000 PSI - 325° F	
HOS-STM50-38	3/8" X 50'
HOS-STM100-38	3/8" X 100'

1/2" - 350 PSI - 325° F	
HOS-STM50-12	1/2" X 50'
HOS-STM100-12	1/2" X 100'

**MEGA-FLEX DRAIN CLEANING KIT**



Used for cleaning drains, culverts, downspouts, as well as thawing and unclogging pipes. Stainless steel drain nozzle included (NOZ-SWR).

KIT-5110-100



KIT-5110-50-18	1/8" X 50', <b>4800 PSI</b> , 160°F
KIT-5110-100-18	1/8" X 100', <b>4800 PSI</b> , 160°F
KIT-5110-50-14	1/4" X 50', <b>4350 PSI</b> , 212°F
KIT-5110-100-14	1/4" X 100', <b>4400 PSI</b> , 212°F
SPECIFY PSI & GPM - SEE FIRST PAGE FOR CHART	

**CLEAR CHEMICAL HOSE - 1/4"**



Clear hose with suction filter.

CEM-HOSE3

CEM-HOSE3	3' ASSEMBLY COMPLETE WITH SUCTION FILTER, 55 PSI
-----------	--

**LOW PRESSURE HOSE - 3/4"**



Low pressure hose. Used between the water tank and the Pressure Washer to supply the Pressure Washer with water.

HOS-BYP38 K	3/8", LOW PRESSURE, BLACK
HOS-BYP12 K	1/2", LOW PRESSURE, BLACK
HOS-AIR12	1/2", 200 PSI, RED
HOS-AIR34	3/4", 200 PSI, RED
HOS-AIR38	3/8", 200 PSI, RED
HOS-AIR1	1", 200 PSI, RED
HOS-AIR112	1-1/2", 200 PSI, RED

**HOSE REELS**

**Hoses are NOT included with Hose Reels, please see our Hoses section for purchasing.**

A hose reel will extend the life of your high pressure cleaning hose considerably by providing safe tangle and kink free storage. It will also save you time when using and storing your high pressure cleaning equipment.

**Every machine should have one!**

**12V OR 120V HOSE REEL - INDUSTRIAL**



Capacity: 300' or 500', Industrial 12 or 120 Volt Hose Reel.

KIT-HR300HP-12V-BLK	ELECTRIC DRIVEN HOSE REEL KIT, C/W 12 VOLT MOTOR & ROLLER BRACKET, 300' CAPACITY
HOS-HR325HP-120V-B	120V, 300' CAPACITY
HOS-HR500HP-12V-BLK	12V, 500' CAPACITY
OTHER 120V MODELS AVAILABLE	

**U-FRAME HOSE REEL**



Capacity: 150' Commercial Hot Water unit mount on plate for easy installation. Rated at 5000 PSI, 3/8" Coupler

HOS-HR150HP-U-BLK	HIGH PRESSURE U FRAME HOSE REEL, 150 FOOT, MANUAL, BLACK
KIT-HR150HP-3-BLK	HOSE REEL KIT 150' CAPACITY & 3' JOINER HOSE (CAN BE FACTORY INSTALLED ON UNIT PER REQUEST)

**HOSE REEL TROLLEY KITS**



KIT-HR150WK



KIT-HR300WK

For the ability to move hose around easily. Hose and joiner hose not included.

KIT-HR150WK	150' CAPACITY HOSE REEL WITH WHEEL KIT
KIT-HR300WK	300' CAPACITY HOSE REEL WITH WHEEL KIT

**A-FRAME HOSE REEL - INDUSTRIAL**



HOS-HR300HP-A-BLK

Can be mounted on various units. Rated at 5000 PSI, 1/2" Coupler

HOS-HR150HP-A-BLK	150' CAPACITY
HOS-HR300HP-A-BLK	300' CAPACITY
HOS-HR450HP-A-BLK	450' CAPACITY

**EASY-KLEEN - STAINLESS STEEL HOSE REEL**



HOS-HR300HP-A-SS-IH

Constructed in-house. Ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining. Rated at 5000 PSI

HOS-HR150HP-A-SS-IH	150' CAPACITY
HOS-HR300HP-A-SS-IH	300' CAPACITY

# HOSE REELS

## - CONTINUED

Hoses are **NOT** included with Hose Reels, please see our Hoses section for purchasing.

### 360° PIVOT HOSE REEL



Hose reel that swivels to allow directional change while unraveling. Rated at 5000 PSI and 194° F

HOS-PHR100	HOSE REEL - 360° PIVOT, 3/8" X 100' CAPACITY
HOS-PHR-MB	MOUNTING BRACKET FOR PIVOT HOSE REEL (Needed to Mount above Hose Reel)

### SPRING DRIVEN HOSE REEL



Ideal for use in garage and wash-bay setups. Self winding. Rated at 3000 PSI 100' capacity. Optional Stainless Steel



HOS-TMPL-N-3100	100', BLUE, RETRACTABLE
HOS-HSP38	HOSE STOP 3/8"
HOS-HSP12	HOSE STOP 1/2"
HOS-TMPL-N-3100-SS	OPTIONAL STAINLESS STEEL

### GREASEABLE SUPER SWIVELS



Upgraded swivel for hose reels. 90° stainless steel swivel with grease nipple, 5000 PSI, 400°F (Mount on any hose reel, except 360° pivot).

HOS-SSW38SS90F	3/8" FMPT X 3/8" FMPT, 5000 PSI
HOS-SSW12SS90F	1/2" FMPT X 1/2" FMPT, 5000 PSI
HOS-SSW34SS90F	3/4" FMPT X 3/4" FMPT, 5000 PSI
HOS-SSW1SS90F	1" FMPT X 1" FMPT, 5000 PSI
HOS-SSW38SS90MF	3/8" MNPT X 3/8" FMPT, 5000 PSI
HOS-SSW12SS90MF	1/2" MNPT X 1/2" FMPT, 5000 PSI

### HOSE REEL STANDS (ONLY)



Elevates the hose reel, making it easier to use, store, and access. **Hose, hose reels, and tank not included.**

FRAME-HRSX1	1-HOSE REEL
FRAME-HRSX2	2-HOSE REELS
FRAME-HRSX3	3-HOSE REELS
TAN-35GAL	C/W 35 GAL TANK OPTIONAL

### PIVOTING HOSE GUARDS



Guides hose while in use, protecting the hose and extending it's lifespan.


HOS-PHG18	18" DRUM, FOR HR325 REELS - 325' HOSE REELS
HOS-PHG28	28" DRUM, FOR HR500 REELS - 500' HOSE REELS

### BALL VALVES



Full port steel ball valves. Carbon steel and Stainless Steel construction. Female NPT threads.

### HOSE REEL - ROLLER BRACKET GUIDE

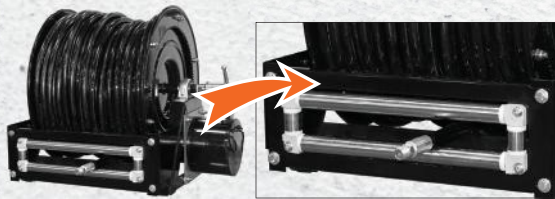

Easier to roll up hose, protecting and extending it's life span.

HOS-RB-BTM12-BLK	BOTTOM, 12" DRUM, BLACK
------------------	-------------------------

### HYDRAULIC HOSE REEL - HIGH PRESSURE



HOS-HR500HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 500' OF 1/2" HP HOSE / 300' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED
HOS-HR1000HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 1000' OF 1/2" HP HOSE / 600' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED

**DEMA INLINE HIGH PRESSURE CHEMICAL INJECTOR**



Allows the chemical to go on at high pressure. Manual ON/OFF ball valve control. Also allows you to be able to meter the amount of chemical coming out.

KIT-CEM-DA203-B	KIT - 2 TO 3 GPM
KIT-CEM-DA204-B	KIT - 4 GPM
KIT-CEM-DA206-B	KIT - 5 TO 6 GPM

**HIGH VOLUME FOAMER**



ACC-LF916105G

Comes with gauges. Requires 35 - 125 PSI water and compressed air. 5 CFM - up to 142 Comes with metering tips, 50' hose, mounting bracket.

ACC-LF916105G	AIR AT HIGH PRESSURE FOAM INJECTION SYSTEM WITH BALL VALVE AND 50' HOSE AND NOZZLE ASSEMBLY
CALL FOR MODEL NUMBER	DOWNSTREAM CHEMICAL INJECTION AT 50% PRESSURE (AFTER COIL)

**ACID PUMP**



Great for acid application. Only to be wired to cord or 12V.

PMP-DP115-1460	1.4 GPM @ 60 PSI, 115V
PMP-DP12-1260	1.2 GPM @ 60 PSI, 12V
PMP-DP12-17100	1.7 GPM @ 100 PSI, 12V
PMP-DP12-3545	3.5 GPM @ 45 PSI, 12V

**SOLENOID CONTROLS**



CEM-RSS-2CD

Control chemical activation in wash bay ON/OFF wired to solenoid control.

CEM-RSS-1	SINGLE CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)
CEM-RSS-1CD	SINGLE CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH BAY UNITS) FLOAT TANK UNITS
CEM-RSS-2	DUAL CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)
CEM-RSS-2CD	DUAL CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH BAY UNITS)

**CHEMICAL SPRAYER**



The chemical sprayer is great for acid or chemical application. ON/OFF control at wand. With painted or Stainless Steel (SS) enclosure.

KIT-ECS-120V	PUMP 120V
KIT-ECS-120VSS	PUMP 120V STAINLESS STEEL
KIT-ECS-12V	PUMP 12V
KIT-ECS-12VSS	PUMP 12V STAINLESS STEEL

**CHEMICAL MIXER**



CALL FOR MODEL NUMBER	HYDRO-MINDER WITH STAINLESS STEEL GALLON TANK FOR CHEMICAL MIXING
CAR-MM100	4.5 GPM @ 40 PSI, INLET CONNECTION 3/4" FEMALE GARDEN HOSE

**OIL & GAS FIRED OPTIONS**

**HIGH LOW GAS VALVES WITH DUAL TEMPERATURE CONTROLS**



PRO-NG-DSGU-940



PRO-VS820A1278

To regulate temperature on system when using a two gun operation.

PRO-NG-DSGU-940	UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, NATURAL GAS
PRO-LP-DSGU-940	UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, PROPANE
PRO-EMGVS	UPGRADE ELECTRONIC MODULATING GAS VALVE SYSTEM (MODULATES FLAME OF HEATER)
PRO-VS820A1278	UPGRADE UNIVERSAL HONEYWELL GAS VALVE, LP/NAT GAS, SINGLE VALVE, STANDING PILOT
PRO-S8610U3009	UPGRADE PILOT IGNITION CONTROL MODULE



# OIL & GAS FIRED OPTIONS

## - CONTINUED

### RAIN CAP



This option keeps rain and snow from entering your coil, which increases coil and burner life.

FRAME-WRC	RAIN CAP/SCOOP WELDED ON COIL EXHAUST
PLEASE SPECIFY COIL SIZE TO FIT (16", 18", 20", 24", 30")	

### POWER DAMPERS - 24 VOLT - LP/NG



ACC-GPD-8	8" POWER DAMPER, 24 VOLT
ACC-GPD-10	10" POWER DAMPER, 24 VOLT
ACC-GPD-12	12" POWER DAMPER, 24 VOLT
ACC-GPD-WK	UNIVERSAL WIRING KIT (REQUIRED)

### OIL FIRED DRAFT INDUCERS



A must for buildings with fans or negative pressure.

ACC-DI-2	120 VOLTS, RECOMMENDED SPECS (522,000 BTU/HR TO 835,000 BTU/HR) (8" TO 12" PIPE)
ACC-DI-4	120 VOLTS, RECOMMENDED SPECS (900,000 BTU/HR TO 1,800,000 BTU/HR) (10" TO 16" PIPE)

## ELECTRIC MOTOR CONTROLS

### VFD FOR ELECTRIC MOTOR CONTROLS



Variable frequency drive - Controls RPM of electric motor for required GPM.

VFD-10HP575V-3-N1	575V, 10 HP
VFD-20HP575V-3-N1	575V, 20 HP
VFD-30HP575V-3-21	575V, 30 HP
VFD-40HP575V-3-N1	575V, 40 HP
VFD-10HP460V-3-N1	460V, 10 HP
VFD-20HP460V-3-N1	460V, 20 HP
VFD-30HP460V-3-N1	460V, 30 HP
VFD-40HP460V-3-N1	460V, 40 HP

(⚠)WARNING: California Proposition 65 - [www.P65Warning.ca.gov](http://www.P65Warning.ca.gov)

### DRAFT HOOD



For natural gas and propane, used for proper air flow. Add 30" of pipe between the pressure washer unit and draft hood for the best efficiency.

PRO-DH8-EK	8", UP TO 390,000 BTU
PRO-DH10-EK	10", 510,000 TO 720,000 BTU
PRO-DH12-EK	12", 940,000 BTU

### POWER DAMPER - 120 VOLT



ACC-OVD-8	VENT DAMPER, 8", 120 VOLT
-----------	---------------------------

### POWER VENTER



Combines the motor blower, and vent hood in one complete, easy to install unit.  
**\*Requires additional control kit and wiring kit, found below.**

ACC-PV-CK-OIL	120 VAC SYSTEM CONTROL KIT FOR OIL FIRED EQUIPMENT
ACC-PV5	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 1.85 GPH FOR OIL / UP TO 290,000 BTU/HR FOR GAS - 4" TO 6"
ACC-PV8	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 4.75 GPH FOR OIL / UP TO 740,000 BTU/HR FOR GAS - 7" TO 9"
ACC-PV6-SS	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 2.65 GPH FOR OIL / UP TO 416,000 BTU/HR FOR GAS - 5" TO 7" - STAINLESS STEEL

### POWER VENTER - CONTROL KIT

ACC-PV-CK	CONTROL KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA
ACC-PV-CK24V	CONTROL KIT - POWER VENTER - PLUG IN - 24 VOLT ELECTRIC DAMPENER

### POWER VENTER - WIRING KIT *\*Requires Power Venter Unit*

ACC-PV-WK	WIRING KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA
-----------	--

### NEMA BOX UPGRADE



All Nema 4 boxes available in Stainless Steel.

ELS-NEMA4X	UPGRADE STAINLESS STEEL, WATER PROOF ELECTRICAL BOX
------------	---

### GROUND-FAULT CIRCUIT INTERRUPTERS



Ground fault interrupter kicks out power when surge happens.

ELS-GFCI-120/20	2 HP - SINGLE PHASE ONLY
ELS-GFCI-240/30	5 HP - SINGLE PHASE ONLY
ELS-GFCI-240/40	7.5 HP - SINGLE PHASE ONLY

**HEAVY-DUTY AUTO STOP START WITH SHUTDOWN TIMERS**

This option gives you the ability to start and stop your unit by squeezing and releasing the trigger gun. This prevents the machine from sitting in bypass mode which will extend the life of your unit over time. It will also save you money because your resources are not being used when the machine is not in use.



**50HZ ELECTRIC MOTORS**




Overseas voltage motors 50HZ.  
 Various HP.

ELS-CW380/50	UPGRADE 380V 50 HZ COLD WATER
ELS-HW380/50	UPGRADE 380V 50 HZ HOT WATER UPGRADE

**COLD WATER UNITS**  
 - FRAME OPTIONS & WHEEL KITS

**FIREHOUSE DISPLAY BASE**

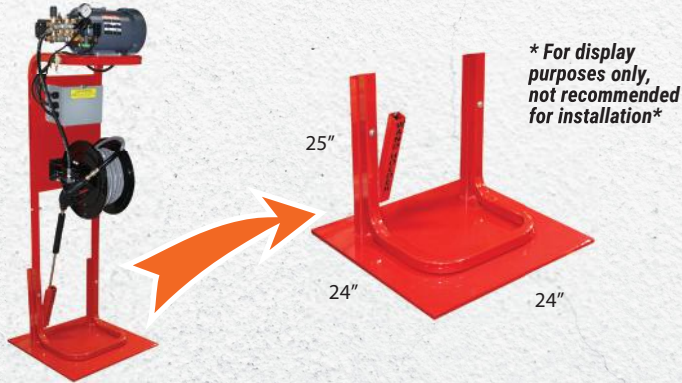

FRAME-FHF-DISPL	DISPLAY BASE FOR FIREHOUSE
-----------------	----------------------------

**STAINLESS STEEL CASTERS**



KIT-CASTER8-SS	8" CASTERS TWO SOLID, AND TWO SWIVEL W/LOCK, STAINLESS STEEL (AS SHOWN)
----------------	---

RECIPE TO ORDER	
HDASS/HORSE POWER/VOLTAGE/PHASE	
<b>HDASS</b>	HEAVY-DUTY AUTO STOP START - ALWAYS MUST BE AT START OF MODEL NUMBER
<b>HORSE POWER</b>	THE HORSE POWER OF THE UNIT - 2 HP, 5 HP, 7.5 HP, 10 HP, 15 HP, 20 HP, 25 HP, 30 HP, 50 HP
<b>VOLTAGE</b>	THE VOLTAGE OF THE UNIT - 110V, 208V, 220V, 230V, 460V, 575V
<b>PHASE</b>	THE PHASE OF THE UNIT - 1 PH OR 3 PH
<b>NOTE</b>	COMPONENT NUMBERS SHOULD NOT HAVE THE COMPONENT DESCRIPTION IN THE MODEL NUMBER
EXAMPLE	
EZO2435E-GP	COMMERCIAL SERIES, HOT WATER PRESSURE CLEANING SYSTEM, OIL FIRED, 350,000 BTU. ELECTRIC, <b>5 HP, 230V-1PH</b> , 3.5 GPM @ 2400 PSI, GENERAL PUMP
<b>HDASS/5/230/1</b>	<b>5 HP, 230V, 1 PH</b>

**ELECTRICALLY HEATED TIMER**

ACC-EHTMR	UPGRADE 24-HR TIMER FOR ELECTRICALLY HEATED UNITS, AUTOMATICALLY TURNS ON/OFF HEATER
-----------	--

**EMERGENCY SHUT-OFFS**

ELS-HTCO	UPGRADE HIGH TEMPERATURE SHUT DOWN (COLD WATER UNITS)
ELS-LWC	UPGRADE LOW INLET WATER SHUT DOWN

**STAINLESS STEEL COLD WATER ROLL CAGES**



All units can be ordered with aluminum or stainless steel frames. Stainless steel pumps and fittings are also available for food grade usage.

FRAME-CW57510BDERC-SS	ELECTRIC, BELT DRIVE, 5, 7.5, & 10 HP
FRAME-CW1520BDERC-SS	ELECTRIC, BELT DRIVE, 15 & 20 HP

**COLD WATER CART**



FRAME-ASCART-SM-AL	SMALL, FITS 6.5 HP GAS/2 HP ELECTRIC ACTION SERIES, ALUMINUM
FRAME-ASCART-LG-AL	LARGE, FITS 13 & 14 HP GAS/5 & 7 HP ELECTRIC ACTION SERIES, ALUMINUM
FRAME-ASCART-BD-AL	LARGE, ACTION SERIES ALUMINUM BELT DRIVE

# COLD WATER UNITS

## - FRAME OPTIONS & WHEEL KITS CONTINUED

### COLD WATER SHROUD & FLAT BASE FRAMES



FRAME-CW57510DDFBWS	C/W SHROUD, ELECTRIC MOTOR FOR 5, 7.5, & 10 HP, 3 PH, DIRECT DRIVE
FRAME-CW57510BDFBWS	FOR ELECTRIC 5, 7.5, & 10 HP, 3 PH, BELT DRIVE
FRAME-CW101520BDFB	FLAT BASE OPEN FRAME - ELECTRIC MOTOR BELT DRIVE - 15 & 20 HP - 3 PH

### COLD WATER LEG FRAME - FOR SHROUD & FLAT BASE UNITS



For cold water units with shroud and flat base.

FRAME-LS-3FT-ST575DDFB	36" FOR USE WITH FLAT BASE FRAME UNITS WITH 5/7.5/10 HP, 3 PH MOTORS
------------------------	--

### WALL MOUNT FOR DIRECT DRIVE



Ideal for locations with limited floor space. This frame style allows your unit to be up and out of the way.

FRAME-WM25DD	COMMERCIAL DIRECT DRIVE PUMP, WALL MOUNTED FRAME 2/5/7 HP (ALTERNATIVE TO CART STYLE FRAME, NO ADDITIONAL COST)
FRAME-WMCW57510	INDUSTRIAL C/W FLAT BASE AND SHROUD, 5/7.5/10 HP

### COLD WATER STACKED PUMP FRAMES



DOUBLE & TRIPLE STACKED PUMP FRAME (PRICE PER PUMP)	
FRAME-DS-2	DOUBLE STACK UP TO 10 HP
FRAME-TS-3	TRIPLE STACK UP TO 10 HP

# INDUSTRIAL HOT WATER ELECTRIC UNITS

## - FRAME OPTIONS & WHEEL KITS

### INDUSTRIAL HOT WATER ELECTRIC WHEEL KITS

Mounted to **Hot Water Electric Frames**.



WHEEL KIT OPTIONS AVAILABLE

### BRACKET OPTIONS



Ask about our propane engine and propane burner units.

<b>PROPANE TANK BRACKET</b>	
FRAME-LP-TB40	PROPANE TANK BRACKET, HOLDS 40 LB. TANK, C/W HOSE AND REGULATOR, FOR 290,000 BTU UNITS
FRAME-LP-TB100-B	PROPANE TANK BRACKET, 100 LB. C/W HOSE AND REGULATOR
<b>CHEMICAL BUCKET BRACKET</b>	
FRAME-CHEMBRKT	5 GAL.

### LEG FRAME



Regulations require gas fired machines must be a specified amount of distance away from combustible material. (Differs per region)

FRAME-LS-42"-GF2248	5/7.5/10 HP, 3 PH, 24"W X 42"H
CALL FOR MODEL NUMBER	10 HP, 1 PH, 27"W X 42"H
FRAME-LS-42"-GF2760	10/15/20 HP, 500,000 - 800,000 BTU, 29"W X 42"H
CALL FOR MODEL NUMBER	20 HP, 940,000 BTU GAS FIRED, 33"W X 42"H
CALL FOR MODEL NUMBER	50 HP, 42"W X 42"H

### STAINLESS STEEL FRAMES



Stainless steel frames are marine grade and ideal for use in fish and food applications.

STAINLESS STEEL OPTIONS AVAILABLE

**RENTAL ROLL CAGE - WITH GRAB BAR**



*Rental Frame Option*  
 with grab bar surround  
 for easy loading and  
 total protection.

EZO4035G-K-GP-12-RTL

UPGRADE	
FRAME-MAG15-RTL	C/W BATTERY BOX, 13-15 HP, FOAM FILLED TIRES (FRAME UPGRADE) GRAB BAR SURROUND

**ALUMINUM & STAINLESS COMMERCIAL ROLL CAGE FRAME**



Aluminum and Stainless Steel frames are ideal for corrosive or sanitary environments such as food and fish plants, salt water off shore operations, mills, and mining. Stainless Steel pumps and fittings are also available for food grade usage.

ALUMINUM	
FRAME-MAG3RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC
FRAME-MAG4RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC
FRAME-MAG15RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS
STAINLESS STEEL	
FRAME-MAG3RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC
FRAME-MAG4RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC
FRAME-MAG15RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS

**INDUSTRIAL WHEEL KIT**



FRAME-GRIZZLY 1-WK	LIGHT - INDUSTRIAL HOT WATER GAS FRAME #2
FRAME-GRIZZLY 1-SUPERWHEELKIT	SUPER DUTY INDUSTRIAL HOT WATER GAS FRAME #2

**COMMERCIAL WHEEL KIT - CRAB LEG EXTENSION**



Upgrade to solid and sturdy caster wheels on crab leg extensions.

FRAME-WKIT-MAG	CASTER WHEEL KIT FOR ROLL CAGE FRAME 8" SWIVEL CASTERS / CRAB LEG EXTENSION
----------------	---

**FOAM FILLED TIRES**



Never have a flat tire again because of the sturdy, protective foam inside the tire.

RUB-TIRE13-FF	13", 3/4" AXLE - EACH
---------------	-----------------------

# INDUSTRIAL FULLY ELECTRICALLY HEATED - FRAME OPTIONS & WHEEL KITS



FRAME-EHEATER-WK-2  
Certified Lifting Eyes.  
Double Coil



FRAME-EHEATER-WK-1  
Certified Lifting Eyes.  
Single Coil

## STAINLESS STEEL EXTERIOR OPTIONS

FRAME-HTR1-SS	STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, <b>SINGLE COIL</b> UNIT, UP TO 48 KW
FRAME-HTR2-SS	STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, <b>DOUBLE COIL</b> UNIT, OVER 48 KW

## STAINLESS STEEL TANK

FRAME-HTR1-SS-TANK	STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, <b>SINGLE COIL</b> UNIT, UP TO 48 KW
FRAME-HTR2-SS-TANK	STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, <b>DOUBLE COIL</b> UNIT, OVER 48 KW

## WHEEL KIT

FRAME-EHEATER-WK-1	WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, <b>SINGLE COIL</b> , C/W HEAVY-DUTY CASTERS, LIFTING EYES
FRAME-EHEATER-WK-2	WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, <b>DOUBLE COIL</b> , C/W HEAVY-DUTY CASTERS, LIFTING EYES

EXTRA CHARGE FOR NON MARKING CASTERS

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

# DRY STEAM GENERATORS - FRAME OPTIONS & WHEEL KITS

## DRY STEAM SKID - HORIZONTAL



Allows you to load and unload your complete dry steam package with ease.

## DRY STEAM SKID - VERTICAL



Allows you to load and unload your complete dry steam package easily with the use of the forklift slots.

SKID-STEAM-PU-225	MOBILE SKID FOR HORIZONTAL DRY STEAMER 225 GAL. TANK
SKID-STEAM-PU-325	MOBILE SKID FOR HORIZONTAL DRY STEAMER 325 GAL. TANK

SKID-STEAM-PU-225-V	MOBILE SKID FOR VERTICAL STEAMER 225 GAL. TANK
SKID-STEAM-PU-325-V	MOBILE SKID FOR VERTICAL STEAMER 325 GAL. TANK

## DRY STEAM WHEEL KIT - HORIZONTAL



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

## DRY STEAM WHEEL KIT - VERTICAL



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

FRAME-STM20-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO20ST-H
FRAME-STM30-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO30ST-H
FRAME-STM40-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO40ST-H
FRAME-STM50-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO50ST-H

FRAME-STM20-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO20ST-V
FRAME-STM30-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO30ST-V
FRAME-STM40-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO40ST-V
FRAME-STM50-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO50ST-V

**Machines, Hoses, and Hose Reels are NOT included. These items are FRAMES & TANKS only. Please see our other catalog sections for purchasing these options and accessories.**

**PICKUP SKID**



Add any **Commercial Gas or Diesel Driven Cold Water** or **12 Volt Hot Water** unit to this frame for 100% portable cleaning.

SKID-PU-225	COMMERCIAL SKID & TANK UNIT C/W 225 GAL. TANK AND PLUMBING
-------------	--

**PROPANE PICKUP SKID**



Add your **Commercial Propane Fired** unit to this frame.

SKID-PU-225-PRO	COMMERCIAL SKID & TANK UNIT FOR PROPANE MOBILE WASH UNIT C/W 225 GAL. TANK & PLUMBING, 2 - 100 LB BOTTLES (FOR FOOD WAREHOUSE CLEANING)
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

**FILL & PLAY 225G FRAME  
 INDUSTRIAL HOT WATER GASOLINE - OIL FIRED**



◀ Add your **Industrial Hot Water Gasoline - Oil Fired** units to this frame. 225 gallon water tank.

FILL&PLAY-GRIZ-225

FILL & PLAY-GRIZ-225-2R	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (INCLUDES 2 REEL CAPACITY)
FILL & PLAY-GRIZ-225	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-GRIZ-225SF	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST) FITS IN 8' PICKUP TRUCK BOX
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

**FILL & PLAY 325G FRAME  
 INDUSTRIAL HOT WATER GASOLINE - OIL FIRED**



Add your **Industrial Hot Water Gasoline - Oil Fired** unit to this frame. 325 gallon water tank included with purchase.

FILL & PLAY-GRIZ-325	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (HOSE REEL EXTRA)
CALL FOR MODEL NUMBER	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

**FILL & PLAY 525G FRAME  
 INDUSTRIAL HOT WATER GASOLINE - OIL FIRED**



Add your **Industrial Hot Water Gasoline - Oil Fired** unit to this frame. Larger capacity 525 gallon water tank.

FILL & PLAY-GRIZ-525	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 525 GAL. TANKS AND PLUMBING, (2 REEL CAPACITY - ADDITIONAL COST)
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	



◀ Add your **Industrial Hot Water Gasoline - Oil Fired** units to this frame. 225 gallon water tank capacity. Designed to be transported in an 8' box truck.

FILL&PLAY-GRIZ-225SF

# PICKUP SKID, FILL & PLAY FRAME OPTIONS - CONTINUED

## FILL & PLAY 325G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame, 325 gallon capacity. With optional relocation panel.

## FILL & PLAY 525G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame. Larger capacity 525 gallon water tank.

FILL & PLAY-BM1-325	FRAME FOR BULL MOOSE 1, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
FILL & PLAY-BM2-325	FRAME FOR BULL MOOSE 2, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
FILL & PLAY-BM3-325	FRAME & SKID FOR BULL MOOSE 3, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

FILL & PLAY-BM1-525	FILL & PLAY SKID FOR BULL MOOSE 1, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
FILL & PLAY-BM2-525	FILL & PLAY SKID FOR BULL MOOSE 2, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
FILL & PLAY-BM3-525	FILL & PLAY SKID FOR BULL MOOSE 3, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

## FILL & PLAY 740G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame, largest capacity of 740 gallon. Ideal for mining/mill applications.

## LIGHT KIT



ACC-TRAF-DIRECT-KIT	MUNICIPAL FLASHING LIGHT / ARROW / 3 WORK LIGHTS - KIT MOUNTED ON ANY SKID FRAME (FACTORY INSTALL)
ACC-TRAF-DIRECT-SUPPORT	MOTORIZED ARROW BOARD SUPPORT FOR TRAFFIC DIRECTOR KIT

FILL & PLAY-BM1-740	FILL & PLAY SKID FOR BULL MOOSE 1, C/W 740 GAL. TANK & PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM2-740	FILL & PLAY SKID FOR BULL MOOSE 2, C/W 740 GAL. TANK & PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM3-740	FILL & PLAY SKID FOR BULL MOOSE 3, C/W 740 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

## CUSTOM ORDERS

We offer complete aluminum, stainless steel, galvanizing, powder coated, engineered frames, and systems to meet your specific needs. We utilize solid works 3D design software. Please do not hesitate to inquire about any special requests.

**IF YOU CAN DREAM IT, WE CAN BUILD IT!**


**Call today!**



**JETTER NOZZLE KITS**




Selection of 4, so you are covered for any jetting application.



NOZ-KIT-JTR1130-38	KIT, 11 GPM @ <b>3000 PSI</b> , 3/8" NPT, 4-PACK
NOZ-KIT-JTR1230-38	KIT, 12 GPM @ <b>3000 PSI</b> , 3/8", 4 PACK
NOZ-KIT-JTR2040-38	KIT, 20 GPM @ <b>4000 PSI</b> , 1/2" NPT, 4-PACK

**JETTER HOSES**

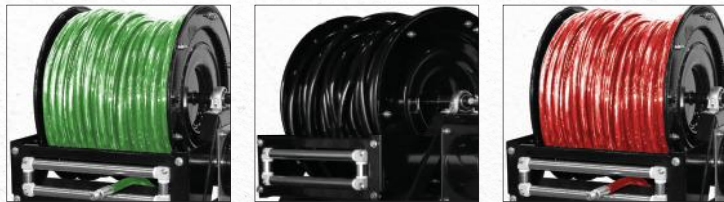

HOS-SFX18-50	1/8" X 50' C/W MALE ENDS, <b>4800 PSI</b> , BLACK
HOS-SFX18-100	1/8" X 100' C/W MALE ENDS, <b>4800 PSI</b> , BLACK
HOS-SFX14-50	1/4" X 50' C/W MALE ENDS, <b>4400 PSI</b> , BLACK
HOS-SFX14-100	1/4" X 100' C/W MALE ENDS, <b>4400 PSI</b> , BLACK
HOS-JTR100-14	1/4" X 100' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED)
HOS-JTR200-14	1/4" X 200' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED)
HOS-JTR300-14	1/4" X 300' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED)
HOS-JTR100-38	3/8" X 100' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR200-38	3/8" X 200' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR300-38	3/8" X 300' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR100-12	1/2" X 100' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR200-12	1/2" X 200' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR300-12	1/2" X 300' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR400-12	1/2" X 400' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR500-12	1/2" X 500' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED)
HOS-JTR500-340	3/4" X 500' C/W MALE ENDS, <b>2400 PSI</b> , ORANGE

PIRANHA HOSE IS SPECIAL ORDER ONLY

**TANKS**

**WINTERIZATION KIT**



Adapts to most models allowing you to quickly winterize your pressure washer in the cooler climates. Protect pump, coil, and hose. For hot water units.

KIT-WTZ	WINTERIZATION KIT
---------	-------------------

**FUEL TANK OPTION**



For larger fuel capacity. Adaptable to some of the **Industrial Hot Water Diesel - Oil Fired** units.

STE-TAN-100G	100 GAL. STEEL (FOR INDUSTRIAL HOT WATER DIESEL - OIL FIRED #3 FRAME)
--------------	---

**SEWER / CULVERT NOZZLES**



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4200 PSI

NOZ-SWR18-5.5	1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR14-5.5	1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR38-5.5	3/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK

**JETTER WINTERIZATION KIT**



Winterization Kit for jetter. Plumb into existing system to protect pump and hoses from freezing.

KIT-WTZ-(JTR)	WINTERIZATION KIT FOR EJZ3512 JETTER
---------------	--------------------------------------

**FOOT PEDAL INLINE**



When operating sewer or jetter machine, this allows hands to be free.

SWT-FTSW-SNP-Y	FOOT SWITCH, SNAP ACTION CONTACTS, 24-240 VOLT - YELLOW
SWT-FV5012-IH	FOOT VALVE, 12 GPM @ <b>5000 PSI</b> , 300°F, 3/8" INLET FNPT, 1/4" FNPT OUTLET
SWT-FV808-IH	FOOT VALVE, 8 GPM @ <b>8000 PSI</b> , 300 °F

**JETTER HOSE REEL KIT**



Electric Driven Hose Reel Kit. A great base set for your jetting needs. **Hose is not included.**

KIT-HR300HP-12V	JETTER HOSE REEL KIT, C/W 12V MOTOR, & ROLLER BRACKET - 300 FOOT CAPACITY
-----------------	---

**FUEL TANKS, GAS CAPS, & TANK BRACKET**



TAN-FUEL-10G	FUEL TANK - 10 GAL.
TAN-FUEL-20G	FUEL TANK - 20 GAL.
TAN-FC10G	GAS CAP WITHOUT GAUGE
TAN-FC10G-WG	GAS CAP WITH GAUGE
FRAME-TANKBRACKET-10G	TANK BRACKET



# TANKS

## - CONTINUED

### FLOAT TANK

For water supply to pump systems.  
Garden hose connection.

KIT-FLOAT TANK (CHW)	1 GALLON FLOAT TANK KIT FOR COMMERCIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP
KIT-FLOAT TANK (IHW)	18 GALLON FLOAT TANK KIT FOR INDUSTRIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP

### SMALL POLY WATER TANKS



TAN-35GAL	35 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED
TAN-100GAL	100 GAL. FRAME, FITTINGS & STRAPS NOT INCLUDED

### LARGE POLY WATER TANKS

Frame Not Included



Steel Pipe Straps




TAN-225GAL	225 GAL. DIMENSIONS, 49" L X 38"W X 41"H
STEEL TANK STRAPS ADDITIONAL COST FOR 225 GAL. POLY WATER TANK	
TAN-325GAL	325 GAL. DIMENSIONS, 68" L X 38"W X 43"H
TAN-525GAL	525 GAL. DIMENSIONS, 72" L X 49"W X 54"H
STEEL TANK STRAPS ADDITIONAL COST FOR 325 & 525 GAL. POLY WATER TANK	
TAN-740GAL	740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH PIPE FRAME

# STEAM OPTIONS

## - MACHINE OPTIONS & ACCESSORIES

STEAM OPTION KITS - \*Must Be Ordered With A Pressure Washer Unit and Factory Installed\*

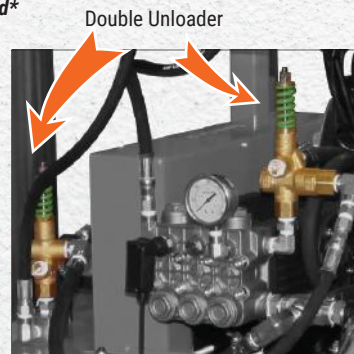

<b>STANDARD KIT</b>	
KIT-STM OPT-4.3	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
KIT-STM OPT-5-3.5	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
KIT-STM OPT-8-3	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
<b>STEAM OPTION KITS - DOUBLE UNLOADER TYPE</b>	
STEAM OPTION FOR INDUSTRIAL HOT WATER MACHINES - STEAM GAUGE, 3 WAY VALVE, FLOW SWITCH, STEAM HOSE, STEAM WAND - ADD "-STM" TO MODEL #	
<b>DRY STEAM KIT</b>	
KIT-DRYSTM	DRY STEAM KIT (COMPATIBLE WITH ALL INDUSTRIAL HOT WATER UNITS UP TO 1,000,000 BTU) (HOSE/WAND NOT INCLUDED)
<b>PID CONTROL OPTION FOR ALL INDUSTRIAL STEAM MODELS</b>	
THR-PID2362	PID CONTROLLER FOR INDUSTRIAL STEAM MACHINES - HIGH/LOW FIRE ON OIL BURNER

**SOAP SWITCH CONTROL PANEL**

\*Cord not included  
To control units with one switch.



SWT-RMS	1 SWITCH, 24-250V 3A
SWT-RMS2	2 SWITCHES, 24-250V 3A
SWITCH FUNCTION MUST BE SPECIFIED ON ORDER	

**REMOTE WASH BAY CONTROL PANEL**

To control the functions of your pressure washer from the wash-bay location.



KIT-WBS3	REMOTE WASH BAY CONTROL PANEL - START-STOP/SOAP/BURNER. LEAD WIRE NOT SUPPLIED
KIT-WBS4	4 SWITCH REMOTE WASH BAY CONTROL PANEL - MOTOR START-STOP/SOAP ON-OFF/WAX ON-OFF/BURNER ON-OFF. LEAD WIRE NOT SUPPLIED. INCLUDES SOAP SOLENOID

**WAND HOLDER**

In bay stainless steel, keeps your gun wands up off the floor.



CAR-WH-17	17"
-----------	-----

**MAT CLAMPS**

Allows your customers to clamp their mats to the wall so they can easily be sprayed off.



CAR-MATCA10	STAINLESS STEEL
-------------	-----------------

**STAINLESS STEEL VACUUM**

Stainless steel construction for commercial use with 1\$ acceptor and heavy-duty lock box. Powered by twin 1-6 HP motors coupled with hose and claw nozzle.



CAR-VS0-CP	STAINLESS STEEL VACUUM, COIN ACCEPTOR INCLUDED
------------	--

**STAINLESS STEEL COILS**  
- MACHINE OPTIONS & ACCESSORIES



Stainless Steel (great for food grade usage)



STAINLESS STEEL COILS - OIL FIRED	
COI-EK4232-SP40	16" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO200, EZO350)
COI-EK4105-SP80	18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO300)
COI-EK4426-SP80	18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO400)
COI-EK4122-SP80	20" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO440)
COI-EK4465-SP80	20" COIL & TANK ASSEMBLY, OIL FIRED, (FOR EZO600, EZO700, EZO800, 1/2")
COI-EK4128-SP80	24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO700, EZO900 3/4")
COI-EK4455-SP80	24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1000)
COI-EK4132-SP80	30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1200)
COI-EK9600-1-SP80	30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO 1800)

STAINLESS STEEL COILS - GAS FIRED	
COI-EK4232-SP40	16" COIL & TANK ASSEMBLY, GAS FIRED 195,000 BTU
COI-EK4117-SP80 COI-EK4117-SP160	18" COIL & TANK ASSEMBLY, GAS FIRED, 295,000 BTU
COI-EK4118-SP80	20" COIL & TANK ASSEMBLY, GAS FIRED, 395,000 BTU
COI-EK4109-SP80	24" COIL & TANK ASSEMBLY, GAS FIRED, 510,000 / 600,000 / 720,000 BTU
COI-EK4132-SP80	30" COIL & TANK ASSEMBLY, GAS FIRED, 940,000 BTU

CERTIFIED CRN COILS - OIL OR GAS FIRED	
ADD "-CRN" TO MODEL NUMBER	COIL WITH CANADIAN REGISTERED NUMBER - 3/4", 1/2", AND 1" COILS

**COMPLETE FOAM BRUSH ASSEMBLY**



The assembly comes with a soft bristle brush, as well as a single bay chemical mixer/injector kit for your foam wash option.

KIT-CAR-FBXS-1	COMPLETE ASSEMBLY, SINGLE BAY CAR WASH
KIT-CAR-FBXS-2	COMPLETE ASSEMBLY, DOUBLE BAY CAR WASH
CAR-FBHH	FOAM BRUSH HANDLE HOLDER


**TRUCK WASH BRUSH**



A stiff bristle brush to help remove stuck on grease, mud, dirt, and grime.

ACC-TWB10	TRUCK WASH BRUSH, 2 1/2" X 10", C/W BUMPER
-----------	--

**OVERHEAD BOOM**




360° ceiling mount with 11' swing diameter.

CAR-OBO	OVERHEAD BOOM, 360° PIVOT, 3000 PSI, 5'5"
---------	---

**FESTOON SYSTEM** To hold the hose off the floor.

TYPICAL SYSTEM LAYOUT

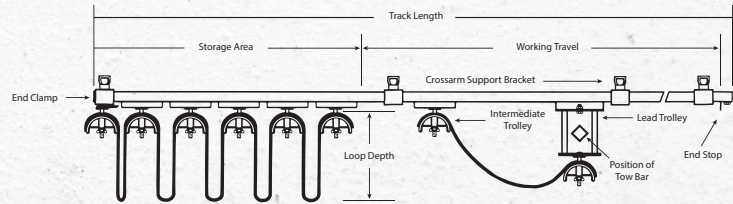

FST-T100C-10T	SYSTEM WITH 100' CABLE, WHEEL TROLLEY KIT
FST-T60N-9T	FESTOON SYSTEM, 60 FEET NYLON CABLE C/W 9 TROLLEYS

# MISCELLANEOUS ITEMS

## - UPGRADES & ADDITIONS

Ask about CAT, GIANT & PRAT Optional Pumps!

### EMPEROR PUMP UPGRADE



High temperature pump. Rated @ 185° F. Nickel plated, forged brass manifold, run-dry seals.

PMP-G0915HTC	2 HP EMPEROR PUMP UPGRADE - UP TO 180°F WATER, 2.1 GPM, 1500 PSI, 1750 RPM
--------------	--

### GENERAL PUMP UPGRADE



For all cold or hot water units with 2 HP electric or 6.5 HP gas motors.

PMP-G0915E17ET	PUMP UPGRADE FOR COLD OR HOT WATER 2 HP UNIT TO GENERAL PUMP, <b>2.1 GPM @ 2610 PSI</b>
PMP-G0815G6ET	PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO GENERAL PUMP, <b>3.4 GPM @ 2610 PSI</b>

### AR PUMP UPGRADE



For all cold or hot water units with 6.5 HP gas motors.

PMP-ARRCV3G27D-F7	PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO AR PUMP, 3 GPM @ 2700 PSI
-------------------	---

### HOURLY METER



Add to a pressure washer to easily track maintenance intervals.

ELS-HR-MTR-12/24V	12/24 HOUR METER
ELS-HR-MTR-120V	120 HOUR METER

### OUTLET TEMPERATURE GAUGE



For metering boiler outlet temperature.

THR-T3X4B500	INLINE OUTLET TEMPERATURE GAUGE - 3" - 0° TO 500°F
--------------	--

### PUMP KITS

PRK-EK-33-61	REPAIR KIT, UNLOADER ASSEMBLY, EK PUMPS
PRK-EK-21-28	PACKING KIT, EK3435H, EK440, EK215 FOR EK PUMP
PRK-EK-64-65	VALVE KIT, EK3435H, EK440, EK215 FOR EK PUMP
PRK-G001	VALVE KIT FOR GENERAL PUMP
PRK-G028	PACKING KIT WITH BRASS FOR GENERAL PUMP
PRK-G069	PACKING KIT WITHOUT BRASS FOR GENERAL PUMP
PRK-G123	VALVE KIT FOR GENERAL PUMP
PRK-G156	PACKING KIT FOR GENERAL PUMP

### HOT WATER PACKING VALVE KIT GENERAL PUMP



Allows you to run hot water through your pump up to 185° F

**Note: On new machines higher temp TPI will be required.**

PRK-G220	HOT WATER PACKING KIT / VALVE KIT
PRK-G209	(TSF SERIES EXCEPT 2421)
PRK-G211	TSF2421 ONLY

### INLINE FILTERS



Keeps debris from damaging pump.

FIL-CBF12-80	INLINE FILTER, CLEAR, 1/2" 80 MESH
FIL-CBF34-80	INLINE FILTER, CLEAR, 3/4" 80 MESH
FIL-CBF1-80	INLINE FILTER, CLEAR, 1" 80 MESH
FIL-CBF114-80	INLINE FILTER, CLEAR, 1-1/4" 80 MESH
FIL-CBF112-80	INLINE FILTER, CLEAR, 1-1/2" 80 MESH
FIL-GCF12	GREEN CAP INLINE FILTER, 1/2" FPT INLET/MPT OUTLET, TWO 1/4" SIDE PORTS, 6 GPM MAX FLOW 145 PSI MAX PRESSURE

### UNLOADER - FLOW ACTIVATED



Flow Activated instead of Pressure activated (easier on piped in systems).

UNL-FA10835-K73	<b>6.6-10.8 GPM @ 3500 PSI.</b> 165°. 3/8" BSP-F. 3/8" BSP-F. 3/8" BSP-M
UNL-FA13258-K9	<b>2.5-13.2 GPM @ 5800 PSI.</b> 165°. 1/2" BSP-F. 1/2" BSP-F. 1/2" BSP-M

### VOLT METER



To confirm voltage in 12 volt systems.

ELS-VOLT-MTR	FOR 12 VOLT SYSTEMS
--------------	---------------------

**PRESSURE GAUGE**



Shows operating PSI of machine, great for applications where PSI is changing frequently from job to job.

THR-PG1000	PRESSURE GAUGE <b>1000/2000/3000 PSI</b>
THR-PG2000	PRESSURE GAUGE <b>2000 PSI</b>
THR-PG3000	PRESSURE GAUGE <b>3000 PSI</b>
THR-PG5000	PRESSURE GAUGE <b>5000 PSI</b>
THR-PG6000	PRESSURE GAUGE <b>6000 PSI</b>
THR-PG10000	PRESSURE GAUGE <b>10,000 PSI</b>
THR-PG20000	PRESSURE GAUGE <b>20,000 PSI</b>
SPECIFY APPROX. 60% OF OPERATING PRESSURE	
EXTRA CHARGE FOR MOUNTING	

**GENERATORS**



For pressure washers to run on 120 Volt burners. Replacement for built on generators.

GEN-MC300	GENERATOR - ELECTRIC/AC - 3000 WATT - 3600 RPM
PLEASE SPECIFY MODEL OF YOUR MACHINE WHEN ORDERING	

**ELECTRIC CLUTCH UPGRADE - 12 VOLT BELT DRIVEN MACHINES**



Work with hydraulic motor on boats to run the pump.

PMP-DGC-12-WP12	ELECTRIC CLUTCH UPGRADE (BELT/GASOLINE DRIVEN - OIL FIRED UNITS) UP TO 24HP
PMP-DGC12-WP7	DOUBLE GROOVE CLUTCH UPGRADE ADAPTER KIT C/W 7" PULLEY, 12V, FOR GENERAL PUMPS 47, ES & ESN SERIES PUMPS

**ELECTRIC START UPGRADE KITS - COLD WATER**



For use only on commercial gas units with same size engine. Turns your pull start (recoil) unit into an electric start.

<b>ELECTRIC START UPGRADE KIT</b>	
KOH-CH440-ES	GAS ENGINE, KOHLER, 14 HP
HON-GX390E18	GAS ENGINE, HONDA, 13 HP

**SUCTION KIT**



Allows you to pick up water from lake, bay, ocean, and wash out on your aquaculture site. For industrial cold water gas units.

KIT-SUCTION	SUCTION KIT - 6' 3/4" HOSE - INLINE WATER FILTER - FOOT VALVE - PRIMER VALVE (COLD WATER GAS DRIVEN)
-------------	--

**HYDROSTATIC VALVE AND ASSEMBLY KIT**

For pressure testing lines with your pressure washer.

KIT-HDT	HYDROSTATIC VALVE AND ASSEMBLY KIT (FACTORY INSTALL)
---------	--

**FUEL FILTERS**



FIL-FF14	FUEL FILTER ASSEMBLY, 1/4" (HO87099420)
FIL-FF14-AL	FUEL FILTER ASSEMBLY, 1/4", ALUMINUM
FIL-FFWS-CMP	FUEL FILTER/ WATER SEPARATOR, COMPLETE UNIT (87497700) (HO87497710)
FIL-FFWS-E	ELEMENT, FUEL FILTER/ WATER SEPARATOR (87497710) (HO87253070) (HO87497700)

**PRIMARY CONTROL**



Safety drive that turns off burner to prevent flooding.

OIL-7556A0000U	12V
OIL-7575A0000U	120V
OIL-7580A0000-U	230V
OIL-52082U	BECKETT GENESIS BURNER CONTRACTOR PRIMARY CONTROL DIAGNOSTIC TOOL

**12 VOLT BURNER - PRIMARY CONTROL**



A 12 VDC primary safety control for oil burners used on pressure washers. It can provide interrupted or intermittent duty ignition, and it has a 15 second lockout time.

KIT-BNR12-MSR-UPGRADE	12V BURNER PRIMARY CONTROL
-----------------------	----------------------------

# MISCELLANEOUS ITEMS

## - CONTINUED

### REMOTE SWITCH - ELECTRIC DRIVEN ONLY



To control functions on pressure washers with electrical or mechanical controls.

SWT-RMS-50	REMOTE SWITCH C/W 50' OF CORD - ELECTRIC DRIVEN ONLY
------------	--

### FITTINGS - STEEL



FIT-S1003-B	HEX COUPLING, 1/4" FNPT
FIT-S1022-C	HEX NIPPLE, 3/8", (WMM0003GS)
FIT-S1022-CB	HEX NIPPLE, REDUCING, 3/8" X 1/4", (WMM0302GS)
FIT-S1022-D	HEX NIPPLE, 1/2", (WMM0004GS)
FIT-S1022-DB	HEX NIPPLE, REDUCING, 1/2" X 1/4", (RCF0402SS)
FIT-S1022-DC	HEX NIPPLE, REDUCING, 1/2" X 3/8", (WMM0403GS)
FIT-S1022-EC	HEX NIPPLE, REDUCING, 3/4" X 3/8"

### SPARK ARRESTOR

Reduces any sparks from engines.

KIT-ESA	ENGINE SPARK ARRESTOR FOR MINING OR OILFIELD APPLICATIONS
---------	---

### COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNITS

Option for older propane with millivolt controls.

X PRO-KIT-LP400MV	COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNIT, 400,000 BTU
-------------------	--

### THERMOSTAT



THR-EK220	THERMOSTAT, 220°F, EK, 7000 PSI 802829352311 (HO87500950)
THR-EK302	THERMOSTAT, 302°F, EK, 7000 PSI
THR-BC200C	TEMPERATURE CONTROLLER, 200°F, BOX STYLE, 90-240 VAC INPUT, 5AMP/240 VAC OUTPUT

### HIGH LIMITS

THR-HL12WL-230	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 230°F
THR-HL12WL-330	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 330°F
THR-HL12WL-375SS	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 375°F, STAINLESS STEEL

### BRASS FLOW SWITCH



Designed to operate in response to low volume, low pressure flow, and still allow for high pump output flow. Provides reliable ON/OFF for STOP/START systems.

SWT-FS1068	<b>25 GPM @ 3000 PSI MAX, 1/2", 180°F MAX TEMP</b>
SWT-FS329	<b>0.75 - 16 GPM @ 5000 PSI MAX, 3/8", 165°F MAX TEMP</b>
SWT-FS975	<b>REEDLESS, 12 GPM @ 5000 PSI MAX, 3/8", 180°F MAX TEMP (100975)</b>
SWT-FS011	<b>01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP</b>
SWT-FS879	<b>01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP</b>
SWT-FS1068	<b>01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP</b>

### BATTERY



ELS-BATT-12V	12V BATTERY COMMERCIAL SERIES
ELS-BATT-12V-HD	12V HEAVY-DUTY BATTERY

### BURNER PARTS



We have all Oil Burner Nozzle sizes in stock.

OIL-2.00X80B	OIL BURNER NOZZLE, 2.00X80B (HO900771)
OIL-31812-12	IGNITER KIT W/O TIMER, 12V, MSR. WAYNE - 802829352076 (HO91075070)

### THERMAL RELIEF VALVES



UNL-TRV38	3/8" (100557) (HO921421)
UNL-TRV12	1/2" (100558) (HO921422)
UNL-TRV12HT	1/2", HIGH TEMPERATURE, 190°F

### DELAY TIMER



Solid state timer delay on break timing module. For use on auto STOP/START systems.

ELS-TSB222	SOLID STATE TIMER
------------	-------------------

### PRESSURE SWITCH



Used primarily for the burner system to ignite the burner, also used in Auto Start Systems.

SWT-PSW14	<b>4000 PSI, 1/4" MNPT</b>
SWT-PSW38SS	<b>3/8", STAINLESS STEEL, 8700 PSI, 195°F</b>

### FLOW SWITCH



Designed to provide control on solenoids, timers, and indicator lights on cold and hot water systems.

SWT-FS05ST	<b>1-7.8 GPM @ 8700 PSI MAX, 3/8" INCH, STAINLESS STEEL, 180°F MAX TEMP</b>
SWT-FSI	<b>01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP</b>

**EXAMPLE: To help you size your Nozzle**

- Pressure washer is 4000 PSI @ 3.5 GPM
- Tip size is 3.5


#1. START WITH YOUR MACHINE'S PSI UP HERE

		POUNDS PER SQUARE INCH (PSI)																
STANDARD NOZZLE SIZE	HOLE SIZE	500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	4500	5000
2.0	.034"/0.86mm	0.71	0.87	1.00	1.12	1.22	1.32	1.41	1.50	1.58	1.66	1.73	1.80	1.87	1.94	2.00	2.12	2.24
2.5	.042"/1.07mm	0.88	1.08	1.25	1.40	1.53	1.65	1.77	1.88	1.98	2.07	2.17	2.25	2.34	2.42	2.50	2.65	2.80
3.0	.043"/1.09mm	1.06	1.30	1.50	1.68	1.84	1.98	2.12	2.25	2.37	2.49	2.60	2.70	2.81	2.90	3.00	3.18	3.35
<b>3.5</b>	<b>.048"/1.22mm</b>	1.24	1.52	1.75	1.96	2.14	2.32	2.47	2.63	2.77	2.90	3.03	3.15	3.27	3.39	3.50	3.71	3.91
4.0	.052"/1.32mm	1.41	1.73	2.00	2.24	2.45	2.65	2.83	3.00	3.16	3.32	3.46	3.61	3.74	3.87	4.00	4.24	4.47
4.5	.055"/1.40mm	1.59	1.95	2.25	2.52	2.76	2.98	3.18	3.38	3.56	3.73	3.90	4.06	4.21	4.36	4.50	4.77	5.03
5.0	.057"/1.45mm	1.77	2.17	2.50	2.80	3.06	3.31	3.54	3.75	3.95	4.15	4.33	4.51	4.68	4.84	5.00	5.30	5.59
5.5	.060"/1.52mm	1.94	2.38	2.75	3.07	3.37	3.64	3.89	4.13	4.35	4.56	4.76	4.96	5.14	5.33	5.50	5.83	6.15
6.0	.062"/1.63mm	2.12	2.60	3.00	3.35	3.67	3.97	4.24	4.50	4.74	4.97	5.20	5.41	5.61	5.81	6.00	6.36	6.71
6.5	.064"/1.63mm	2.30	2.81	3.25	3.63	3.98	4.30	4.60	4.88	5.14	5.39	5.63	5.86	6.08	6.29	6.50	6.89	7.27
7.0	.067"/1.70mm	2.47	3.03	3.50	3.91	4.29	4.63	4.95	5.25	5.53	5.80	6.06	6.31	6.55	6.78	7.00	7.42	7.83
7.5	.070"/1.78mm	2.65	3.25	3.75	4.19	4.59	4.96	5.30	5.63	5.93	6.22	6.50	6.76	7.02	7.26	7.50	7.95	8.39
8.0	.072"/1.83mm	2.83	3.46	4.00	4.47	4.90	5.29	5.66	6.00	6.32	6.63	6.93	7.21	7.48	7.75	8.00	8.49	8.94
8.5	.074"/1.88mm	3.01	3.68	4.25	4.75	5.21	5.62	6.01	6.38	6.72	7.05	7.36	7.66	7.95	8.23	8.50	9.02	9.50
9.0	.076"/1.93mm	3.18	3.90	4.50	5.03	5.51	5.95	6.36	6.75	7.12	7.46	7.79	8.11	8.42	8.71	9.00	9.55	10.06
9.5	.078"/1.98mm	3.36	4.11	4.75	5.31	5.82	6.28	6.72	7.13	7.61	7.88	8.23	8.56	8.89	9.20	9.50	10.08	10.62
10.0	.080"/2.03mm	3.54	4.33	5.00	5.59	6.12	6.61	7.07	7.50	7.91	8.29	8.66	9.01	9.35	9.68	10.00	10.61	11.18
11.0	.083"/2.11mm	3.89	4.76	5.50	6.15	6.74	7.28	7.78	8.25	8.70	9.12	9.53	9.96	10.29	10.65	11.00	11.67	12.30
12.0	.087"/2.21mm	4.24	5.20	6.00	6.71	7.35	7.94	8.49	9.00	9.49	9.95	10.39	10.86	11.22	11.62	12.00	12.73	13.42
12.5	.098"/2.26mm	4.42	5.41	6.25	6.99	7.65	8.27	8.84	9.38	9.88	10.36	10.83	11.27	11.69	12.10	12.50	13.26	13.98
13.0	.091"/2.31mm	4.60	5.63	6.50	7.27	7.96	8.60	9.19	9.75	10.28	10.78	11.26	11.72	12.16	12.59	13.00	13.79	14.53
15.0	.096"/2.44mm	5.30	6.50	7.50	8.39	9.19	9.92	10.61	11.25	11.86	12.44	12.99	13.52	14.03	14.52	15.00	15.91	16.77
20.0	.109"/2.77mm	7.07	8.66	10.00	11.18	12.25	13.23	14.14	15.00	15.71	16.58	17.32	18.03	18.71	19.36	20.00	21.21	22.36
25.0	.125"/3.18mm	8.84	10.83	12.50	13.98	15.31	16.54	17.68	18.75	19.76	20.73	21.65	22.53	23.39	24.21	25.00	26.52	27.95
30.0	.141"/3.58mm	10.61	12.99	15.00	16.77	18.37	19.84	21.21	22.50	23.72	24.87	25.98	27.04	28.06	29.05	30.00	31.82	33.54
40.0	.156"/3.96mm	14.14	17.32	20.00	22.36	24.49	26.46	28.28	30.00	31.62	33.17	34.64	36.06	37.42	38.73	40.00	42.43	44.72
50.0	.172"/4.37mm	17.68	21.65	25.00	27.95	30.62	33.07	35.36	37.50	39.53	41.46	43.30	45.07	46.77	48.41	50.00	53.03	55.90
60.0	.188"/4.78mm	21.21	25.98	30.00	33.54	36.74	39.69	42.43	45.00	47.43	49.75	51.96	54.08	56.12	58.09	60.00	63.64	67.08


#3. THEN FIND YOUR ANSWER HERE!

#2. THEN FIND YOUR GPM IN THESE ROWS

NOTE: Ensure correct orifice nozzle in machine to prevent overheating and pump cavitation



**Red (Cutting Nozzle) - 0°**  
**Uses** - Powerful pinpoint for spot cleaning of hard, unpainted surfaces or for high reach areas  
**Surfaces** - Unpainted metal or concrete; DO NOT use on wood  
 Delivers the most concentrated stream possible. Capable of cutting through some materials and cleaning off very stubborn stains on concrete and other hard surfaces. Can cause damage to home siding, wood, and other materials so use with caution.




**Yellow (Intense Washing Nozzle) - 15°**  
**Uses** - Intense cleaning of unpainted hard surfaces  
**Surfaces** - Grills, driveways, concrete or brick walkways, unpainted brick or stucco  
 Provides enough force to work like a scraper, stripping paint, grease, and other materials from hard surfaces.



**Green (Washing Nozzle) - 25°**  
**Uses** - Standard cleaning nozzle for most applications  
**Surfaces** - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco, gutters and eaves, concrete, brick surfaces  
 Perfect for cleaning dirt and grime from home siding, sidewalks, and metal furniture.



**White (Rinsing Nozzle) - 40°**  
**Uses** - Cleaning of painted or delicate surfaces  
**Surfaces** - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco, gutters and eaves, concrete, brick surfaces  
 The wide spray allows you to wash a large area fast. Safe for most surfaces, excluding aluminum siding, windows, and vehicles.



**Black (Detergent Application Nozzle) - Low Pressure**  
**Uses** - Applies cleaning solutions  
**Surfaces** - Low pressure spray is safe on all surfaces. Always verify compatibility of cleaning solution prior to use  
 When using detergent or other chemicals in your pressure washer, the black nozzle will siphon it into the water spray evenly. Spray is wide and low pressure.

# THANK YOU FOR CHOOSING EASY-KLEEN

**EASY-KLEEN**   
PRESSURE SYSTEMS LTD.  
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT


**Great care and attention is taken** at each of our pre-assembly stations to prepare the components for each of our three specialized assembly lines: cold water, hot water, and industrial. Each unit has a number of quality control checks throughout the production process with a final test to ensure peak performance. We appreciate your business and thank you for choosing the highest-quality, rugged equipment in the industry that lasts and is easy to service.



# EASY-KLEEN

PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

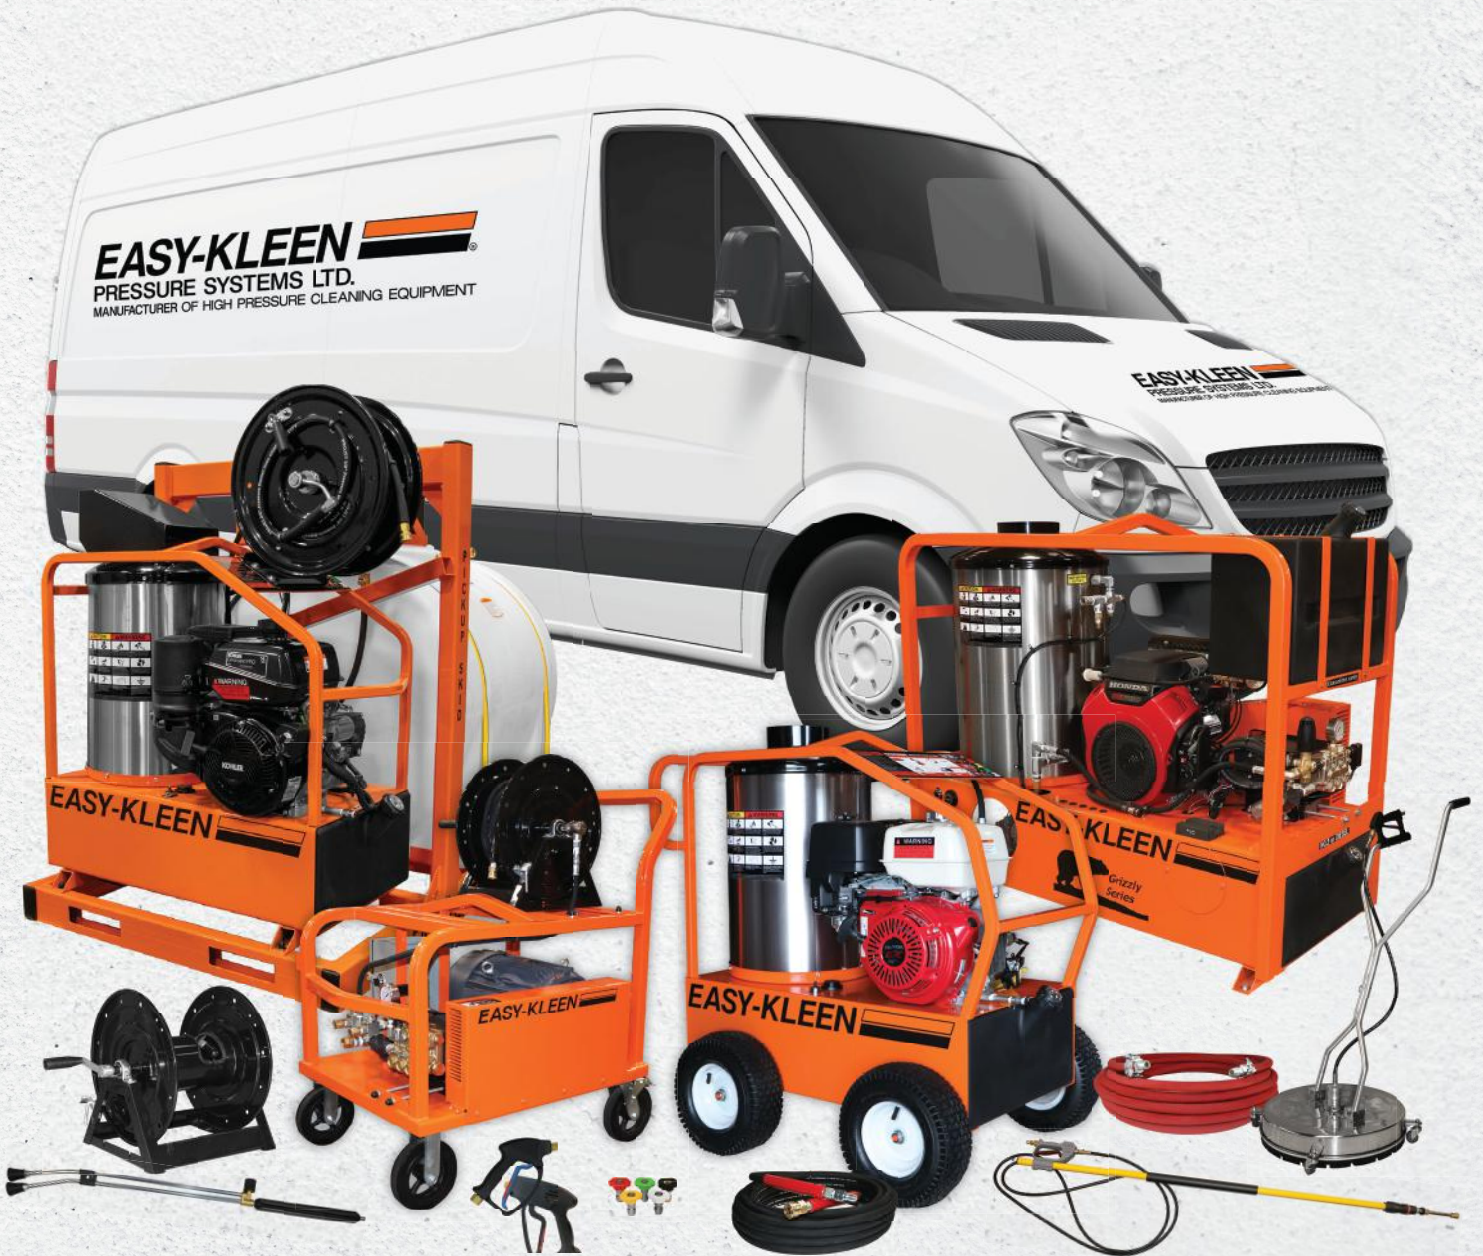

**1-800-315-5533**  
**easykleen.com**



**sales@easykleen.com**

