




## Muscle Groups Focus

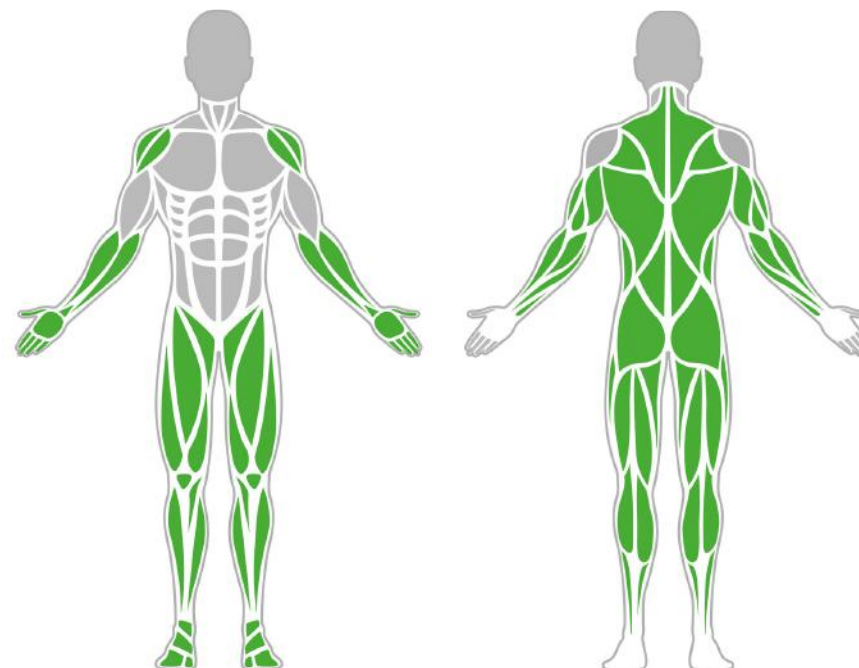

### Vertec Pro

Single- and double-leg performance can be developed and measured using a unique jump height meter located in the middle of the park. The Vertex is a wonderfully designed measuring device that not only helps to train vertical performance, but also to measure the baseline level of vertical performance and the improvement in performance as a result of training.


### Attributes

Product code	1-1-189
Certificate	EN 16630
Age group	14 + years
Capacity	1 person
Max. weight load	99 kg
Type	Sport Specific
Difficulty level	Easy


### QR Code



## Side View

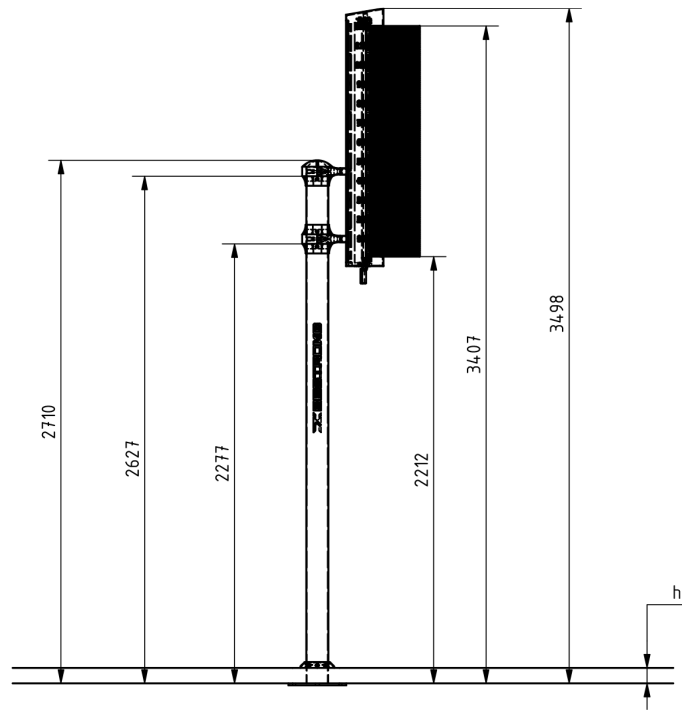

## Plan View

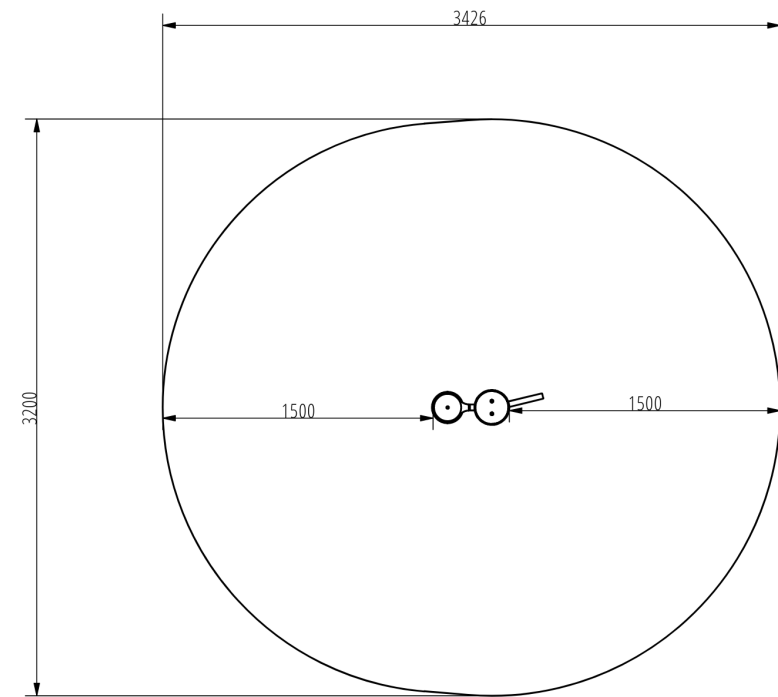

## Installation information

Number of installers (concrete)	At least 2 people
Total installation time (concrete)	45-90 min.
Number of installers (equipment)	At least 2 people
Total installation time (equipment)	60-90 min.
Excavation volume	0.5 m <sup>3</sup>
Concrete volume	0.5 m <sup>3</sup>
Size of the base structure	0,8 x 0,8 x 0,8 m
Anchoring options	In-ground or surface
In combined structures, the volume of concrete required varies.	


## Technical specification

Safety surface area	Around 1,5 m radius
Net weight	79 kg
Material	S235
Critic fall height	-
Color options	<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>
For more color options, discuss with your sales representative.	

## Warranty

Structure	10 years
Steel	5-10 years
Paint	2 years
Plastic	5-10 years
Rubber	1-3 years
Moving parts	2 years
Detailed information in the warranty document	

# Material specification

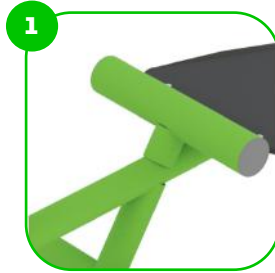

The element is made of high quality S235 steel, which has been cleaned via sandblasting. A corrosion resistant powder coating finish is then applied. Also available with galvanized surface for even greater protection and longevity!



The clamp system allows for easy assembly and extreme stability.



The connecting elements are fastened with vandal-proof stainless steel screws and nuts.



The ends of the bars and posts are sealed with injection-moulded plastic caps.



The internal structure has 120 moveable plastic „bars“.



The levers are rubber-coated for a more comfortable grip and to prevent head injuries.

# BESTRONG

 [bestrongworld](#)  [bestrongworld](#)  [global.bestrong.com](#)  [info@bestrong.com](#)

