



IOR SCOPES

catalogue 2024-2025

RIFLESCOPE CONTENTS

VARIABLE MAGNIFICATION RIFLESCOPE

1-10x26 GHOST	4-5
2-16x42 BREAKER	6-7
3-25x56 TX RIDER	8-9
4-28x50 RECON	10-11
5.8-40x56 CRUSADER	12-13
5-40x56 CRUSADER 2.0	14-15
9-36x56 PATRIOT	16-17
10-60x56 INVICTUS	18-19
12-52x56 TERMINATOR	20-21
6-24x56	28-29
6-24x50	30-31

COMPETITION RIFLESCOPE

40x45 Competition	22-23
-----------------------------	-------

FIXED MAGNIFICATION RIFLESCOPES

16x56.	24-25
10x42.	26-27

DUAL MAGNIFICATION RIFLESCOPES

1x/4x32.	32
1x/6x32	33

RED DOT SIGHT

Red Dot RD 1x22	34
Red Dot Micro	35

WHO WE ARE



IOR is one of the tradition companies in Romania, having a great experience in the field of designing and producing opto-electronic and opto-mechanical products.

IOR was established in 1936 under the Romanian Optical Industry name.

IOR SA has maintained a long track record as a pioneer in Romanian optics, as well as tradition and innovation. These are synonyms for a company with ultra-high-quality riflescopes.

The overarching goal of our design and development work is to achieve our uncompromising quality targets. The manifest outcome is that we meet the highest features of quality in all categories of riflescope development: riflescopes that set new technical features and precision devices that impressively demonstrate our philosophy, PRECISION & QUALITY!.

Those committed to quality will be greatly impressed by IOR SA products.

This conviction is realized through the provision of superior technology and through setting the ultimate features of quality that others are measured against.

Our riflescopes are developed in close collaboration with competition shooters .


All IOR riflescopes share outstanding reliability and precision, enabling the perfect shot over short, medium, long and ultra long distances.

Our products are built to service the various needs and applications for hunting, long-distance shooting and competitions.

We encourage you to shoot with our riflescopes and experience the ultimate in precision shooting success.

GHOST

1-10x26



APPLICATION



The 1-10x20 Ghost is with its 10x zoom perfect for any dynamic shooting like 3-Gun, CQC, IPSC or for hunting fast moving game. On 1x magnification provides a generous eye box for quick acquisition which is combined with a good visible and tactical reticle containing a distinct illuminated red dot. On the other hand the 10x zoom enables shots at distant targets which defines it as a very versatile and dynamic rifle scope.

GHOST 1-10X26



1. Dimensions & physical properties

Weight:	967g	Main tube diameter:	35mm
Length:	420mm		

2. Optical Data*

Magnification:	1.0 - 10.0	Eye relief:	90mm
Objective diameter:	26mm	Transmission:	90%
Field of view	42.67m-11.58m / 100m	Focal plane:	2nd (SFP)
Exit pupil:	8.6mm - 2.6mm		

3. Adjustments*

Diopter:	-4 dpt. to +4dpt.	Adjustment range windage turret:	50MOA
Adjustment range elevation turret:	80MOA	Parallax:	7m - ∞

4. Environmental properties*


Temperature range:		Function:	-20°C to +40°C
Storage:	-30°C to +50°C		

5. Available configurations*


a) Turrets:	Elevation Windage Illuminating system Turret configurations Elevation & Windage MOA-MOA - 1/4 or 0.1 mrad	b) Colors:	Black
		c) Illumination	Illuminated
		d) Reticles	SH, Mp8 etc.

BREAKER

2-16x42 - COMPACT



APPLICATION

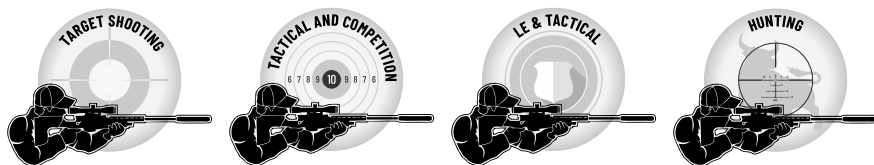

The 2-16x42 BRAKER represents IOR's shortest full featured rifle scope and is perfect for medium and long-range targets. Our newly designed illumination control is integrated into the parallax adjustment and allows a better mounting solution - also for left handed use. The redesigned magnification ring offers now more grip.

BREAKER - COMPACT 2-16X42



1. Dimensions & physical properties

Weight:	990 g	Main tube diameter:	35 mm
Length:	325 mm		

2. Optical Data*

Magnification:	2.0 - 16.0	Eye relief:	80-90 mm
Objective diameter:	42 mm	Transmission:	90 %
Field of view:	17.5m-2.2m/100m	Focal plane:	1 st
Exit pupil:	6.5 mm - 2.63 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	125 MOA	Parallax:	7m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Parallax with Illuminating sys. Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad	b). Colors:	Black Sand
		c). Illumination	Illuminated
		d). Reticles	Special Hunting


**all data is subject to change
More configurations on request!*

TX RIDER

3-25x56M COMPACT



APPLICATION

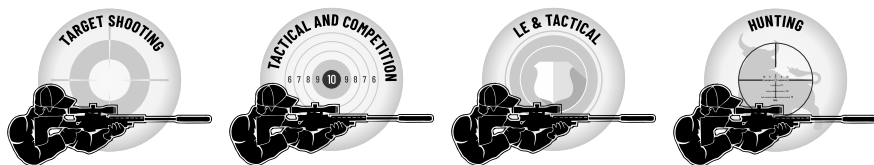

The optical performance and a large field-of-view on low power makes the 3-25x56 Breaker a perfect rifle scope for medium and long-range targets. Although extremely compact, it features a powerful 8.33 x zoom which is rugged and lightweight and therefore ideal for compact weapon systems. The low-profile elevation turret with a large adjustment range can easily be combined with a red dot sight for close distances. This is why it is in use by competition shooters around the world.

TX RIDER 3-25X56



1. Dimensions & physical properties

Weight:	1050 g	Main tube diameter:	35 mm
Length:	335 mm		

2. Optical Data*

Magnification:	3.0 - 25.0	Eye relief:	90 mm
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	11.64 m-1.41m/100m	Focal plane:	1 st
Exit pupil:	7mm-2mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	100 MOA	Parallax:	10m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Parallax with Illuminating sys. Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	Special Hunting


**all data is subject to change
More configurations on request!*

RECON

4-28x50



APPLICATION

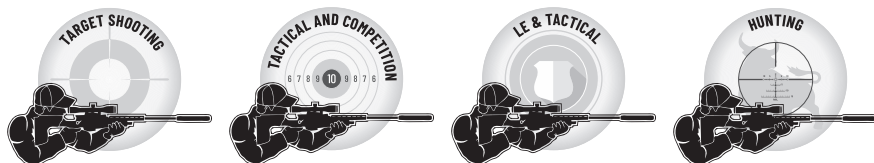

Due to its huge 7x zoom ratio the 4-28x50 is perfect for multi-caliber rifles. Although initially developed for extreme long-range shooting it has proven to be very versatile: the 4-28x power range and parallax adjustment going down to 7 m can handle easily anything from a close, quick shot to long-range distances this makes it very popular now.

TERMINATOR 4-28X50 COMPACT



1. Dimensions & physical properties

Weight:	1120 g	Main tube diameter:	40 mm
Length:	367 mm		

2. Optical Data*

Magnification:	4.0 - 28.0	Eye relief:	80 to 95 mm
Objective diameter:	50 mm	Twilight factor:	16.7 - 50.2
Field of view:	9.8m-1.43m/100m	Transmission:	90 %
Exit pupil:	7mm- 1.8mm	Focal plane:	1 st

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	120 MOA	Parallax:	8m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		

5. Available configurations*


a). Turrets:	Elevation Windage Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	XTREME

**all data is subject to change
More configurations on request!*


RIFLESCOPE

CRUSADER

5.8-40x56



APPLICATION

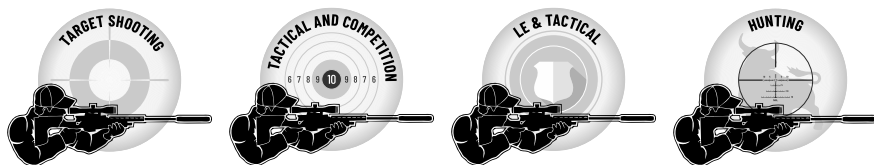

Developed for the toughest long-range conditions the 5-40x56 uses the best optics in a solid and rugged rifle scope design. Having an outstanding optical performance over the entire magnification range, it is perfect for identifying even small targets or spotting your results.

CRUSADER 5.8-40X56



1. Dimensions & physical properties

Weight:	1270g	Main tube diameter:	40 mm
Length:	410 mm		

2. Optical Data*

Magnification:	5.8 - 40.0	Twilight factor:	16.7 - 50.2
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	12m-1.15m/100m	Focal plane:	1 st
Exit pupil:	6.7 mm- 1.4mm	Parallax :	
Eye relief:	80 to 95 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	100 MOA	Parallax:	8m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad MOA-MOA - 1/4 MOA	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	XTREME


**all data is subject to change
More configurations on request!*

CRUSADER 2.0

5-40x56



APPLICATION

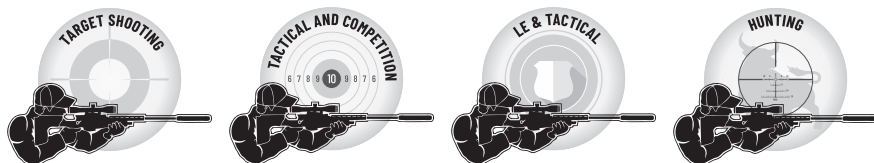

Due to its great magnification range and well engineered performance, the 5-40x56 is very popular among competition shooters and not only which are demanding the best of the best.

The 5-40x50 now features our new "IPI" which means „Illumination Parallax Integrated“. This new and very easily operable illumination control is integrated into the parallax adjustment and allows a better mounting solution. It also enables a better left handed use.

The bigger knob which is next to the tube operates the very precise side focus/parallax adjustment which start from 7m.

CRUSADER 2.0 - 5-40X56



1. Dimensions & physical properties

Weight:	1250 g	Main tube diameter:	40 mm
Length:	397 mm		

2. Optical Data*

Magnification:	5.0 - 40.0	Twilight factor:	16.7 - 50.2
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	7.25m-0.9m/100m	Focal plane:	1 st
Exit pupil:	6.7 mm- 1.4mm	Parallax :	
Eye relief:	85 to 95 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	125 MOA	Parallax:	7m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad MOA-MOA - 1/4 MOA	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	X TREME


**all data is subject to change
More configurations on request!*

PATRIOT

9-36x56



APPLICATION

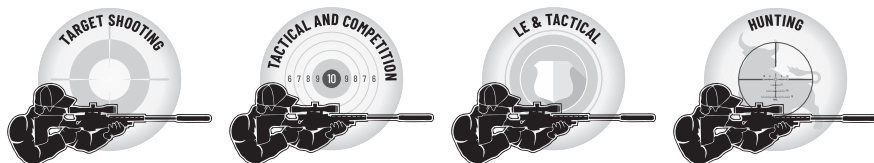

The 9-36x56 is perfect for sensitive and distant game. This application is supported by a fine and unique click value turret adjustment which gives this riflescope an extra portion of precision.

Over the decades, our well experienced engineers have steadily improved and optimized this riflescope which also can be used for target shooting.

PATRIOT 9-36X56



1. Dimensions & physical properties

Weight:	1250 g	Main tube diameter:	40 mm
Length:	405 mm		

2. Optical Data*

Magnification:	9x to 36x	Eye relief:	80 mm
Objective diameter:	56 mm	Transmission:	90 %
Max Field of view:	45m/100m	Focal plane:	1 st (FFP)
Max. Exit pupil:	6.2 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	34 mrad
Adjustment range elevation turret:	34 mrad	Parallax:	7m - ∞

4. Environmental properties*

Temperature range		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Turret configurations Elevation & Windage 0.1 mrad	b). Colors:	Black
		c). Reticles	*Special Hunting


**all data is subject to change
More configurations on request!*

INVICTUS

10-60x56



APPLICATION

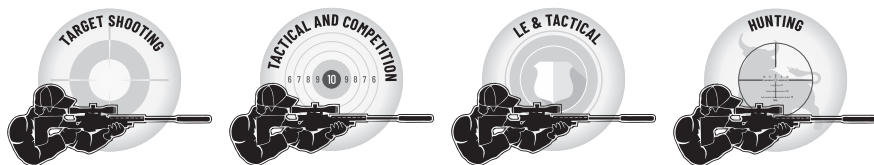

The 10-60x56 is IOR's highest magnifying rifle scope. For those who are notoriously detail-orientated in handloading ammunition and individual gunsmithing our manually assembled 10-60x56 is the subsequent choice for a setup which demands the best.

It is perfect for identifying even small targets or spotting your results.

INVICTUS 10-60X56



1. Dimensions & physical properties

Weight:	1450 g	Main tube diameter:	40 mm
Length:	420 mm		

2. Optical Data*

Magnification:	10-60	Eye relief:	75 to 90 mm
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	3.84 m - 0.64 m/ 100m	Focal plane:	2nd (SFP)
Exit pupil:	3.6 mm - 1.1 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	40 MOA
Adjustment range elevation turret:	80 MOA	Parallax:	8m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Turret configurations Elevation & Windage MOA-MOA - 1/8 MOA	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	XTREME


**all data is subject to change
More configurations on request!*

TERMINATOR

12-52x56



APPLICATION

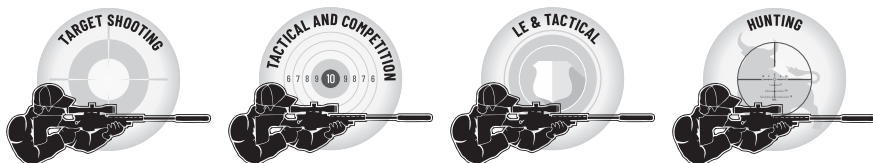

The scopes of the IOR S.A. - Terminator is designed to meet the unique challenges of high precision shooting. Their quality and function make it possible to achieve exceptional shooting results as well to fulfill the critical and demanding needs of civile market.

The 12-52x56 is perfect when shooting from a stand or ground blind. Due to its magnification range it is also suitable for long distance shooting. In fact it is IOR one of most popular riflescope.

TERMINATOR 12-52X56



1. Dimensions & physical properties

Weight:	1370g	Main tube diameter:	40 mm
Length:	410 mm		

2. Optical Data*

Magnification:	12.0 - 52.0	Eye relief:	75 to 90 mm
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	3.3m-0.8m/100m	Focal plane:	2 nd (SFP)
Exit pupil:	3.6 mm - 1.1 mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	100 MOA	Parallax:	8m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Turret configurations Elevation & Windage MOA-MOA - 1/4 MOA	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	XTREME


**all data is subject to change
More configurations on request!*

COMPETITION

40x45

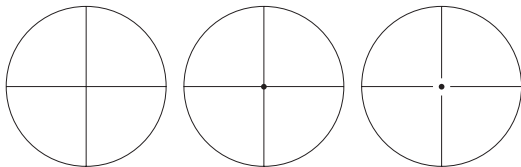

APPLICATION

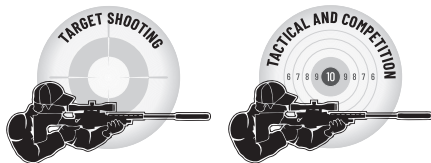

When it all comes down to the slightest details, the IOR Competition 40x45mm scope is the right tool for the job. Its high-powered magnification, precise tracking, and crystal-clear image give you the advantage you need to leave the rest of the competition behind.

COMPETITION 40X45



1. Dimensions & physical properties

Weight:	665 g	Main tube diameter:	30 mm
Length:	386 mm		

2. Optical Data*

Magnification:	40x	Eye relief:	83 mm
Objective diameter:	45 mm	Transmission:	90 %
Field of view:	1.065 m/ 100m	Focal plane:	1 st (FFP)
Exit pupil:	1.125 mm		

3. Adjustments*

Diopter:	-2 dpt. to +2 dpt.	Adjustment range windage turret:	40 MOA
Adjustment range elevation turret:	60 MOA	Parallax:	8m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		

5. Available configurations*


a). Turrets:	Elevation Windage Turret configurations Elevation & Windage MOA-MOA - 1/8	b). Colors:	Black
		c). Reticles:	Cross

**all data is subject to change
More configurations on request!*

16 56/IL



APPLICATION

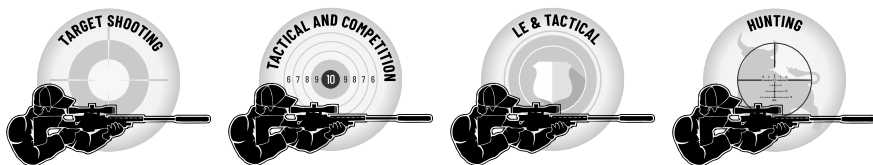

The 16x56 scopes of the IOR S.A. - compact series are designed to meet the unique challenges of high precision. Their quality and function make it possible to achieve exceptional hunting results.

- *The 16x56 telescopic sight has the perfect telescopic sight for hunting long-range*
- *Maximum optical brilliance for perfect target recognition at longest distances.*

COMPACT 16X56/IL



1. Dimensions & physical properties

Weight:	880 g	Main tube diameter:	35 mm
Length:	350 mm		

2. Optical Data*

Magnification:	16	Exit pupil:	3.5mm
Objective diameter:	56 mm	Eye relief:	88 mm
Field of view:	1.62/100m	Transmission:	90 %

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	140 MOA	Parallax:	10m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +30° C
Storage:	-40° C to +40° C		

5. Available configurations*


a). Turrets:	Elevation Windage Parallax with Illuminating sys. Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad and 1/4 MOA	b). Colors:	Black
		c). Illumination	central dot illuminated of reticle
		d). Reticle type	Cross with lines

**all data is subject to change
More configurations on request!*

10X42



APPLICATION

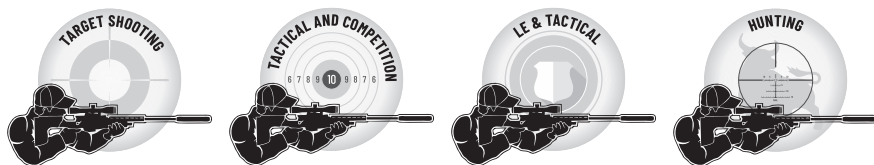

Fixed power 10x42 scopes are becoming rare these days since the majority of manufacturers moved forward and started producing riflescopes with variable magnification.

Nevertheless, fixed power rifle scopes still have some distinct advantages. Due to the small number of lenses used in fixed power rifle scopes construction, this riflescope tends to be brighter than its variable magnification counterparts are. Normally, such a comparison is only valid if both riflescopes have glass and coating of the same quality.

The second advantage is that fixed power - scopes are easy to use. There is no magnification setting, no parallax adjustment, or any other distractions before taking the shot. Just aim and shoot.



1. Dimensions & physical properties

Weight:	690g	Main tube diameter:	30 mm
Length:	350 mm		

2. Optical Data*

Magnification:	10.0	Eye relief:	90 mm
Objective diameter:	42 mm	Transmission:	90 %
Field of view:	3.6m/100m	Focal plane:	1 st
Exit pupil:	2.6mm		

3. Adjustments*

Diopter:	-3 dpt. to +3 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	90 MOA	Parallax:	fix 100m

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-40° C to +50° C		

5. Available configurations*


a). Turrets:	Elevation Windage Turret configurations Elevation & Windage Mil-Mil - 0.1 mrad or 1/4 MOA	b). Colors:	Black
		c). Illumination	No
		d). Reticles	X TREME

**all data is subject to change
More configurations on request!*

6-24X56



APPLICATION

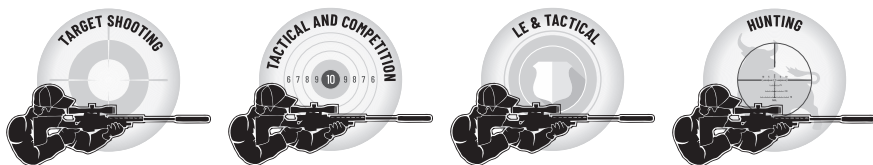

If pushing the limits of yourself and your rifle at extended ranges is what drives you, the 6-24x56 has all the features you need in a rifle scope that measures slightly over 14 inches. Available with First or Second Focal Plane (FFP / SFP) reticles, all 6-24x56 feature exposed. MIL based reticles feature 0.1 milradian per click adjustments, while MOA based reticles feature 0.25 MOA per click.

6-24X56



1. Dimensions & physical properties

Weight:	1000 g	Main tube diameter:	35 mm
Length:	415mm		

2. Optical Data*

Magnification:	6.0 - 24.0	Eye relief:	85-90 mm
Objective diameter:	56 mm	Transmission:	90 %
Field of view:	8.83 m- 1.82 m/100m	Focal plane:	1 st (FFP)
Exit pupil:	9.33 mm - 2.33 mm		

3. Adjustments*

Diopter:	-4 dpt. to +4 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	70 MOA	Parallax:	30m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		

5. Available configurations*


a). Turrets:	Elevation (Dual Point turret) Windage Illuminating digital sys. Turret configurations Elevation & Windage MOA-MOA - 1/4 or 0.1 mrad	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	SH or MP8

**all data is subject to change
More configurations on request!*

6-24X50



APPLICATION

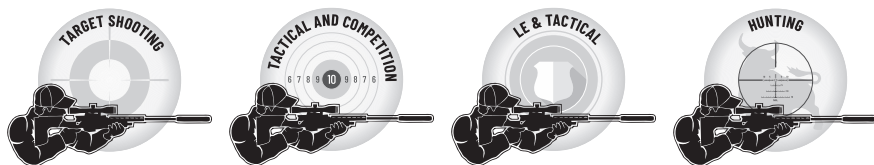

Long range precision with an attractive price. High powered, accurate and dead-on-target, these are the requirements of serious long-range shooters, and the IOR 6-24x50 delivers in every way. Crisp windage and elevation adjustments ensure that you will be sighted in the correctly with each and every shot.

6-24X50



1. Dimensions & physical properties

Weight:	960 g	Main tube diameter:	35 mm
Length:	420 mm		

2. Optical Data*

Magnification:	6.0 - 24.0	Eye relief:	85 mm
Objective diameter:	50 mm	Transmission:	90 %
Field of view:	9.44 m-1.82m/100m	Focal plane:	2 nd (SFP)
Exit pupil:	8mm-2mm		

3. Adjustments*

Diopter:	-4 dpt. to +4 dpt.	Adjustment range windage turret:	50 MOA
Adjustment range elevation turret:	70 MOA	Parallax:	30m - ∞

4. Environmental properties*

Temperature range:		Function:	-20° C to +40° C
Storage:	-30° C to +50° C		


5. Available configurations*

a). Turrets:	Elevation Windage Illuminating sys. Turret configurations Elevation & Windage MOA-MOA - 1/4 or 0.1 mrad	b). Colors:	Black
		c). Illumination	Illuminated
		d). Reticles	SH or MP8


**all data is subject to change
More configurations on request!*

DUAL MAGNIFICATION RIFLESCOPES

1X/4X32



APPLICATION

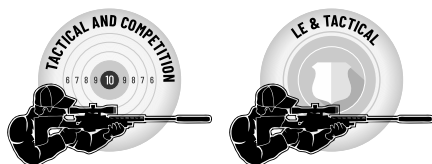

SPECIFICATION

Minimal magnification:	1x	Adjustment per click	10mm/100m - 0.10MIL
Maximum magnification:	4x	Turret Type	Tactical
Diopter range	+3 / -3 dpt	Elevation (mrad).	15mrad
Lens diameter.	32mm	Windage (mrad).	15mrad
Min. exit pupil.	8mm	Reticle	CQB
Max. exit pupil.	32mm	Reticle position	2 focal plane - SFP
Min. field of view.	12.7m/100m	Reticle illumination	Yes
Max. field of view.	48m/100m	Length.	185mm
Max. eye relief.	89mm	Weight.	650g
Light transmission	90%	Tube diameter	35mm
Fast focus eyepiece	Yes		


DUAL MAGNIFICATION RIFLESCOPES



1X/6X30



APPLICATION

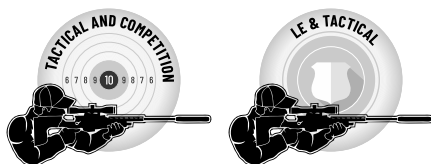

SPECIFICATION

Minimal magnification.	1x	Zero Stop	Yes
Maximum magnification.	6x	Elevation (mrad).	20mrad
Diopter range	-4 / +4	Elevation (MOA).	68MOA
Lens diameter.	30mm	Windage (mrad).	20mrad
Min. exit pupil.	5mm	Windage (MOA).	68MOA
Max. exit pupil.	30mm	Reticle	CQB
Min. field of view.	9.5m/100m	Reticle position	2 focal plane - SFP
Max. field of view.	42m/100m	Reticle illumination	Yes
Min. eye relief.	89mm	Illumination color	Red
Max. eye relief.	88.9mm	Length.	199mm
Light transmission	90%	Weight.	595g
Fast focus eyepiece	Yes	Color	Black
Adjustment per click	10mm/100m - 0.10MIL	Tube diameter	30mm
Turret Type	Tactical		

1X22



Compact, Solid and Light Weight for All Application Tactics, Hunting & Sporting 3MOA Dot Size with 11 Levels Red Dot Intensity, 10 Daylight & 1 NV Unlimited Eye Relief and Parallax Free (<1MOA) 38mm 1.5" From Bottom to Red Dot Sight Center 1MOA Direct Finger Adjustment with Audible Click, Total 100MOA Come with Picatinny QD Riser Mount w/ Safety Button & Lower Mount, Lens Cap.

SPECIFICATION

Magnification:	N/A	Elevation Range:	>100MOA
Objective Lens:	22mm	Windage Range:	>100MOA
Eye Relief:	Free	Mounting:	Picatinny
Optics Coating:	Multi coated	Battery Style:	CR2032
Overall Length:	76mm / 3.0 inch	Excellent for moving target and fast shooting	
QD Base Length:	48mm / 1.9 inch	Shock proof, IPX4 water resistance and fog proof.	
Low Mount Length:	48mm / 1.5 inch	High quality aluminum alloy 6061 in durable black matte finish.	
Width:	44mm / 1.7 inch	With QD mount knob lock feature.	
Height:	38mm(1.5") from bottom to center	Free Accessories: QD picatinny mount, low picatinny mount, lens rubber cover, hex keys and cleaning cloth etc.	
Weight:	188g / 6.6 ounce		
Click Value:	1MOA		
Parallax:	1MOA		
Dot Intensity:	11 levels		
Dot Size:	3MOA		

RD MICRO



3MOA Dot Size with 8 Levels & 2 NV Red Dot Intensity, Black Matte Finish TEK Footprint w/ 4 Sets Screws, 50.000 Hours Battery Runtime for Weakest Visible Dot IPX6 Water Proof, Take 9mm, 45ACP, 12GA and Lapua Magnum 338 Recoil 6061-T6 Aluminum Alloy Housing, Parallax Set @ 100 Yards, Premier Lens Coating On/off Switches on Side, Complete User Control and 4 Hours Auto Shut-down.

SPECIFICATION

Magnification:	N/A	Battery:	CR2032
Window Lens Size:	24X17mm	Run time:	50,000 hours for the weakest visible dot
Length:	46mm / 1.8"	Finish:	Black matte
Width:	32mm / 1.2"	For close-in work and general shooting IPX6 water proof up to 1 meter depth for 30 minutes. High quality aluminum alloy 6061 in durable black matte finish. Tested on 9mm pistol, 30-06 rifle and 12 GA shotgun. Package includes: retail package, weaver mount, rubber lens cover, hex keys and cleaning cloth etc.	
Height:	35mm / 1.4"		
Weight (net):	56g / 2.0oz		
Eye Relief:	Free		
Field of View:	27°		
Optics Coating:	Multi coated		
Parallax:	±1.0MOA		
Elevation Range:	45MOA		
Windage Range:	45MOA		
Dot Size:	3MOA		
Dot Intensity:	8 levels & 2 night vision dot		
Mounting:	Picatinny		



visit us



IOR S.A., str. Bucovina, nr. 4 , sect. 3, 030393 București, ROMANIA
Phone: +40213244261 • Fax : +40213244512 • commercial@ior.ro • www.ior.ro