



PRINT MEDIA
LAMINATES
MOUNTING FILMS

DIGITAL PRINT MEDIA

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
MATTE WHITES	201 85 mic - Matte White Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
	201HTAP 85 mic - Matte White Vinyl Clear High-Tack Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
	201HTAPAE 85 mic - Matte White Vinyl Clear High-Tack Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		
	201OP 85 mic - Matte White Opaque Vinyl Grey Solvent Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
	201OPAE 85 mic - Matte White Opaque Vinyl Grey Solvent Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M 1.52 x 45.7M ^o 1.37 x 91.4M 1.52 x 91.4M		
	202 85 mic - Matte White Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
	209+ MetroMark® 87.5 mic - Matte White Opaque Transit Vinyl Clear Removable Adhesive 145 gsm Printed Logo DSPE Liner OUTFRONT ^{micro} and JCDecaux approved product	5 yr / 1 yr	1.37 x 45.7M 1.57 x 45.7M 1.62 x 45.7M		
	209AE+ MetroMark® 87.5 mic - Matte White Opaque Vinyl Clear Removable Adhesive 145 gsm Air Egress DSPE Liner	5 yr / 1 yr	1.37 x 45.7M 1.37 x 91.4M*		
	214 80 mic - Matte White Promotional Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner	3 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
	222 150 mic - Matte White Semi-Rigid Vinyl Clear Permanent Adhesive 145 gsm Tight Release DSPE Liner	3 yr / -	0.76 x 30.5M 1.37 x 30.5M ^o 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		
223 150 mic - Matte White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M ^o 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*			
GLOSS WHITES	203 75 mic - Gloss White Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
	203HTAP 75 mic - Gloss White Vinyl Clear High-Tack Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		
	203HTAPAE 75 mic - Gloss White Vinyl Clear High-Tack Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M		
	203OP 75 mic - Gloss White Opaque Vinyl Grey Solvent Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
	203OPAE 75 mic - Gloss White Opaque Vinyl Grey Solvent Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
	204 75 mic - Gloss White Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M ^o		
	216 80 mic - Gloss White Promotional Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner	3 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
	218 WindowMark™ Blockout 200 mic - Gloss White Dual-Layer Blockout Vinyl Clear Removable Adhesive 145 gsm DSPE Liner	3 yr / 1 yr	1.37 x 30.5M ^o 1.52 x 30.5M		
	220 150 mic - Gloss White Semi-Rigid Vinyl Clear Permanent Adhesive 145 gsm Tight Release DSPE Liner	3 yr / -	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		
	221 150 mic - Gloss White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.

+ ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).

^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

GENERAL DIGITAL cont.

GLOSS PREMIUM

GLOSS CLEARS

MATTE CLEARS

SEMI-RIGIDS

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
230+	AutoMark™ 60 mic - Gloss White Conformable Vinyl Grey Solvent, Repositionable, Long-Term Removable Adhesive 145 gsm Air Egress DSPE Liner <i>Recommended Laminate: GF 231, 240, 242, 813 & 844</i>	7 yr / 2 yr	1.37 x 45.7M ^o 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
246	60 mic - Gloss White Premium Vinyl Grey Solvent Permanent Repositionable Adhesive 145 gsm DSPE Liner	7 yr / 2 yr	1.37 x 45.7M ^o		S L UV
333	AutoMark™ DRIFT® PW 75 mic - Gloss White Polymeric Wrap Vinyl Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 170 gsm Air Egress DSPE Liner <i>Recommended Laminate (Partial Wraps): GF 231, 240, 242, 813 & 844</i> <i>Recommended Laminate (Flat/General Signage): GF 247 & 248</i>	7 yr / 2 yr	1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
246C	60 mic - Gloss Clear Premium Vinyl Clear Permanent Repositionable Adhesive 145 gsm DSPE Liner	7 yr / 2 yr	1.37 x 45.7M		S L UV
830+	AutoMark™ Cast with DRIFT® Technology 50 mic - Gloss White Cast Wrap Vinyl with DRIFT® Technology Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 160 gsm Air Egress Layflat Liner <i>Recommended Laminate: GF 242, 813, 831, 840 & 844</i>	8 yr / 4 yr	1.37 x 45.7M 1.52 x 45.7M		S L UV
205	75 mic - Gloss Clear Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner	3 yr / -	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M ^o		S L UV
206	75 mic - Gloss Clear Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	3 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M ^o		S L UV
219	150 mic - Gloss Clear Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	1.37 x 30.5M		S L UV
247	Print-N-Lam™ 75 mic - Gloss Clear UV Polymeric Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner <i>Can also be used as a UV inhibited laminate.</i>	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		S L UV
255	OptiMark™ 75 mic - Optically Clear Gloss Vinyl Optically Clear Solvent Removable Adhesive 50 mic Traction Backed Polyester Liner	3 yr / 1 yr	1.37 x 45.7M ^o 1.52 x 45.7M		S L UV
248	Print-N-Lam™ 75 mic - Matte Clear UV Polymeric Vinyl Clear Permanent Adhesive 145 gsm DSPE Liner <i>Can also be used as a UV inhibited laminate.</i>	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M		S L UV
287+	RoughMark™ Clear 75 mic - Matte Clear Conformable Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminate: GF 242, 813, 831, 840 & 844</i>	5 yr / 6 mo	1.37 x 22.9M 1.37 x 45.7M		S L UV
218	WindowMark™ Blockout 200 mic - Gloss White Dual-Layer Blockout Vinyl Clear Removable Adhesive 145 gsm DSPE Liner	3 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M		S L UV
219	150 mic - Gloss Clear Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	1.37 x 30.5M		S L UV
220	150 mic - Gloss White Semi-Rigid Vinyl Clear Permanent Adhesive 145 gsm Tight Release DSPE Liner	3 yr / -	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		S L UV
221	150 mic - Gloss White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		S L UV
222	150 mic - Matte White Semi-Rigid Vinyl Clear Permanent Adhesive 145 gsm Tight Release DSPE Liner	3 yr / -	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
223	150 mic - Matte White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
226+	WallMark® 150 mic - Matte White Semi-Rigid Vinyl Clear Low-Tack Microsphere Beaded Adhesive 145 gsm Tight Release DSPE Liner	5 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.

+ ASTM E84 Class 1 or A (Rolling Standard Test Method for Surface Burning Characteristics of Building Materials).

• Indoor Durability of Material Under Normal Conditions.

^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

NOTE: All durability statements are estimates based on unprinted media and deemed to be reliable; however, this information is given without a guarantee and does not constitute a written warranty. Please refer to the specific technical data sheets for further information at www.generalformulations.com.

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE	
GENERAL	202 85 mic - Matte White Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M			
	204 75 mic - Gloss White Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M			
	206 75 mic - Gloss Clear Vinyl Clear Low-Tack Removable Adhesive 145 gsm DSPE Liner	3 yr / 1 yr	0.76 x 45.7M 1.37 x 45.7M 1.52 x 45.7M			
	218 WindowMark™ Blockout 200 mic - Gloss White Dual-Layer Blockout Vinyl Clear Removable Adhesive 145 gsm DSPE Liner	3 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M			
	219 150 mic - Gloss Clear Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	1.37 x 45.7M			
	221 150 mic - Gloss White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M			
	223 150 mic - Matte White Semi-Rigid Vinyl Clear Low-Tack Removable Adhesive 145 gsm Tight Release DSPE Liner	3 yr / 1 yr	0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*			
	255 OptiMark™ 75 mic - Optically Clear Gloss Vinyl Optically Clear Solvent Removable Adhesive 50 mic Traction Backed Polyester Liner	3 yr / 1 yr	1.37 x 30.5M ^o 1.52 x 30.5M ^o			
	WINDOWS	232+ WindowMark™ 150 mic - Matte White Perforated 50/50 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i> <i>approved product</i>	2 yr / 1 yr	0.76 x 7.6M 1.37 x 7.6M 1.52 x 7.6M 0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		
		260+ WindowMark™ 150 mic - Matte White Perforated 60/40 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i> <i>approved product</i>	2 yr / 1 yr	1.37 x 7.6M 1.52 x 7.6M 1.37 x 30.5M ^o 1.52 x 30.5M		
261 WindowMark™ 150 mic - Gloss Clear Perforated 60/40 Film Clear Face/Clear Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Casts</i>		2 yr / 1 yr	1.37 x 30.5M ^o 1.52 x 30.5M		 White Ink Systems Only	
270+ WindowMark™ 150 mic - Matte White Perforated 70/30 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i>		2 yr / 1 yr	1.37 x 7.6M 1.52 x 7.6M 1.37 x 30.5M ^o 1.52 x 30.5M			
280+ WindowMark™ 150 mic - Matte White Perforated 80/20 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i>		2 yr / 1 yr	1.37 x 7.6M 1.52 x 7.6M 1.37 x 30.5M ^o 1.52 x 30.5M			
SPECIALTY	290+ ChalkMark™ 125 mic - Matte Black Chalkboard Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>UV Curable & HP Latex White Ink Only - Indoor/Outdoor</i>	3 yr / 1 yr	1.22 x 22.9M 1.52 x 22.9M 0.61 x 45.7M 1.22 x 45.7M 1.52 x 45.7M			
	790AE Print-N-Privacy™ 75 mic - Polymeric Etched Glass Vinyl (Light) Clear Solvent Permanent Adhesive 145 gsm Air Egress Liner <i>Dry Apply Only</i>	7 yr / -	1.37 x 22.9M 1.52 x 22.9M 1.37 x 45.7M ^o 1.52 x 45.7M			

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.
 + ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).
^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

Window Films Continued on Page 5

WINDOWS cont.
STATIC CLING

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
207**	175 mic - Clear Static Cling 145 gsm DSPE Liner	3 mo / -	0.69 x 22.9M 1.37 x 22.9M 1.52 x 22.9M 1.37 x 45.7M ^o 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
208**	175 mic - White Static Cling 145 gsm DSPE Liner Certified for HP Latex Inks	3 mo / -	0.69 x 22.9M 1.37 x 22.9M 1.52 x 22.9M 1.37 x 45.7M ^o 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV

WALLS
INDOOR VINYL
INDOOR / OUTDOOR
INDOOR FABRIC

226+	WallMark® 150 mic - Matte White Semi-Rigid Wall Vinyl Clear Low-Tack Repositionable Microsphere Beaded Adhesive 145 gsm Tight Release Liner	5 yr• / 1 yr	1.37 x 30.5M 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
226HTR+•	WallMark® HTR 150 mic - Matte White Semi-Rigid Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr• / 1 yr	1.37 x 30.5M ^o 1.52 x 30.5M		S L UV
229+	WallMark® Canvas 150 mic - Matte White Embossed Canvas Wall Vinyl Clear Low-Tack Repositionable Microsphere Beaded Adhesive 145 gsm Tight Release Liner	5 yr• / 1 yr	1.37 x 30.5M 1.52 x 30.5M		S L UV
229HTR+•	WallMark® Canvas HTR 150 mic - Matte White Embossed Canvas Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr• / 1 yr	1.37 x 30.5M 1.52 x 30.5M		S L UV
262HTR+	WallMark® Sand HTR 150 mic - Matte White Sand Embossed Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr• / 1 yr	1.37 x 30.5M 1.52 x 30.5M		S L UV
290+	ChalkMark™ 125 mic - Matte Black Chalkboard Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>UV Curable & HP Latex White Ink Only - Indoor/Outdoor</i>	5 yr• / 1 yr	1.22 x 22.9M 1.52 x 22.9M 0.61 x 45.7M 1.22 x 45.7M ^o 1.52 x 45.7M ^o		L UV
234+	GraphiTex™ 175 mic - Matte White Polyester Wall Fabric Clear Repositionable Wall Adhesive 145 gsm DSPE Liner	10 yr• / 1 yr	1.37 x 30.5M ^o 1.52 x 30.5M 1.37 x 91.4M* 1.52 x 91.4M*		S L UV
285+	RoughMark™ 87.5 mic - Matte White Opaque Conformable Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminate: GF 242, 813, 831, 840 & 844</i>	5 yr / 6 mo	1.37 x 22.9M 1.52 x 22.9M 1.37 x 45.7M ^o 1.52 x 45.7M		S L UV
287+	RoughMark™ Clear 75 mic - Matte Clear Conformable Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminate: GF 242, 813, 831, 840 & 844</i>	5 yr / 6 mo	1.37 x 22.9M ^o 1.37 x 45.7M		S L UV

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.

** Not intended for Inside Mount Applications. Please see Technical Data Sheet at www.generalformulations.com for specific installation instructions.

+ ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).

• Indoor Durability of Material Under Normal Conditions.

^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

FLOOR & COUNTER
INDOOR

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
210*	Traffic Graphic® 85 micron - Matte White "Floor Advertising" Vinyl Clear Removable Adhesive 145 gsm DSPE Liner	5 yr / 6 mo	1.37 x 45.7M ^o		
212*	Traffic Graphic® 85 micron - Matte White "Carpet Advertising" Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 6 mo	1.37 x 45.7M ^o		
109	Traffic Graphic® 125 micron - Scratch Resistant Textured Matte Vinyl Floor Laminate Clear Solvent Permanent Adhesive 37.5 mic Clear Polyester Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 65 Wet PTV: 29 / ANSI A137.1/A326.3 - Dry DCOF: 0.96 Wet DCOF 0.28 / DIN 51130 - R9</i>	- / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M ^o 1.37 x 91.4M*		
211	Traffic Graphic® 150 micron - Gloss Clear Light Embossed Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant • AS HB198:2014 (AS/NZS 4586) - Dry PTV: 81 Wet PTV: 20 • ANSI A137.1/A326.3 - Dry DCOF: 0.94 Wet DCOF 0.29</i>	- / -	1.37 x 45.7M ^o		
213	Traffic Graphic® 90 micron - Embossed Clear Polypropylene Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Indirect Food Contact Solution - The film and adhesive complies with the following citations in 21CFR 174 thru 182 and 21CFR 175.105 respectively Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 66 Wet PTV: 30 / ANSI A137.1/A326.3 - Dry DCOF: 0.94 Wet DCOF 0.29 / DIN 51130 - R9</i>	- / -	1.37 x 45.7M ^o		
217	Traffic Graphic® 75 micron - Gloss Clear Vinyl Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant • AS HB198:2014 (AS/NZS 4586) - Dry PTV: 79 Wet PTV: 18 • ANSI A137.1/A326.3 - Dry DCOF: 0.96 Wet DCOF 0.24</i>	- / -	1.37 x 45.7M		

TRANSLUCENTS

224	TransMark™ 80 micron - Matte White Translucent Vinyl Clear Solvent Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	0.76 x 45.7M 1.37 x 45.7M ^o 1.52 x 45.7M		
228	TransMark™ 150 micron - Matte White Translucent Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner curb Taxi Top approved product	3 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M		

WRAPS
GENERAL
CARBON FIBER

230+	AutoMark™ 60 micron - Gloss White Conformable Wrap Vinyl Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 145 gsm Air Egress DSPE Liner <i>Recommended Laminate: GF 231, 240, 242, 813 & 844</i>	7 yr / 2 yr	1.37 x 45.7M ^o 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
333	AutoMark™ DRIFT® PW 75 micron - Gloss White Polymeric Wrap Vinyl Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 170 gsm Air Egress DSPE Liner <i>Recommended Laminate (Partial Wraps): GF 231, 240, 242, 813 & 844 Recommended Laminate (Flat/General Signage): GF 247 & 248</i>	7 yr / 2 yr	1.37 x 45.7M ^o 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
830+	AutoMark™ Cast with DRIFT® Technology 50 mic - Gloss White Cast Wrap Vinyl with DRIFT® Technology Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 160 gsm Air Egress Layflat Liner <i>Recommended Laminate: GF 242, 813, 831, 840 & 844</i>	8 yr / 4 yr	1.37 x 45.7M 1.52 x 45.7M		
780	DragonWrap™ 140 micron - Polymeric Black Carbon Fiber Clear Solvent Repositionable Permanent Adhesive 145 gsm Air Egress DSPE Liner <i>UV Curable & HP Latex White Ink Only - Indoor/Outdoor</i>	5 yr / 2 yr	0.76 x 45.7M 1.52 x 45.7M		

SPECIALTY

765	Rainbow Holographic 150 mic - Rainbow Holographic Film Clear Permanent Adhesive 145 gsm Layflat Liner	1 yr / -	0.76 x 22.9M 1.52 x 22.9M 0.76 x 45.7M 1.52 x 45.7M ^o		
-----	--	----------	---	--	--

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.
 + ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).
 • Durability and Removability specifications are contingent upon using Traffic Graphic® matched component system.
^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

TRANSIT

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
209+	MetroMark® 87.5 mic - Matte White Opaque Transit Vinyl Clear Removable Adhesive 145 gsm Printed Logo DSPE Liner OUTFRONT^{media} and JCDecaux approved product	5 yr / 1 yr	1.37 x 45.7M 1.57 x 45.7M 1.62 x 45.7M		
209AE+	MetroMark® 87.5 mic - Matte White Opaque Vinyl Clear Removable Adhesive 145 gsm Air Egress DSPE Liner	5 yr / 1 yr	1.37 x 45.7M 1.37 x 91.4M*		
228	TransMark™ 150 mic - Matte White Translucent Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner CLUB Taxi Top approved product	3 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M		
232+	WindowMark™ 150 mic - Matte White Perforated 50/50 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i> OUTFRONT^{media} approved product	2 yr / 1 yr	0.76 x 7.6M 1.37 x 7.2M 1.52 x 7.6M 0.76 x 30.5M 1.37 x 30.5M 1.52 x 30.5M		
260+	WindowMark™ 150 mic - Matte White Perforated 60/40 Film White Face/Black Back - Clear Removable Adhesive 127 gsm DSPE with Dual Liner Technology <i>Recommended Laminate: GF 242 Gloss Optically Clear Cast</i> OUTFRONT^{media} approved product	2 yr / 1 yr	1.37 x 7.6M 1.52 x 7.6M 1.37 x 30.5M 1.52 x 30.5M		
275+	SubMark™ 87.5 mic - Matte White Opaque Transit Vinyl Clear Solvent High-Tack Permanent Adhesive 145 gsm Printed Logo DSPE Liner OUTFRONT^{media} approved product	5 yr / -	1.37 x 45.7M 1.52 x 45.7M 1.57 x 45.7M		
285+	RoughMark™ 87.5 mic - Matte White Opaque Conformable Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminate: GF 242, 813, 831, 840 & 844</i> OUTFRONT^{media} approved product	5 yr / 6 mo	1.37 x 45.7M 1.37 x 22.9M 1.52 x 45.7M ^o 1.52 x 22.9M		
333	AutoMark™ DRIFT® PW 75 mic - Gloss White Polymeric Wrap Vinyl Grey Solvent Slidable, Repositionable, Long-Term Removable Adhesive 170 gsm Air Egress DSPE Liner <i>Recommended Laminate (Partial Wraps): GF 231, 240, 242, 813 & 844</i> <i>Recommended Laminate (Flat/General Signage): GF 247 & 248</i>	7 yr / 2 yr	1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		

HIGH-TACK
PERMANENT

201HTAP	85 mic - Matte White Vinyl Clear High-Tack Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
201HTAPAE	85 mic - Matte White Vinyl Clear High-Tack Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M 1.52 x 45.7M		
203HTAP	75 mic - Gloss White Vinyl Clear High-Tack Permanent Adhesive 145 gsm DSPE Liner	5 yr / -	1.37 x 45.7M 1.52 x 45.7M		
203HTAPAE	75 mic - Gloss White Vinyl Clear High-Tack Permanent Adhesive 145 gsm Air Egress DSPE Liner	5 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		
235+	MotoMark® GRIP 100 mic - Matte White Vinyl Clear Solvent High Bond LSE• Permanent Adhesive 145 gsm DSPE Liner <i>Recommended Laminate: GF 238</i>	5 yr / -	0.61 x 45.7M 0.76 x 45.7M 1.37 x 45.7M ^o 1.52 x 45.7M		
275+	SubMark™ 87.5 mic - Matte White Opaque Transit Vinyl Clear Solvent High-Tack Permanent Adhesive 145 gsm DSPE Printed Logo Liner OUTFRONT^{media} approved product	5 yr / -	1.37 x 45.7M 1.52 x 45.7M 1.57 x 45.7M		

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.
+ ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).
• Low Surface Energy
^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

HIGH-TACK cont.
REMOVABLE

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
212**	Traffic Graffico® 85 mic - Matte White "Carpet Advertising" Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr / 6 mo	1.37 x 45.7M		
226HTR+	WallMark® HTR 150 mic - Matte White Semi-Rigid Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr • / 1 yr	1.37 x 30.5M		
228	TransMark™ 150 mic - Matte White Translucent Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner CUrb Taxi Top approved product <small>Taxi Media</small>	3 yr / 1 yr	1.37 x 30.5M 1.52 x 30.5M		
229HTR+	WallMark® Canvas HTR 150 mic - Matte White Embossed Canvas Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr • / 1 yr	1.37 x 30.5M 1.52 x 30.5M		
262HTR+	WallMark® Sand HTR 150 mic - Matte White Sand Embossed Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner	5 yr • / 1 yr	1.37 x 30.5M		
285+	RoughMark™ 87.5 mic - Matte White Opaque Conformable Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminates: GF 242, 813, 831, 840 & 844</i>	5 yr / 6 mo	1.37 x 45.7M 1.37 x 22.9M 1.52 x 45.7M 1.52 x 22.9M		
287+	RoughMark™ Clear 75 mic - Matte Clear Polymeric Conformable Wall Vinyl Clear Solvent High-Tack Removable Adhesive 145 gsm DSPE Liner <i>Optional Laminates: GF 242, 813, 831, 840 & 844</i>	5 yr / 6 mo	1.37 x 22.9M 1.37 x 45.7M		

LAMINATES
GENERAL

100	75 mic - Gloss Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner	1 yr / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
101	75 mic - Lustre Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner VERIFONEMEDIA Taxi Top Solution Product CUrb Taxi Top approved product <small>Taxi Media</small>	1 yr / -	0.76 x 45.7M 0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
102	75 mic - Matte Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner	1 yr / -	0.76 x 45.7M 0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
400	75 mic - Gloss UV Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner	4 yr / -	0.76 x 45.7M 0.97 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
401	75 mic - Lustre UV Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner	4 yr / -	0.76 x 45.7M 0.97 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		
402	75 mic - Matte UV Clear Vinyl Laminate Clear Permanent Adhesive 80 gsm Liner	4 yr / -	0.76 x 45.7M 0.97 x 45.7M 1.37 x 45.7M 1.52 x 45.7M 1.37 x 91.4M* 1.52 x 91.4M*		

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.
 ** Durability and Removability specifications are contingent upon using Traffic Graffico® matched component system.
 + ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).
 • Indoor Durability of Material Under Normal Conditions.
 ◦ This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

Laminates Continued on Page 9

LAMINATES cont.

GENERAL

DRY ERASE

FLOORS / COUNTER MATS (indoor)

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE	INK TYPE
231+	AutoMark™ 60 mic - Gloss Clear UV Wrap Laminate Clear Solvent Permanent Adhesive 80 gsm Liner	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o 1.37 x 91.4M* 1.52 x 91.4M*		
240+	AutoMark™ 60 mic - Matte Clear UV Wrap Laminate Clear Solvent Permanent Adhesive 80 gsm Liner	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		
238+	MotoMark® ARMOR 300 mic - Gloss Clear UV Laminate Clear Solvent Permanent Adhesive 80 gsm Liner	5 yr / -	0.61 x 22.9M 0.76 x 22.9M 1.37 x 22.9M ^o 1.52 x 22.9M		
242	OptiMark™ Cast 50 mic - Optically Clear UV Gloss Cast Laminate Optically Clear Solvent Permanent Adhesive 50 mic Smooth Frosted Polyester Liner OUTFRONT™ approved product	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M		
247	Print-N-Lam™ 75 mic - Gloss Clear UV Polymeric Vinyl Laminate Clear Permanent Adhesive 145 gsm DSPE Liner	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M ^o		
248	Print-N-Lam™ 75 mic - Matte Clear UV Polymeric Vinyl Laminate Clear Permanent Adhesive 145 gsm DSPE Liner	7 yr / -	1.37 x 45.7M ^o 1.52 x 45.7M		
813+	AutoMark™ Cast 33 mic - High Gloss Clear UV Cast Wrap Laminate Clear Solvent Permanent Adhesive 120 gsm Liner	4 yr / -	1.37 x 45.7M 1.52 x 45.7M		
831+	AutoMark™ Cast 50 mic - Gloss Clear UV Cast Wrap Laminate Clear Solvent Permanent Adhesive 120 gsm Liner	8 yr / -	1.37 x 45.7M 1.52 x 45.7M		
840+	AutoMark™ Cast 50 mic - Matte Clear UV Cast Wrap Laminate Clear Solvent Permanent Adhesive 120 gsm Liner	8 yr / -	1.37 x 45.7M 1.52 x 45.7M		
844+	AutoMark™ Cast 50 mic - Ulti-Matte Clear UV Cast Wrap Laminate Clear Solvent Permanent Adhesive 120 gsm Liner	8 yr / -	1.37 x 45.7M 1.52 x 45.7M		
110	EraseMark™ Pro 50 mic - Commercial Grade Dry Erase Gloss Clear Polyester Laminate High Performance Engineered Surface Clear Solvent Permanent Adhesive 80 gsm Liner <i>Indoor Only</i>	5 yr / -	1.37 x 45.7M ^o		
111	EraseMark™ 50 mic - Dry Erase Gloss Clear Polypropylene Laminate Clear Permanent Adhesive 80 gsm Liner <i>Indoor Only</i>	6 mo ■ / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M ^o 1.37 x 91.4M*		
103	125 mic - Clear Textured Matte Polycarbonate Laminate Clear Solvent Permanent Adhesive 37.5 gsm Clear Polyester Liner	- / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M		
109**	Traffic Graphic® 125 mic - Scratch Resistant Textured Matte Vinyl Floor Laminate Clear Solvent Permanent Adhesive 37.5 gsm Clear Polyester Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 65 Wet PTV: 29 / ANSI A137.1/A326.3 - Dry DCOF: 0.96 Wet DCOF 0.28 / DIN 51130 - R9</i>	- / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.37 x 91.4M*		
211**	Traffic Graphic® 150 mic - Gloss Clear Light Emboss Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 81 Wet PTV: 20 / ANSI A137.1/A326.3 - Dry DCOF: 0.94 Wet DCOF 0.29</i>	- / -	1.37 x 45.7M		
213**	Traffic Graphic® 90 mic - Embossed Clear Polypropylene Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Indirect Food Contact Solution - The film and adhesive complies with the following citations in 21CFR 174 thru 182 and 21CFR 175.105 respectively Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 66 Wet PTV: 30 / ANSI A137.1/A326.3 - Dry DCOF: 0.94 Wet DCOF 0.29 / DIN 51130 - R9</i>	- / -	1.37 x 45.7M		
217**	Traffic Graphic® 75 mic - Gloss Clear Vinyl Floor Laminate Clear Permanent Adhesive 80 gsm Liner <i>Slip Resistance Ratings - Test Methods: UL 410 - Slip Resistant / AS HB198:2014 (AS/NZS 4586) - Dry PTV: 79 Wet PTV: 18 / ANSI A137.1/A326.3 - Dry DCOF: 0.96 Wet DCOF 0.24</i>	- / -	1.37 x 45.7M		

* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.

** Durability and Removability specifications are contingent upon using Traffic Graphic® matched component system.

+ ASTM E84 Class 1 or A (Rating Standard Test Method for Surface Burning Characteristics of Building Materials).

■ Please review product data bulletin for recommended applications. Intended for short-term / indoor use only (3-6 months, not a commercial use product).

° This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

SPECIALTY LAMINATES

OPTICALLY CLEAR

MOUNTING FILMS

SERIES	PRODUCT DESCRIPTION	DURABILITY / REMOVABILITY	SIZE	ADHESIVE TYPE	INK TYPE
108+	Tedlar® by DuPont™ 25 mic - Satin Clear Tedlar® Anti-Graffiti Laminate Clear Solvent Permanent Adhesive 80 gsm Liner	10 yr / -	1.37 x 45.7M ^o		
105	50 mic - High Gloss Optically Clear Polyester Laminate Optically Clear Solvent Permanent Adhesive 37.5 mic Clear Polyester Liner	2 yr / -	0.79 x 45.7M 0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.54 x 45.7M		
106	25 mic - Optically Clear Polyester Mounting Film Optically Clear Solvent Permanent Adhesive - Both Sides 37.5 mic Clear Polyester Liner - Both Sides	1 yr / -	0.79 x 45.7M 0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M ^o		
107	37.5 mic - White Opaque Print Mounting Film White Opaque Polypropylene High-Tack Clear Permanent Adhesive - Both Sides 114 gsm Liner (Self-Wound) <i>Indoor only</i>	1 yr / -	0.79 x 45.7M 0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.52 x 45.7M		
112	25 mic - Clear Polyester Print Mounting Film High-Tack Clear Permanent Adhesive - Both Sides 114 gsm Liner (Self-Wound) <i>Indoor only</i>	1 yr / -	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M		
113**	25 mic - Clear Polyester Perm/Removable Print Mounting Film High-Tack Clear Permanent Adhesive 1-Side Low-Tack Clear Removable Adhesive 1-Side Clear 30 mic Polyester Liner Printed (Self-Wound)	6 mo / 6 mo	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M		
114	25 mic - Clear Polyester Perm/Removable Print Mounting Film High-Tack Clear Permanent Adhesive 1-Side Low-Tack Clear Removable Adhesive 1-Side 114 gsm (Self-Wound)	6 mo / 6 mo	0.97 x 45.7M 1.29 x 45.7M 1.37 x 45.7M 1.37 x 91.4M*		
116**	25 mic - Clear Polyester Removable "Air-Egress" Print Mounting Film High-Tack Clear Permanent Adhesive 1-Side / 37.5 mic PET Clear Liner High-Tack Clear Solvent Removable Adhesive 1-Side / 112.5 mic Clear Air Egress Printed PET Liner	1 yr / 6 mo	1.37 x 45.7M ^o 1.37 x 91.4M*		
118**	25 mic - Clear Polyester Removable Print Mounting Film High-Tack Clear Permanent Adhesive 1-Side / 37.5 mic PET Clear Liner Low-Tack Clear Removable Adhesive 1-Side / 112.5 mic Printed PET Clear Liner	6 mo / 6 mo	1.37 x 45.7M 1.37 x 91.4M*		


* Please note 91.4 meter rolls come standard on 7.5 cm cores and may contain a splice. Consult printer manufacturer specifications for roll diameter and weight tolerances.

** Printed with "Remove to Expose Adhesive" on the Removable Adhesive Side.

^o This indicates product sizes stocked by Spicers. Other products available on indent (minimums apply).

ADHESIVE LEGEND

- Permanent Adhesive / Clear
- Permanent Adhesive / Grey
- Permanent Repositionable Adhesive / Grey
- Repositionable Removable Adhesive / Clear
- Permanent Opaque Adhesive / Grey
- Repositionable Removable Adhesive / Grey
- Permanent Adhesive / Clear
- Slidable Repositionable Removable Adhesive / Grey
- Removable Repositionable Wall Adhesive / Clear
- Removable Adhesive / Clear
- Low-Tack Removable Adhesive / Clear
- High-Tack Removable Adhesive / Clear
- High-Tack LSE* Permanent Adhesive / Clear
- High-Tack Permanent Adhesive / Clear
- High-Tack Permanent Adhesive / Clear
- High-Tack Removable Adhesive / Clear
- Removable Adhesive / Clear

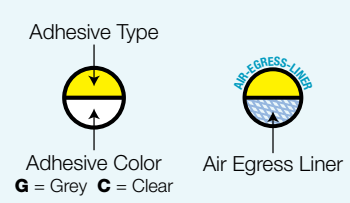

INK COMPATIBILITY LEGEND

- Solvent / Eco-Solvent
- Latex
- UV Curable

SERIES	General Signage, Displays, P.O.P.	Vehicle Wraps	Fleet & Vehicle Graphics	Clear (Transparent)	Low Surface Energy	Translucent	Semi-Rigid	Transit (Outdoor Advertising Media)	Windows (Removable "R") - Permanent ("P")	Walls (Smooth Dry Wall-Removable)	Walls (Moderately Textured Surfaces / Brick & Block) Removable	Floors (Tile & smooth sealed cement)	Carpet (Short loop commercial)	Outdoor	Indoor
201	●													●	●
201HTAP	●			●										●	●
201HTAPAE	●			●										●	●
201OP	●													●	●
201OPAE	●													●	●
202	●							● R						●	●
203	●													●	●
203HTAP	●			●										●	●
203HTAPAE	●			●										●	●
203OP	●													●	●
203OPAE	●													●	●
204	●							● R						●	●
205	●		●											●	●
206	●		●					● R						●	●
207	●		●					● R						●	●
208	●							● R						●	●
209	●		●				●	● R	●					●	●
209AE	●		●				●	● R	●					●	●
210	●									●				●	●
212	●										●			●	●
214	●											●		●	●
216	●													●	●
218	●					●		● R						●	●
219	●		●			●		● R						●	●
220	●					●		●						●	●
221	●					●		● R						●	●
222	●					●		●						●	●
223	●					●		● R						●	●
224	●				●			● P						●	●
226	●					●			●					●	●
226HTR	●			●		●		● R	●					●	●
228	●				●		●	● R						●	●
229	●					●		●						●	●
229HTR	●			●		●		● R	●					●	●
230	●	●	●											●	●
232	●	●	●				●	● R						●	●
234	●								●					●	●
235	●			●										●	●
246	●		●											●	●
247	●			●										●	●
248	●			●										●	●
255	●			●				● R						●	●
260	●						●	● R						●	●
261	●							● R						●	●
262HTR	●			●		●		● R	●					●	●
270	●							● R						●	●
275	●			●			●							●	●
280	●							● R						●	●
285										●				●	●
287			●	●						●				●	●
290	●			●				● R	●					●	●
333	●	●	●				●							●	●
765	●					●		● P						●	●
780	●	●	●											●	●
790AE								● P						●	●
830	●	●	●				●	● R						●	●

Please see Technical Data Sheets at www.generalformulations.com for complete information.



CORPORATE HEADQUARTERS

309 S. UNION
SPARTA, MI 49345
800.253.3664

www.generalformulations.com

GLOBAL LOCATIONS

SPARTA, MI, U.S. - 800.253.3664
LOS ANGELES, CA, U.S. - 562.802.7778
COLOGNE, GERMANY - +49 2203 5918255

SUPPLIED BY



For enquiries or a sample of General Formulations,
please contact your local Spicers representative.

1300 132 644 / spicers.com.au

FOLLOW US

