# EASY-KLEEN ====

# PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# **EQUIPMENT, OPTIONS, & ACCESSORIES CATALOG**







1-800-315-5533 easykleen.com










# WHY CHOOSE EASY-KLEEN?







Since my father, Fred Howland, started Easy-Kleen in 1982, our equipment has become the premier choice for companies that depend on pressure-cleaning equipment in their everyday business. To this day, Easy-Kleen applies the same principles and builds high-quality, rugged equipment that lasts and is easy to service.

Easy-Kleen does things differently. We have a hands-on approach to ensure that the equipment our in-house engineering and design team builds has the best components from industry-leading manufacturers that offering worldwide support for those components. Easy-Kleen frames are engineered and designed with SolidWorks 3-D software. Our steel fabrication and powder coating are performed in-house under a strict quality control program.

We offer over 400 models of pressure washers to meet your needs, from small units used in meat shops to continuous-duty systems used 24/7 in major manufacturing and processing plants.

This company is more than a factory that takes steel and components to make products. Easy-Kleen is a problem-solving company with vast experience in thousands of applications. If you cannot find a machine to suit your needs, we also offer custom machines. All our design work is done in-house, allowing us to take on custom projects that other manufacturers do not have the capabilities and flexibility to complete. We have a policy — We never say no to a customer's request. We are willing to take on any project and develop a solution that will work for the customer's application. When dealing with our company you can be confident that we will give you the correct advice on the equipment and ensure that it will perform most efficiently for your application now and for years to come.

Our equipment will perform your toughest cleaning jobs quickly and efficiently for years to come. Your Easy-Kleen team will be here if you need us, whether you are down the street or around the world.

Give us a call today! We look forward to finding the right pressure system for you.

Yours truly,

Bul Howland

Brad Howland Owner



# **HISTORY**



# Easy-Kleen has been family owned and operated for over 40 years.

Easy-Kleen comes from humble beginnings. Fred Howland, a born salesman and entrepreneur, felt the brand of pressure washers he was selling in the 80's was substandard to what he could build himself. He believed that providing his customers with high-quality well-built, serviceable equipment was crucial for both his customer and his own business. In 1982, Fred received his first contract from the Canadian Military and manufactured the first Easy-Kleen Cold Water Pressure Washer out of his home in Kars, New Brunswick. The business started to grow and pretty soon it had outgrown the garage and the cows were kicked out of the barn to make room.

Now, over 40 years later, with Fred's grandchildren involved in the company, Easy-Kleen has grown into an international brand, housed in a state-of-the-art 120,000 square feet manufacturing facility, shipping equipment worldwide. Easy-Kleen now has over 180 employees with 8 different locations across Canada: Annapolis Valley, Montreal, Cambridge, Toronto, Ottawa, Edmonton, Red Deer, and the head office with the manufacturing facility is based in Sussex, New Brunswick.

"If you need it, we can build it." Brad Howland, Fred's son and the company's owner, is never one to shy away from a challenge. All of the companies design work is done in house which allows Easy-Kleen to take on custom projects that other manufacturers do not have the capabilities and flexibility to complete.

**Easy-Kleen does things differently.** We have a very hands on approach to ensure that the equipment meets the customer's needs and also takes future growth into account. There are Easy-Kleen units that have given 30 years of service to their owners and continue to keep on washing. It is very important to us that the initial purchase sustain the customer now and in the future. Serviceability is key to ensure proper maintenance can be carried out easily.

To this day the same principles apply. Easy-Kleen builds high-quality, rugged equipment that lasts and is easy to service.

"We are building a company that will last for generations to come.
The world is a very big place and everyone needs a pressure washer."

~ Brad Howland













# IN-HOUSE COIL MANUFACTURING

# Our coil is the heart of our equipment.

It all starts with the care and attention that is put into each and every coil. Every step of the manufacturing process takes place in our state-of-the-art 120,000 square foot factory. Each piece of steel and stainless steel is fabricated in-house utilizing the most advanced CNC computer controlled equipment in the world. Our coil machinery is state-of-the-art, with 11 axis pipe maneuvering capability, providing our customers a coil with no pipe bend restrictions. 100% pipe penetration is achieved during our fusion welding process versus the competitors stick welding process, which only yields 60 to 70% pipe penetration.

Ordering our coil pipe directly from the mill has also allowed us to purchase pipe in lengths up to twice as long as the competition therefore eliminating butt welds. Each pancake is structurally braced with steel rods to eliminate vibration and friction that causes pipe wear over time. In addition, each layer of pipe is welded to the next for additional strength. Our coils are bolted down to the base for security over the harshest conditions. We are so confident in our coils that most carry a lifetime warranty. Each coil has been matched with the ideal burner system to maximize efficiency. Every unit is tested in our lab for efficiency, CO2 levels, and heat rise prior to leaving the factory.



**Pipe Fusing Process** 

# FRAME FABRICATION



# We are equipment people.

We have a history of building the best frames in the industry. While our competitors are reducing the weight of steel in frames, we continue to build a frame to the highest standards that can withstand the test of time in function, structure, and finish.

Our flat steel frame assemblies are cut with a state-of-the-art Fiber Laser. The machine cuts out all of the details from the sheet in one process. The material is then bent on a high-performance PLC controlled speed brake. All square tubing is cut on the computerized band saw for precise edges and angles. It is bent on a PLC controlled, automated tube bender. This whole process ensures that all our steel components are made exactly the same each time to fit the welding jigs.

After the welding process is complete, mounting bolt heads are welded in place. The frame is drilled and tapped to allow for serviceability in the future. We make it easy to perform preventative maintenance on our equipment, therefore extending the life of the equipment and leading to a lower cost of ownership.

Metal preparation before painting is taken very seriously. We understand that metal has to be perfectly clean and etched in order for the paint to adhere to the surface. We have a five-stage wash cycle for every frame to ensure our finish stands the test of time. The metal is de-greased, pressure washed, dipped in phosphate, rinsed and then dipped in corrosion inhibitor. The frames go into the oven for a dry cycle to ensure they are completely dry. A heavy 3mm powder coat finish is applied and then baked in our PLC controlled powder oven.

The final product is a machine built with the highest quality components in the world, best coils, and the highest quality frame which is all backed by people who will be there for you now, and in the future.







6

sales@easykleen.com

# **EQUIPMENT**TABLE OF CONTENTS

| COMMERCIAL COLD WATER ELECTRIC / ACTION SERIES                                | 8  | VAC TRUCK HOT WATER HEATERS / WILDCAT SERIES - OIL FIRED             | 34 |
|---|----|--|----|
| FIREHOUSE & CAR DETAILING SERIES  | 9  | FULLY ENCLOSED HOT WATER HEATERS / PLUG & PLAY CABINETS              | 35 |
| INDUSTRIAL COLD WATER ELECTRIC  | 10 |  | 33 |
| EXPLOSION PROOF - COLD WATER  | 11 | - TRUCK & MARINE   | 36 |
| COMMERCIAL SOFT WASH  | 12 | MARINE MOUNT SERIES  |    |
| COMMERCIAL COLD WATER GAS  / ACTION SERIES                                    | 13 | - HYDRAULIC DRIVE, ELECTRIC, & ELECTRIC CLUTCH  DRY STEAM GENERATORS | 37 |
| INDUSTRIAL COLD WATER GAS & DIESEL  | 14 | / WOLVERINE SERIES   | 38 |
| COMMERCIAL HOT WATER ELECTRIC   |    | DRY STEAM GENERATOR OPTIONS  | 39 |
| - OIL FIRED   | 15 | JETTERS / GROUNDHOG JETTER   | 40 |
| COMMERCIAL HOT WATER ELECTRIC / SHOP DOG - OIL, PROPANE, OR NATURAL GAS FIRED | 16 | JETTER TRAILERS & OPTIONS  | 41 |
| INDUSTRIAL HOT WATER ELECTRIC / ALPHA SERIES - OIL FIRED                      | 17 | DUST SUPPRESSION TRAILER / WATER OTTER SERIES                        | 42 |
| INDUSTRIAL HOT WATER ELECTRIC / BUFFALO SERIES - NATURAL GAS & PROPANE FIRED  | 18 | RV & CAR LOT WASH TRAILER  | 43 |
| INDUSTRIAL HOT WATER  |    | OPEN TRAILER UNITS   | 44 |
| FULLY ELECTRICALLY HEATED / CARIBOU SERIES                                    | 20 | OPEN TRAILER UNIT OPTIONS  | 45 |
| EXPLOSION PROOF - HOT WATER   | 21 | ENCLOSED TRAILER UNITS   | 46 |
|   | -  | ENCLOSED TRAILER UNIT OPTIONS  | 47 |
| ROCKET SERIES - INDUSTRIAL HOT WATER ELECTRICALLY HEATED                      | 22 | IN-PLANT SYSTEMS   | 48 |
| ON DEMAND ELECTRICALLY HEATED   | 23 | CUSTOM IN-PLANT SYSTEMS  | 49 |
| COMMERCIAL HOT WATER GAS & DIESEL - OIL FIRED                                 | 24 | PARTS WASHER   | 50 |
| PORTABLE PICKUP TRUCK SKID  | 25 | TOTE-BOX WASHER  | 51 |
|   | 25 | HYDROSTATIC TESTERS  | 52 |
| INDUSTRIAL HOT WATER GAS WET STEAM / STEAM OPTIONS - OIL FIRED                | 26 | COIN OPERATED CAR WASH   | 53 |
| INDUSTRIAL HOT WATER DIESEL   |    | CUSTOMIZED UNITS & FRAME OPTIONS                                     | 54 |
| / BULL MOOSE SERIES - OIL FIRED   | 27 | EK DEMUCKER  | 56 |
| INDUSTRIAL HOT WATER GAS / GRIZZLY SERIES - OIL FIRED                         | 28 | ALUMINUM/STAINLESS STEEL OPTIONS                                     | 56 |
| FILL & PLAY EQUIPMENT SERIES  |    | MOBILE & ON-SITE SERVICE REPAIR                                      | 57 |
| / GRIZZLY & BULL MOOSE SERIES - DIESEL & GAS UNITS                            | 30 | NOZZLE CHART   | 80 |
| OPTIONS   | 31 | THANK YOU FOR CHOOSING EASY-KLEEN                                    | 81 |
| MODULAR HOT WATER HEATERS / WILDCAT SERIES - GAS FIRED OR ELECTRIC            | 32 | INDEX  | 82 |
|   | JZ | NOTES  | 85 |
| OPEN MODULAR HOT WATER HEATERS / WILDCAT SERIES - OIL FIRED                   | 33 |  |    |

1-800-315-5533

easykleen.com

# OPTIONS & ACCESSORIES TABLE OF CONTENTS



| ACCESSORIES  NOZZLES  ROTARY NOZZLES • MEG NOZZLE • QUICK COUPLER NOZZLES • SEWER / CULVERT NOZZLES • ROTARY SEWER / CULVERT NOZZLES • ROTARY TIP FILTER • BARRACUDA ROTARY NOZZLE   |          | TRAILER & JETTER OPTIONS  OPEN TRAILERS & OPTIONS  **OPEN TRAILERS & OPTIONS  **INDUSTRIAL HOT WATER GASOLINE - OIL FIRED BOLT ON TRAILER PACKAGE  **PICKUP SKID BOLT ON TRAILER PACKAGE **RAÍN CAP   | 44        |
|--|----------|---|-----------|
| NOZZLES & WAND ACCESSORIES  • STEAM NOZZLES • HYDRO EXCAVATION NOZZLE • GUTTER CLEANER  • WET SANDBLAST KIT • SURFACE CLEANER • FOAM CANNONS • PIT BOSS  • WATER BROOM • UNDERCARRIAGE CLEANER   | 59       | ENCLOSED TRAILERS & OPTIONS  • 8' ENCLOSED TRAILER PACKAGE 225G  • 14' ENCLOSED TRAILER PACKAGE 525G  • 16' ENCLOSED TRAILER PACKAGE 525G & 740G  | 46        |
| GUN & WAND ASSEMBLIES  TRIGGER GUNS · WANDS · QUICK COUPLERS · QUICK COUPLER NIPPLES  FITTINGS · O-RINGS · EXTENSION WANDS · GUN & WAND ASSEMBLIES  GUN/WAND/QUICK COUPLER ASSEMBLY · DUAL LANCE WANDS  HARNESS                                  | 59       | • JETTER BOX • JETTER NOZZLE KITS  • ROTARY SEWER / CULVERT NOZZLES • HYDRO EXCAVATION NOZZLE  • FOOT PEDAL INLINE • SEWER / CULVERT NOZZLES • JETTER HOSES   | 1, 72     |
| HOSES  • JOINER HOSE • STANDARD HOSE • STEAM HOSE  • CUSTOM ORDER HOSES • BLUE NON-MARKING HOSE  • MEGA-FLEX DRAIN CLEANING KIT • LOW PRESSURE HOSE  • CLEAR CHEMICAL HOSE   | 61       | · HOT PACK · HOSE REEL TROLLEY KITS · JETTER HOSE KIT<br>· JOINER HOSES · WINTERIZATION KIT  MACHINE OPTIONS & ACCESSORIES  TANKS   | 72        |
| HOSE REELS  • U-FRAME HOSE REEL • MANUAL HOSE REEL • BALL VALVES  • A-FRAME HOSE REEL - INDUSTRIAL • 360° PIVOT HOSE REEL  • JOINER HOSE • 12V OR 120V HOSE REEL • SPRING DRIVEN HOSE REEL  • GREASEABLE SUPER SWIVELS • HOSE REEL STANDS (ONLY) | 62<br>·^ | • WINTERIZATION KIT • FUEL TANK OPTION • FLOAT TANK • LARGE POLY WATER TANKS • FUEL TANKS, GAS CAPS, & TANK BRACKET • SMALL POLY WATER TANKS  STEAM OPTIONS   | 73        |
| • HOSE REEL - ROLLER BRACKET GUIDE • HOSE REEL TROLLEY KITS • HYDRAULIC HOSE REEL • PIVOTING HOSE GUARDS  CHEMICAL CONTROL & INJECTION KITS  | 64       | STEAM HOSE - 3/8" • STEAM HOSE - 1/2" • STEAM OPTION KITS STANDARD KIT • STEAM OPTION KITS - DOUBLE UNLOADER TYPE DRY STEAM KIT • STEAM NOZZLE • STEAM WAND PID CONTROL OPTION FOR ALL INDUSTRIAL STEAM MODELS  |           |
| DEMA INLINE HIGH PRESSURE CHEMICAL INJECTOR     HIGH VOLUME FOAMER    CHEMICAL MIXER    SOLENOID CONTROLS     CHEMICAL SPRAYER    ACID PUMP  |          | WASH BAY ACCESSORIES  • SOAP SWITCH CONTROL PANEL • STAINLESS STEEL VACUUM • WAND HOLDER • MAT CLAMPS • FESTOON SYSTEM  | 74        |
| • DRAFT HOOD • POWER DAMPER - 120 VOLT • OIL FIRED DRAFT INDUCERS • HIGH LOW GAS VALVES WITH DUAL TEMPERATURE CONTROLS • RAIN CAP • POWER DAMPERS - 24 VOLT - LP/NG • POWER VENTER   | 64       | • REMOTE WASH BAY CONTROL PANEL • TRUCK WASH BRUSH • COMPLETE FOAM BRUSH ASSEMBLY • OVERHEAD BOOM  STAINLESS STEEL COILS • STAINLESS STEEL COILS - OIL FIRED  | 74        |
| ELECTRIC MOTOR CONTROLS  • HEAVY-DUTY AUTO STOP START • NEMA BOX • EMERGENCY SHUT-OFFS  • VFD FOR ELECTRIC MOTOR CONTROLS • 50HZ ELECTRIC MOTORS  • GROUND-FAULT CIRCUIT INTERRUPTERS • ELECTRICALLY HEATED TIMER                                | 65       | • STAINLESS STEEL COILS - GAS FIRED • CERTIFIED CRN COILS - OIL OR GAS FIRED  UPGRADES & ADDITIONS • EMPEROR PUMP UPGRADE • GENERAL PUMP UPGRADE AR PUMP UPGRADE  | <i>75</i> |
| FRAME OPTIONS & WHEEL KITS  COLD WATER UNITS  LEG FRAME · CASTERS · PUMP FRAME · FIREHOUSE DISPLAY BASE  COLD WATER CART · STAINLESS STEEL ROLL CAGES  WALL MOUNT FOR DIRECT DRIVE · FLAT BASE FRAME  • STATIONARY FRAME                         | 66       | HOUR METER • OUTLET TEMPERATURE GAUGE • PUMP KITS • VOLT METER HOT WATER PACKING VALVE KIT GENERAL PUMP • PRESSURE GAUGE • INLINE SUCTION KIT • UNLOADER • FLOW ACTIVATED • ELECTRIC CLUTCH UPGRADE HYDROSTATIC VALVE AND ASSEMBLY KIT • GENERATORS • SPARK ARRESTOR ELECTRIC START UPGRADE KITS FUEL FILTERS • FITTINGS • STEEL REMOTE SWITCH • ELECTRIC DRIVEN ONLY • BATTERY • PRIMARY CONTROL COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNITS • BURNER PARTS |           |
| INDUSTRIAL HOT WATER ELECTRIC DRIVE  • RAIN CAP • WHEEL KITS • BRACKET OPTIONS • PROPANE TANK BRACKET • CHEMICAL BUCKET BRACKET • LEG FRAME • STAINLESS STEEL FRAMES   | 67       | DIESEL ENGINE SHUTDOWN SYSTEM • 12 VOLT BURNER - PRIMARY CONTROL     THERMAL RELIEF VALVES • THERMOSTAT • HIGH LIMITS • FLOW SWITCH     BRASS FLOW SWITCH • DELAY TIMER • PRESSURE SWITCH   |           |
| COMMERCIAL & INDUSTRIAL GAS & DIESEL  RENTAL ROLL CAGE • COMMERCIAL ROLL CAGE FRAME  • COMMERCIAL WHEEL KIT • FOAM FILLED TIRES  • INDUSTRIAL WHEEL KIT • RAIN CAP   | 68       | CHEMICALS  • KLEEN-BREAK • CHLOR-KLEEN • CARBON-KLEEN • CARBON-KLEEN PLUS • KLEEN-RIP LT • KLEEN-RIP HD • KLEEN-SHINE • KLEEN-SHINE PLUS • POLISHED ALUMINUM CLEANER • ANTI-RUST APW ADDITIVE   | 78        |
| INDUSTRIAL FULLY ELECTRICALLY HEATED  • STAINLESS STEEL EXTERIOR OPTIONS • STAINLESS STEEL TANK • WHEEL KIT  | 69       | CABINET WASHER POWDER • GLASS CLEANER • APW PRO WHITE 500     APW LIQUID PHOSPHATIZER   |           |
| DRY STEAM GENERATORS  • HORIZONTAL DRY STEAM SKID • WHEEL KITS  • VERTICAL DRY STEAM SKID  | 69       | "HOW TO" ON SELECTING YOUR<br>UNIT FRAME OPTIONS  | 79        |
| PICKUP SKID & FILL & PLAY FRAME OPTIONS  • PICKUP SKID • PROPANE PICKUP SKID • LIGHT KIT  • GRIZZLY FILL & PLAY FRAME OPTIONS WITH 225, 325, & 525 GALLON TANKS  • BILL MOOSE FILL & PLAY FRAME OPTIONS WITH 235, 325                            | 70       | CUSTOM ORDERS   | 79        |

& 525 GALLON TANKS • CUSTOM ORDERS

**Ask about CAT, GIANT & PRAT Optional Pumps!** 



MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# **Pumps**

- Commercial Duty Triplex Plunger Pumps
- · Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

# Electric Motors (2, 5 & 7.5 HP)

- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

# **Electrical Control Panel**

- · Nema 4
- · Water Tight
- Easy Access
- Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

# Frame

- · Adjustable Pull Up Handle
- · One Piece Bent Steel Base
- Portable Cart Frame
- 13" Pneumatic Tires
- All Powder Coated
- Wall Mount and Hand Carry Units Available

# **Includes**

- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with Quick Coupler System (27" on 2 HP Units)
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Soap Injection System
- 50' of High Pressure Hose

# **Options & Accessories**

- Auto Stop/Start
- Hose Reel
- Rotary Nozzle
- Drain Cleaning/Jetter Kit



# SCAN FOR VIDEO!



# COMMERCIAL COLD WATER ELECTRIC

Our Commercial Cold Water Electric driven units are used for multiple applications - farm, car and truck washing, meat shops, and every day uses.



AS152E/HC

Hand Carry







| MODEL          | GPM | PSI  | DRIVE RPM | HP      | VOLTAGE |
|----------------|-----|------|-----------|---------|---------|
| AS152E         | 2.2 | 1500 | 1750      | 2       | 110/1PH |
| Alternate Spec | 2.2 | 1000 | 1/50      | 15 AMPS |         |
| AS2436E        | 3.6 | 2400 | 1750      | 5       | 220/1PH |
| AS253E-GP      | 3.5 | 2400 | 1750      | 5       | 220/1PH |
| AS304E         | 4   | 3000 | 1750      | 7.5     | 220/1PH |
| AS3636E        | 3.6 | 3600 | 1750      | 7.5     | 220/1PH |
| AS3035E-GP     | 3.5 | 3000 | 1750      | 7.5     | 220/1PH |

# FIREHOUSE & CAR DETAILING SERIES

PRESSURE SYSTEMS LTD.

This stationary unit is always hooked up and ready to use. With a squeeze of the trigger gun you're ready to clean. It's easy, safe, and exactly what your fire station or detailing shop needs.

# **Pumps**

- Commercial Duty Triplex Plunger Pumps
- · Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

# **Electric Motors**

- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- · Thermal Overload Protection
- Continuous Duty

# **Electrical Control Panel**

- · Nema 4
- · Water Tight
- Easy Access
- Trigger Gun Controlled Auto Stop/Start with Time Delay

# Frame

- Square Tubing
- Compact
- Ready to Install Against a Wall

# **Includes**

- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly With Quick Coupler System
- High Pressure Chemical Injection
- Hose Reel
- 100' of Non-Marking High Pressure Hose

# **Options & Accessories**

- Rotary Nozzle
- Water Broom (Ideal for Washing Floors & Fire Hose)
- Foam Cannon
- Undercarriage Cleaner



# SCAN FOR VIDEO!







"We had a portable pressure washer and it was hard to set up and it just did not get used. With this Easy-Kleen system our equipment is always clean because it's easy to use and there is no set up."

- Jody Price, Oromoncto Fire Chief



**Foam Cannon** (NOZ-FMR4830T) Allows full chemical cover and activation!



**Undercarriage Cleaner** (ACC-UCC) Ideal for cleaning under trucks!



**Water Broom** (ACC-WTRBRM4)
Great for washing floors & fire hose!



| MODEL      | GPM | PSI  | HP  | VOLTAGE  | ELECTRIC DRIVE |
|------------|-----|------|-----|----------|----------------|
| FD152E     | 2.2 | 1500 | 2   | 110V-1PH | 1750 RPM       |
| FD2040E    | 4   | 2000 | 5   | 220V-1PH | 1750 RPM       |
| FD2435E-GP | 3.5 | 2400 | 5   | 220V-1PH | 1750 RPM       |
| FD3035E-GP | 3.5 | 3000 | 7.5 | 220V-1PH | 1750 RPM       |



# INDUSTRIAL COLD WATER ELECTRIC

**Pumps** 

Industrial Heavy-Duty Triplex Plunger Pump

Oil Bath Crankcase • Stainless Valves

• Brass Manifold • Thermo Pump Protector

## **Electric Motors**

Heavy-Duty • 1750 RPM • TEFC • Full Frame

• 1.15 and 1.25 Service Factors

• Thermal Overload Protection

Continuous Duty • High EfficiencyContinuous Duty V-Belt Drive System with 11 Gauge Belt Guard or Flange & Coupling Drive

# **Electrical Control Panel**

• Nema 4 • Water Tight • Easy Access

Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

# **Frame**

· All Welded • Powder Coated

1-1/2" Bent Steel Roll Cage

• Lifting Bar • 1/4" Motor and Pump Mounting Plate

Mounted on Large 8" Casters

Capacity for Two 400' Hose Reels (Optional)

Stationary Units also Available

## Includes

· Liquid Filled Pressure Gauge

Adjustable Pressure Regulator

 Gun and Wand Assembly with Quick Coupler System for Machines Under 5000 PSI

0°/15°/25°/40° Nozzles • 1 Soap Nozzle

• Downstream Chemical Injection System on Machines Up To 7.5 HP

50' of High Pressure Hose

# **Options**

VFD • PLC • Pressure Transducer • Auto Stop/Start - Add (/A)

Ideal for use in processing plants, mills and factories for everyday reliable cleaning. Stationary frame options are available for facilities that require a piped in system for multiple location cleaning and/or multiple gun use.



IS3606F-3-208/A-FB with Flat Base Frame Option - Add (-FB) (15 & 20 HP) & Optional Auto Stop/Start

EASY-KLEEN-

IS505E-3-575



**SCAN FOR VIDEO!** 



IS505F-3-575 with Flat Base Frame with Shroud Option - Add (-FBWS) (5/7.5/10 HP), Optional Leg Frame & Auto Stop/Start





| • Stainless Steel - Add (/SS) • Order either flat base or portable frames with a Wheel Kit)  Up to 80 |     |        |                 |     |                       |  |
|---|-----|--------|-----------------|-----|-----------------------|--|
| MODEL   | GPM | PSI    | DRIVE           | HP  | VOLTAGE               |  |
| IS204FE-1   | 4   | 2000   | FLANGE/COUPLING | 5   | 220V-1PH              |  |
| IS204FE-3   | 4   | 2000   | FLANGE/COUPLING | 5   | 208/230/460/575 V-3PH |  |
| IS204E-1  | 4   | 2000   | V-BELT          | 5   | 220V-1PH              |  |
| IS204E-3  | 4   | 2000   | V-BELT          | 5   | 208/230/460/575 V-3PH |  |
| IS304FE-1   | 4   | 3000   | FLANGE/COUPLING | 7.5 | 220V-1PH              |  |
| IS304FE-3   | 4   | 3000   | FLANGE/COUPLING | 7.5 | 208/230/460/575 V-3PH |  |
| IS304E-1  | 4   | 3000   | V-BELT          | 7.5 | 220V-1PH              |  |
| IS304E-3  | 4   | 3000   | V-BELT          | 7.5 | 208/230/460/575 V-3PH |  |
| IS255FE-3   | 5   | 2500   | FLANGE/COUPLING | 7.5 | 208/230/460/575 V-3PH |  |
| IS208E-3  | 8   | 2000   | V-BELT          | 10  | 208/230/460/575 V-3PH |  |
| IS306E-1  | 5.5 | 3000   | V-BELT          | 10  | 220V-1PH              |  |
| IS306E-3  | 5.5 | 3000   | V-BELT          | 10  | 208/230/460/575 V-3PH |  |
| IS404FE-1   | 4   | 4000   | FLANGE/COUPLING | 10  | 220V-1PH              |  |
| IS404FE-3   | 4   | 4000   | FLANGE/COUPLING | 10  | 208/230/460/575 V-3PH |  |
| IS1212E-3   | 12  | 1200   | V-BELT          | 10  | 208/230/460/575 V-3PH |  |
| IS3606E-3   | 6   | 3600   | V-BELT          | 15  | 208/230/460/575 V-3PH |  |
| IS465E-3  | 6.5 | 4000   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS505E-3  | 5   | 5000   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS310E-3  | 10  | 3000   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS2512E-3   | 12  | 2500   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS3685E-3   | 8.5 | 3600   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS654E-3  | 4.3 | 6500   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS704E-3  | 4   | 7000   | V-BELT          | 20  | 208/230/460/575 V-3PH |  |
| IS808E-3  | 8   | 8000   | V-BELT          | 50  | 208/230/460/575 V-3PH |  |
| IS1156E-3   | 6   | 11,500 | V-BELT          | 50  | 208/230/460/575 V-3PH |  |
| IS150045E-3   | 4.5 | 15,000 | V-BELT          | 50  | 208/230/460/575 V-3PH |  |

# **EXPLOSION PROOF - COLD WATER** - STANDARD & OFF-SHORE SERIES



# **Pumps**

- Industrial Heavy-Duty Triplex Plunger Pumps
- Belt Driven Oil Bath Plunger Pump
- Pressure Regulator

# Electric Motors (5, 7.5, 10, & 15 Hp)

- 1800 RPM TEFC Continuous Duty
- CSA Approved/ Ul Listed Explosion-Proof Motor
- IP55 Minimum Ingress Protection Rating
- 1.15 Service Factor High Efficiency
- Automatic High Temperature Shut Down (Thermal Probe) for Pump Protection
- <u>Off-Shore</u> Fully Automatic Start/Stop Circuit with Solid State Time Delay Shut Down - Controlled by Trigger Gun Activation

## **Frame**

- Steel Roll Cage Construction (with Drip-Proof Pump Base on the <u>Off-Shore</u> units)
- Mounting Feet Lifting Eyes
- **<u>Standard</u>** Powder Coat Painted
- <u>Off-Shore</u> Galvanized to ASTM123 and CSA G164-M1981 Specifications

## **Includes**

- 50' High Pressure Hose Assembly, Complete with Trigger Gun, and Wand
- CSA Approved/UI Listed Control Box, Flexible Coupling, Conduit, and Seals

# **Options & Accessories**

- CAT Plunger or Piston Pump
- SA Nitrogen Charged Pulsation Dampener
- SRA Surge Relief Assembly (For Flows of 6 GPM and Greater)
   PG Liquid-Filled Pressure Gauge
- CSA Inspected & Certified for use In Class 1, Division 1, Group C & D Hazardous Location Environments
- LWPP Low Inlet Water Pressure Protection with Reset
- ETM-EXA (D) Integrated Analog (Digital) Hour Meter
- USC Upstream (High Pressure) Chemical Injection
- PCA-EX Portability Feature With Casters and

<u>All</u> Industrial Electric Series

**Units** (model numbers starting with "IS") **are available in** 

**Explosion Proof.** 







Push/Pull Handle
HRA 13 (16) High Pressure
Hose Reel Assembly
with 13" (16") Drum.

 EGR-50 Enclosed Grounding Reel with 50' Grounding Wire And Clamp

PCO Water Feed Tank

XPIS505E-3-230 Featuring our Stainless Steel Option

XPIS505E-3-230

| DIVISIONS / ZONES |           |           |          |                            |          |          |        |         |                     |
|-------------------|-----------|-----------|----------|----------------------------|----------|----------|--------|---------|---------------------|
| ATMOSPHERE        | CLASS*    | DIVISION* | ZONE**   | AREA CLASSIFICATION        |          |          |        |         |                     |
|                   |           | DIV. 1    | ZONE 0   | CONTINUOUS HAZARD          |          |          |        |         |                     |
| GAS               | CLASS I   | DIV. I    | ZONE 1   | INTERMITTENT HAZARD        |          |          |        |         |                     |
|                   |           | DIV. 2    | ZONE 2   | ABNORMAL CONDITIONS HAZARD |          |          |        |         |                     |
|                   |           | DIV. 1    | ZONE 20  | CONTINUOUS HAZARD          |          |          |        |         |                     |
| DUST              | CLASS II  | CLASS II  | CLASS II | CLASS II                   | CLASS II | CLASS II | DIV. I | ZONE 21 | INTERMITTENT HAZARD |
|                   |           | DIV. 2    | ZONE 21  | ABNORMAL CONDITIONS HAZARD |          |          |        |         |                     |
|                   |           | DIV. 1    | ZONE 20  | CONTINUOUS HAZARD          |          |          |        |         |                     |
| FIBER             | CLASS III |           | ZONE 21  | INTERMITTENT HAZARD        |          |          |        |         |                     |
|                   |           | DIV. 2    | ZONE 22  | ABNORMAL CONDITIONS HAZARD |          |          |        |         |                     |

\* ACCORDING TO NEC 5000 / CEC ANNEX J; \*\* ACCORDING TO IEC / NEC 5050 / CEC 18

|            | GROUPS                           |         |            |                        |   |          |  |  |
|------------|----------------------------------|---------|------------|------------------------|---|----------|--|--|
| ATMOSPHERE | ATMOSPHERE CLASS* GROUP* GROUP** |         | GROUP**    | REPRESENTATIVE ELEMENT |   |          |  |  |
|            |                                  | -       | GROUP I    | METHANE                |   |          |  |  |
|            |                                  | GROUP D | GROUP IIA  | PROPANE                |   |          |  |  |
| GAS        | CLASS I                          | GROUP C | GROUP IIB  | ETHYLENE               |   |          |  |  |
|            |                                  | G       |            | GROUP B                | GROUP IIC (EXCEPT C <sub>2</sub> H <sub>2</sub> ) | HYDROGEN |  |  |
|            |                                  | GROUP A | GROUP IIC  | ACTYLENE               |   |          |  |  |
|            |                                  | GROUP G | GROUP IIIB | NON-CONDUCTIVE DUSTS   |   |          |  |  |
| DUST       | CLASS II                         | GROUP F | GROUP IIIB | CARBONACEOUS DUSTS     |   |          |  |  |
|            |                                  | GROUP E | FROUP IIIC | METAL DUST             |   |          |  |  |
| FIBER      | CLASS III                        | -       | GROUP IIIA | FIBERS OR FLYINGS      |   |          |  |  |

\* ACCORDING TO NEC 5000 / CEC ANNEX J; \*\* ACCORDING TO IEC / NEC 5050 / CEC 18



# COMMERCIAL COLD WATER SOFT WASH

**Pump** 

• AR 45 Commercial Duty Triplex Plunger Pump

# Engine

- Gasoline Driven
- Recoil Start 6.5 Honda GX200 Engine
- Efficient
- Serviceable

# Frame

· Flat Base Frame

# **Options & Accessories**

- Adjustable Nozzles
- Fixed Nozzles
- JRODS
- · Hose Outlet and Bypass
- Inlet Hose
- Hose Reels
- · Fittings and Quick Connects
- Hose Clamps
- Trigger Guns
- Lances
- Filters

# Suggested Accessories:



# **EASY-KLEEN** STAINLESS STEEL HOSE REEL

Capacity: 150' or 300' HOS-HR150HP-A-SS-IH HOS-HR300HR-A-SS-IH



# **FIXED NOZZLE**

1/4 Meg Spray, 0° Spray Angle (other sizes available) NOZ-1/4MEG0030WJ



JROD NOZZLE HOLDER 1/4 Meg X 4, Stainless Steel NOZ-NH-4MEG-SS

Our Soft Wash unit uses a mixture of low-pressure and high-volume water. Combined with specific detergents, it's the perfect option for a gentler clean. It is ideal for delicate surfaces such as roofs and wood structures.





# **SOFT WASH** TRIGGER GUN

122° F, 18 GPM @ 362 PSI, 1/2" Inlet x 1/2" Outlet GUN-SW3618-12



# **ADJUSTABLE NOZZLE** X-Jet Twist Nozzle, C/W Filter

& QC Plug, 7-12 GPM NOZ-XJETM5DS-K7-12

# Used below on a residential roof:

# **AFTER**



# **BEFORE**



| MODEL          | GPM | PSI | DRIVE  | ENGINE          |
|----------------|-----|-----|--------|-----------------|
| EKSW30011/AR-H | 11  | 300 | DIRECT | 6.5 HONDA GX200 |

# COMMERCIAL COLD WATER GAS



# **Pumps**

- Commercial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

# Engines (Kohler, Lifan & Honda)

- Gasoline Driven
- Recoil Start (Electric Start Optional)
- Efficient
- Serviceable

## Frame

- · Adjustable Pull Up Handle
- · One Piece Bent Steel Base
- Portable Cart Frame
- 13" Pneumatic Tires
- All Powder Coated

# Includes

- 36" Gun and Wand Assembly with Quick Coupler System (27" on 6.5 HP Units)
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Chemical Injection System
- · 50' of High Pressure Hose

# **Options & Accessories**

- Hose Reel
- Rotary Nozzle
- Drain Cleaning/Jetter Kit
- Foamer
- Sandblast Kit
- Foam Filled Tires
- Drain Cleaning Kit

Cut Your Cleaning Time In Half With A Rotary Nozzle!

See page 58



The Commercial Cold Water Gas driven series was designed for everyday commercial cleaning jobs.











| MODEL     | GPM | PSI  | DRIVE  | ENGINE     |
|-----------|-----|------|--------|------------|
| AS327GL   | 3   | 2700 | DIRECT | 6.5 LIFAN  |
| AS327GK   | 3   | 2700 | DIRECT | 6.5 KOHLER |
| AS327GH   | 3   | 2700 | DIRECT | 6.5 HONDA  |
| AS440GL   | 3.5 | 4000 | DIRECT | 15 LIFAN   |
| AS440GK   | 3.5 | 4000 | DIRECT | 14 KOHLER  |
| AS440GH   | 3.5 | 4000 | DIRECT | 13 HONDA   |
| AS440GHGP | 4   | 4000 | DIRECT | 13 HONDA   |
| AS440GKGP | 4   | 4000 | DIRECT | 14 KOHLER  |



# **Pumps**

- Industrial Duty Triplex Plunger Pumps
- Oil Bath Crankcase Stainless Valves
- Brass Manifold
- Thermo Pump Protector

# **Gas Engines**

• Gasoline Driven • Efficient • Serviceable

# **Diesel Enaines**

Diesel Driven • Efficient • Serviceable

# Drive (Power Band Belt or Gearbox)

 Continuous Duty Power Band Belt Drive System with 11 Gauge Belt Guard or Gearbox Drive

# Frame

- All Welded Powder Coated
- 1-1/2" Bent Steel Roll Cage
- · Lifting Bar
- 1/4" Motor and Pump Mounting Plate
- 13" Foam Filled Rubber Tires
- 10 Gallon Poly Fuel Tank
- Geared for a 400' Hose Reel (Optional)
- IS3504G have Two Wheeled Carts
- · Stationary Units also Available

# Includes

- · Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with **Quick Coupler System for Machines** Under 5000 PSI • 0°/15°/25°/40° Nozzles
- 50' of High Pressure Hose
- · Units over 24 HP come standard with Foam Filled Tires

# **Options & Accessories**

- Hose Reel Rotary Nozzle
- · Drain Cleaning Kit · Wet Sandblast Kit
- Stationary Frame Casters Forklift Slots
- Low Emission Exhaust Battery
- Stainless Steel Add (/SS)

# INDUSTRIAL **COLD WATER GAS & DIESEL**

The Industrial Cold Water Gas & Diesel driven units feature the toughest frames and components in the industry. These units are utilized by surface preparation and heavy-duty blasting/cleaning contractors.



IS15004D/SKID\* Skid frame with forklift slots and lifting eyes.



**SCAN FOR VIDEO!** 





IS3504G-H/BD-ES-FB with Optional Flat Base Frame



IS7004D/CAS with Optional Hose Reel, Casters, & **Forklift Slots** 



\* Stationary Units Built with Skid Style Frame -Add (/SKID)

|                 |     | INDUSTRIAL COL | D WATER GASOLINE       |                            |
|-----------------|-----|----------------|------------------------|----------------------------|
| MODELS          | GPM | PSI            | DRIVE                  | ENGINE                     |
| IS3504G         | 4   | 3500           | GEARBOX / BELT         | 14 HP KOHLER / 13 HP HONDA |
| IS3506G         | 6   | 3500           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
| IS3607G         | 7   | 3600           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
| IS3508G         | 8   | 3500           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
| IS3675G-JB      | 7.5 | 3600           | GEARBOX<br>JABSCO PUMP | 25 HP KOHLER / 24 HP HONDA |
| IS2512G         | 12  | 2500           | POWER BAND BELT        | 35 HP VANGUARD             |
| IS3010G         | 10  | 3000           | POWER BAND BELT        | 35 HP VANGUARD             |
| IS5005G         | 5   | 5000           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
| IS5070G         | 7   | 5000           | POWER BAND BELT        | 35 HP VANGUARD             |
| IS6045G         | 4.5 | 6000           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
| IS7040G         | 4   | 7000           | POWER BAND BELT        | 25 HP KOHLER / 24 HP HONDA |
|                 |     | INDUSTRIAL CO  | LD WATER DIESEL        |                            |
| MODELS          | GPM | PSI            | DRIVE                  | ENGINE                     |
| IS3204D         | 4   | 3200           | POWER BAND BELT        | 9.8 HP KOHLER              |
| IS5005D         | 5   | 5000           | POWER BAND BELT        | 26 HP KOHLER               |
| IS7004D         | 4   | 7000           | POWER BAND BELT        | 26 HP KOHLER               |
| IS8008D/SKID *  | 8   | 8000           | POWER BAND BELT        | 60 HP KUBOTA               |
| IS11506D/SKID * | 6   | 11,500         | POWER BAND BELT        | 60 HP KUBOTA               |
| IS15004D/SKID * | 4.5 | 15,000         | POWER BAND BELT        | 60 HP KUBOTA               |

# COMMERCIAL HOT WATER ELECTRIC - OIL FIRED



# **Pumps**

- Commercial Duty Triplex Plunger Pumps • Direct Drive
- · Oil Bath Crankcase
- Stainless Steel Valves Brass Manifold
- Thermo Pump Protector

# Electric Motors (2, 5 & 7.5 HP)

- 1750 RPM TEFC Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

# **Electrical Control Panel**

- Nema 4 Water Tight Easy Access
- Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

# **Heating Coil**

- · Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- · Sealed with Ceramic Blanket
- Stainless Steel Housing

# **Burners**

- Oil Fired Adjustable Thermostat
- On/Off Switch North American Made
- Dependable Serviceable

# Frame

- All Welded Powder Coated
- 12 Gauge Bent Steel Roll Cage
- · Lifting Bar
- 3/4"Threaded Axles Welded to Frame
- 13" Pneumatic Wheels Attached with Lock Nuts
- 10 Gallon Poly Fuel Tank
- · Hose Reel Mounting Plate

# **Includes**

- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Chemical
- Injection System
- · 50' of High Pressure Hose

# **Options & Accessories**

- Auto Stop/Start
- Hose Reel
- Rotary Nozzle
- Wet Sandblast Kit
- Water Broom
- Drain Cleaning/Jetter Kit

Dependable, long lasting machines built for a multitude of applications. Heats water faster and hotter than our competitors.



| MODEL       | GPM | PSI  | BTU     | ELECTRIC DRIVE | HP/VOLTAGE   |
|-------------|-----|------|---------|----------------|--------------|
| EZO1520E    | 2   | 1500 | 200,000 | 1750 RPM       | 2/110V/1PH   |
| EZO2434E    | 3.4 | 2400 | 350,000 | 1750 RPM       | 5/220V/1PH   |
| EZO2435E-GP | 3.5 | 2400 | 350,000 | 1750 RPM       | 5/220V/1PH   |
| EZO3636E    | 3.6 | 3600 | 350,000 | 1750 RPM       | 7.5/220V/1PH |
| EZO3035E-GP | 3.5 | 3000 | 350,000 | 1750 RPM       | 7.5/220V/1PH |



# PRESSURE SYSTEMS LTD.

# Pump

- Commercial Duty Triplex **Plunger Pumps**
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- · Direct Drive
- Thermo Pump Protector

# **Electric Motors**

- 5 HP Electric Motor
- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- · Thermal Overload Protection
- Continuous Duty

# **Electrical Control Panel**

- Nema 4
- Water Tight
- Easy Access
- · Heavy-Duty On/Off Cam Switch
- Trigger Gun Controlled Auto Stop/Start with Time Delay

# **Heating Coil**

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- · Sealed with Ceramic Blanket
- · Stainless Steel Housing

# **Burners**

- · Choice of Oil, Propane, or Natural Gas Fired
- Adjustable Thermostat
- On/Off Switch
- · North American Made
- Dependable
- Serviceable

# Frame

- · All Welded Powder Coated
- 12 Gauge Bent Steel Enclosure

# Includes

- · 36" Gun and Wand Assembly with **Quick Coupler System**
- 0°/15°/25°/40° Nozzles
- High Pressure Chemical Injection System
- · Hose Reel
- · 50' of High Pressure Hose

# **Options & Accessories**

- Rotary Nozzle
- Surface Cleaner
- · Water Broom
- Foam Cannon

# COMMERCIAL HOT WATER ELECTRIC - OIL, PROPANE, OR NATURAL GAS FIRED

The Shop Dog Pressure Washer is ideal for the garage or shop enthusiast for washing cars, trucks, or boats. Dependable, long lasting and built for a multitude of applications. Heats water faster and hotter than our competitors.















| MODEL          | GPM | PSI  | BTU     | FUEL        | ELECTRIC DRIVE | HP/VOLTAGE |
|----------------|-----|------|---------|-------------|----------------|------------|
| EZO2435E-GP-SD | 3.5 | 2400 | 350,000 | OIL         | 1750 RPM       | 5/220V/1PH |
| EZP2435E-GP-SD | 3.5 | 2400 | 290,000 | PROPANE     | 1750 RPM       | 5/220V/1PH |
| EZN2435E-GP-SD | 3.5 | 2400 | 290,000 | NATURAL GAS | 1750 RPM       | 5/220V/1PH |

EZO2435E-GP-SD

# INDUSTRIAL **HOT WATER ELECTRIC** - OIL FIRED



# **Pumps**

Industrial Duty Triplex Plunger Pumps • Oil Bath Crankcase

Stainless Steel Valves • Brass Manifold • Thermal Pump Protector

# Electric Motors (5, 7.5, 10, 15, 20 & 50 HP)

1750 RPM • TEFC • Full Frame • 1.15 Service Factor (Single Phase)

• 1.25 Service Factor (3 Phase - High Efficiency)

• Thermo Overload Protection • Continuous Duty

# **Electrical Control Panel**

Nema 4 • Water Tight • Easy Access

Heavy-Duty On/Off Cam Switch Or Optional Auto Stop/Start With Time Delay

# **Heating Coil**

- Schedule 80 or 160 Pipe Elliptically Wound & Stretched
- No Seam Welds Thermostat Controlled
- Structurally Braced To Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket Stainless Steel Housing

# Optional CRN/ASME 30.1 Pressure Vessel Coded Coils Burners

# **Burners**

- Oil Fired Adjustable Thermostat On/Off Switch
- Cleanable Fuel Filters North American Made
- Dependable Serviceable

# Frame

• All Welded • Powder Coated • Heavy gauge bent one piece plate

 Tip Ahead Shroud with built-in Belt Guard designed to fully expose all components for Ease of Maintenance • Hose Reel Compatible

• Fuel Tank Optional (\* 800,000 - 1,200,000 BTUs)

Optional portable units are mounted on Two 13" Foam Filled Rubber Tires and Two 8" Heavy-Duty Casters

# Stationary Units Built with Skid Style Frame - Add (/SKID) Includes

- Liquid Filled Pressure Gauge Adjustable Pressure Regulator
- 48" Gun And Wand Assembly with Quick Coupler System for machines under 5000 PSI · Chemical Injection System
- 0°/15°/25°/40° Nozzles 1 Soap Nozzle
- 50' Of High Pressure Hose

# **Options & Accessories**

Auto Stop/Start - Add (/A) • Hose Reel • Wheel Kit - Add (/WK)





**SCAN FOR VIDEO!** 





EZO3004-1/A-WK

& Wheel Kit

with Optional Auto Stop/Start, Hose Reel



| <ul> <li>Remote • VFD</li> </ul> | • Remote • VFD • PLC • Pressure Transducer • Stainless Steel - Add (/SS) |      |           |                 |     |                       |              |  |  |  |  |
|----------------------------------|--|------|-----------|-----------------|-----|-----------------------|--------------|--|--|--|--|
| MODEL                            | GPM  | PSI  | BTU       | DRIVE           | HP  | VOLTAGE               | L" X W" X H" |  |  |  |  |
| EZO2004F-1                       | 4  | 2000 | 400,000   | FLANGE/COUPLING | 5   | 220V-1PH              | 48 X 26 X 43 |  |  |  |  |
| EZO2004-1                        | 4  | 2000 | 400,000   | BELT            | 5   | 220V-1PH              | 48 X 26 X 48 |  |  |  |  |
| EZO2004F-3                       | 4  | 2000 | 400,000   | FLANGE/COUPLING | 5   | 208/230/460/575 V-3PH | 48 X 26 X 43 |  |  |  |  |
| EZO2004-3                        | 4  | 2000 | 400,000   | BELT            | 5   | 208/230/460/575 V-3PH | 48 X 26 X 48 |  |  |  |  |
| EZO3004F-1                       | 4  | 3000 | 400,000   | FLANGE/COUPLING | 7.5 | 220V-1PH              | 48 X 26 X 43 |  |  |  |  |
| EZO3004-1                        | 4  | 3000 | 400,000   | BELT            | 7.5 | 220V-1PH              | 48 X 26 X 48 |  |  |  |  |
| EZO3004F-3                       | 4  | 3000 | 400,000   | FLANGE/COUPLING | 7.5 | 208/230/460/575 V-3PH | 48 X 26 X 43 |  |  |  |  |
| EZO3004-3                        | 4  | 3000 | 400,000   | BELT            | 7.5 | 208/230/460/575 V-3PH | 48 X 26 X 48 |  |  |  |  |
| EZO3005-1                        | 5  | 3000 | 500,000   | BELT            | 10  | 220V-1PH              | 48 X 26 X 48 |  |  |  |  |
| EZO3005-3                        | 5  | 3000 | 500,000   | BELT            | 10  | 208/230/460/575 V-3PH | 48 X 26 X 48 |  |  |  |  |
| EZO4004F-1                       | 4  | 4000 | 400,000   | FLANGE/COUPLING | 10  | 220V-1PH              | 48 X 26 X 43 |  |  |  |  |
| EZO4004-3                        | 4  | 4000 | 400,000   | BELT            | 10  | 208/230/460/575 V-3PH | 48 X 26 X 48 |  |  |  |  |
| EZO2008-1                        | 8  | 2000 | 800,000   | BELT            | 10  | 220V-1PH              | 48 X 26 X 48 |  |  |  |  |
| EZO3606-3                        | 6  | 3600 | 600,000   | BELT            | 15  | 208/230/460/575 V-3PH | 60 X 31 X 50 |  |  |  |  |
| EZO3008-3                        | 8  | 3000 | 800,000   | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 54 |  |  |  |  |
| EZO3608-3                        | 8  | 3600 | 800,000   | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 65 |  |  |  |  |
| EZO3010-3                        | 10   | 3000 | 1,000,000 | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 65 |  |  |  |  |
| EZO2512-3                        | 12   | 2500 | 1,200,000 | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 65 |  |  |  |  |
| EZO5005-3                        | 5  | 5000 | 500,000   | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 50 |  |  |  |  |
| EZO6004-3                        | 4  | 6000 | 400,000   | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 50 |  |  |  |  |
| EZO7004-3                        | 4  | 7000 | 400,000   | BELT            | 20  | 208/230/460/575 V-3PH | 60 X 31 X 50 |  |  |  |  |
| EZO8008-3                        | 8  | 8000 | 800,000   | BELT            | 50  | 208/230/460/575 V-3PH | 64 X 38 X 59 |  |  |  |  |



# INDUSTRIAL HOT WATER ELECTRIC - NATURAL GAS & PROPANE FIRED

# **Options & Accessories**

- Auto Stop Start
- Hose Reel
- Rotary Nozzle
- Draft Hoods
- Wheel Kits
- Stainless Steel Coils
- VFD PLC Control
- Second Pumping Systems
- Soap Solenoid & Switch
- Remote Station
- Steam Kit Dual Gun Kit
- · Leg Stands
- Remote Control
- · Stainless Steel and Wheel Kits Available
- Propane Fired Units start with (EZP)



# SCAN FOR VIDEO!



Ideal for in-plant, service shop, and wash bay systems. These are the most efficient, long lasting machines on the market. Simple in design for ease of maintenance and usability. HOTTER, FASTER, & MORE EFFICIENT!



BUFFALO



Unit Shown with Shroud Tipped Ahead







Direct Drive Propane Fired Units Are Portable with 30lb Tank Brackets.

■ EZP1502-1/-WK
EZP2435E-1/A-WK



Direct Drive ...
Natural Gas Units
Are Stationary
Without A Shroud
EZP2435-1/A





| MODEL          | GPM | PSI  | BTU     | HP  | DRIVE           | VOLTAGE               | L" X W" X H" |
|----------------|-----|------|---------|-----|-----------------|-----------------------|--------------|
| EZN1502-1      | 2   | 1500 | 195,000 | 2   | DIRECT          | 120V-1PH              | 43 X 30 X 45 |
| EZN2435E-1     | 3.5 | 2400 | 290,000 | 5   | DIRECT          | 220V-1PH              | 37 X 30 X 40 |
| EZN3035E-1     | 3.5 | 3000 | 290,000 | 7.5 | DIRECT          | 220V-1PH              | 37 X 30 X 40 |
| EZN2004F-1-A   | 4   | 2000 | 390,000 | 5   | FLANGE/COUPLING | 220V-1PH              | 48 X 26 X 44 |
| EZN2004-1-A    | 4   | 2000 | 390,000 | 5   | BELT            | 220V-1PH              | 48 X 26 X 44 |
| EZN2004F-3     | 4   | 2000 | 390,000 | 5   | FLANGE/COUPLING | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN2004-3      | 4   | 2000 | 390,000 | 5   | BELT            | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN3004F-1-A   | 4   | 3000 | 390,000 | 7.5 | FLANGE/COUPLING | 220V-1PH              | 48 X 26 X 44 |
| EZN3004-1-A    | 4   | 3000 | 390,000 | 7.5 | BELT            | 220V-1PH              | 48 X 26 X 44 |
| EZN3004F-3     | 4   | 3000 | 390,000 | 7.5 | FLANGE/COUPLING | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN3004-3      | 4   | 3000 | 390,000 | 7.5 | BELT            | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN3005-1-A    | 5   | 3000 | 390,000 | 10  | BELT            | 220V-1PH              | 48 X 26 X 44 |
| EZN3005-3      | 5   | 3000 | 390,000 | 10  | BELT            | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN3005-HT-1-A | 5   | 3000 | 510,000 | 10  | BELT            | 220V-1PH              | 61 X 31 X 51 |
| EZN3005-HT-3   | 5   | 3000 | 510,000 | 10  | BELT            | 208/230/460/575 V-3PH | 61 X 31 X51  |
| EZN4004F-1-A   | 4   | 4000 | 390,000 | 10  | FLANGE/COUPLING | 220V-1PH              | 48 X 26 X 44 |
| EZN4004-3      | 4   | 4000 | 390,000 | 10  | BELT            | 208/230/460/575 V-3PH | 48 X 26 X 44 |
| EZN2008-1-A    | 8   | 2000 | 720,000 | 10  | BELT            | 220V-1PH              | 61 X 31 X 51 |
| EZN3606-3      | 6   | 3600 | 560,000 | 15  | BELT            | 208/230/460/575 V-3PH | 61 X 31 X 51 |
| EZN3008-3      | 8   | 3000 | 720,000 | 20  | BELT            | 208/230/460/575 V-3PH | 61 X 31 X 51 |
| EZN3608-3      | 8   | 3600 | 720,000 | 20  | BELT            | 208/230/460/575 V-3PH | 61 X 31 X 51 |
| EZN3010-3      | 10  | 3000 | 940,000 | 20  | BELT            | 208/230/460/575 V-3PH | 66 X 35 X 62 |
| EZN2512-3      | 12  | 2500 | 940,000 | 20  | BELT            | 208/230/460/575 V-3PH | 66 X 35 X 62 |
| EZN5005-3      | 5   | 5000 | 510,000 | 20  | BELT            | 208/230/460/575 V-3PH | 66 X 35 X 62 |
| EZN6004-3      | 4   | 6000 | 390,000 | 20  | BELT            | 208/230/460/575 V-3PH | 57 X 31 X 47 |
| EZN7004-3      | 4   | 7000 | 390,000 | 20  | BELT            | 208/230/460/575 V-3PH | 57 X 31 X 47 |
| EZN8008-3      | 8   | 8000 | 720,000 | 50  | BELT            | 208/230/460/575 V-3PH | 81 X 38 X 51 |

# INDUSTRIAL HOT WATER ELECTRIC - NATURAL GAS & PROPANE FIRED



# Lotia Sons Pvt Ltd. Testimonial

"We bought our machine in August 2015 to clean surfaces to prepare for powder coating. We bought this unit because of its superior cleaning which makes the whole process more efficient and cost effective. The best part about this machine is the fact that you don't need to use chemicals to get amazing results which is very important to us because that ensures there is no negative impact on the environment.

This purchase lived up to our expectations and I would definitely recommend Easy Kleen."

- Zahra Nadeem Ahmed (Islamabad, Pakistan)



# **Innovative Features**

# **Quick Kleen Burner System**

Each model in this series is equipped with a Quick Kleen Burner System. Your burner orifices should be cleaned every 6 months and this system makes it easy to do so. You simply disconnect the wiring harness, remove 2 bolts and your burner will slide out with ease. Once you have cleaned your burner, the apparatus will easily slide back into place with a little push. Quick and Easy Maintenance.



# **Quick Adjust Air Flow Vents**

The Quick Adjust Air Flow Vents allow you to adjust the amount of air that is flowing into the burner chamber. This adjustment allows you to maximize the efficiency of the burner by fine tuning the CO levels to optimize emission levels at different altitudes. This allows you to adjust your air flow quickly and simply.



# Tip Ahead Shroud with Integrated Belt Guard

The Tip Ahead Shroud allows you to easily access all of your motor and pump components in seconds. You simply loosen the T-Nuts on both sides of the unit and pull the shroud forward. The belt guard is integrated into the design of the shroud for maximum serviceability and safety. This ensures that your belt and pulley system will never be exposed.



# **Nema 4 Water Tight Control Panel**

Electrical Nema 4 water tight control panels complete with hinged covers are utilized for easy service access. No unnecessary electronics are used when designing these units, making service and diagnostics simple. Available with standard on/off switch or optional autostart/stop timer shutdown. Standard on 4 - 12 GPM models.



# Standard Features

# **Electric Motors**

Totally enclosed fan cooled full frame 1750 RPM electric motors. Single phase equipped with a 1.15 service factor, 3 phase equipped with a 1.25 service factor, both are high efficiency.

# **General Pumps**

Italian made industrial heavy-duty triplex plunger pump with oil bath crankcases, stainless steel valves and brass manifolds. General Pumps are the most widely used pumps in the world.

(Other Pumps Also Available)

# **Drive Systems**

**Belt Drive** - large diameter pulleys are used to reduce belt wear.

*Flange and Coupling Drive* - Available for those who do not prefer belt drives.

# **Heating Coil**

Elliptically wound cold process of stretched reduced full body normalized ASTM A53/APIPSL schedule 80 or 160 pipe. The coil is structurally braced to minimize pipe wear and vibration. It is sealed with a ceramic blanket in a stainless steel housing.

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

# Burners

Quality North American made natural gas or propane fired burners and controls with adjustable thermostats are used for efficiency, dependability and serviceability. Units are equipped with quick kleen burner apparatuses. Burner jets have 6 oxygen orifice inlets to ensure maximum burn and minimize CO results.

# Frame

Rugged 11 gauge and 1/4" bent one piece plate steel frame is fulled welded with a powder coat finish. Frames are equipped with 11 gauge steel shrouds with integrated belt guards for maximum serviceability.

# Also Includes

These units include: gun and wand assembly, 50' of high pressure hose, high pressure chemical injection, 5 nozzles and poly float tanks on 4 - 12 GPM units.



# INDUSTRIAL HOT WATER FULLY ELECTRICALLY HEATED

# **Pumps**

- Industrial Heavy-Duty Triplex Plunger Pumps Oil Bath Crankcase
- Stainless Valves Brass Manifold Thermo Pump Protector
- Belt Or Flange & Coupling Driven

# Electric Motors (3, 5, 7.5, 10 & 20 HP)

- 1750 RPM TEFC Full Frame 1.25 Service Factor
- High Efficiency Thermal Overload Protection Continuous Duty

## Heater

- 316 Stainless Steel Heat Exchanger Coil Designed for Continuous Use • Large 70 Gallon (Single Coil Models) & 120 Gallon (Dual Coil Models) Heater Storage Tanks
- Allows for Continuous Recovery Even When Trigger Gun(s) Not In Use • No Open Flame • Compact Foot Print • Cut-Off Switch
- Standard and Explosion Proof Models
- Heater Exchanger Coils Do Not Require De-calcification
- Require Less KW Than Input Direct-Immersion Type Electrically Heated Models • Low Heat Exchanger Solution
- Adjustable Temperature Controller
- Pin-Type Calrod Heating Elements With Incoloy Sleeves

- All Welded Powder Coated
- 11 Gauge Bent Steel Tip Ahead Shroud Designed to Expose All Components for Ease Of Service

- Liquid Filled Pressure Gauge Adjustable Pressure Regulator
- 48" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 50' of High Pressure Wash Hoses (8 10 GPM Units Come with 2 Gun & Wand Assemblies & 50' of High Pressure Hose)

## **Options & Accessories**

- Full Range of Portable Frames Stainless Steel Covers and
- Heater Skins 50HZ Models VFD PLC Control Remote Control Wheel Kit ASME B31.1 2004 (Power Piping) Code Compliant Models Available And Explosion Proof Unit
- \* Units with Double Coils (Larger Heating Capacity)

Utilized by: Mines, Mills, Refineries, Service Shops, and Food Processing Plants. Can be installed in virtually any location with no exhaust venting required.















EH430E472A-460 Double Coil Larger Heating Capacity

| Units with Double Coil | s (Larger He | ating Capaci | ity)         |          |       |           |       |              |
|------------------------|--------------|--------------|--------------|----------|-------|-----------|-------|--------------|
| MODEL                  | GPM          | PSI          | HEATER INPUT | MOTOR HP | ТО    | TAL AMP 3 | PH    | DIMENSIONS   |
| MODEL                  | GFM          | 131          | HEATER INFOT | MOTOR HE | 208   | 460       | 575   | L" X W" X H" |
| EH411E24A              | 4            | 1200         | 24 KW        | 5        | 72.5  | 33.3      | 26.6  | 32 X 28 X 52 |
| EH411E48A              | 4            | 1200         | 48 KW        | 5        | 134.8 | 62.2      | 49.7  | 32 X 28 X 52 |
| EH420E24A              | 4            | 2000         | 24 KW        | 5        | 77.1  | 35.5      | 28.4  | 32 X 28 X 52 |
| EH420E448A             | 4            | 2000         | 48 KW        | 5        | 139.6 | 64.4      | 51.8  | 32 X 28 X 52 |
| EH420E472A*            | 4            | 2000         | 72 KW        | 5        | N/A   | 93.3      | 74.4  | 48 X 28 X 52 |
| EH430E424A             | 4            | 3000         | 24 KW        | 7.5      | 85    | 39.1      | 31.3  | 32 X 28 X 52 |
| EH430E448A             | 4            | 3000         | 48 KW        | 7.5      | 147.5 | 68        | 54.4  | 32 X 28 X 52 |
| EH430E472A*            | 4            | 3000         | 72 KW        | 7.5      | N/A   | 96.5      | 76.9  | 48 X 28 X 52 |
| EH440E448A             | 4            | 4000         | 48 KW        | 10       | 154   | 70.9      | 56.7  | 32 X 28 X 52 |
| EH440E472A*            | 4            | 4000         | 72 KW        | 10       | N/A   | 99.8      | 79.9  | 48 X 28 X 52 |
| EH450E448A             | 4            | 5000         | 48 KW        | 15       | N/A   | 75.9      | 60.7  | 36 X 54 X 36 |
| EH450E472A*            | 4            | 5000         | 72 KW        | 15       | N/A   | 104.8     | 83.9  | 48 X 54 X 36 |
| H550E448A              | 5            | 5000         | 48 KW        | 20       | N/A   | 82.8      | 66.5  | 36 X 54 X 36 |
| EH550E472A*            | 5            | 5000         | 72 KW        | 20       | N/A   | 112.2     | 89.8  | 48 X 54 X 36 |
| EH535E448A             | 5            | 3500         | 48 KW        | 10       | 154   | 70.9      | 56.7  | 32 X 28 X 52 |
| EH535E472A*            | 5            | 3500         | 72 KW        | 10       | N/A   | 99.8      | 79.9  | 48 X 28 X 52 |
| H562E448A              | 5.6          | 2000         | 48 KW        | 7.5      | 147.5 | 68        | 54.4  | 32 X 28 X 52 |
| EH562E472A*            | 5.6          | 2000         | 72 KW        | 7.5      | N/A   | 96.9      | 77.6  | 48 X 28 X 52 |
| H612E448A              | 6            | 1200         | 48 KW        | 5        | 139.6 | 64.4      | 51.8  | 32 X 28 X 52 |
| EH620E448A             | 6            | 2000         | 48 KW        | 10       | 147.5 | 68        | 54.4  | 32 X 28 X 52 |
| EH620E472A*            | 6            | 2000         | 72 KW        | 10       | N/A   | 96.9      | 77.6  | 48 X 28 X 52 |
| EH812E2448A*           | 8            | 1200         | 48 KW        | 7.5      | 147.5 | 68        | 54.4  | 32 X 28 X 52 |
| EH812E2472A*           | 8            | 1200         | 72 KW        | 7.5      | N/A   | 96.9      | 77.6  | 48 X 28 X 52 |
| EH820E2448A*           | 8            | 2000         | 48 KW        | 10       | 154   | 70.9      | 56.7  | 32 X 28 X 52 |
| H820E2472A*            | 8            | 2000         | 72 KW        | 10       | N/A   | 99.8      | 79.9  | 48 X 28 X 52 |
| EH830E2448A*           | 8            | 3000         | 48 KW        | 15       | 165   | 75.9      | 60.7  | 36 X 54 X 36 |
| H830E2472A*            | 8            | 3000         | 72 KW        | 15       | N/A   | 104.8     | 83.9  | 48 X 54 X 36 |
| EH1030E2472A*          | 10           | 3000         | 72 KW        | 20       | N/A   | 112.2     | 89.8  | 48 X 54 X 36 |
| EH1030E2496A*          | 10           | 3000         | 96 KW        | 20       | N/A   | 141.3     | 113.1 | 48 X 54 X 36 |
| EH1030E24115A*         | 10           | 3000         | 115 KW       | 20       | N/A   | 164.3     | 131.4 | 48 X 54 X 36 |

# **EXPLOSION PROOF - HOT WATER** - STANDARD & OFF-SHORE SERIES



# **Pumps**

- Industrial Heavy-Duty Triplex Plunger Pumps
- Belt Driven Oil Bath Plunger Pump Pressure Regulator
- Standard Powder Coated Pump Cover with Louvered End Covers.
- Off-Shore Stainless Steel Pump Cover with Mesh/ Louvered End Covers • Off-Shore - Low Inlet Water Pressure Protection

# **Electric Motors**

- 1800 RPM TEFC 1.15 Service Factor High Efficiency
- Continuous Duty CSA Approved/ UI Listed Explosion-Proof Motor • IP55 Minimum Ingress Protection Rating
- Standard Automatic High Temperature Shut Down (Thermal Probe) for Pump Protection
- Off-Shore Fully Automatic Start/Stop Circuit with Solid State Time Delay Shut Down - Controlled by Trigger Gun Activation

## Heater

- Non-Direct Immersion Heat Exchanger with #316 Stainless Steel Heat Exchange Coil
- Low Water (Heat Exchanger Fluid) Level Switch
- Adjustable Temperature Controller
- Calrod Elements with Incoloy Sleeves
- Fully Automatic Start/Stop Circuit with Solid State Time Delay Shutdown - Controlled by Trigger Gun Activation

- Steel Cage Construction (with Drip-Proof Pump Base on the Off-Shore Units) • Mounting Feet • Lifting Eyes
- <u>Standard</u> Powder Coat Painted <u>Off-Shore</u> Galvanized to ASTM123 and CSA G164-M1981 Specifications

## Includes

- 50' High Pressure Hose Assembly, Complete with Trigger Gun, and Wand
- CSA Approved/ Ul Listed Control Box, Flexible Coupling, Conduit, and Seals
- CSA Inspected & Certified for use in Class 1, Division 1, Group C & D Hazardous Location Environments

# All Electrically Heated Units (model numbers starting with "EH") are available in Explosion Proof.



**CAT Plunger or Piston Pump** 

- SA Nitrogen Charged Pulsation Dampener
- SRA Surge Relief Assembly (for Flows of 6 GPM and Greater)
- PG Liquid-Filled Pressure Gauge
- LWPP Low Inlet Water Pressure Protection with Reset
- ETM-EXA (D) Integrated Analog (Digital) Hour Meter
- USC Upstream (High Pressure) Chemical Injection
- PCA-EX Portability Feature with Casters and Push/Pull Handle
- HRA 13 (16) High Pressure Hose Reel Assembly with 13" (16") Drum
- EGR-50 Enclosed Grounding Reel with 50' Grounding Wire and Clamp

|            |           | DIVISI    | ONS / ZONES |                            |
|------------|-----------|-----------|-------------|----------------------------|
| ATMOSPHERE | CLASS*    | DIVISION* | ZONE**      | AREA CLASSIFICATION        |
| GAS        |           | DIV. 1    | ZONE 0      | CONTINUOUS HAZARD          |
|            | CLASS I   | DIV. I    | ZONE 1      | INTERMITTENT HAZARD        |
|            |           | DIV. 2    | ZONE 2      | ABNORMAL CONDITIONS HAZARD |
|            |           | DIV. 1    | ZONE 20     | CONTINUOUS HAZARD          |
| DUST       | CLASS II  | DIV. I    | ZONE 21     | INTERMITTENT HAZARD        |
|            |           | DIV. 2    | ZONE 21     | ABNORMAL CONDITIONS HAZARD |
|            |           | DIV. 1    | ZONE 20     | CONTINUOUS HAZARD          |
| FIBER      | CLASS III | DIV. I    | ZONE 21     | INTERMITTENT HAZARD        |
|            |           | DIV. 2    | ZONE 22     | ABNORMAL CONDITIONS HAZARD |

\* ACCORDING TO NEC 5000 / CEC ANNEX J; \*\* ACCORDING TO IEC / NEC 5050 / CEC 18

|                | GROUPS        |         |   |                        |  |  |  |  |  |  |
|----------------|---------------|---------|---|------------------------|--|--|--|--|--|--|
| ATMOSPHERE     | CLASS*        | GROUP** |   | REPRESENTATIVE ELEMENT |  |  |  |  |  |  |
|                |               | -       | GROUP I   | METHANE                |  |  |  |  |  |  |
|                |               | GROUP D | GROUP IIA   | PROPANE                |  |  |  |  |  |  |
| GAS            | CLASS I       | GROUP C | GROUP IIB   | ETHYLENE               |  |  |  |  |  |  |
|                |               | GROUP B | GROUP IIC (EXCEPT C <sub>2</sub> H <sub>2</sub> ) | HYDROGEN               |  |  |  |  |  |  |
|                |               | GROUP A | GROUP IIC   | ACTYLENE               |  |  |  |  |  |  |
|                |               | GROUP G | GROUP IIIB  | NON-CONDUCTIVE DUSTS   |  |  |  |  |  |  |
| DUST           | CLASS II      | GROUP F | GROUP IIIB  | CARBONACEOUS DUSTS     |  |  |  |  |  |  |
|                |               | GROUP E | FROUP IIIC  | METAL DUST             |  |  |  |  |  |  |
| FIBER          | CLASS III     | -       | GROUP IIIA  | FIBERS OR FLYINGS      |  |  |  |  |  |  |
| * ACCORDING TO | NIEC FOOD / C |         | CCORDING TO IFC / NEC FORO / CEC 10               |                        |  |  |  |  |  |  |

\* ACCORDING TO NEC 5000 / CEC ANNEX J; \*\* ACCORDING TO IEC / NEC 5050 / CEC 18



MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# **ROCKET SERIES**

# - INDUSTRIAL HOT WATER ELECTRICALLY HEATED

# **Pumps**

- GIANT™ Industrial-Duty Plunger Pump
- Adjustable Pressure Regulator
- Pilot-Activated Flow Switch
- Factory-Set Pressure Relief Valve
- Liquid Filled Pressure Gauge

# Electric Motors (5, 7.5, 10 & 15 HP)

- 1750 RPM TEFC Full Frame
- 1.25 Service Factor High Efficiency
- Thermal Overload Protection
- Continuous Duty

- 316 Stainless Steel Heat Exchanger Coil
- · Single And Dual Heavy Wall (Stainless Steel) Heat Exchanger Coils
- Allows For Continuous Recovery Even When Trigger Gun(s) Not in Use
- No Open Flame Can Be Installed In Virtually Any Location
- · Compact Foot Print · No Venting
- Required Heater Exchanger Coils Do Not Require De-calcification
- Require Less KW Than Input **Direct-Immersion Type Electrically Heated Models**
- Low Heat Exchanger Solution **Cut-Off Switch**
- Adjustable Temperature Controller

- · Powder Coat Painted Frame With Optional Aluminum Checker Plate Panels
- Optional Automatic Refill
- Dual Low Water Level Switches With Indicator Lights
- Factory Set Temperature Controller

# **Options & Accessories**

- Full Range of Portable Frames
- VFD PLC Control
- Remote Control
- Wheel Kit
- (\*) Most Popular Models

The Rocket Series of Electrically Heated pressure washing systems are designed and built for the toughest of applications, and are available for single and multi-user operation. These units include oversized (de-rated) industrial-duty pumps, motors and components, and heavy wall stainless steel heat exchange coils and tanks provide for consistent reliability, safety, performance, and maximum productivity.



| MODEL         | CDM | DCI  | LIFATED INDUIT | MOTORUR  | TOTAL / | АМР ЗРН | III V WII V I III |
|---------------|-----|------|----------------|----------|---------|---------|-------------------|
| MODEL         | GPM | PSI  | HEATER INPUT   | MOTOR HP | 480     | 575     | L" X W" X H"      |
| ROCKET42-A4   | 3.5 | 2000 | 45 KW          | 7.5      | 67      | 53      | 36 X 20 X 54      |
| ROCKET43-A4 * | 3.5 | 3000 | 45 KW          | 7.5      | 67      | 53      | 36 X 20 X 54      |
| ROCKET43-A6   | 3.5 | 3000 | 60 KW          | 7.5      | 86      | 68      | 36 X 20 X 54      |
| ROCKET44-A4   | 4   | 4000 | 45 KW          | 10       | 71      | 56      | 36 X 20 X 54      |
| ROCKET53-A4 * | 4.7 | 3000 | 45 KW          | 10       | 71      | 56      | 36 X 20 X 54      |
| ROCKET53-A6   | 4.7 | 3000 | 60 KW          | 10       | 90      | 71      | 36 X 20 X 54      |
| ROCKET612-A6  | 6   | 1200 | 60 KW          | 5        | 83      | 65      | 36 X 20 X 54      |
| ROCKET612-A8  | 6   | 1200 | 80 KW          | 5        | 108     | 85      | 36 X 20 X 54      |
| ROCKET62-A6   | 6   | 2000 | 60 KW          | 10       | 90      | 71      | 36 X 20 X 54      |
| ROCKET62-A8   | 6   | 2000 | 80 KW          | 10       | 115     | 91      | 36 X 20 X 54      |
| ROCKET63-A6   | 6   | 3000 | 60 KW          | 15       | 94      | 74      | 36 X 20 X 54      |
| ROCKET63-A8   | 6   | 3000 | 80 KW          | 15       | 119     | 95      | 36 X 20 X 54      |
| ROCKET812-A8  | 8   | 1200 | 80 KW          | 7.5      | 111     | 88      | 36 X 26 X 54      |
| ROCKET82-A8   | 8   | 2000 | 80 KW          | 15       | 119     | 95      | 36 X 26 X 54      |
| ROCKET83-A8 * | 8   | 3000 | 80 KW          | 15       | 119     | 95      | 36 X 26 X 54      |

# ON DEMAND ELECTRICALLY HEATED



# **Pumps**

- Industrial Pump
- · Belt Driven or Direct Drive
- Adjustable Pressure Regulator
- Pilot-Activated Flow Switch
- Factory-Set Pressure Relief Valve
- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator

# **Electric Motors**

- 1750 RPM TEFC
- Full Frame
- 1.25 Service Factor
- High Efficiency
- Thermal Overload Protection
- · Continuous Duty

## Heater

- Electric Water Heater
- · Automatic Heating On Demand
- Low Heat Exchanger Solution Cut-Off Switch
- Adjustable Temperature Controller
- Automatic Stop/Start switch with delay

## Frame

· Powder Coat Painted Frame

# **Includes**

- 50' Hose
- Adjustable Thermostat
- Pressure Relief Valve
- Thermal Valves
- · Lance with Trigger Gun
- Pressure gauge
- Chemical Injection

# **Options & Accessories**

- Wheels
- Hose Reel With Support
- Stainless Steel Frame

Easy-Kleen's On-Demand-Electrically-Heated is ready for a job at a moment's notice. Not only does this machine heat water instantly, but it is lightweight, 50% quieter than other non-electric washers, and uses less electricity. No fuel mess or spillage.



| MODEL            | PSI  | GPM | HP  | RPM  | DRIVE  | VOLTAGE   | AMP | KW |
|------------------|------|-----|-----|------|--------|-----------|-----|----|
| ARHEF-2040EE3AS  | 2000 | 4   | 5   | 1750 | DIRECT | 575V-3 PH | 65  | 60 |
| ARHEF-2535EE3AS  | 2500 | 3.5 | 5   | 1750 | DIRECT | 575V-3 PH | 50  | 45 |
| ARHEF-3030EE3AS  | 3000 | 3   | 5   | 1750 | DIRECT | 575V-3 PH | 50  | 45 |
| ARHEF-3035EE3AS  | 3000 | 3.5 | 7.5 | 1750 | DIRECT | 575V-3 PH | 53  | 45 |
| ARHEF-3040EE3AS  | 3000 | 4   | 7.5 | 1750 | DIRECT | 575V-3 PH | 53  | 45 |
| ARHEF-3040EE3AS  | 3000 | 4   | 7.5 | 1750 | BELT   | 575V-3 PH | 68  | 60 |
| ARHEF-3050EE3ACS | 3000 | 5   | 10  | 1750 | BELT   | 575V-3 PH | 82  | 72 |
| ARHEF-4040EE3ACS | 4000 | 4   | 10  | 1750 | BELT   | 575V-3 PH | 70  | 60 |
| ARHEF-4050EE3ACS | 4000 | 5   | 15  | 1750 | BELT   | 575V-3 PH | 87  | 72 |
| ARHEF-4060EE3ACS | 4000 | 6   | 20  | 1750 | BELT   | 575V-3 PH | 110 | 90 |



MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# Pumps

- Commercial Duty Triplex Plunger Pump
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold Direct Drive
- Thermo Pump Protector

# Engines (Kohler, Lifan & Honda)

- · Gasoline or Diesel Driven
- Efficient Serviceable

# **Heating Coil**

- Schedule 80 Pipe No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

# Burners (Wayne - 120 & 12 Volt)

- · Oil Fired Adjustable Thermostat
- · On/Off Switch
- · North American Made
- Dependable Serviceable

## Frame

- · All Welded Powder Coated
- 12 Gauge Bent Steel Roll Cage
- 3/4"Threaded Axles Welded to the Frame • Lifting Bar
- 13" Pneumatic Wheels Attached with Lock Nuts • 10 Gallon Poly Fuel Tank
- · Hose Reel Mounting Plate
- Stationary Skid Frame also Available

# Includes

- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles 1 Soap Nozzle
- Downstream Chemical Injection System
- 50' of High Pressure Hose

# **Options & Accessories**

- Rain Cap Hose Reel Rotary Nozzle
- Drain Cleaning/Jetter Kit
- Battery

# **COMMERCIAL HOT WATER GASOLINE & DIESEL** - OIL FIRED

Our most popular and versatile units. Utilized by a multitude of businesses for a wide variety of cleaning needs. From a simple oil field application to daily construction and farm use. Our customers continuously comment on the heat and speed of cleaning with these machines.



- John March, J.E. March Trucking

EASY-KLEEN

EZO4035G-K-GP-12

"We've had our machine for 4 years and it's never skipped a beat. It makes life so much easier to work

on clean equipment versus dirty equipment."









EZO4035G-K-GP-12/RTL Rental Frame Option with Grab Bar Surround for easy loading and total protection



EZO3504G-H/ST With Optional Hose Reel







Intertel

|                   |     |      |              |                   | **        |                | Intertel |
|-------------------|-----|------|--------------|-------------------|-----------|----------------|----------|
|                   |     |      | COMMERCIAL H | HOT WATER GAS - C | OIL FIRED |                |          |
| MODEL             | GPM | PSI  | BTU          | HP/ ENGINE        | DRIVE     | ELECTRIC START | BURNER   |
| EZO2703G          | 3   | 2700 | 300,000      | 6.5 KOHLER        | DIRECT    | NO             | 120V     |
| EZO4035G-K-GP-R   | 3.5 | 4000 | 350,000      | 14 KOHLER         | DIRECT    | NO             | 120V     |
| EZO4035G-H-GP-R   | 3.5 | 4000 | 350,000      | 13 HONDA          | DIRECT    | NO             | 120V     |
| EZO4035G-K-GP-120 | 3.5 | 4000 | 350,000      | 14 KOHLER         | DIRECT    | YES            | 120V     |
| EZO4035G-H-GP-120 | 3.5 | 4000 | 350,000      | 13 HONDA          | DIRECT    | YES            | 120V     |
| EZO4035G-L-GP-12  | 3.5 | 4000 | 350,000      | 15 LIFAN          | DIRECT    | YES            | 12V      |
| EZO4035G-K-GP-12  | 3.5 | 4000 | 350,000      | 14 KOHLER         | DIRECT    | YES            | 12V      |
| EZO4035G-H-GP-12  | 3.5 | 4000 | 350,000      | 13 HONDA          | DIRECT    | YES            | 12V      |
| EZO3504G-K        | 4   | 3500 | 400,000      | 14 KOHLER         | GEARBOX   | YES            | 12V      |
| EZO3504G-H        | 4   | 3500 | 400,000      | 13 HONDA          | GEARBOX   | YES            | 12V      |
|                   |     | C    | OMMERCIAL HO | OT WATER DIESEL - | OIL FIRED |                |          |
| MODEL             | GPM | PSI  | BTU          | HP/ ENGINE        | DRIVE     | ELECTRIC START | BURNER   |
| EZO4032D-K-GP-12  | 4   | 3200 | 350,000      | 9.8 KOHLER        | DIRECT    | YES            | 12V      |
| EZO3204D-K        | 4   | 3200 | 400,000      | 9.8 KOHLER        | GEARBOX   | YES            | 12V      |

# PORTABLE PICKUP TRUCK SKID



# **Pumps**

- Heavy-Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold
- Gearbox Drive
- Thermo Pump Protector

# **Engines**

- 14 HP Kohler / 13 HP Honda Gasoline Engine or 9.8 HP Diesel Engine
- Efficient
- Serviceable

# **Heating Coil**

- Schedule 80 Pipe
- · Elliptically Wound & Stretched
- · No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

# Burners (Wayne - 12 Volt)

- Oil Fired
- · Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable
- Serviceable

# Frame

- 2 x 4 Tube Fully Welded Steel
- Powder Coated
- Lifting Eye
- Forklift Slots
- 225 Gallon Poly Water Tank
- 10 Gallon Winterization System
- Rain Cap on Boiler

# **Includes**

- Hose Reel
- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzles
- 100' of High Pressure Hose
- Downstream Soap Injection System

# **Options & Accessories**

- · Drain Cleaning/Jetter Kit
- Rotary Nozzle
- Wet Sandblast Kit
- Battery

Propane Fired Units Are Available for Food Warehouse Applications (Modified for Two 100 Pound Tanks)

The Easy Kleen Portable Skid Unit is a totally self contained system that allows for 100% portable cleaning. These units have been designed to fit perfectly into the 6'6" box of a pickup truck. Forklift slots and a lifting eye make loading this unit easy and efficient. There is also a built in winterization system which makes year round cleaning and transportation possible.









"We purchased a pickup skid for our harvesting operation and so far it working out really well! The reliability has been excellent! Having the pressure washer and water tank together just makes it so easy to load up with the forklift and take it out to the equipment to keep it clean and running cool."

- Joe Blaney, Blaney Logging







PRESSURE SYSTEMS LTD.

# **Pumps**

- Triplex Plunger Pump
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold Belt Driven
- Thermo Pump Protector

# Engine (Kohler)

- 14 HP Kohler Gasoline Engine
- Electric Start Efficient
- Serviceable

# **Heating Coil**

- Schedule 80 Pipe No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear
- · Sealed with Ceramic Blanket
- Stainless Steel Housing

# **Burners (Wayne 12 Volt)**

- Diesel Fired On/Off Switch
- Adjustable Thermostat
- North American Made
- Dependable Serviceable

## **Compact Frame**

- All Welded Powder Coated
- 1-1/2" Bent Steel Cage with 3/16" Mounting Plate • Lifting Bar
- All Mounting Bolts are Welded to the Frame for ease of Service
- 10 Gallon Diesel Tank
- · Portable Wheeled Frame

## **Includes**

- · Temperature Gauge on the Outlet of the Boiler, 500° F Rated
- 50' Steam Hose with Steam Lance and Steam Tip Nozzle
- · Flow Switch Control with High Limit Switch

# **Options & Accessories**


- Extra Hose Hose Insulation Wrap
- Steam Head for Weeds
- Burner: 120V (Electric) or 12V (Gas)
- Skid Unit with Tank Hose Reel
- Stainless Steel Coil Battery
- Larger Boiler (with greater BTU)
- Honda Motor Option
- **Diesel Motor Option**
- Dry Steam Option Add (/DS)

# These units are ideal for:

- · Organic Weed Killing for Municipalities
- Restaurant Hood Cleaning
- · Ice.Dam & Snow Melting
- · Sanitizing: Playgrounds, Nurseries, Farm Soil, Furniture
- · Pipe Thawing · Graffiti Removal
- Engine Cleaning & Metal De-greasing
- Cleaning Air Conditioners & H-Vac Mold
- · Completely eliminates oily residue from surfaces
  - ~ Great for paint preparation!
- · Reduces the volume of chemical needed
- Gentle on delicate masonry stone work
- Reduced water consumption i.e. less clean up/run off

# INDUSTRIAL HOT WATER **GASOLINE** - OIL FIRED, PORTABLE WET STEAM

These Hot Water Steamers were designed to be portable or trailer mounted for mobile steam purposes. These units can also be mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system.





# STEAM OPTIONS

# Wet Steam Kits\*

- All of our Industrial Hot Water units are available with Wet Steam capabilities. \*Must Be Purchased with Unit and Factory Installed
- A combo wet steam/high pressure unit is extremely versatile. It allows you to switch from high pressure to wet steam in minutes.



# Dry Steam Options Available - Add (/DS)

Dry steam (350°F+) is vapor with no moisture content. This is required for applications in the pipe relining industry and degassing tanks.



| MODEL          | GPM | PSI | BTU     | НР        | DRIVE | L" X W" X H" |
|----------------|-----|-----|---------|-----------|-------|--------------|
| EZO3015GSTM-K  | 1.5 | 300 | 400,000 | 14 KOHLER | BELT  | 43 X 31 X 45 |
| EZO304GSTM-K-G | 4   | 300 | 800,000 | 14 KOHLER | BELT  | 40 x 40 x 54 |

# INDUSTRIAL HOT WATER DIESEL - OIL FIRED



# **Pumps**

- Industrial Heavy-Duty Triplex Plunger Pumps • Stainless Steel Valves
- Oil Bath Crankcase Brass Manifold
- Thermo Pump Protector
- Belt or Gearbox Driven

# **Engines**

· Diesel Driven · Efficient · Serviceable

# **Heating Coil**

- Schedule 80 & 160 Pipe
- Elliptically Wound & Stretched
- · Structurally Braced to reduce Vibration & Pipe Wear • No Seam Welds
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

# Burners (Wayne 120 Volt & 12 Volt)

- Oil Fired Adjustable Thermostat
- On/Off Switch North American Made
- Dependable Serviceable

# Frame

- Extremely Heavy-Duty 2" Square Tubing & 1/4" Mounting Plates
- All Welded Powder Coated
- · All Mounting Bolts are Welded to the Frame for Ease of Service
- Lifting Eye Fork Lift Slots
- Convenient Control Panel
- 2 x 20 Gallon Diesel Engine Tanks 26 HP Units (100 Gallon Optional on 60 HP Units)
- 60 HP Units (2" x 4" Steel Tubing with 1/2" Mounting Plate)

# Includes

- Adjustable Pressure Regulator
- 48" Gun And Wand Assembly With Quick Coupler System for Machines Under 5000 PSI
- 0°/15°/25°/40° Nozzles
- · 50' Of High Pressure Hose

# **Options & Accessories**

- · Steam Kit · Hose Reel · Electric Clutch
- All In One Skid & Water Tank Frames
- Open and Enclosed Trailer Packages
- Certified Lift Cages
- Drain Cleaning/Jetter Kit

# Add (/STM) for Steam Kit

# Add (/G) for Generator & 120 Volt Burner

This series of Hot Water Pressure Washers was designed to be truck or trailer mounted for mobile washing purposes. These units are ideal for use within municipal, mining, oil field, forestry and industrial cleaning operations. These units can also be mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system.






**SCAN FOR VIDEO!** 





EZO8008D

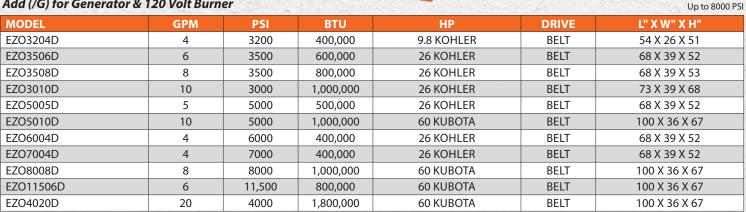

Intertek



# INDUSTRIAL **HOT WATER GAS** - OIL FIRED

# Pump

- Industrial Heavy-Duty Triplex Plunger Pumps • Oil Bath Crank Case
- Stainless Steel Valves Brass Manifold
- Thermo Pump Protector
- Belt or Gearbox Driven

# **Engines**

· Gasoline Driven • Efficient • Serviceable

# **Heating Coil**

- Schedule 80 & 160 Pipe No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear • Sealed With Ceramic Blanket
- Stainless Steel Housing

# Burners (Wayne 120 & 12 Volt)

- · Oil Fired Adjustable Thermostat
- On/Off Switch North American Made
- Cleanable Fuel Filter Dependable
- Serviceable

# **Compact Frame**

- All Welded Powder Coated
- 1-1/2" Bent Steel Cage with 3/16" Mounting Plate
- · All Mounting Bolts are Welded to the Frame for Ease of Service
- 10 Gallon Gas Tank
- 20 Gallon Diesel Tank Lifting Bar
- Designed to be Truck or Trailer Mounted
- Skid Frame Design Hose Reel Compatible
- 38 HP Units are Equipped with a 1/4" Mounting Plate and Roll Cage is Optional

# Includes

- Adjustable Pressure Regulator
- 48" Gun & Wand Assembly With Quick Coupler System for Machines under 5000 PSI • 0°/15°/25°/40° Nozzles
- Chemical Injector up to 5 GPM
- 50' of High Pressure Hose

# **Options & Accessories**

- 3000 Watt Generator Steam Kit
- Hose Reel Drain Cleaning/Jetter Kit
- All In One Skid & Water Tank Frames
- Open and Enclosed Trailer Packages
- Certified Lift Cages Electric Clutch
- Battery

This series of hot water pressure washers was designed to be truck or trailer mounted for mobile washing purposes. These units are ideal for use within municipal, mining, oil field, forestry, and industrial cleaning operations.





**SCAN FOR** VIDEO!







| MODEL      | GPM | PSI  | BTU       | НР                 | DRIVE   | L" X W" X H" |
|------------|-----|------|-----------|--------------------|---------|--------------|
| EZO3004G   | 4   | 3000 | 400,000   | 13 HONDA           | BELT    | 54 X 26 X 48 |
| EZO3504BG  | 4   | 3500 | 400,000   | 14 KOHLER          | GEARBOX | 54 X 26 X 48 |
| EZO3505.5G | 5.5 | 3500 | 400,000   | 18 VANGUARD        | BELT    | 54 X 26 X 48 |
| EZO3504G   | 4   | 3500 | 400,000   | 14 KOHLER          | BELT    | 54 X 26 X 48 |
| EZO3505G   | 5   | 3500 | 500,000   | 25 KOHLER/24 HONDA | BELT    | 54 X 26 X 48 |
| EZO3506G   | 6   | 3500 | 600,000   | 25 KOHLER/24 HONDA | BELT    | 54 X 26 X 48 |
| EZO3008G   | 8   | 3500 | 800,000   | 25 KOHLER/24 HONDA | BELT    | 54 X 26 X 51 |
| EZO3010G   | 10  | 3000 | 1,000,000 | 35 VANGUARD        | BELT    | 66 X 31 X 65 |
| EZO3708G   | 8   | 3700 | 800,000   | 35 VANGUARD        | BELT    | 66 X 31 X 55 |
| EZO5005G   | 5   | 5000 | 500,000   | 25 KOHLER/24 HONDA | BELT    | 54 X 26 X 51 |
| EZO6006G   | 6   | 6000 | 600,000   | 35 VANGUARD        | BELT    | 66 X 31 X 55 |
| EZO7004G   | 4   | 7000 | 400,000   | 25 KOHLER/24 HONDA | BELT    | 54 X 26 X 51 |

STANDARD UNITS ARE VERTICALLY FIRED = 5% - 10% HIGHER HEAT

FOR MODEL CHOICES ADD: KOHLER (-K), HONDA (-H), WHEEL KIT (-WK), STEAM (-STM), GENERATOR & 120 VOLT BURNER (-G)

EZO3010G-H

Standard 35 HP Frame

# INDUSTRIAL HOT WATER GAS - OIL FIRED - CONTINUED



Wide Frame, Horizontal Coil Option

13 to 24 HP 44" L x 49" W x 49" H

These units can also be upgraded to a horizontal frame, or mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system. The footprint of this unit can be adjusted to suit your needs.



CUSTOM EZO3506G-H/HZ Narrow Frame, Horizontal Coil Option 13 to 24 HP 45"L x 35"W x 58"H



EZO3505G/G-K-TLR with Generator, Open Trailer Option, and two Hose Reels

ASY-KLEEN

EASY-KLEEN





# FILL & PLAY EQUIPMENT SERIES - DIESEL & GAS UNITS

Many of Easy-Kleen's customers have come to realize the

pressure washer is only one part of the cleaning package. Now

you can design a hassle free system that you simply fill with

fuel, water and chemical to put on your truck, trailer, train or barge, or simply move around the site with a forklift to get the job done. Easy-Kleen believes in solving problems and the Fill &

Play Series has been the solution for hundreds of customers.

# GRIZZLY & BULL MOOSE FILL & PLAY SERIES



# SCAN FOR VIDEO!



# EZO3010D

The City of Red Deer and the City of Prince George have each purchased two of these units. Geared to transport in the back of a flatbed truck.

A Bull Moose Series Pressure Washer with 10 GPM at 3000 PSI, 740 gallon water tank, steam, and high pressure 12 volt hose reels with hose guides and light kit. Used for thawing, cleaning road signs, graffiti, sidewalks, and equipment.





# ■ EZO3508G

Using our *Grizzly Series Pressure Washer*, this unit was designed to be transported in an 8' box truck for shopping mall cleaning and property maintenance. **8 GPM at 3500 PSI** unit complete with 225 Gallon water tank, 2 high pressure reels, and 1 low pressure tank feed reel mounted curbside.

**TALK TO YOUR EASY-KLEEN REPRESENTATIVE TODAY!** Design a totally self contained Fill & Play System that will fit your needs.


# FILL & PLAY EQUIPMENT SERIES OPTIONS



# GRIZZLY & BULL MOOSE FILL & PLAY SERIES OPTIONS

# EZO5005G

Using a *Grizzly Series Pressure Washer*, this unit was designed for construction and forestry applications for cleaning equipment and thawing culverts. **5 GPM at 5000 PSI** unit with 225 gallon tank and three 250' hose reels.

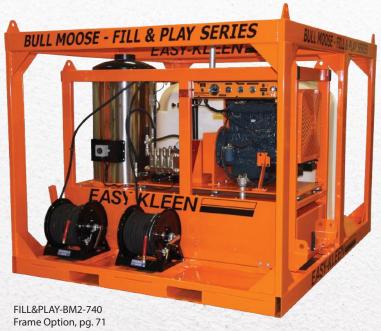



# **■ EZO5010D**

Designed for Detour Gold Mine. This unit uses a *Bull Moose Series Pressure Washer* and is transported around the mine and the mill with an industrial forklift. Used for cleaning equipment, belts, conveyors, screens, thawing and flushing pipelines. **10 GPM at 5000 PSI** unit with 740 gallon water tank and 2 high pressure manual rewind hose reels.

# EZO3010D-12 & KIT-TRAILER-14-2-630

Using a *Bull Moose Series Pressure Washer*, this unit was designed for Baffinland Canada, one of the largest iron ore mines in Canada. It is used to provide portability while clean heavy mining equipment on the job site, such as articulating rock trucks, conveyors, screens, and thawing pipes. **10 GPM at 3000 PSI** unit with 630 gallon water tank, and two 300' hose reels for the use of two wands at once.



Don't quite see what you are looking for? We have the ability to <u>CUSTOM DESIGN & MANUFACTURE</u> all types of high pressure cleaning equipment. If you have a need we will meet it.



# **MODULAR HOT WATER HEATERS**- NATURAL GAS, PROPANE FIRED, OR ELECTRIC

# Natural Gas (EZN) or Propane Fired (EZP)

# **Heating Coil**

- Schedule 80 or optional 160 Pipe (up to 11,500 PSI)
- Elliptically Wound & Stretched No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing Thermostat Controlled
- · Optional Stainless Steel Coil

# Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

## **Burners**

- · Natural Gas or Propane Fired
- Natural Aspirated Ring Cast Burner
- Six Oxygen Port Brass Burner Nozzles for Lower Emissions Controlled by 24 Volt Gas Valves
- Quick Clean Burner System
- Quick Adjust Air Flow Vents (Enclosed Design to Allow for Optimum Air Flow to Maximize Efficiency)

# **Safety Features**

- Flow switch Rupture Disc High Limit
- Adjustable Thermostat Gas Pressure Gauge

## Frame

- 11 gauge to 1/4" steel All Welded
- · Fully Powder Coated

# **Electrically Heated Heater**

- Must know HP of Paired Unit 316 Stainless Steel Heat Exchanger Coil • Designed for Continuous Use
- Large 70 Gallon (Single Coil Models) & 120 Gallon (Dual Coil Models) Heater Storage Tanks
- Allows for Continuous Recovery Even When Trigger Gun(s) Not in Use • No Venting Required
- · No Open Flame · Compact Foot Print
- · Can be Installed in Virtually Any Location
- Stand and Explosion Proof Models
- Heater Exchanger Coils Do Not Require De-calcification • Require Less KW Than Input Direct-Immersion Type Electrically Heated Models
- · Low Heat Exchanger Solution Cut-Off Switch
- Adjustable Temperature Controller
- Pin-Type Calrod Heating Elements With Incoloy Sleeves

Our Modular Hot Water Heaters are designed for heating high pressure water efficiently.





EHE48 Electrically Heated

Gas Fired



**Propane Fired** 

|   |                     |             |              | intertek                          |  |  |  |  |  |
|---|---------------------|-------------|--------------|-----------------------------------|--|--|--|--|--|
| NATURAL GAS (EZN) & PROPANE (EZP) FIRED HEATERS |                     |             |              |                                   |  |  |  |  |  |
| MODEL   | PSI                 | вти         | VOLTAGE      | BASE MEASUREMENTS<br>L" X W" X H" |  |  |  |  |  |
| EZN195  | 5000                | 195,000 BTU | 24V          | 18 X 24 X 39                      |  |  |  |  |  |
| EZN295  | 5000                | 295,000 BTU | 24V          | 22 X 26 X 40                      |  |  |  |  |  |
| EZN390  | 5000                | 390,000 BTU | 24V          | 22 X 26 X 44                      |  |  |  |  |  |
| EZN510  | 5000                | 510,000 BTU | 24V          | 24 X 31 X 49.75                   |  |  |  |  |  |
| EZN560  | 5000                | 560,000 BTU | 24V          | 24 X 31 X 49.75                   |  |  |  |  |  |
| EZN720  | 4000                | 720,000 BTU | 24V          | 24 X 31 X 49.75                   |  |  |  |  |  |
| EZN940  | 4000                | 940,000 BTU | 24V          | 31 X 35 X 61.25                   |  |  |  |  |  |
|   | ELECTRICALLY HEATED |             |              |                                   |  |  |  |  |  |
| MODEL   | PSI                 | VOLT        | L" X W" X H" |                                   |  |  |  |  |  |

| ELECTRICALLY HEATED |      |         |              |  |  |  |  |  |
|---------------------|------|---------|--------------|--|--|--|--|--|
| MODEL               | PSI  | VOLTAGE | L" X W" X H" |  |  |  |  |  |
| EHE24               | 4000 | 24 KW   | 32 X 24 X 36 |  |  |  |  |  |
| EHE48               | 4000 | 48 KW   | 32 X 24 X 36 |  |  |  |  |  |
| EHE72               | 4000 | 72 KW   | 32 X 24 X 36 |  |  |  |  |  |
| EHE48-2             | 4000 | 48 KW   | 48 X 24 X 36 |  |  |  |  |  |
| EHE72-2             | 4000 | 72 KW   | 48 X 24 X 36 |  |  |  |  |  |
| EHE99-2             | 4000 | 99 KW   | 48 X 24 X 36 |  |  |  |  |  |

# OPEN MODULAR HOT WATER HEATERS - OIL FIRED



# **Heating Coil**

Elliptically wound cold process of stretched reduced fully body normalized ASTM A53/ APIPSL schedule 80 or optional 160 pipe is structurally braced to minimize pipe wear and vibration. The coil is sealed with a ceramic blanket and enclosed in a stainless steel housing for heating efficiency. These coils have been specially designed to be paired with the burners for maximum heating and fuel efficiency. The coils are securely mounted to the frames to reduce vibration and enhance ease of maintenance. Wet/dry steam option available. (Optional 11,500 PSI Coils)

# Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

# Burners (Wayne)

Quality North American made oil fired burners with adjustable thermostats are used due to their efficiency and durability. Safety features include: flow switch, pressure switch, rupture disc, high limit and adjustable thermostat.

# **Control Panel**

Nema 4 water tight control panels are utilized.

# **Frames**

Industrial grade frames are fully welded and powder coated for longevity. Install ready.

# **Options**

Hydraulic, electric, gasoline, and diesel driven pump systems are available to pair with these units, as well as Long Body Frame options.

Redundancy packages, various types of thermostats, flow switches, and safety features are also available to meet your specifications.

# Our Stand-Alone Open Modular Hot Water Heaters are designed for heating high pressure water efficiently.







Electrically Heated





| [18] [18] [18] [18] [18] [18] [18] [18] |           |           |                    |                     |                            |
|---|-----------|-----------|--------------------|---------------------|----------------------------|
| MODEL                                   | вти       | VOLTAGE   | SCHEDULE 80<br>PSI | SCHEDULE 160<br>PSI | DIMENSIONS<br>L" X W" X H" |
| EZO200                                  | 200,000   | 120 OR 12 | 5000               | 10,000              | 16 X 16 X 37               |
| EZO350                                  | 350,000   | 120 OR 12 | 5000               | 10,000              | 18 X 18 X 42               |
| EZO400                                  | 400,000   | 120 OR 12 | 5000               | 10,000              | 18 X 18 X 42               |
| EZO350/WK                               | 350,000   | 120 OR 12 | 5000               | 10,000              | 18 X 18 X 42               |
| EZO440                                  | 440,000   | 120 OR 12 | 5000               | 10,000              | 19 X 19 X 51               |
| EZO600                                  | 600,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50           |
| EZO700-(1/2)                            | 700,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50           |
| EZO800-(1/2)                            | 800,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50           |
| EZO800-(3/4)                            | 800,000   | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 58           |
| EZO900-(3/4)                            | 900,000   | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 58           |
| EZO1000-(3/4)                           | 1,000,000 | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 64           |
| EZO1200-(3/4)                           | 1,200,000 | 120       | 4000               | 8000                | 31 X 31 X 62               |
| EZO1800-(1)                             | 1,800,000 | 120       | 3200               | 6000                | 31 X 31 X 70               |
| EZO2000-(1-1/4)                         | 2,000,000 | 120       | 3000               | 5000                | 36 X 36 X 70               |



MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# **Heating Coil**

Elliptically wound cold process of stretched reduced fully body normalized ASTM A53/ APIPSL schedule 80 or optional 160 pipe is structurally braced to minimize pipe wear and vibration. The coil is sealed with a ceramic blanket and enclosed in a stainless steel housing for heating efficiency. These coils have been specially designed to be paired with the burners for maximum heating and fuel efficiency. The coils are securely mounted to the frames to reduce vibration and enhance ease of maintenance. Wet/dry steam option available. (Optional 11,500 PSI Coils)

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

# Burners (Wayne)

Quality North American made oil fired burners with adjustable thermostats are used due to their efficiency and durability. Safety features include: flow switch, pressure switch, rupture disc, high limit and adjustable thermostat.

# **Control Panel**

Nema 4 water tight control panels are utilized.

# **Frames**

Industrial grade frames are fully welded and powder coated for longevity. Install ready.

# **Options**

Hydraulic, electric, gasoline, and diesel driven pump systems are available to pair with these units, as well as Long Body Frame options.

Redundancy packages, various types of thermostats, flow switches and safety features are also available to meet your specifications.

# VAC TRUCK HOT WATER HEATERS - OIL FIRED

Install ready for vacuum and hydro-vac trucks. These rugged, heavy-gauge frames offer durability even in severe road and weather conditions.















|                     | Intertek  |           |                    |                     |                                |
|---------------------|-----------|-----------|--------------------|---------------------|--------------------------------|
| MODEL               | BTU       | VOLTAGE   | SCHEDULE 80<br>PSI | SCHEDULE 160<br>PSI | VAC DIMENSIONS<br>L" X W" X H" |
| EZO200/VAC          | 200,000   | 120 OR 12 | 5000               | 10,000              | 16 X 16 X 37                   |
| EZO350/VAC          | 350,000   | 120 OR 12 | 5000               | 10,000              | 18 X 18 X 42                   |
| EZO400/VAC          | 400,000   | 120 OR 12 | 5000               | 10,000              | 18 X 18 X 42                   |
| EZO440/VAC          | 440,000   | 120 OR 12 | 5000               | 10,000              | 19 X 19 X 51                   |
| EZO600/VAC          | 600,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50               |
| EZO700-(1/2)/VAC    | 700,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50               |
| EZO800-(1/2)/VAC    | 800,000   | 120 OR 12 | 5000               | 10,000              | 22.5 X 22.5 X 50               |
| EZO800-(3/4)/VAC    | 800,000   | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 58               |
| EZO900-(3/4)/VAC    | 900,000   | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 58               |
| EZO1000-(3/4)/VAC   | 1,000,000 | 120 OR 12 | 4000               | 8000                | 26.5 X 26.5 X 64               |
| EZO1200-(3/4)/VAC   | 1,200,000 | 120       | 4000               | 8000                | 31 X 31 X 62                   |
| EZO1800-(1)/VAC     | 1,800,000 | 120       | 3200               | 6000                | 31 X 31 X 70                   |
| EZO2000-(1-1/4)/VAC | 2,000,000 | 120       | 3000               | 5000                | 36 X 36 X 70                   |

# **FULLY ENCLOSED HOT WATER HEATERS** - PLUG & PLAY CABINETS



# Cabinets (VCB Models)

These frames are constructed with one piece of 11 gauge steel that is box bent with a 1/4" steel coil base (Fully welded and powder coated).

These units are equipped with two service panels at the base of the unit and a removable top for quick and easy coil removal. Stainless steel hinges and fasteners are also utilized.

# Install ready for Vacuum and Hydro Vac Trucks



EZO440/-12-VCB

# Our Plug & Play Fully Enclosed Modular Hot Water Heater Cabinets are designed for heating high pressure water efficiently, well protected, and ready to roll.



"Reliable and Rugged... Easy-Kleen reaches a quality standard unmatched by any competitor in the industry. Easy to install and easy to maintain, the details have been thought out to improve efficiency and usability. I have been using Easy-Kleen equipment for 30 years in Industrial Service companies. I would highly recommend purchasing Easy-Kleen equipment to anyone in the industry or anyone in need of high pressure cleaning equipment."

- Troy Canning, Clean Earth Industrial Services

# **VAC Truck Heater/Jetting Combo Unit** Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs



EZO440/-12-VCB-20 20 GPM @ 4000 PSI, Pump Pack



EZJ4020HD

| MODEL               | BTU       | VOLTAGE   | SCHEDULE 80<br>PSI | SCHEDULE 160<br>PSI | VCB DIMENSIONS<br>L" X W" X H" |
|---------------------|-----------|-----------|--------------------|---------------------|--------------------------------|
| EZO200/VCB          | 200,000   | 120 OR 12 | 5000               | 10,000              | CALL                           |
| EZO350/VCB          | 350,000   | 120 OR 12 | 5000               | 10,000              | CALL                           |
| EZO400/VCB          | 400,000   | 120 OR 12 | 5000               | 10,000              | CALL                           |
| EZO440/VCB          | 440,000   | 120 OR 12 | 5000               | 10,000              | 24 X 24 X 62.5                 |
| EZO600/VCB          | 600,000   | 120 OR 12 | 5000               | 10,000              | 26 X 24 X 64                   |
| EZO700-(1/2)/VCB    | 700,000   | 120 OR 12 | 5000               | 10,000              | 26 X 24 X 64                   |
| EZO800-(1/2)/VCB    | 800,000   | 120 OR 12 | 5000               | 10,000              | 26 X 24 X 64                   |
| EZO800-(3/4)/VCB    | 800,000   | 120 OR 12 | 4000               | 8000                | 27 X 29 X 77                   |
| EZO900-(3/4)/VCB    | 900,000   | 120 OR 12 | 4000               | 8000                | 27 X 29 X 77                   |
| EZO1000-(3/4)/VCB   | 1,000,000 | 120 OR 12 | 4000               | 8000                | 27 X 29 X 77                   |
| EZO1200-(3/4)/VCB   | 1,200,000 | 120       | 4000               | 8000                | CALL                           |
| EZO1800-(1)/VCB     | 1,800,000 | 120       | 3200               | 6000                | CALL                           |
| EZO2000-(1-1/4)/VCB | 2,000,000 | 120       | 3000               | 5000                | CALL                           |

| COMPLETE WITH PUMP PACKS |           |         |      |      |  |  |  |
|--------------------------|-----------|---------|------|------|--|--|--|
| MODEL                    | BTU       | VOLTAGE | PSI  | GPM  |  |  |  |
| EZO440/-12-VCB-13        | 440,000   | 12      | 3000 | 13.7 |  |  |  |
| EZO440/-12-VCB-20        | 440,000   | 12      | 4000 | 20   |  |  |  |
| EZJ4020HD                | 1,000,000 | 12      | 4000 | 20   |  |  |  |



# **HYDRAULIC SYSTEMS** - MARINE & TRUCK


These units are designed to be mounted on trucks or fishing/work-boats. Utilized by industry professionals that need high pressure on location.

# **Pumps**

- Industrial Duty Triplex Plunger Pumps
- · Oil Bath Crankcase Stainless Steel Valves
- Brass Manifold
- Stainless Steel Manifold Option Available
- · Direct Drive
- Thermo Pump Protector

# **Hydraulic Drive**

• Industrial Continuous Duty Serviceable Gear Motors Direct or Belt Driven, to be Mounted in Compact Space Where Hydraulic Power Fluid is Available



Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs







| HYDRAULIC - MARINE & TRUCK |                              |  |   |  |   |  |  |
|----------------------------|------------------------------|--|---|--|---|--|--|
| CDM                        | PSI                          | DRIVE  | HYDRAULIC FLUID POWER REQUIREMENT   |  |   |  |  |
| GPM                        |                              |  | (-20)   | (-30)  | (-40)   |  |  |
| 3                          | 3000                         | COUPLING   | N/A   | 5 GPM @ 2550 PSI   | N/A   |  |  |
| 4                          | 3500                         | COUPLING   | 11 GPM @ 1850 PSI   | 9 GPM @ 2332 PSI   | N/A   |  |  |
| 6                          | 3500                         | COUPLING   | 13 GPM @ 2184 PSI   | 11 GPM @ 2612 PSI  | 9 GPM @ 3289 PSI  |  |  |
| 10                         | 3000                         | COUPLING   | 17 GPM @ 2338 PSI   | 19 GPM @ 2914 PSI  | N/A   |  |  |
| 8                          | 4000                         | COUPLING   | 21 GPM @ 2255 PSI   | 17 GPM @ 2914 PSI  | 14 GPM @ 3385 PSI   |  |  |
| 5                          | 5000                         | COUPLING   | 17 GPM @ 2090 PSI   | 13 GPM @ 2770 PSI  | 11 GPM @ 3314 PSI   |  |  |
| 20                         | 4000                         | COUPLING   | 50 GPM @ 2317 PSI   | 45 GPM @ 2573 PSI  | 40 GPM @ 2896 PSI   |  |  |
| 20                         | 4000                         | COUPLING   | 50 GPM @ 2317 PSI   | 45 GPM @ 2573 PSI  | 40 GPM @ 2896 PSI   |  |  |
|                            | 4<br>6<br>10<br>8<br>5<br>20 | 3 3000<br>4 3500<br>6 3500<br>10 3000<br>8 4000<br>5 5000<br>20 4000 | GPM         PSI         DRIVE           3         3000         COUPLING           4         3500         COUPLING           6         3500         COUPLING           10         3000         COUPLING           8         4000         COUPLING           5         5000         COUPLING           20         4000         COUPLING | GPM         PSI         DRIVE         HYDRAU (-20)           3         3000         COUPLING         N/A           4         3500         COUPLING         11 GPM @ 1850 PSI           6         3500         COUPLING         13 GPM @ 2184 PSI           10         3000         COUPLING         17 GPM @ 2338 PSI           8         4000         COUPLING         21 GPM @ 2255 PSI           5         5000         COUPLING         17 GPM @ 2090 PSI           20         4000         COUPLING         50 GPM @ 2317 PSI | GPM         PSI         DRIVE         HYDRAULIC FLUID POWER REQU<br>(-20)         HYDRAULIC FLUID POWER REQU<br>(-30)           3         3000         COUPLING         N/A         5 GPM @ 2550 PSI           4         3500         COUPLING         11 GPM @ 1850 PSI         9 GPM @ 2332 PSI           6         3500         COUPLING         13 GPM @ 2184 PSI         11 GPM @ 2612 PSI           10         3000         COUPLING         17 GPM @ 2338 PSI         19 GPM @ 2914 PSI           8         4000         COUPLING         21 GPM @ 2255 PSI         17 GPM @ 2914 PSI           5         5000         COUPLING         17 GPM @ 2090 PSI         13 GPM @ 2770 PSI           20         4000         COUPLING         50 GPM @ 2317 PSI         45 GPM @ 2573 PSI |  |  |

CAT/GIANT/GENERAL PUMP/PRATISSOLI/AR PUMPS AVAILABLE

PLEASE ADD (-20), (-30) OR (-40) TO THE MODEL NUMBER TO SPECIFY HYDRAULIC FLUID POWER REQUIREMENT (EX: HD303-30)

# **MARINE MOUNT SERIES**



### **Pumps**

- Industrial Duty Triplex Plunger Pumps
- · Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Stainless Steel Manifold Option Available
- · Direct Drive
- Thermo Pump Protector

### **Electric Motors**

- 1750 RPM TEFC Full Frame
- 1.15 Service Factor (Single Phase)
- 1.25 Service Factor (3 Phase)
- Thermal Overload Protection
- · Continuous Duty

### **Hydraulic Drive**

 Industrial Continuous Duty Serviceable Gear Motors Direct or Belt Driven, to be Mounted in Compact Space Where Hydraulic Power Fluid is Available

### **Electric Clutch**

 Heavy-Duty Clutch Specifically Matched for Each Pump, Geared To Mount on Front of Diesel Engine for Every Day Washing on Barges, Work Boats and Fishing Boats

### Frame

- Compact 12 Gauge and ¼" Frame Assembly
- Powder Coated
- · Optional: Stainless Steel

### Includes

- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with Quick Coupler System
- 4 Wash Nozzles
- · 50' of High Pressure Hose

These units are designed to be mounted on fishing/work-boats. Utilized by industry professionals that need high pressure on location.



### **U.S. Coast Guard Testimonial**

"We had our Easy Kleen 4000 PSI electric on board system installed on the Henry Blake over 15 years ago. Our crew uses this unit for cleaning buoys and our vessel daily. We are pleased with the serviceability and quality of Easy-Kleen's marine equipment. We will be returning to Easy-Kleen for our next marine high pressure system."

- USCGC, Henry Blake (WLM-563)



|            | MARINE SERIES - ELECTRIC CLUTCH |      |                   |        |                       |  |
|------------|---------------------------------|------|-------------------|--------|-----------------------|--|
| MODEL      | GPM                             | PSI  | DRIVE             | POWER  | VOLTAGE               |  |
| EC204      | 4                               | 2000 | V-BELT            | 5 BHP  | 12V                   |  |
| EC354      | 5                               | 3500 | V-BELT            | 10 BHP | 12V                   |  |
| EC408      | 8                               | 4000 | V-BELT            | 20 BHP | 12V                   |  |
|            | MARINE SERIES - ELECTRIC MOTOR  |      |                   |        |                       |  |
| MODEL      | GPM                             | PSI  | DRIVE             | POWER  | VOLTAGE               |  |
| ES204E-A   | 4                               | 2000 | FLANGE & COUPLING | 5 HP   | 220V-1PH              |  |
| ES204E-A-3 | 4                               | 2000 | FLANGE & COUPLING | 5 HP   | 208/230/460/575 V-3PH |  |
| ES304E-A   | 4                               | 3000 | FLANGE & COUPLING | 7.5 HP | 220V-1PH              |  |
| ES304E-A-3 | 4                               | 3000 | FLANGE & COUPLING | 7.5 HP | 208/230/460/575 V-3PH |  |
| ES404E-A   | 4                               | 4000 | FLANGE & COUPLING | 10 HP  | 220V-1PH              |  |
| ES404E-A-3 | 4                               | 4000 | FLANGE & COUPLING | 10 HP  | 208/230/460/575 V-3PH |  |



MANUFACTURER OF HIGH PRESSURE OF FANING FOURMENT

# DRY STEAM GENERATORS

### Electric Motor (2 HP)

- 1750 RPM TEFC Full Frame
- 1.15 Service Factor
- Thermo Overload Protection
- Continuous Duty

### **Pumps**

- Heavy-Duty Triplex Plunger Pump
- · Oil Bath Crankcase
- Stainless Valves Brass Manifold
- Direct Drive Thermal Pump Protector

### **Control Panel**

- Nema 4 Water Tight Easy Access
- Heavy-Duty On/Off Cam Switch

### Coil

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing (Vertical Units)

# Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

### Burner

- · Oil Fired
- · Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable Serviceable

### Frame

- · All Welded Powder Coated
- Horizontal Units include a 40 Gallon Internal Fuel Tank
- Fuel Tanks are Optional For Vertical Units
- Forklift Slots and Lifting Eyes
- Optional Wheel Kit Available

### **Safety Features**

- Electronic Thermostat with Deviation Control
- · Safety Valve Flow Control









### Dry Steam is used for a wide variety of applications.

- Curing municipal pipe relining systems
- Thawing culverts, pipelines, drains for processing plants, railways, municipalities and highway departments
- **De-greasing** High temperature raises the effectiveness of chemicals
- Degassing petroleum tanks before maintenance or repair
- Melting debris such as paraffin wax and grease from traps in wastewater treatment and refineries
- Cleaning and Restoring Steam is less intrusive than high pressure cleaning for masonry restoration and monument cleaning etc.
- Removing gum from sidewalks and other like surfaces
- **Prepping** surfaces for paint
- Purifying soil, mulch, and compost

Weed Control - Kills weeds without the use of chemicals



| MODEL     | ВНР | PSI | вти       | НР | VOLTAGE    | VERTICAL<br>L" X W" X H" |
|-----------|-----|-----|-----------|----|------------|--------------------------|
| EZO20ST-V | 20  | 100 | 800,000   | 2  | 110V - 1PH | 33 X 20 X 52             |
| EZO30ST-V | 30  | 100 | 1,200,000 | 2  | 110V - 1PH | 37 X 25 X 63             |
| EZO40ST-V | 40  | 100 | 1,500,000 | 2  | 110V - 1PH | 44 X 31 X 62             |
| EZO50ST-V | 50  | 100 | 2,000,000 | 2  | 110V - 1PH | 44 X 31 X 72             |

# DRY STEAM GENERATOR **OPTIONS**



Add on **Wheeled Frame** 

for easy portability on

Easy turn casters with

two locking brakes.


smooth surfaces.

### **Options**

- Wheel Kits See pg. 69 for all options.
- Horizontal Unit Remove (-V) Horizontal Units include a 40 Gallon Internal Fuel Tank
- Skid Frame Option with 225 Gallon Water Tank, Forklift Slots & Lifting Eye
- Complete Trailer Package with 225 Gallon Water Tank
- Fuel Tank for Vertical Units



Our **Skid Frame** with Forklift Slots and Lifting eyes allows you to load and unload your complete dry steam package



FRAME-STM20-WK-V pg. 69

Our Horizontal Unit

is an available option. What ever application you need our machines

to fit, we can get you

there.

EZO20ST-V with Wheeled Frame

### **Used for Installing Municipal Liners**

### BEFORE



**AFTER** 

### **Used for Curing Concrete on large Job Site**

Option



Sanivac, based out of Ontario and Quebec, is a Service and Sanitary Facility company using our heavy-duty dry steam generator to cure concrete on large job sites.

This machine quickly creates large amounts of steam while also being compact and portable, allowing them to do their job swiftly and efficiently.

1-800-315-5533



# GROUNDHOG JETTERS

### EZJ3512G ▶

Designed to be transported in a pickup truck or the side or rear door of a van.

- · 35 HP Vanguard Gasoline Engine
- Pump (Gearbox Driven)
- 12 GPM @ 3500
- 12 Volt Hose Reel Complete With Hose Guides, Super Swivel and Foot Pedal Control
- 300 Feet of 3/8" Jetter Hose
- 10 Gallon Poly Fuel Tank
- · 200 Gallon Poly Water Tank

EZJ3512G-R 12 GPM @ 3500 PSI with Optional Remote - Add (-R)



Mr. Rooter "The Best Van Pack In The Business" - Brad Sims, Mr. Rooter











### EZJ4020D A

### Designed to be truck or trailer mounted

- · 60 HP Kubota Diesel Engine
- · Pump (Belt Driven)
- 20 GPM @ 4000 PSI
- Hydraulic Driven Hose Reel
- 300 Feet of 1/2" Jetter Hose
- 525 Gallon Poly Water Tank

### VAC Truck Heater/Jetting Combo Unit

Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs





| MODEL         | GPM | PSI  | HP             | DRIVE   | WATER TANK | FUEL TANK | HOSE REEL          |
|---------------|-----|------|----------------|---------|------------|-----------|--------------------|
| EZJ3512G      | 12  | 3500 | 35 HP VANGUARD | GEARBOX | 200 GALLON | 10 GALLON | 12 VOLT - 300 FT   |
| EZJ4020D/SKID | 20  | 4000 | 60 HP KUBOTA   | BELT    | 525 GALLON | 10 GALLON | HYDRAULIC - 300 FT |

# **JETTER TRAILERS & ACCESSORIES**



### **Optional Remote**

- Hose Reel In
- Motor OFF and Speed Control
- Pressure ON/OFF

### **Other Options**

- · Cold or Hot Water
- Gas, Diesel, or Electric
- 225, 525, and 740 Gallon Water Tanks
- Fully Customizable Hose Reel Racks
- Winterization System
- Chemical Tank 10 Gallon Poly Chemical Tank Mounted for High Pressure Soap Injection
- Complete Light Packages Arrows & Work Lights
- Multi Reel & Multi Gun
- Twin Jetter Trailer
- Dual Pump System 20 GPM @ 4000 PSI
- Exhaust Vent For Enclosed Trailers
- Fuel Tanks Float Tanks

### Open Trailer Option - Add (- MOBILE)

- 8' & 14'Trailer Options
- Multiple Engine/HP Options
- Single or Dual Axel

### **Enclosed Trailer Option**

- 8′. 225G Enclosed Trailer
- 14', 525G Enclosed Trailer
- 16', 525G & 740G Enclosed Trailer

### **Remote Option**

· Add (-R) to model number for Remote



### **FOOT PEDAL INLINE**





When operating sewer or jetter machine, this allows hands to be free.

| SWT-FTSW-SNP-Y | FOOT SWITCH, SNAP ACTION CONTACTS, 24-240 VOLT - YELLOW                          |
|----------------|--|
| SWT-FV5012-IH  | FOOT VALVE, 12 GPM @ <b>5000 PSI</b> , 300°F, 3/8 " INLET FNPT, 1/4" FNPT OUTLET |
| SWT-FV808-IH   | FOOT VALVE, 8 GPM @ <b>8000 PSI</b> , 300°F                                      |

### JETTER HOSE REEL KIT





Electric Driven Hose Reel Kit. A great base set for your jetting needs. Hose is not included.

KIT-HR300HP-12V

JETTER HOSE REEL KIT, C/W 12V MOTOR, & ROLLER BRACKET - 300 FOOT CAPACITY

### JETTER NOZZLE KITS





| NOZ-KIT-JTR1130-38 | KIT, 11 GPM @ <b>3000 PSI</b> , 3/8" NPT, 4-PACK  |
|--------------------|---|
| NOZ-KIT-JTR1230-38 | KIT, 12 GPM @ <b>3000 PSI</b> , 3/8", 4-PACK      |
| NOZ-KIT-JTR2040-12 | KIT, 20 GPM @ <b>4000 PSI</b> , 1/2 " NPT, 4-PACK |

### Find MORE Options & Accessories starting on page 72

### TRAILER OPTION EXAMPLES



### EZJ4020-TLR 14' Jetter Open Trailer

- 60 HP Kubota
- Belt Driven
- 20 GPM @ 4000 PSI
- 300 Gal Water Tank

### **HEATER PACK**

Add hot water to your Sewer Jetter System with a Modular Heater.

Increases speed and efficiency when cleaning out ice or grease.

- 440,000 BTUs
- Oil Fired Burner



### **EZJ3820G-2-TLR**

### 14' Twin Jetter Open Trailer

- 2 x 35 HP Electric Start Vanguard
- 20 GPM @ 3850 PSI
- Triplex Pump
- Belt Driven
- 525 Gal Water Tank





# DUST SUPPRESSION TRAILER

### 2" Honda Trash Pumps

- Heavy-duty 2" Construction Trash Pump
- Easy starting 5.5 HP Honda **OHV Commercial Engine**
- 185 GAL/min Capacity
- Solid Handling Capability up to 13/16"
- Heavy-duty, Deep-vane Impeller and extra-thick, Cast-**Aluminum Pump Housing**
- Cast Iron Conical Impeller
- · Ouick Clean Out Port

### Frame

- Coated Steel
- 120° Spray Nozzles

### Includes

- 2" Hydrant Tank Fill

The Water Otter series is the ideal solution for all your dust suppression needs offering a rear mounted spray bar. This heavy-duty road ready trailer has an 8' deck with tandem 5200 lb axles and is equipped with a 525 gallon poly water tank with hydrant fill capabilities.





**SCAN FOR VIDEO!** 





| MODEL   | MAX PUMP OUTPUT        | HP/ENGINE     | FUEL     | DRIVE  | WATER TANK |
|---------|------------------------|---------------|----------|--------|------------|
| PWT525G | 185 GALLONS PER MINUTE | 5.5 HP HONDA  | GASOLINE | DIRECT | 525 GALLON |
| PWT525D | 185 GALLONS PER MINUTE | 9.8 HP DIESEL | DIESEL   | DIRECT | 525 GALLON |

# **RV & CAR LOT WASH TRAILER**



### **Pumps**

- Heavy-Duty Triplex **Plunger Pumps**
- · Oil Bath Crankcase
- Stainless Valves Brass Manifold
- Thermo Pump Protector
- Adjustable Pressure Regulator
- Ball Valve Control

### **Engines**

- 6.5 or 14 HP Kohler **Gasoline Engines**
- Efficient Serviceable

### Frame

- Fully Welded Powder Coated Steel
- 16 Inch Wheels
- 100 Gallon Poly Water Tank

### **Includes**

- · 36" Gun and Wand Assembly with **Quick Coupler System**
- In-Line Water Filter 1 Soap Nozzle
- 0°/15°/25°/40° Nozzles
- · Downstream Chemical Injection System • Hose Reel
- 50' of High Pressure Hose

Ideal for RV dealerships, car lots, equipment rental shops, and RV

you to bring your pressure washer to your lot inventory instead of

hauling it to the pressure washer, saving both time and resources.

parks. Designed to be pulled behind ATVs or small tractors, allowing

### **Options & Accessories**

 Road Worthy Trailer • Larger 225 Gallon Water Tank

Honda Engines • Diesel Engines

High Pressure Soap

• Extend-A-Wands • Rotary Nozzle

• Drain Cleaning/Jetter Kit



Removable Tongue



**SCAN FOR** 

VIDEO!

Add (-H) to model number for Honda Engine, (-K) for Kohler

| MODEL                         | GPM          | PSI          | НР                             | DRIVE         | WATER TANK                   |
|-------------------------------|--------------|--------------|--------------------------------|---------------|------------------------------|
| RVWASH100/6.5                 | 3            | 2700         | 6.5 HP KOHLER                  | DIRECT        | 100 GALLON                   |
| RVWASH100/14                  | 4            | 4000         | 14 HP KOHLER                   | DIRECT        | 100 GALLON                   |
| ADD (- DOT) TO MODEL NUMBER F | OR THE DOT A | PPROVED BOLT | ON TRAILER PACKAGE 2200LB SING | LE AXLE, FEND | ERS, AND TONGUE WITH LIGHTS. |

EASY-KLEEN

RVWASH100/6.5-K-DOT

# **OPEN TRAILERS**

# Our open trailers are manufactured in-house. Fully Welded • Powder Coated • Rugged • Built to Last

Customizable to meet any applications! Choose from a wide variety of water tanks, hose reels, jetting and wet steam accessories, and options to create a unit tailored to your specific specifications.



### Industrial Hot Water Gasoline - Oil Fired EZO3008G

This unit was built to wash boats in order to prevent the spread of invasive mussels in British Columbia.





# EZO3010D

# Industrial Hot Water Diesel - Oil Fired

### EZO3010D

This unit was designed for a mine in Peru that was in need of a fully mobile unit for washing equipment and machinery in multiple locations.





# Industrial Hot Water Gasoline - Oil Fired

26 HP Kohler Diesel Engine 10 GPM @ 3000 PSI

### EZO3008G

- Grizzly Series
- Skid Unit with 225 Gallon Water Tank & two Hose Reels
- Bolt-On-Trailer Package



### **OPEN TRAILER PACKAGES**

Equipment ready to go! Great for mobile service with compact design.

| KIT-FDTLR-8-225  | 8' SINGLE 3200LB. AXLE 225 GAL. WATER TANK    |
|------------------|---|
| KIT-FDTLR-10-525 | 10' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK |
| KIT-FDTLR-12-525 | 12' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK |
| KIT-FDTLR-14-525 | 14' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK |
| KIT-FDTLR-16-740 | 16' TANDEM 7000 LB. AXLES 740 GAL. WATER TANK |

# **OPEN TRAILER OPTIONS**

### **FLOAT TANK**

For water supply to pump systems. Garden hose connection.

| KIT-FLOAT TANK (CHW) | 1 GALLON FLOAT TANK KIT FOR COMMERCIAL HOT<br>WATER UNIT, COMES WITH BALL VALVE FOR HIGH<br>PRESSURE SOAP  |
|----------------------|--|
| KIT-FLOAT TANK (IHW) | 18 GALLON FLOAT TANK KIT FOR INDUSTRIAL HOT<br>WATER UNIT, COMES WITH BALL VALVE FOR HIGH<br>PRESSURE SOAP |

### **LARGE POLY WATER TANKS**

### Frames Not Included





|  | 그 마음 그는 내용 그는 아이들은 이 아이들이 얼마를 하고 있다면 내용하다 하는데, 그는 사람들이 되었다면 하는데 없었다.     |  |  |
|--|--|--|--|
| TAN-225GAL   | 225 GAL. DIMENSIONS, 49" L X 38"W X 41"H                                 |  |  |
| TAN-325GAL   | 325 GAL. DIMENSIONS, 68" L X 38"W X 43"H                                 |  |  |
| TAN-525GAL   | 525 GAL. DIMENSIONS, 72" L X 49"W X 54"H                                 |  |  |
| STEEL TANK STRAPS ADDITIONAL COST FOR 225, 325 & 525 GAL. POLY WATER TAN |  |  |  |
| TAN-740GAL   | 740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH STEEL TANK STRAPS |  |  |

### **SMALL POLY WATER TANKS**





| TAN-35GAL  | 35 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED  |
|------------|---|
| TAN-100GAL | 100 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED |

### **FUEL TANKS, GAS CAPS, TANK BRACKET, & WINTERIZATION KIT**





| TAN-FUEL-10G          | FUEL TANK - 10 GAL.   |
|-----------------------|-----------------------|
| TAN-FUEL-20G          | FUEL TANK - 20 GAL.   |
| TAN-FC10G             | GAS CAP WITHOUT GAUGE |
| TAN-FC10G-WG          | GAS CAP WITH GAUGE    |
| FRAME-TANKBRACKET-10G | TANK BRACKET          |
| KIT-WTZ               | WINTERIZATION KIT     |

Find MORE Options & Accessories starting on page 58

### A-FRAME HOSE REEL - INDUSTRIAL



Can be mounted on various units. Rated at 5000 PSI

| HOS-HR150HP-A-BLK | 150' CAPACITY |
|-------------------|---------------|
| HOS-HR300HP-A-BLK | 300' CAPACITY |
| HOS-HR450HP-A-BLK | 450' CAPACITY |

HOS-HR300HP-A-BLK



Capacity: 300' or 500', Industrial 12 or 120 Volt Hose Reel.

| KIT-HR300HP-12V             | ELECTRIC DRIVEN HOSE REEL KIT, C/W 12 VOLT MOTOR & ROLLER BRACKET, 300' CAPACITY |  |  |
|-----------------------------|--|--|--|
| HOS-HR325HP-120V-B          | 120V, 300' CAPACITY  |  |  |
| HOS-HR500HP-12V-BLK         | 12V, 500' CAPACITY   |  |  |
| OTHER 120V MODELS AVAILABLE |  |  |  |


### **EASY-KLEEN - STAINLESS STEEL HOSE REEL**



Constructed in-house. Ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining. Rated at 5000 PSI

|          | HOS-HR150HP-A-SS-IH | 150' CAPACITY |
|----------|---------------------|---------------|
| A. A. C. | HOS-HR300HP-A-SS-IH | 300' CAPACITY |

### **HOSE REEL - ROLLER BRACKET GUIDE**



Easier to -roll up hose, protecting and extending it's life span.

HOS-RB-BTM12-BLK BOTTOM, 12" DRUM, BLACK



Hose reel that swivels to allow directional change while unraveling. Rated at 5000 PSI and 194° F

| CONT.   | HOS-PHR100 | HOSE REEL - 360° PIVOT, 3/8" X 100' CAPACITY                           |
|---------|------------|--|
| COMPANY | HOS-PHR-MB | MOUNTING BRACKET FOR PIVOT HOSE REEL (Needed to Mount above Hose Reel) |

### **HYDRAULIC HOSE REEL - HIGH PRESSURE**



180°, RIGHT & LEFT SWIVEL (HOLDS 500' OF 1/2" HP HOSE / 300' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED HOS-HR500HP-HYD 180°, RIGHT & LEFT SWIVEL (HOLDS 1000' OF 1/2" HP HOSE / 600' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED HOS-HR1000HP-HYD



# ENCLOSED TRAILERS

Paired with machines from the *Industrial Hot Water Gas* or the *Industrial Hot Water Diesel Series*. 4 to 10 GPM at 3000 to 11,500 PSI *Gasoline or Diesel Driven - Oil Fired*. (See Pages 26 and 29)

Choose from a wide variety of water tanks, hose reels, jetting and wet steam accessories, and options to

create a unit tailored to your specific specifications.











Custom Hose Reel Racks & Light Kit



740 Gallon Water Tank



Wet Steam - Jetter & 2 x High Pressure Hose & Reels



EZO3010G Grizzly Series Trailer





### 8' ENCLOSED TRAILER PACKAGE 225G

KIT-CARTLR-8-225

8' ENCLOSED TRAILER WITH SINGLE 3500 LB AXLE, BARN STYLE REAR DOORS, 5' WIDE, 225 GAL. WATER TANK, 10 GAL. ANTIFREEZE TANK, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER. THE 8'TRAILER MOST COMMONLY PAIRS WITH COMMERCIAL HOT WATER & JETTER UNITS.

### 14' ENCLOSED TRAILER PACKAGE 525G

KIT-CARTLR-14-525

COMPLETE TURNKEY TRAILER KIT INCLUDES - 14' ENCLOSED CARGO TRAILER, TANDEM 5200 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 525 GAL, WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

### 16' ENCLOSED TRAILER PACKAGE 525G & 740G

KIT-CARTLR-16-525

COMPLETE TURNKEY TRAILER KIT INCLUDES - 16' ENCLOSED CARGO TRAILER, TANDEM 7000 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 525 GAL. WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

KIT-CARTLR-16-740

COMPLETE TURNKEY TRAILER KIT INCLUDES - 16' ENCLOSED CARGO TRAILER, TANDEM 7000 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 740 GAL. WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

# **ENCLOSED TRAILER OPTIONS**



### Our 14' & 16' Enclosed Trailers come standard with:

- Tandem Axle
- Electric Brakes
- Rear Barn Style Doors
- Insulated Interior Wall and Roof, White Metal Lined
- Insulated & Painted floor (1-1/2" Urethane Foam)
- Burner Safety Switch and Exhaust Vent
- A-Frame Hose Reel 150' Capacity, with 100' high pressure hose installed
- 35 Gallon Antifreeze Tank
- · 1500 WATT Trailer Heater

They are then completed with your unit and water tank of choice.



### Other Options available:

- 6" Square Lockable Hatch (curb side) to pull hose through
- Interior LED Light
- Cam Lock Fill
- Additional A-Frame Hose Reel
- Multiple Reels installed in rear of Trailer
- Chemical Tanks
- · Low Water Cut Off



ACC-TRAF-DIRECT-KIT

MUNICIPAL FLASHING LIGHT / ARROW / 3 WORK LIGHTS - KIT MOUNTED ON ANY SKID FRAME (FACTORY INSTALL)

ACC-TRAF-DIRECT-SUPPORT

MOTORIZED ARROW BOARD SUPPORT FOR TRAFFIC DIRECTOR KIT

### A-FRAME HOSE REEL - INDUSTRIAL



Can be mounted on various units. Rated at 5000 PSI

| HOS-HR150HP-A-BLK | 150'CAPACITY |
|-------------------|--------------|
| HOS-HR300HP-A-BLK | 300'CAPACITY |
| HOS-HR450HP-A-BLK | 450'CAPACITY |

### **LARGE POLY WATER TANKS**





|               | 보고 하다는 것은 사람들은 보고 있다면 하고 있다면 하다면 하다면 보다는 사람들이 되었다면 보고 있다면 보다면 보고 있다면 |
|---------------|--|
| TAN-225GAL    | 225 GAL. DIMENSIONS, 49" L X 38"W X 41"H   |
| TAN-325GAL    | 325 GAL. DIMENSIONS, 68" L X 38"W X 43"H   |
| TAN-525GAL    | 525 GAL. DIMENSIONS, 72" L X 49"W X 54"H   |
| STEEL TANK ST | TRAPS ADDITIONAL COST FOR 225, 325, & 525 GAL. POLY WATER TANK   |
| TAN-740GAL    | 740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH STEEL TANK STRAPS                                       |

### **HOSE REEL STANDS (ONLY)**

Elevates the hose reel, making it easier to use, store, and access.

Hose, hose reels, and tank not included.



| FRAME-HRSX1 | 1-HOSE REEL, ORANGE      |
|-------------|--------------------------|
| FRAME-HRSX2 | 2-HOSE REELS, ORANGE     |
| FRAME-HRSX3 | 3-HOSE REELS, ORANGE     |
| TAN-35GAL   | C/W 35 GAL TANK OPTIONAL |

Find MORE Options & Accessories starting on page 58.

FULLY CUSTOMIZABLE, INSULATED AND ENCLOSED TRAILER PACKAGES!
EVERYTHING HAS BEEN THOUGHT OF TO ENSURE YOUR SUCCESS



# **IN-PLANT SYSTEMS**

### **Pumps**

- Industrial Heavy-duty Triplex Plunger Slow Speed Pumps
- · Oil Bath Crankcase
- Stainless Steel Valves
- Manifold Available in Brass, Nickel, Aluminum, Bronze or 316 Stainless Steel
- Belt Driven or Optional Gearbox Drive

### **Electric Motors**

- 1750 RPM TEFC Full Frame
- 1.25 Service Factors
- Thermal Overload Protection
- Continuous Duty

### **Electrical Control Panel**

- Nema 4 Water Tight Easy Access
- · Auto Stop/Start With Time Delay

### Frame

- All Welded All Powder Coated
- Super Heavy-Duty Plate or Channel Iron Base Frame Assembled

### Includes


- Liquid Filled Stainless Steel Pressure Gauge
- · Adjustable Pressure Regulator

### **Options & Accessories**

- Multi Pump and Multi Staging of Pumps
- High Temp Shut Down
- Pulsation Dampener
- · Pressure Blow Off
- · Tank Feed
- Steam/Hot Water Sensor Temp Controls
- Level Controls
- Wash Station Foamers
- Wash Station Control Systems
- Wash Station Valve Assemblies
- VFD PLC Pressure Transducer

# Designed for industrial and food processing plants that require 24 hour on demand cleaning capabilities throughout their operation. Any requirement can be met — no matter how large or small the need!



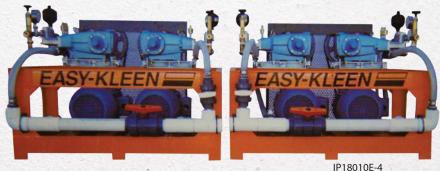

IP18010E-4 4 Pump Multi Stage







# **Pratissoli**

| MODEL      | GPM | PSI  | HP     | VOLTAGE               |
|------------|-----|------|--------|-----------------------|
| IP1010E-1  | 10  | 1000 | 7.5    | 208/230/460/575 V-3PH |
| IP1510E-1  | 15  | 1000 | 10     | 208/230/460/575 V-3PH |
| IP2110E-1  | 21  | 1000 | 15     | 208/230/460/575 V-3PH |
| IP1022E-1  | 10  | 2200 | 15     | 208/230/460/575 V-3PH |
| IP4210E-2  | 42  | 1000 | 2 X 15 | 208/230/460/575 V-3PH |
| IP3612E-1  | 36  | 1200 | 30     | 208/230/460/575 V-3PH |
| IP4510E-1  | 45  | 1000 | 30     | 208/230/460/575 V-3PH |
| IP7212E-2  | 72  | 1200 | 2 X 30 | 208/230/460/575 V-3PH |
| IP9010E-2  | 90  | 1000 | 2 X 30 | 208/230/460/575 V-3PH |
| IP13510E-3 | 135 | 1000 | 3 X 30 | 208/230/460/575 V-3PH |
| IP18010E-4 | 180 | 1000 | 4 X 30 | 208/230/460/575 V-3PH |
| IP2320E-1  | 23  | 2000 | 30     | 208/230/460/575 V-3PH |
| IP4620E-2  | 46  | 2000 | 2 X 30 | 208/230/460/575 V-3PH |
| IP6012E-1  | 60  | 1200 | 50     | 208/230/460/575 V-3PH |
| IP7010E-1  | 70  | 1000 | 50     | 208/230/460/575 V-3PH |
| IP6010E-1  | 60  | 1000 | 40     | 208/230/460/575 V-3PH |
| IP3025E-1  | 25  | 3000 | 50     | 208/230/460/575 V-3PH |
| IP4020E-1  | 20  | 4000 | 50     | 208/230/460/575 V-3PH |

# **CUSTOM IN-PLANT SYSTEMS**

PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Our customer needed an effective and efficient way to clean their plant after processing lobster, with three pumps, which can all be run at once, ensuring very little down time, and a fully automatic stop/start system pull station dampener put on each pump to ensure smooth, constant flow and to increase pump life, meaning a station is always ready.

This custom, In-Plant, Hot Water Cleaning System is complete with three, 4 GPM @ 2000 PSI pumps, leading to a total of 12 GPM @ 2000 PSI, tied into a 5 HP, 575 Volt, 3 Phase, Belt Driven, all electric Hot Water Heater with Industrial Duty General Pumps. Modular stacking frame designed with three stainless steel lines going out to specific areas within the fish plant. The system was set up with a water supply tank to ensure proper pressure supplied to each pumping system. With the ability to use either hot or cold water and featuring automatic controls, open design for easy maintenance, and three pumps, ensuring that should one require any work, the machine is still operational.









IP4510E-1-575 45 GPM @ 1000 PSI with 225 Gallon Water Tank



# **PARTS WASHER**

Stop manually cleaning parts with pressure washers and scrub tubs. Our Parts Washer's heavy-duty cleaning power and relatively small footprint help you get the job done safely and more efficiently.

### **System Features**

- Heavy-Duty, Roll-Door Design
- Load Capacity up to 1,500 lbs
- Sprocket-Driven Turnable Available in 25", 31", and 36"
- · Auto Water Fill and Low Water Shut-Off
- · Vertical, No-Seal Pump
- Built-in Disc-Style Oil Skimmer Extends the Life of Your Cleaning Solution
- 7-day Programmable Timer for Heat and Oil Skimmer
- 60-Minute Wash
- Two-Week Build Time
- 1+ Year Warranty

### **Additional Elements**

- Stainless Steel: Stainless Steel Cabinet, Electromechanical 24 Hour Heat Times, Mid-Spray Bar
- · Large: Chain Driven Turntable

### **Options & Accessories**

- Parts Baskets
- · Parts Tree
- · Hydro Spray Hand-Held Detail Wand
- Steam Exhaust Fan
- Casters
- Bag Filter System



# Extend the life of your parts with a machine that saves you time and money while providing a powerful clean!

| MODEL     | TURNTABLE<br>DIAMETER | INSIDE<br>HEIGHT | WEIGHT<br>CAPACITY | PUMP<br>(HP) | PUMP<br>OUTPUT | SOLUTION CAPACITY | HEAT SOURCE<br>(KW) | OVERALL DIMENSIONS |
|-----------|-----------------------|------------------|--------------------|--------------|----------------|-------------------|---------------------|--------------------|
| ORCA-2532 | 25"                   | 32"              | 1000 LBS           | 3            | 45 PSI/50 GPM  | 60 GAL            | 6                   | 36L X 51W X 68H    |
| ORCA-3142 | 31"                   | 42"              | 1000 LBS           | 3            | 45 PSI/50 GPM  | 80 GAL            | 6/1PH OR 12/3PH     | 42L X 56W X 78H    |
| ORCA-3648 | 36"                   | 48"              | 1500 LBS           | 5            | 58 PSI/85 GPM  | 110 GAL           | 12                  | 47L X 65W X 85H    |

## TOTE-BOX WASHER

### EASY-KLEEN PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

### **Design & Standard Features**

### Multi-Stage

- First Stage: Pre Rinse Pumped From Third Stage Rinse Tank - Drained to Plant Drain
- Second Stage: Wash Pressurized High Volume Hot Chemical. Wash-Recycled through Filter and Steam **Heated Tank**
- Third Stage: Clean Rinse Pressurized High Volume Rinse - Recycled through Filter and Cold Water Tank
- · Fourth Stage: Blower/Dryer

### Conveyor System:

- Dual 2060 Stainless Steel Conveyor Chain Run in Nylon Grooves (Optional Third Length Chain System)
- Stainless Steel Drive Shafts and Sprockets
- Nylon Flanged Type Sealed Bearings
- Adjustable Chain Speed Controller
- Stainless Steel 304 Square Tubing and **Angle Framework**
- Stainless Steel 11 and 16 Gauge Shrouding, and Sheet Metal Work
- Poly Neoprene Curtains between Stages and on each end
- Tension Adjuster
- Adjustable Guild Rails for different size Tote and Tray

### **Nozzle Manifold System:**

- All Stainless Steel Nozzles and Manifold Piping
- Stainless Steel adjustable Angle Ball-Joint
- High impact inner Tote Cleaning Nozzle
- Easily adjustable to height of container for Maximum Impact
- Rugged Access Doors for Easy Maintenance

### **Pumps Systems:**

- Industrial Grade Continuous Duty
- · Seal Less, Vertical Pump designed for no maintenance
- · Proven in pumping High Volume High Temperature Chemicals and Dirty Fluids
- TEFC, 480 Volt, 3 Phase Motors
- Wash Stage Pump 10 HP, 175 GPM, 70 PSI
- Clean Rinse Stage Pump 7.5 HP, 125 GPM, 70 PSI

### **Options**

- PH Control System
- ORP Control System
- Electrically Heated Package 40KW
- Third Run of Conveyor Chain
- · Recycling Sanitizing Pump & Tank System

### **Totes & Tray Sizes:**

 From 7"W x 5"D x 12"L to 15"W x 7"D x 32"L

### **Dimensions:**

5'W x 6'H x 30'L Approximately

### **Production:**

· 250-400 Large Totes per Hour **Electrical Supply:** 

### • 80 AMP, 480 Volt, 3 Phase

Water Supply: 30 GPM Main Pressure

### Testing:

24 Hours Before Pickup

**Tanks System** 

First Stage:

· Drip Tray catches all sprayer debris and drained fitting to connect to plant drains

### **Second Stage:**

- 175 Gallon Stainless Steel Insulated Tank
- 40 KW 480 Volt Electrically Heated Tank
- Temperature Controller Temperature Gauge
- Low Water Pump Cut Out
- · Automatic Refill Float Valve
- Large Drain Valve and sloped for fast and easy wash out
- Large Rectangular Filter Basket to catch foreign material before being re-pumped to nozzles
- (Optional) PH Controller, Sensor and Chemical Pump to control and maintain chemical strength in Tank
- Oil Skimmer

### Third System:

- 125 Gallon Stainless Steel Tank
- Large Drain Valve and sloped for fast and easy wash out
- · Automatic Refill Float Valve
- Low Water Pump Cut Out
- Large Rectangular Basket Filter to catch foreign material before being pumped through nozzles

### Forth Stage:

· Air/Blower - Knife Dryer

### **Control Panel:**

- · Control Panel mounted to system
- Stainless Steel Nema 4 water tight
- Pre-wired to all components on system
- · Complete with all necessary Starters, Overloads, Fuses, Control Transformers, Indicator Lights and Controls as required



### **Start Up & Training:**

Optional



# **HYDROSTATIC TESTERS**

Ideal for contractors and rental shops for test pumps due to its rugged and dependable design.

### Water/Sewer Main Testers

### Pump

- Diaphragm Pump
- 550 RPM
- Gearbox Drive
- 10 GPM @ 600 PSI

### **Engine**

- 6.5 HP Kohler or Honda Gasoline Engine
- Low Oil Alert System
- Recoil Start

### Frame

- Fully Welded
- Powder Coated
- Roll Cage Cart
- 13" Foam Filled Tires

### **Includes**

- Adjustable Heavy-Duty Aluminum Pressure Regulator with Water Dump Feature
- Liquid Filled Pressure Gauge
- 10 Feet of Suction/Bypass & Discharge Hose

### **Options**

· Test Line Gauge Kit





### **Vessel & Pipeline Testers**

With over 35 years of experience manufacturing and designing hydrostatic test equipment to heavy industry applications in refineries, mills, mines, oil and gas.

Each system is generally customized to meet the specific needs of the customers application.





# **COIN OPERATED CAR WASH**



### Pump

- Heavy-Duty Triplex Plunger Pump
- · Oil Bath Crankcase · Stainless Valves
- Brass Manifold
- · Direct Drive
- Thermo Pump Protector
- Belt or Flange & Coupling Drive

### Electric Motor (5 HP)

- 1750 RPM TEFC Full Frame
- 1.15 Service Factor (Single Phase)
- 1.25 Service Factor (3 Phase)
- · Thermal Overload Protection
- Continuous Duty
- 220 Volt 1 Phase or 208/230/460/575 Volt - 3 Phase

### **Control Panel**

- Nema 4 Water Tight Easy Access
- Mounted to Pump Base
- · Pre-wired, Just Requires a Power Source

### **Soap Controls**

- Standard Soap and Wax Injection Valves with Fine Point Metering
- Complete with Hot Water Solenoid to Control Hot Soap and Wax
- Cold Water Rinse Solenoid to Save Money Heating Water
- Pump Suction is Controlled with 10 Gallon Poly Float Tank

### Frame

- All Welded Powder Coated Bench Style
- Optional Stackable Pump System Frames Available

### Includes

- Adjustable Pressure Regulator
- · Liquid Filled Pressure Gauge
- Heavy-Duty Fittings

### **Bay Equipment**

- Stainless Steel Heavy-Duty Coin Box with 8 Position Switch for Optional Selections, Internal Heater and Extreme Duty Lock Box
- Multi Coin Acceptor with State Timer, Coin Acceptor (Quarters, Loonies and Toonies or Tokens) LED, Beeper (Specify Front or Rear Loading)
- Center Mounted Spring Loaded 360° Boom
- Flexible Wands
- High Pressure Swivels
- · 4000 PSI Rated Weep Trigger Gun
- Stainless Steel Nozzle
- · Bay Lines are Steel Braided and Non-Marking
- Stow-Away Wall Brackets
- Complete Instruction Signs are Included

### **Options**

- · Foaming Brush System
- Motor and Tire Cleaner
- Floor Mat Clamps
- Coin Operated Vacuums
- Vending Machines
- · Stainless Bill Changer

We have taken pride in designing and manufacturing fool proof, easy to install and maintain, self-serve car wash systems that will provide savings from installation to maintenance for years to come.





# EASY-KLEE! PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

# CUSTOMIZED UNITS & FRAME OPTIONS



**In-Plant Systems** Custom Triple-Stacked Frame.

We have the ability to custom design and manufacture all types of high pressure cleaning equipment. If you have a need we will meet it.

### Custom Grizzly for Truck Bed

Grizzly Fill & Play with 225 Gallon Water Tank, Hose Reels, Steam Kit, Winterization



### **Fully Custom Unit** with Dual Heaters & Industrial Pump

Two Oil Fired Modular Heaters, Industrial Series 25 GPM @ 800 PSI Pump System, Custom Skid and Frame, 160 Gallon Diesel Tank, 225 Gallon Water Tank, and a 35 Gallon Winterization Kit.





**Hot Water Heaters** For Military Showers Complete with Stainless Steel Coils. (3 Portable Units)



Cold Water Diesel 60 HP Kubuta Engine,

20 GPM @ 4000 PSI, 525 Gallon Water Tank, 500' Hose & Hydraulic Reel.

TALK TO YOUR EASY-KLEEN REPRESENTATIVE TODAY! Design a Custom System that will fit your needs.

# **CUSTOMIZED UNITS & FRAME OPTIONS** - CONTINUED



### **Fully Electrically Heated Unit**

Customized with Wheel Kit and Cage Frame, allowing the unit to be transported between multiple washing locations without the use of a forklift.

### Modular Hot Water **Heater - Oil Fired**

EZO700-(1/2) with Redundancy Package.





for a tractor.


3 Pumps with a Stationary Horizontal Stack Frame.



### Vac Truck Heater/Jetting **Combo Unit**

20 GPM @ 4000 PSI 96" x 40" x 68"







### Custom Setup within Enclosed Trailer

Two Split Unit Bull Mose Series Hot Water Pressure Cleaning Systems, 26 HP, 5 GPM @ 5000 PSI and 4 GPM @ 7000 PSI 730 Gallon Water Tank, Exhaust Vent Kit with Flip Lid and Safety Control, Steam Option, Mega Flex Drain Cleaning Kit, two 300' A-Frame Hose Reels, 35 Gallon Antifreeze Kit.



# EASY-KLEEN DEMUCKER

Ideal for pre-washing heavy equipment, lumber and rental yards, mining operations, and tracked vehicles. This high volume unit delivers 100 gallons per minute which allows for easy removal of heavy mud in the pre-washing stage shorting the washing cycle.

### Pump (Centrifugal Pump)

· Direct Drive

### Electric Motor (7.5 HP)

- 1750 RPM TEFC 1.25 Service Factor
- High Efficiency Continuous Duty

### **Electrical Control Panel**

- Nema 4 Water Tight Easy Access
- Trigger Gun controlled Auto Stop/Start with Time Delay

### Frame

• All Welded • Powder Coated

### **Options & Accessories**

Hose Reel





| MODEL           | GPM | PSI | HP  | DRIVE RPM | VOLTAGE   | L" X W" X H"          |
|-----------------|-----|-----|-----|-----------|-----------|-----------------------|
| HVLP10060-3-575 | 100 | 60  | 7.5 | 1,750     | 575 V-3PH | 25.5" X 48.5" X 46.25 |

# **ALUMINUM & STAINLESS STEEL OPTIONS**

### **Aluminum& Stainless Steel Options**

- Coils, Frames, Pumps, Hose Reels, & Fittings
- Aluminum and stainless steel frames are ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining.
- All units can be ordered with Aluminum or Stainless Steel Frames.
- Stainless steel pumps, fittings, and coils are available for food grade usage.













# **MOBILE & ON-SITE SERVICE REPAIR**



### Extend the Life of your **Pressure Washer!**

- Easy-Kleen branches have service technicians on-hand who are trained to perform in-house and on-the-road service.
- Service for All Makes & Models of High Pressure Cleaning Equipment
- An Experienced Pressure Washer Service Team - Service Reps with 20 Plus Years of Experience Each
- The Largest Parts Inventory In Canada
- Distributor for All Major Pump & Parts Brands General • Pratissoli • Cat • Giant • Comet • AR
- Preventative Maintenance Packages
- Engineering & Design Service
- Coast-To-Coast Mobile Service
- Fly Out Immediate Service
- 24-Hour Service
- Free Phone-In Help Line

Easy-Kleen branches have service technicians on-hand who are trained to perform in-house and on-the-road service.



# **MOBILE & ON-SITE SERVICE REPAIR!**



**Mobile Service:** Our service team can help you maximize productivity by keeping your pressure system serviced and maintained, so you can clean faster and more efficiently!

### **On-Site & In-House Repair:**

- Service Vans on call daily
- We perform repairs on all makes and models of pressure washers in the following locations:

**Mobile Service:** Nova Scotia, New Brunswick, PEI, Quebec, Ontario, & Alberta In-House Service: Sussex, Montreal, Concord, Cambridge, Edmonton, & Red Deer

We have replacement pumps and parts for all your

cleaning equipment.

# Just Some Of The Services We Offer:

### **SERVICE MAINTENANCE PACKAGE**

Not only will we survey your unit for leaks, scale buildup, and burner emissions, but we will also check oil levels, filters, belt tension, pulley alignment, hoses, and electrical switches.

### **OIL CHANGE**

We will take care of everything "Oil!" Our service techs will change your pressure washer's oil while inspecting leaks, pump and engine oil levels, and your oil filter.

### **COMPLETE PUMP REBUILD**

Our technicians have many years experience and will provide the highest quality pump & mechanical seal repairs, pump rebuilds, and pump service.

### MONTHLY/QUARTERLY/ **ANNUAL SERVICE**

On-site inspections, preventative replacements, project planning, asset management, and service life calculations are utilized when our trained service techs evaluate your equipment.


















### NOZZLES

### Ask us! We stock all brands and models of rotary nozzles for your preference.

### **ROTARY NOZZLES - COMMERCIAL DUTY**



Rotating nozzles increases the force in which you clean. It easily cuts through tough cleaning jobs in half the time. NOZ-RN400##C Rated at 212° F



| NOZ-RN365## | UP TO 3600 PS |
|-------------|---------------|
|             |               |

NOZ-RN400##C | ECONOMICAL - UP TO 4000 PSI - 212° F 1/4 FNPT INLET BRASS

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### GIANT™ ROTARY NOZZLES





Giant's original Turbo Laser™ nozzles takes the power of a zero-degree nozzle and rotate it in either a circular or linear fashion. This allows the user to clean up to 70% faster than with a conventional zero-degree nozzle.

| NOZ-RN360##G | <b>3600 PSI</b> , 195°F |
|--------------|-------------------------|

NOZ-RN600##G **5800 PSI**, 195°F

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **ROTARY SEWER / CULVERT NOZZLES**



These rotating nozzles add extra agitation speeding up your work, as the reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4000 PSI

|  | NOZ-SWR18-5.5R | 1/8", 5.5 ORIFICE - 3 BACK |
|--|----------------|----------------------------|
|  | NOZ-SWR14-5.5R | 1/4", 5.5 ORIFICE - 3 BACK |
|  | NOZ-SWR38-6R   | 3/8", 6.0 ORIFICE - 3 BACK |

### **QUICK COUPLER NOZZLES**



Contains complete set of 5 quick coupler nozzles for various spray patterns. Includes one black soap nozzle. Rated @ 4000 PSI max

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

| IDENTIFICATIO | N KFY - RFFFR TO | ) PAGE 1 F | OR SIZING |
|---------------|------------------|------------|-----------|

| 00 | DEGREE       |
|----|--------------|
| ## | ORIFICE SIZE |

### **ROTARY NOZZLES - HEAVY-DUTY**





The fully stainless steel model works at a higher pressure. Rated at 190° F

| NOZ-RN510## | UPTO 5100 PSI |
|-------------|---------------|
|             |               |

NOZ-RN870## | UP TO **8700 PSI** NOZ-RN110## UP TO **11,000 PSI** 

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **MEG NOZZLE**



Hardened stainless steel nozzle for high pressure washes. A great, standard, high pressure, high heat multi-job nozzle.

NOZ-1/4MEG<sup>oo</sup>## | 5000 PSI RATED TO 7000 PSI MAX

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **SEWER / CULVERT NOZZLES**



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls Rated at 4200 PSI

|               | 마리 (CHI) 12 10 11 12 12 12 12 12 12 12 12 12 12 12 12 |
|---------------|---|
| NOZ-SWR18-5.5 | 1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK                |
| NOZ-SWR14-5.5 | 1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK                |
| NOZ-SWR38-5.5 | 3/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK                |

### **ROTARY TIP FILTER**



Protect your turbo nozzle from damage caused by debris in the water flow and prolongs the life of your tip.

| NOZ-RNF5000-14   | 1/4" INLET/ OUTLET, 5000 PSI, 300°F  |
|------------------|--------------------------------------|
| NOZ-RNF5000-14QC | 1/4 " QC PLUG X 1/4" MNPT - 5000 PSI |

### **BARRACUDA ROTARY NOZZLE**



Considered industry standard for speed controlled rotary shotgunning.

| NOZ-AP4-##                                  | ATTACK TIP, 1/4" MVPT  |
|---|--|
| NOZ-RN-BC-K                                 | 4.4-11 GPM, 2000 TO 21,750 PSI, 1/4" PORT (REQUIRES ATTACK TIPS) |
| SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES |  |

### **NOZZLES & WAND ACCESSORIES**

### PIT BOSS



Sludge sucker uses a high pressure water stream (1000-3000 PSI) to suck the sludge off the bottom of pits or tanks and ejects it through a 1-1/2" (15' long) hose to a disposal tank. The base unit attaches to the end of a pressure washer lance with a quick coupler for extension to the bottom of the pit. Uses a 0° tip for suction/power ejection.

ACC-PBSK | SLUDGE SUCKER KIT WITH NOZZLE, 5.5 NOZZLE 4000 PSI, 104°F

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **WET SANDBLAST KIT**



Suction fed injection of sand and water to peel paint and rust from metal effortlessly with no dust. Leaves surface ready to prime. For 3 GPM up to 10 GPM flow.



ACC-SNDBLKT FOR MACHINES 3000 PSI +, MUST SIZE NOZZLE. 0° UP TO 5500 PSI

### **NOZZLES & WAND ACCESSORIES**

- CONTINUED \_\_

### EASY-KLEEN PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

### **HYDRO EXCAVATION NOZZLE**



Dig faster, save water! The Ripsaw Rotating Turbo nozzle is specifically designed and engineered for the rugged Hydro-Excavation industry. It's cone shaped flow pattern (18°) is idéal for potholing applications. 35% Faster than Regular Rotary Tips.



NOZ-RS32040

RIPSAW - 3200 PSI, 4.0, 180°F

### **GUTTER CLEANER**



This accessory allows you to clean your gutters from the ground. No more getting up and down the ladder with gloved hands!



ACC-GC12 12" GUTTER POLE, 4000 PSI, 200°F

### WATER BROOM



Fits 1/4" wand Ideal for cleaning floors, decks, driveway, and great for industrial flat surfaces.



ACC-WTRBRM4

4 NOZZLE 1/4" - 24" BROOM (MUST ADD NOZZLES) 4000 PSI RATED @ 140°F

SPECIFY GPM & PSITO ENSURE CORRECT NOZZLES (Spray Nozzles Needed For Operation)

### **SURFACE CLEANER**





Used for removing dirt and grime from brick, concrete, sidewalks, driveways, shop floors in a contained fashion. Rated at 194°F, 12 GPM Two nozzles required

ACC-SRFCLNR24 | STAINLESS STEEL - 24" 4000 PSI RATED

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **STEAM NOZZLES**



For cleaning and thawing operations. Great for de-icing. For installation on steam wand WAN-STM see page 60.

| NOZ-STM14-1.5F | FLAT, 1.5 MM, BRASS |
|----------------|---------------------|
| NOZ-STM38-BLK  | BRASS, BLANK STEAM  |

### **FOAM CANNONS**





Allows full chemical coverage and activation. Ideal for vehicle and house washing.



| 1 | NOZ-FMR4830 |
|---|-------------|

| NOZ-FMR4830  | C/W 1.5 MM INJECTOR, 4.8 GPM @ <b>3000 PSI</b> , 1/4" FEMALE CONNECT      |
|--------------|---|
| NOZ-FMR4830T | WITH INJECTOR C/W BOTTLE, 4.8 GPM @ <b>3000 PSI</b> , 1/4" FEMALE CONNECT |
| NOZ-FMR-COM  | COMPACT FOAMER, 1-5 GPM @ 2500 PSI, 1/4" FEMALE CONNECT                   |

### **UNDERCARRIAGE CLEANER**





Used for cleaning under cars, trucks and equipment. Ideal for detailing, rust check, vehicle repair centers, and firehouses. Rated at 194°F, 4000 PSI 5'5" Reach, Two nozzles required

ACC-UCC UP TO 4000 PSI RATED

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES

### **GUN & WAND ASSEMBLIES**

### TRIGGER GUNS















Easy-Kleen offers a variety of pressure washer trigger guns.

GUN-TG5010 GUN-TG5012-RX

GUN-TG7221-12

GUN-TG4010W

GUN-WG1635S

GUN-LG3216-12-HE

GUN-TG5010 GENERAL PUMP GUN, 300°F, 5000 PSI, 10 GPM, 3/8" INLET, 1/4" OUTLET GUN-TG5010V PA VEGA 250, 300°F, 5000 PSI, 10 GPM, 3/8" INLET, 1/4" OUTLET RELAXED TRIGGER GUN, 300°F, 5000 PSI, 12 GPM, EASY PULL, HEAVY-DUTY, 3/8" INLET, 1/4" OUTLET GUN-TG5012RX GUN-TG5680RX RELAXED TRIGGER GUN, 5600 PSI, 8 GPM, EASY PULL, RELOAD GUN, 3/8" INLET, 1/4" OUTLET GUN-TG7221-12 PA BIG GUN, 210°F, 8100 PSI, 21 GPM, RELOAD GUN, 1/2" INLET/OUTLET GUN-TG4010W TRIGGER GUN, WEEPING, 300°F, 4000 PSI, 10 GPM, FOR COIN OPERATED CAR WASHES, 3/8" INLET, 1/4" OUTLET **GUN-HV1732** TRIGGER GUN, HIGH VOLUME, 300°F, 1950 PSI, 32 GPM, 1/2" INLET/OUTLET **GUN-WG1635S** WASH DOWN GUN, 16 GPM, 350 PSI, HIGH FLOW LOW PRESSURE GUN-LG3216-12-HE TRIGGER GUN, HYDRO EXCAVATION, 3200 PSI, 16 GPM, 1/2" INLET/OUTLET



### **GUN & WAND ASSEMBLIES**

- CONTINUED



| WAN-SLH          | SIDE HANDLE GRIP FOR 1/4" PIPE WAND               |
|------------------|---|
| WAN-SL12         | 12" INSULATED SINGLE LANCE                        |
| WAN-SL24         | 24" INSULATED SINGLE LANCE                        |
| WAN-SL36         | 36" INSULATED SINGLE LANCE                        |
| WAN-SL48         | 48" INSULATED SINGLE LANCE                        |
| WAN-SL36-SS      | 36" INSULATED SINGLE LANCE, STAINLESS STEEL       |
| WAN-SL40SS-12    | 40" SINGLE LANCE, STAINLESS STEEL, 1/2" MNPT      |
| WAN-SL59         | 59" INSULATED SINGLE LANCE                        |
| WAN-SL79         | 79" INSULATED SINGLE LANCE                        |
| WAN-SL48SS-SH-12 | 48" SINGLE LANCE C/W SIDE HANDLE, STAINLESS STEEL |

### **GUN/WAND/QUICK COUPLER ASSEMBLY**



Complete assemble for pressure washing. Quick attach for quick assembly with the GUN-TG5010 or GUN-TG5010V. Rated at 10 GPM @ 5000 PSI. (Add "V" to upgrade to Vega Gun)

|           | 하는 사람들이 살아왔다. 그렇게 하는 것은 사람들이 하는 것이 없는 것이었다면 없는 것이 없는 것이 없는 것이었다면 없어요. |
|-----------|---|
| KIT-GW12  | KIT - 5000 PSI GUN, 12" WAND, QC & NIPPLE   |
| KIT-GW24  | KIT - 5000 PSI GUN, 24" WAND, QC & NIPPLE   |
| GUN-GW36  | KIT - 4000 PSI GUN, 36 " WAND, QC & NIPPLE  |
| KIT-GW36V | KIT - 5000 PSI VEGA GUN, 36" WAND, QC & NIPPLE  |
| GUN-GW48  | KIT - 5000 PSI GUN, 48" WAND, QC & NIPPLE   |
| KIT-GW59  | KIT - 5000 PSI GUN, 59" WAND, QC & NIPPLE   |
| KIT-GW79  | KIT - 5000 PSI GUN, 79" WAND, QC & NIPPLE   |

### **O-RINGS**



O-Rings for AP, Hansen, Foster, Parker, and other quick-coupler brands. Viton to 300°F

| ORG-QC14HT | QC, 1/4 ", HIGH TEMP |
|------------|----------------------|
| ORG-QC38HT | QC, 3/8 ", HIGH TEMP |
| ORG-QC12HT | QC, 1/2", HIGH TEMP  |

### HARNESS



Used with extension wands to help stabilize and support the wand for ease of use.

| 45.5         | WAN-HRNS | SUPPORT BELT                     |
|--------------|----------|----------------------------------|
| \$ 200 200 B |          | ENDED TO PAIR THIS ITEM WITH THE |

### **STEAM WAND**





Must be used in steam application. Safety guard around wand.



| GUN-STM12-38 SW | STEAM TRIGGER GUN. 0 GPM @ 1500 PSI & 350°. INLET: 1/2"<br>FPT OUTLET: 3/8" FPT DUE TO LIABILITY WE DO NOT INSTALL<br>ON STEAM SYSTEMS |
|-----------------|--|
| WAN-STM38       | 3/8" STEAM WAND WITH EXPANDED METAL GRIP   |
| WAN-STM12       | 1/2" STEAM WAND WITH EXPANDED METAL GRIP   |
| WAN-STM34       | 3/4" STEAM WAND WITH EXPANDED METAL GRIP   |
| WAN-STM1        | 1" STEAM WAND WITH EXPANDED METAL GRIP   |

### **BRASS QUICK COUPLERS**



For speedy and sturdy interchanging of tools and attachments. Disconnect coupler band rated at 5000 PSI, 210°F

| STANDARD QUICK COUPLER         |                       |  |
|--------------------------------|-----------------------|--|
| FIT-QC14F/M                    | 1/4" FNPT/MNPT, BRASS |  |
| FIT-QC38F/M                    | 3/8" FNPT/MNPT, BRASS |  |
| FIT-QC12F/M                    | 1/2" FNPT/MNPT, BRASS |  |
| STANDARD QUICK COUPLER NIPPLES |                       |  |
| FIT-QCN14F/M                   | 1/4" FNPT/MNPT, BRASS |  |
| FIT-QCN38F/M                   | 3/8" FNPT/MNPT, BRASS |  |
| FIT-QCN12F/M                   | 1/2" FNPT/MNPT, BRASS |  |

### STAINLESS STEEL QUICK COUPLERS



For speedy and sturdy interchanging of tools and attachments. Disconnect coupler band rated at 5000 PSI, 210°F

| STAINLESS STEEL QUICK COUPLER |   |  |
|-------------------------------|---|--|
| FIT-QC14F/M-SS                | 1/4" FNPT/MNPT, STAINLESS STEEL           |  |
| FIT-QC38F/M-SS                | 3/8 " FNPT/MNPT, STAINLESS STEEL          |  |
| FIT-QC12F/M-SS                | 1/2 " FNPT/MNPT, STAINLESS STEEL          |  |
| FIT-QC12F-SS-L                | 1/2 " FNPT, STAINLESS STEEL, LOCKING TYPE |  |
| STAINLESS STI                 | EEL QUICK COUPLER NIPPLES                 |  |
| FIT-QCN14F/M-SS               | 1/4" FNPT/MNPT, STAINLESS STEEL           |  |
| FIT-QCN38F/M-SS               | 3/8" FNPT/MNPT, STAINLESS STEEL           |  |
| FIT-QCN12F/M-SS               | 1/2" FNPT/MNPT, STAINLESS STEEL           |  |
|                               |   |  |

### **FITTINGS**



| FIT-S1003-B  | HEX COUPLING, 1/4", FNPT                               |
|--------------|--|
| FIT-S1022-C  | HEX NIPPLE, 3/8", STEEL (WMM0003GS)                    |
| FIT-S1022-CB | HEX NIPPLE, REDUCING, 3/8 " X 1/4 ", STEEL (WMM0302GS) |
| FIT-S1022-D  | HEX NIPPLE, 1/2", STEEL (WMM0004GS)                    |
| FIT-S1022-DB | HEX NIPPLE, REDUCING, 1/2 " X 1/4", STEEL (RCF0402SS)  |
| FIT-S1022-DC | HEX NIPPLE, REDUCING, 1/2 " X 3/8 ", STEEL (WMM0403GS) |
| FIT-S1022-EC | HEX NIPPLE, REDUCING, 3/4" X 3/8", STEEL               |


### **EXTENSION WANDS**



Two sizes to choose from, high quality telescoping wand reaches either 18' or 24' at max length. Lightweight and balanced under pressure for various spray patterns.
Up to 10 GPM @ 4000 PSI @ 195° F

| WAIN-1318HD 18 | 8′, EXTENSION WAND |
|----------------|--------------------|
| WAN-TS24HD 24  | 4′, EXTENSION WAND |

### DUAL LANCE WANDS



| WAN-DL38SN                           | 36", WITH KNOB & SOAP NOZZLE        |  |
|--------------------------------------|-------------------------------------|--|
| WAN-DL38SN-SH                        | 36", WITH SIDE HANDLE & SOAP NOZZLE |  |
| NOZZLE 1/4"TIP EXTRA - HIGH PRESSURE |                                     |  |
| SPECIFY PSI & GPM                    |                                     |  |
|                                      |                                     |  |

### **GUN & WAND COMBOS**



|  | GUN-GW36-XHP   | PA VEGA, <b>7000 PSI</b> (7207 - 38" GUN/WAND/QUICK COUPLER ASSEMBLY - 36" STAINLESS STEEL) |
|--|----------------|---|
|  | GUN-GW48HT-XHP | 48"WAND, <b>7250 PSI,</b> 21 GPM, 1/2', 210°F   |
|  | GUN-GW30-HDI   | GUN/WAND COMBO, <b>22,000 PSI</b> , HEAVY-DUTY INDUSTRIAL, 10.6 GPM. W/ 30" WAND            |
|  | NOZZLE EXTRA   |   |

### **FLEX WANDS & PUSH PULL LANCE**



Flexes for hard to clean areas. Ideal for car washes.

| WAN-FLX18G2B | 18.", <b>2500 PSI</b> , 1/4." MNPT INLET/OUTLET, 200°F (AVAILABLE IN BLUE, RED, & BLACK) |
|--------------|--|
| WAN-FLX90-5  | 90° FLEXIBILITY, <b>5000 PSI</b>   |
| WAN-PPL34SS  | 34" PUSH/PULL LANCE, STAINLESS STEEL, <b>3050 PSI</b>                                    |

### HOSES

### **JOINER HOSE - 4000 PSI**



Single Braid Connects short distances. Rated at 4500 PSI and 250° F

| HOS-JNR2       | 3/8" X 2' (BETWEEN PUMP & COIL, COMMERCIAL UNITS)      |
|----------------|--|
| HOS-JNR3       | 3/8" X 3' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F  |
| HOS-JNR4       | 3/8" X 4' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F  |
| HOS-JNR6       | 3/8" X 6' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F  |
| HOS-JNR10      | 1/2" X 10' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F |
| Δ\/ΔΙΙ ΔΒΙ Ε Δ | T CUSTOM LENGTH - 3000 TO 6000 PSI                     |

### **STANDARD HOSE - 4000 PSI**



Single Braid Rated at 4000 PSI 250° F

| 3/8"      |             |
|-----------|-------------|
| HOS-HW25  | 3/8" X 25'  |
| HOS-HW50  | 3/8" X 50'  |
| HOS-HW100 | 3/8" X 100' |
| HOS-HW150 | 3/8" X 150' |
| HOS-HW200 | 3/8" X 200' |

| 1/2"         |             |
|--------------|-------------|
| HOS-HW50-12  | 1/2" X 50'  |
| HOS-HW100-12 | 1/2" X 100' |
| HOS-HW150-12 | 1/2" X150'  |
| HOS-HW200-12 | 1/2" X 200' |

### HOSE - 3/8"



Braided

HOS-HP100

| 6000 PSI - | 250° F      |
|------------|-------------|
| HOS-HP50   | 3/8" X 50'  |
| HOS-HP75   | 3/8" X 75'  |
| HOS-HP100  | 3/8" X 100' |
| HOS-HP150  | 3/8" X 150' |
| HOS-HP200  | 3/8" X 200' |



| 8000 PSI - 250° F |             |  |
|-------------------|-------------|--|
| HOS-XHP50-38      | 3/8" X 50'  |  |
| HOS-XHP100-38     | 3/8" X 100' |  |
| HOS-XHP200-38     | 3/8" X 200' |  |

### HOSE - 1/2"



**Double Braided** Rated at 6000 PSI

| 6000 PSI - 250° F |             |  |
|-------------------|-------------|--|
| HOS-HP50-12       | 1/2" X 50'  |  |
| HOS-HP100-12      | 1/2" X 100' |  |

| 10,000 PSI - 250° F |            |  |  |  |
|---------------------|------------|--|--|--|
| HOS-XHP50-12        | 1/2" X 50' |  |  |  |
| HOS-XHP100-12       | 1/2" X100' |  |  |  |

### HOSE - 1/2" 15,000 PSI



HOS-XXHP50-12

**Double Braided** Rated at 15,000 PSI 250° F

|                | HOS-XXHP50-12  | 1/2" X 50' C/W MALE ENDS, 15,000 PSI         |
|----------------|----------------|--|
| HOS-XXHP100-12 |                | 1/2" X 100′ C/W MALE ENDS, 15,000 PSI        |
|                | HOS-XXHP250-12 | 1/2" X 250' C/W MALE ENDS, 15,000 PSI, 250°F |

### **SWIVEL**





Allows your hose to swivel under high pressure. No more tangled hose!

| BRASS           |  |  |  |  |
|-----------------|--|--|--|--|
| FIT-HPS14MF     | 1/4", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 194°F    |  |  |  |
| FIT-HPS38MF     | 3/8", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 194°F    |  |  |  |
| FIT-HPS12MF     | MF 1/2", MALE X FEMALE, 10.5 GPM @ <b>4050 PSI</b> , 325°F |  |  |  |
| STAINLESS STEEL |  |  |  |  |
| FIT-HPS14MFS    | 1/4", MALE X FEMALE, 10.5 GPM @ <b>5600 PSI</b> , 194°F    |  |  |  |
| FIT-HPS38MFS    | 3/8", MALE X FEMALE, 10.5 GPM @ <b>5600 PSI</b> , 194°F    |  |  |  |
| FIT-HPS12MFS    | 1/2", MALE X FEMALE, 27 GPM @ <b>3500 PSI</b> , 180°F      |  |  |  |

### BLUE (B), GREY (G), & YELLOW (Y) NON-MARKING HOSE - 4500 PSI







Single Braid Hose that does not mark. Rated at 4500 PSI 250° F

HOS-HW150G Insert color initial for color choice "(-)"

| HOS-HW50(-)      | 3/8" X 50'  |
|------------------|-------------|
| HOS-HW100(-)     | 3/8" X 100' |
| HOS-HW150(-)     | 3/8" X 150' |
| HOS-HW200(-)     | 3/8" X 200' |
| HOS-HWREEL650(-) | 3/8" X 650  |
| HOS-HW25-14(-)   | 1/4" X 25'  |
| HOS-HW50-14(-)   | 1/4" X 50'  |
| HOS-HW100-14(-)  | 1/4" X 100' |

### **WET STEAM HOSE**



Hoses used for wet steam. Rated at 325° F

| 3/8" - 3000 PSI - 325° F |             | 1/2" - 350 PSI - 325° F |             |
|--------------------------|-------------|-------------------------|-------------|
| HOS-STM50-38             | 3/8" X 50'  | HOS-STM50-12            | 1/2" X 50'  |
| HOS-STM100-38            | 3/8" X 100' | HOS-STM100-12           | 1/2" X 100' |



### HOSES - CONTINUED

### **MEGA-FLEX DRAIN CLEANING KIT**



Used for cleaning drains, culverts, downspouts, as well as thawing and unclogging pipes. Stainless steel drain nozzle included (NOZ-SWR).

KIT-5110-100

| _                 |                                      |
|-------------------|--------------------------------------|
| KIT-5110-50-18    | 1/8" X 50', <b>4800 PSI</b> , 160°F  |
| KIT-5110-100-18   | 1/8" X 100', <b>4800 PSI</b> , 160°F |
| KIT-5110-50-14    | 1/4" X 50', <b>4350 PSI</b> , 212°F  |
| KIT-5110-100-14   | 1/4" X 100', <b>4400 PSI</b> , 212°F |
| SPECIFY PSI & GPI | M - SEE FIRST PAGE FOR CHART         |

### **CLEAR CHEMICAL HOSE - 1/4"**



Clear hose with suction filter.

CEM-HOSE3

CEM-HOSE3 3' ASSEMBLY COMPLETE WITH SUCTION FILTER, 55 PSI

### **LOW PRESSURE HOSE - 3/4"**





Low pressure hose. Used between the water tank and the Pressure Washer to supply the Pressure Washer with water.

| HOS-BYP38 K | 3/8", LOW PRESSURE, BLACK |
|-------------|---------------------------|
| HOS-BYP12 K | 1/2", LOW PRESSURE, BLACK |
| HOS-AIR12   | 1/2", 200 PSI, RED        |
| HOS-AIR34   | 3/4", 200 PSI, RED        |
| HOS-AIR38   | 3/8", 200 PSI, RED        |
| HOS-AIR1    | 1", 200 PSI, RED          |
| HOS-AIR112  | 1-1/2"", 200 PSI, RED     |
|             |                           |

### **HOSE REELS**

### Hoses are **NOT included with Hose Reels**, please see our Hoses section for purchasing.

A hose reel will extend the life of your high pressure cleaning hose considerably by providing safe tangle and kink free storage. It will also save you time when using and storing your high pressure cleaning equipment.

### Every machine should have one!

### 12V OR 120V HOSE REEL - INDUSTRIAL



Capacity: 300' or 500', Industrial 12 or 120 Volt Hose Reel.

| Wild Other College | KIT-HR300HP-12V-BLK         | ELECTRIC DRIVEN HOSE REEL KIT, C/W 12 VOLT MOTOR & ROLLER BRACKET, 300' CAPACITY |  |
|--------------------|-----------------------------|--|--|
|                    | HOS-HR325HP-120V-B          | 120V, 300' CAPACITY  |  |
|                    | HOS-HR500HP-12V-BLK         | 12V, 500' CAPACITY   |  |
|                    | OTHER 120V MODELS AVAILABLE |  |  |

### HOSE REEL TROLLEY KITS



| 1000 | KIT-HR150WK | 150' CAPACITY HOSE REEL WITH WHEEL KIT |
|------|-------------|--|
| 000  | KIT-HR300WK | 300' CAPACITY HOSE REEL WITH WHEEL KIT |

### **U-FRAME HOSE REEL**



Capacity: 150' Commercial Hot Water unit mount on plate for easy installation. Rated at 5000 PSI, 3/8" Coupler

| HOS-HR150HP-U-BLK | HIGH PRESSURE U FRAME HOSE REEL, 150 FOOT, MANUAL, BLACK |
|-------------------|--|
| KIT-HR150HP-3-BLK | HOSE REEL KIT 150' CAPACITY & 3' JOINER HOSE (CAN BE     |

### A-FRAME HOSE REEL - INDUSTRIAL



HOS-HR300HP-A-BLK

Can be mounted on various units. Rated at 5000 PSI, 1/2" Coupler

|      | HOS-HR150HP-A-BLK | 150'CAPACITY  |
|------|-------------------|---------------|
|      | HOS-HR300HP-A-BLK | 300' CAPACITY |
| 1000 | HOS-HR450HP-A-BLK | 450' CAPACITY |

### **EASY-KLEEN - STAINLESS STEEL HOSE REEL**



Constructed in-house. Ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining. Rated at 5000 PSI

| HOS-HR150HP-A-SS-IH | 150'CAPACITY |
|---------------------|--------------|
| HOS-HR300HP-A-SS-IH | 300'CAPACITY |

### Hoses are **NOT included** with Hose Reels, please see our Hoses section for purchasing.

### 360° PIVOT HOSE REEL



Hose reel that swivels to allow directional change while unraveling. Rated at 5000 PSI and 194° F

| HOS-PHR100 | HOSE REEL - 360° PIVOT, 3/8" X 100' CAPACITY                           |
|------------|--|
| HOS-PHR-MB | MOUNTING BRACKET FOR PIVOT HOSE REEL (Needed to Mount above Hose Reel) |

### **GREASEABLE SUPER SWIVELS**



Upgraded swivel for hose reels. 90° stainless steel swivel with grease nipple, 5000 PSI, 400°F (Mount on any hose reel, except 360° pivot).

| HOS-SSW38SS90F  | 3/8" FMPT X 3/8" FMPT, 5000 PSI |
|-----------------|---------------------------------|
| HOS-SSW12SS90F  | 1/2" FMPT X 1/2" FMPT, 5000 PSI |
| HOS-SSW34SS90F  | 3/4" FMPT X 3/4" FMPT, 5000 PSI |
| HOS-SSW1SS90F   | 1" FMPT X 1" FMPT, 5000 PSI     |
| HOS-SSW38SS90MF | 3/8" MNPT X 3/8" FMPT, 5000 PSI |
| HOS-SSW12SS90MF | 1/2" MNPT X 1/2" FMPT, 5000 PSI |


### **PIVOTING HOSE GUARDS**



Guides hose while in use, protecting the hose and extending it's lifespan.

| HOS-PHG18 | 18" DRUM, FOR HR325 REELS - 325' HOSE REELS |
|-----------|---|
| HOS-PHG28 | 28" DRUM, FOR HR500 REELS - 500' HOSE REELS |

### **HOSE REEL - ROLLER BRACKET GUIDE**



Easier to roll up hose, protecting and extending it's life span.

HOS-RB-BTM12-BLK BOTTOM, 12" DRUM, BLACK

### **SPRING DRIVEN HOSE REEL**



Ideal for use in garage and wash-bay setups. Self winding Rated at 3000 PSI 100' capacity. Optional Stainless Steel

| OS-T | ΓMF | L-N | I-31 | 00 |
|------|-----|-----|------|----|

| TIO3-TWF E-IV-     | 3100                     |
|--------------------|--------------------------|
| HOS-TMPL-N-3100    | 100', BLUE, RETRACTABLE  |
| HOS-HSP38          | HOSE STOP 3/8"           |
| HOS-HSP12          | HOSE STOP 1/2"           |
| HOS-TMPL-N-3100-SS | OPTIONAL STAINLESS STEEL |

### **HOSE REEL STANDS (ONLY)**





Elevates the hose reel, making it easier to use, store, and access Hose, hose reels, and tank not included.

FRAME-HRSX2

| FRAME-HRSX1 | 1-HOSE REEL              |
|-------------|--------------------------|
| FRAME-HRSX2 | 2-HOSE REELS             |
| FRAME-HRSX3 | 3-HOSE REELS             |
| TAN-35GAL   | C/W 35 GAL TANK OPTIONAL |





Full port steel ball valves. Carbon steel and Stainless Steel construction. Female NPT threads.

| CARBON           |   |
|------------------|---|
| KIT-BVCS-C-HP-QD | WITH QC, 3/8", 7000 PSI @ 180°F             |
| KIT-BVCS-D-HP-QD | WITH QC, 1/2", 7000 PSI @ 180°F             |
| BAL-BVCS3W-C     | 3-WAY - 3/8" FNPT - 7250 PSI - CARBON STEEL |
| STAINLESS STEE   | L   |
| KIT-BVSS-C-HP-QC | WITH QC, 3/8", 5800 PSI                     |
| KIT-BVSS-D-HP-QC | WITH QC, 1/2", 5800 PSI                     |

### **HYDRAULIC HOSE REEL - HIGH PRESSURE**





| HOS-HR500HP-HYD  | 180°, RIGHT & LEFT SWIVEL (HOLDS 500' OF 1/2" HP HOSE / 300' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED  |
|------------------|--|
| HOS-HR1000HP-HYD | 180°, RIGHT & LEFT SWIVEL (HOLDS 1000' OF 1/2" HP HOSE / 600' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED |



### **CHEMICAL CONTROL & INJECTION KITS**

### **DEMA INLINE HIGH PRESSURE CHEMICAL INJECTOR**



Allows the chemical to go on at high pressure.
Manual ON/OFF ball valve control.
Also allows you to be able to meter the amount of chemical coming out.

| KIT-CEM-DA203-B | KIT - 2 TO 3 GPM |  |
|-----------------|------------------|--|
| KIT-CEM-DA204-B | KIT - 4 GPM      |  |
| KIT-CEM-DA206-B | KIT - 5 TO 6 GPM |  |

### **HIGH VOLUME FOAMER**



Comes with gauges. Requires 35 - 125 PSI water and compressed air. 5 CFM - up to 142 Comes with metering tips, 50' hose, mounting bracket.

ACC-LF916105G

| ACC-LF916105G            | AIR AT HIGH PRESSURE FOAM INJECTION SYSTEM WITH BALL VALVE AND 50'HOSE AND NOZZLE ASSEMBLY |
|--------------------------|--|
| CALL FOR MODEL<br>NUMBER | DOWNSTREAM CHEMICAL INJECTION AT 50% PRESSURE (AFTER COIL)                                 |

### **ACID PUMP**



Great for acid application. Only to be wired to cord or 12V.

| PMP-DP115-1460 | 1.4 GPM @ 60 PSI, 115V |
|----------------|------------------------|
| PMP-DP12-1260  | 1.2 GPM @ 60 PSI, 12V  |
| PMP-DP12-17100 | 1.7 GPM @ 100 PSI, 12V |
| PMP-DP12-3545  | 3.5 GPM @ 45 PSI, 12V  |

### **SOLENOID CONTROLS**



Control chemical activation in wash bay ON/OFF wired to solenoid control.

| CEM-RSS-1   | SINGLE CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)                    |  |  |
|-------------|---|--|--|
| CEM-RSS-1CD | SINGLE CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH<br>BAY UNITS) FLOAT TANK UNITS |  |  |
| CEM-RSS-2   | DUAL CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)                      |  |  |
| CEM-RSS-2CD | DUAL CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH BAY UNITS)                       |  |  |

### **CHEMICAL SPRAYER**



The chemical sprayer is great for acid or chemical application. ON/OFF control at wand. With painted or Stainless Steel (SS) enclosure.

| KIT-ECS-120V   | PUMP 120V                 |
|----------------|---------------------------|
| KIT-ECS-120VSS | PUMP 120V STAINLESS STEEL |
| KIT-ECS-12V    | PUMP 12V                  |
| KIT-ECS-12VSS  | PUMP 12V STAINLESS STEEL  |

### **CHEMICAL MIXER**



| CALL FOR MODEL<br>NUMBER | HYDRO-MINDER WITH STAINLESS STEEL GALLON TANK FOR CHEMICAL MIXING |
|--------------------------|---|
| CAR-MM100                | 4.5 GPM @ 40 PSI, INLET CONNECTION 3/4" FEMALE GARDEN HOSE        |

# **OIL & GAS FIRED OPTIONS**

### HIGH LOW GAS VALVES WITH DUAL TEMPERATURE CONTROLS





To regulate temperature on system when using a two gun operation.

| UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, NATURAL GAS |
|--|
| UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, PROPANE     |
| UPGRADE ELECTRONIC MODULATING GAS VALVE SYSTEM (MODULATES FLAME OF HEATER)   |
| UPGRADE UNIVERSAL HONEYWELL GAS VALVE, LP/NAT GAS, SINGLE VALVE, STANDING PILOT  |
| UPGRADE PILOT IGNITION CONTROL MODULE  |
|  |

### **OIL & GAS FIRED OPTIONS**

- CONTINUED \_\_\_

# PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

### **RAIN CAP**



This option keeps rain and snow from entering your coil, which increases coil and burner life.

| FRAME-WRC    | RAIN CAP/SCOOP WELDED ON COIL EXHAUST         |
|--------------|---|
| PLEASE SPECI | FY COIL SIZE TO FIT (16", 18", 20", 24", 30") |

### **POWER DAMPERS - 24 VOLT - LP/NG**



| ACC-GPD-8  | 8" POWER DAMPER, 24 VOLT        |
|------------|---------------------------------|
| ACC-GPD-10 | 10" POWER DAMPER, 24 VOLT       |
| ACC-GPD-12 | 12" POWER DAMPER, 24 VOLT       |
| ACC-GPD-WK | UNIVERSAL WIRING KIT (REQUIRED) |

### **OIL FIRED DRAFT INDUCERS**



A must for buildings with fans or negative pressure.

|  | ACC-DI-2 | 120 VOLTS, RECOMMENDED SPECS (522,000 BTU/HR TO 835,000 BTU/HR) (8"TO 12" PIPE)     |
|--|----------|---|
|  | ACC-DI-4 | 120 VOLTS , RECOMMENDED SPECS (900,000 BTU/HR TO 1,800,000 BTU/HR) (10"TO 16" PIPE) |

# **ELECTRIC MOTOR CONTROLS**

### VFD FOR ELECTRIC MOTOR CONTROLS



Variable frequency drive -Controls RPM of electric motor for required GPM.

|                   | 이 있다. 수있는 것이 없는 일반에 가게 하는 것이 없는 것이 하면서 있는 것이 없는 것이 없는 것이 없는 것이다. 그렇게 하는 것이다. |   |
|-------------------|--|---|
| VFD-10HP575V-3-N1 | 575V, 10 HP  |   |
| VFD-20HP575V-3-N1 | 575V, 20 HP  |   |
| VFD-30HP575V-3-21 | 575V, 30 HP  |   |
| VFD-40HP575V-3-N1 | 575V, 40 HP  |   |
| VFD-10HP460V-3-N1 | 460V, 10 HP  |   |
| VFD-20HP460V-3-N1 | 460V, 20 HP  | 4 |
| VFD-30HP460V-3-N1 | 460V, 30 HP  |   |
| VFD-40HP460V-3-N1 | 460V, 40 HP  |   |
|                   |  |   |

### **DRAFT HOOD**



For natural gas and propane, used for proper air flow. Add 30" of pipe between the pressure washer unit and draft hood for the best efficiency.

| PRO-DH8-EK  | 8", UP TO 390,000 BTU       |  |
|-------------|-----------------------------|--|
| PRO-DH10-EK | 10", 510,000 TO 720,000 BTU |  |
| PRO-DH12-EK | 12", 940,000 BTU            |  |

### **POWER DAMPER - 120 VOLT**



ACC-OVD-8 VENT DAMPER, 8", 120 VOLT

### **POWER VENTER**



Combines the motor blower, and vent hood in one complete, easy to install unit.
\*Requires additional control kit and wiring kit, found below.

| ACC-PV-CK-OIL | 120 VAC SYSTEM CONTROL KIT FOR OIL FIRED EQUIPMENT   |
|---------------|--|
| ACC-PV5       | SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP<br>TO 1.85 GPH FOR OIL / UP TO 290,000 BTU/HR FOR GAS - 4"TO 6"                       |
| ACC-PV8       | SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 4.75 GPH FOR OIL / UP TO 740,000 BTU/HR FOR GAS - 7"TO 9"                          |
| ACC-PV6-SS    | SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP<br>TO 2.65 GPH FOR OIL / UP TO 416,000 BTU/HR FOR GAS<br>- 5"TO 7" - STAINI FSS STEFI |

### **POWER VENTER - CONTROL KIT**

| ACC-PV-CK    | CONTROL KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA            |
|--------------|--|
| ACC-PV-CK24V | CONTROL KIT - POWER VENTER - PLUG IN - 24 VOLT ELECTRIC DAMPENER |

### POWER VENTER - WIRING KIT \*Requires Power Venter Unit

| ACC-PV-WK | WIRING KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA |
|-----------|--|
|           |  |

### **NEMA BOX UPGRADE**



All Nema 4 boxes available in Stainless Steel.

### **GROUND-FAULT CIRCUIT INTERRUPTERS**







Ground fault interrupter kicks out power when surge happens.

| ELS-GFCI-120/2 | 2 HP - SINGLE PHASE ONLY   |
|----------------|----------------------------|
| ELS-GFCI-240/3 | 5 HP - SINGLE PHASE ONLY   |
| ELS-GFCI-240/4 | 7.5 HP - SINGLE PHASE ONLY |



### **ELECTRIC MOTOR CONTROLS**

- CONTINUED

### **HEAVY-DUTY AUTO STOP START WITH SHUTDOWN TIMERS**

This option gives you the ability to start and stop your unit by squeezing and releasing the trigger gun. This prevents the machine from sitting in bypass mode which will extend the life of your unit over time. It will also save you money because your resources are not being used when the machine is not in use.



### **50HZ ELECTRIC MOTORS**



Overseas voltage motors 50HZ. Various HP.

| ELS-CW380/50 | UPGRADE 380V 50 HZ COLD WATER        |
|--------------|--------------------------------------|
| ELS-HW380/50 | UPGRADE 380V 50 HZ HOT WATER UPGRADE |

### **RECIPE TO ORDER HDASS/HORSE POWER/VOLT** $\mbox{\bf HEAVY-DUTY AUTO STOP START}$ - ALWAYS MUST BE AT START OF MODEL NUMBER THE HORSE POWER OF THE UNIT - 2 HP, 5 HP, 7.5 HP, 10 HP, 15 HP, **HORSE POWER** 20 HP, 25 HP, 30 HP, 50 HP **VOLTAGE** THE VOLTAGE OF THE UNIT - 110V, 208V, 220V, 230V, 460V, 575V **PHASE** THE PHASE OF THE UNIT - 1 PH OR 3 PH COMPONENT NUMBERS SHOULD NOT HAVE THE COMPONENT DESCRIPTION IN THE MODEL NUMBER NOTE **EXAMPLE** COMMERCIAL SERIES, HOT WATER PRESSURE CLEANING SYSTEM, OIL FIRED, 350,000 BTU. ELECTRIC, **5 HP. 230V-1PH**, 3.5 GPM @ 2400 PSI, GENERAL PUMP EZO2435E-GP HDASS/5/230/1 5 HP, 230V, 1 PH

### **ELECTRICALLY HEATED TIMER**

|  | ACC-EHTMR | UPGRADE 24-HR TIMER FOR ELECTRICALLY HEATED UNITS, AUTOMATICALLY TURNS ON/OFF HEATER |
|--|-----------|--|
|--|-----------|--|


### **EMERGENCY SHUT-OFFS**

| ELS-HTCO | UPGRADE HIGH TEMPERATURE SHUT DOWN (COLD WATER UNITS) |
|----------|---|
| ELS-LWC  | UPGRADE LOW INLET WATER SHUT DOWN                     |

### **COLD WATER UNITS**

- FRAME OPTIONS & WHEEL KITS

### **FIREHOUSE DISPLAY BASE**

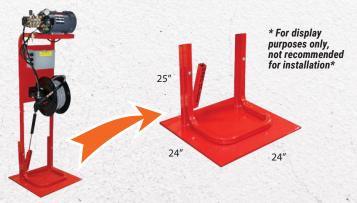

FRAME-FHF-DISPL DISPLAY BASE FOR FIREHOUSE

### STAINLESS STEEL COLD WATER ROLL CAGES



All units can be ordered with aluminum or stainless steel frames. Stainless steel pumps and fittings are also available for food grade usage.

| FRAME-CW57510BDERC-SS | ELECTRIC, BELT DRIVE, 5, 7.5, & 10 HP |
|-----------------------|---------------------------------------|
| FRAME-CW1520BDERC-SS  | ELECTRIC, BELT DRIVE, 15 & 20 HP      |

### STAINLESS STEEL CASTERS



KIT-CASTER8-SS

8 " CASTERS TWO SOLID, AND TWO SWIVEL W/LOCK, STAINLESS STEEL (AS SHOWN)

### COLD WATER CART



| FRAME-ASCART-SM-AL | SMALL, FITS 6.5 HP GAS/2 HP ELECTRIC ACTION SERIES,<br>ALUMINUM      |
|--------------------|--|
| FRAME-ASCART-LG-AL | LARGE, FITS 13 & 14 HP GAS/5 & 7 HP ELECTRIC ACTION SERIES, ALUMINUM |
| FRAME-ASCART-BD-AL | LARGE, ACTION SERIES ALUMINUM BELT DRIVE                             |

### **COLD WATER UNITS**

### - FRAME OPTIONS & WHEEL KITS CONTINUED



MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

### **COLD WATER SHROUD & FLAT BASE FRAMES**



| FRAME-CW57510DDFBWS | C/W SHROUD, ELECTRIC MOTOR FOR 5, 7.5, & 10 HP, 3 PH, DIRECT DRIVE      |
|---------------------|---|
| FRAME-CW57510BDFBWS | FOR ELECTRIC 5, 7.5, & 10 HP, 3 PH, BELT DRIVE                          |
| FRAME-CW101520BDFB  | FLAT BASE OPEN FRAME - ELECTRIC MOTOR<br>BELT DRIVE - 15 & 20 HP - 3 PH |

### WALL MOUNT FOR DIRECT DRIVE



Ideal for locations with limited floor space. This frame style allows your unit to be up and out of the way.

| FRAME-WM25DD |                 | COMMERCIAL DIRECT DRIVE PUMP, WALL MOUNTED FRAME 2/5/7 HP (ALTERNATIVE TO CART STYLE FRAME, NO ADDITIONAL COST) |
|--------------|-----------------|---|
|              | FRAME-WMCW57510 | INDUSTRIAL C/W FLAT BASE AND SHROUD, 5/7.5/10 HP  |

### **COLD WATER LEG FRAME - FOR SHROUD & FLAT BASE UNITS**



For cold water units with shroud and flat base.

FRAME-LS-3FT-ST575DDFB

36" FOR USE WITH FLAT BASE FRAME UNITS WITH 5/7.5/10 HP, 3 PH MOTORS

### **COLD WATER STACKED PUMP FRAMES**





| DOUBLE & TRI | PLE STACKED PUMP FRAME (PRICE PER PUMP) |
|--------------|---|
| FRAME-DS-2   | DOUBLE STACK UP TO 10 HP                |
| FRAME-TS-3   | TRIPLE STACK UP TO 10 HP                |

### INDUSTRIAL HOT WATER ELECTRIC UNITS

- FRAME OPTIONS & WHEEL KITS



WHEEL KIT OPTIONS AVAILABLE

### **BRACKET OPTIONS**



Ask about our propane engine and propane burner units.

| PROPANE TANK BRACKET |   |  |  |
|----------------------|---|--|--|
| FRAME-LP-TB40        | PROPANE TANK BRACKET, HOLDS 40 LB. TANK,<br>C/W HOSE AND REGULATOR, FOR 290,000 BTU UNITS |  |  |
| FRAME-LP-TB100-B     | PROPANE TANK BRACKET, 100 LB. C/W HOSE<br>AND REGULATOR                                   |  |  |
| CHEMICAL BUCK        | CHEMICAL RUCKET RRACKET   |  |  |

FRAME-CHEMBRKT 5 GAL easykleen.com

### **LEG FRAME**



Regulations require gas fired machines must be a specified amount of distance away from combustible material. (Differs per region)

| 점속이 하는데 되었다면 이 경험이 있는데 경우 가게 되었다. 그렇게 하나 되었다는데 없다면 하다고 되었다. | 시간 보고 하나요? 하고 있는데 그는 아무리 아름이라고 어린다면 그 때문에 그는데 아니라 하셨습니다. 아름이 나는데 아름이 없었다. |
|---|---|
| FRAME-LS-42"-GF2248   | 5/7.5/10 HP, 3 PH, 24"W X 42"H  |
| CALL FOR MODEL NUMBER                                       | 10 HP, 1 PH, 27"W X 42"H  |
| FRAME-LS-42"-GF2760   | 10/15/20 HP, 500,000 - 800,000 BTU, 29"W X 42"H                           |
| CALL FOR MODEL NUMBER                                       | 20 HP, 940,000 BTU GAS FIRED, 33"W X 42"H                                 |
| CALL FOR MODEL NUMBER                                       | 50 HP, 42"W X 42"H  |

### STAINLESS STEEL FRAMES



Stainless steel frames are marine grade and ideal for use in fish and food applications.

STAINLESS STEEL OPTIONS AVAILABLE

sales@easykleen.com

# **COMMERCIAL & INDUSTRIAL GAS & DIESEL**

- FRAME OPTIONS & WHEEL KITS

### **RENTAL ROLL CAGE - WITH GRAB BAR**



**Rental Frame Option** with grab bar surround for easy loading and total protection.

### **UPGRADE**

FRAME-MAG15-RTL

C/W BATTERY BOX, 13-15 HP, FOAM FILLED TIRES (FRAME UPGRADE) GRAB BAR SURROUND

### **ALUMINUM & STAINLESS COMMERCIAL ROLL CAGE FRAME**



Aluminum and Stainless Steel frames are ideal for corrosive or sanitary environments such as food environments such as food and fish plants, salt water off shore operations, mills, and mining. Stainless Steel pumps and fittings are also available for food grade usage.

| ALUMINUM          |   |  |
|-------------------|---|--|
| FRAME-MAG3RRC-AL  | ALUMINUM COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC          |  |
| FRAME-MAG4RRC-AL  | ALUMINUM COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC        |  |
| FRAME-MAG15RRC-AL | ALUMINUM COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS           |  |
| STAINLESS STEEL   |   |  |
| FRAME-MAG3RRC-SS  | STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC   |  |
| FRAME-MAG4RRC-SS  | STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC |  |
| FRAME-MAG15RRC-SS | STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS    |  |
|                   |   |  |



| FRAME-GRIZZLY 1-WK            | LIGHT - INDUSTRIAL HOT WATER GAS<br>FRAME #2 |
|-------------------------------|--|
| FRAME-GRIZZLY 1-SUPERWHEELKIT | SUPER DUTY INDUSTRIAL HOT WATER GAS          |

### **COMMERCIAL WHEEL KIT - CRAB LEG EXTENSION**



Upgrade to solid and sturdy caster wheels on crab leg extensions.

FRAME-WKIT-MAG

CASTER WHEEL KIT FOR ROLL CAGE FRAME 8" SWIVEL CASTERS / CRAB LEG EXTENSION

### **FOAM FILLED TIRES**



Never have a flat tire again because of the sturdy, protective foam inside the tire.

RUB-TIRE13-FF 13", 3/4" AXLE - EACH

# INDUSTRIAL FULLY ELECTRICALLY HEATED - FRAME OPTIONS & WHEEL KITS





FRAME-EHEATER-WK-2 Certified Lifting Eyes. Double Coil



FRAME-EHEATER-WK-1 Certified Lifting Eyes. Single Coil

|  | STAINLESS STEEL EXTERIOR OPTIONS  |      |   |  |
|--|---|------|---|--|
| FRAME-HTR1-SS STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, <b>SINGLE COIL</b> UNIT, UP TO 48 KW |   |      |   |  |
|  | FRAME-HTR2-SS STAINLESS STEEL STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, <b>DOUBLE COIL</b> UNIT, OVER 48 KW |      |   |  |
|  | STAINLESS STEEL TANK  |      |   |  |
|  | FRAME-HTR1-SS-T   | ANK  | STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, <b>SINGLE COIL</b> UNIT, UP TO 48 KW   |  |
|  | FRAME-HTR2-SS-TANK ST   |      | STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, <b>DOUBLE COIL</b> UNIT, OVER 48 KW    |  |
|  | WHEEL KIT   |      |   |  |
|  | FRAME-EHEATER-  | WK-1 | WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, <b>SINGLE COIL</b> , C/W HEAVY-DUTY CASTERS, LIFTING EYES |  |
|  | FRAME-EHEATER-  | WK-2 | WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, <b>DOUBLE COIL</b> , C/W HEAVY-DUTY CASTERS, LIFTING EYES |  |
|  | EXTRA CHARGE FOR NON MARKING CASTERS  |      |   |  |
|  | OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)  |      |   |  |

### DRY STEAM GENERATORS

- FRAME OPTIONS & WHEEL KITS

### **DRY STEAM SKID - HORIZONTAL**



Allows you to load and unload your complete dry steam package with ease.

| SKID-STEAM-PU-225 | MOBILE SKID FOR HORIZONTAL DRY STEAMER<br>225 GAL. TANK |
|-------------------|---|
| SKID-STEAM-PU-325 | MOBILE SKID FOR HORIZONTAL DRY STEAMER<br>325 GAL. TANK |

### **DRY STEAM SKID - VERTICAL**



Allows you to load and unload your complete dry steam package easily with the use of the forklift slots.

| SKID-STEAM-PU-225-V | MOBILE SKID FOR VERTICAL STEAMER 225 GAL. TANK |
|---------------------|--|
| SKID-STEAM-PU-325-V | MOBILE SKID FOR VERTICAL STEAMER 325 GAL. TANK |

### **DRY STEAM WHEEL KIT - HORIZONTAL**



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

| FRAME-STM20-WK | WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO20ST-H |
|----------------|---|
| FRAME-STM30-WK | WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO30ST-H |
| FRAME-STM40-WK | WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO40ST-H |
| FRAME-STM50-WK | WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO50ST-H |

### **DRY STEAM WHEEL KIT-VERTICAL**



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

| FRAME-STM20-WK-V | WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO20ST-V |
|------------------|---|
| FRAME-STM30-WK-V | WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO30ST-V |
| FRAME-STM40-WK-V | WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO40ST-V |
| FRAME-STM50-WK-V | WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO50ST-V |

easykleen.com 1-800-315-5533



# PICKUP SKID, FILL & PLAY FRAME OPTIONS

# Machines, Hoses, and Hose Reels are <u>NOT included</u>. These items are FRAMES & TANKS only. Please see our other catalog sections for purchasing these options and accessories.

### **PICKUP SKID**



Add any **Commercial Gas or Diesel Driven Cold Water** or 12 Volt **Hot Water** unit to this frame for 100% portable cleaning.

SKID-PU-225

COMMERCIAL SKID & TANK UNIT C/W 225 GAL. TANK AND PLUMBING

### **PROPANE PICKUP SKID**



Add your **Commercial Propane Fired unit** to this frame.

SKID-PU-225-PRO

COMMERCIAL SKID & TANK UNIT FOR PROPANE MOBILE WASH UNIT C/W 225 GAL. TANK & PLUMBING, 2 - 100 LB BOTTLES (FOR FOOD WAREHOUSE CLEANING)

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

# FILL & PLAY 225G FRAME INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



Add your *Industrial Hot* **Water Gasoline - Oil Fired** units to this frame. 225 gallon water tank.

### **FILL & PLAY 325G FRAME**

INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



Add your *Industrial Hot Water Gasoline - Oil Fired* unit to this frame. 325 gallon water tank included with purchase.

FILL & PLAY-GRIZ-325

FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (HOSE REEL EXTRA)

CALL FOR MODEL NUMBER

FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

### **FILL & PLAY 525G FRAME**

INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



Add your *Industrial Hot Water Gasoline - Oil Fired* unit to this frame. Larger capacity 525 gallon water tank.

FILL & PLAY-GRIZ-525

FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 525 GAL. TANKS AND PLUMBING, (2 REEL CAPACITY - ADDITIONAL COST)

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)



1-800-315-5533

Add your Industrial Hot Water Gasoline - Oil Fired units to this frame. 225 gallon water tank capacity. Designed to be transported in an 8' box truck.

| Z-225-2R | FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING |
|----------|--|
| Z-223-2N | (INCLUDES 2 REEL CAPACITY)   |

FILL & PLAY-GRIZ-225 FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)

FILL & PLAY-GRIZ-225SF FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST) FITS IN 8' PICKUP TRUCK BOX

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

FILL & PLAY-GRIZ

# PICKUP SKID, FILL & PLAY FRAME OPTIONS - CONTINUED

# PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

### **FILL & PLAY 325G FRAME**

INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your *Industrial Hot Water Diesel - Oil Fired* to this frame, 325 gallon capacity. With optional relocation panel.

| FILL & PLAY 525G FRAME                  |
|---|
| INDUSTRIAL HOT WATER DIESEL - OIL FIRED |
|   |



Add your *Industrial Hot Water Diesel - Oil Fired* to this frame. Larger capacity 525 gallon water tank.

| FILL & PLAY-BM1-325      | FRAME FOR BULL MOOSE 1, C/W 325 GAL. TANK,<br>PLUMBING AND HOSE REEL<br>(2 REEL CAPACITY ADDITIONAL COST)        |
|--------------------------|--|
| FILL & PLAY-BM2-325      | FRAME FOR BULL MOOSE 2, C/W 325 GAL. TANK,<br>PLUMBING AND HOSE REEL<br>(2 REEL CAPACITY ADDITIONAL COST)        |
| FILL & PLAY-BM3-325      | FRAME & SKID FOR BULL MOOSE 3, C/W 325 GAL. TANK,<br>PLUMBING AND HOSE REEL<br>(2 REEL CAPACITY ADDITIONAL COST) |
| CALL FOR MODEL<br>NUMBER | OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL                                |
| OPTIONAL LIPGRADE -      | CERTIFIED LIFTING EYES (FOR OIL FIFLDS)  |

|  | NUMBER | DIESEL - OIL FINED CONTROL PAINEL       |
|--|--------|---|
| OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS) |        | CERTIFIED LIFTING EYES (FOR OIL FIELDS) |
|  |        |   |

# FILL & PLAY-BM1-525 FILL & PLAY SKID FOR BULL MOOSE 1, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST) FILL & PLAY-BM2-525 FILL & PLAY-BM3-525 FILL & PLAY-BM3-FOR BULL MOOSE 3, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY ADDITIONAL COST) CALL FOR MODEL OPTIONAL UPGRADE - INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)



|     | ACC-TRAF-DIRECT-KIT     | MUNICIPAL FLASHING LIGHT / ARROW / 3 WORK<br>LIGHTS - KIT MOUNTED ON ANY SKID FRAME<br>(FACTORY INSTALL) |
|-----|-------------------------|--|
| 100 | ACC-TRAF-DIRECT-SUPPORT | MOTORIZED ARROW BOARD SUPPORT FOR TRAFFIC DIRECTOR KIT   |

# FILL & PLAY 740G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your *Industrial Hot Water Diesel - Oil Fired* to this frame, largest capacity of 740 gallon. Ideal for mining/mill applications.

|  | FILL & PLAY-BM1-740      | FILL & PLAY SKID FOR BULL MOOSE 1, C/W 740 GAL. TANK<br>& PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)           |
|--|--------------------------|--|
| STATE OF THE PROPERTY OF THE P | FILL & PLAY-BM2-740      | FILL & PLAY SKID FOR BULL MOOSE 2, C/W 740 GAL. TANK<br>& PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)           |
|  | FILL & PLAY-BM3-740      | FILL & PLAY SKID FOR BULL MOOSE 3, C/W 740 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST) |
|  | CALL FOR MODEL<br>NUMBER | OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL                                |
|  | OPTIONAL UPGRADE -       | CERTIFIED LIFTING EYES (FOR OIL FIELDS)  |

### **CUSTOM ORDERS**

We offer complete aluminum, stainless steel, galvanizing, powder coated, engineered frames, and systems to meet your specific needs. We utilize solid works 3D design software. Please do not hesitate to inquire about any special requests.

### IF YOU CAN DREAM IT, WE CAN BUILD IT! Call today!





### JETTER ACCESSORIES

### **JETTER NOZZLE KITS**

| NOZ-KIT-JTR1130-38 | KIT, 11 GPM @ <b>3000 PSI</b> , 3/8" NPT, 4-PACK  |
|--------------------|---|
| NOZ-KIT-JTR1230-38 | KIT, 12 GPM @ <b>3000 PSI</b> , 3/8", 4 PACK      |
| NOZ-KIT-JTR2040-38 | KIT, 20 GPM @ <b>4000 PSI</b> , 1/2 " NPT, 4-PACK |

### **JETTER HOSES**







| HOS-SFX18-50       | 1/8" X 50' C/W MALE ENDS, <b>4800 PSI</b> , BLACK           |
|--------------------|---|
| HOS-SFX18-100      | 1/8" X 100' C/W MALE ENDS, <b>4800 PSI</b> , BLACK          |
| HOS-SFX14-50       | 1/4" X 50' C/W MALE ENDS, <b>4400 PSI</b> , BLACK           |
| HOS-SFX14-100      | 1/4" X 100' C/W MALE ENDS, <b>4400 PSI</b> , BLACK          |
| HOS-JTR100-14      | 1/4" X 100' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED) |
| HOS-JTR200-14      | 1/4" X 200' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED) |
| HOS-JTR300-14      | 1/4" X 300' C/W MALE ENDS, <b>4400 PSI</b> , (GREEN OR RED) |
| HOS-JTR100-38      | 3/8" X 100' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR200-38      | 3/8" X 200' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR300-38      | 3/8" X 300' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR100-12      | 1/2" X 100' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR200-12      | 1/2" X 200' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR300-12      | 1/2" X 300' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR400-12      | 1/2" X 400' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR500-12      | 1/2" X 500' C/W MALE ENDS, <b>4000 PSI</b> , (GREEN OR RED) |
| HOS-JTR500-34O     | 3/4" X 500' C/W MALE ENDS, <b>2400 PSI</b> , ORANGE         |
| PIRANHA HOSE IS SE | PECIAL ORDER ONLY   |

### **SEWER / CULVERT NOZZLES**



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4200 PSI

| ., -          | ., .                                    |
|---------------|---|
| NOZ-SWR18-5.5 | 1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK  |
| NOZ-SWR14-5.5 | 1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK  |
| NOZ-SWR38-5.5 | 3/8 ", 5.5 ORIFICE - 1 FORWARD & 3 BACK |

### **JETTER WINTERIZATION KIT**



Winterization Kit for jetter. Plumb into existing system to protect pump and hoses from freezing.

KIT-WTZ-(JTR) WINTERIZATION KIT FOR EZJ3512 JETTER

### **FOOT PEDAL INLINE**





When operating sewer or jetter machine, this allows hands to be free.

| SWT-FTSW-SNP-Y | FOOT SWITCH, SNAP ACTION CONTACTS, 24-240 VOLT - YELLOW                          |
|----------------|--|
| SWT-FV5012-IH  | FOOT VALVE, 12 GPM @ <b>5000 PSI</b> , 300°F, 3/8 " INLET FNPT, 1/4" FNPT OUTLET |
| SWT-FV808-IH   | FOOT VALVE, 8 GPM @ <b>8000 PSI</b> , 300°F                                      |

### **JETTER HOSE REEL KIT**



Electric Driven Hose Reel Kit. A great base set for your jetting needs. **Hose is not included.** 

KIT-HR300HP-12V JETTER HOSE REEL KIT, C/W 12V MOTOR, & ROLLER BRACKET - 300 FOOT CAPACITY

### **TANKS**

### WINTERIZATION KIT





Adapts to most models allowing you to quickly winterize your pressure washer in the cooler climates. Protect pump, coil, and hose. For hot water units.

KIT-WTZ WINTERIZATION KIT

### **FUEL TANK OPTION**



For larger fuel capacity. Adaptable to some of the *Industrial Hot Water Diesel* - *Oil Fired* units.

STE-TAN-100G 100 GAL. STEEL

100 GAL. STEEL (FOR INDUSTRIAL HOT WATER DIESEL - OIL FIRED #3 FRAME)

### **FUEL TANKS, GAS CAPS, & TANK BRACKET**





| TAN-FUEL-10G          | FUEL TANK - 10 GAL.   |
|-----------------------|-----------------------|
| TAN-FUEL-20G          | FUEL TANK - 20 GAL.   |
| TAN-FC10G             | GAS CAP WITHOUT GAUGE |
| TAN-FC10G-WG          | GAS CAP WITH GAUGE    |
| FRAME-TANKBRACKET-10G | TANK BRACKET          |

#### **FLOAT TANK**

For water supply to pump systems. Garden hose connection.

KIT-FLOAT TANK (CHW)

1 GALLON FLOAT TANK KIT FOR COMMERCIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH

PRESSURE SOAP

KIT-FLOAT TANK (IHW)

18 GALLON FLOAT TANK KIT FOR INDUSTRIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP

#### **SMALL POLY WATER TANKS**





| TAN-35GAL  | 35 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED |
|------------|--|
| TAN-100GAL | 100 GAL. FRAME, FITTINGS & STRAPS NOT INCLUDED |

### **LARGE POLY WATER TANKS**

Frame Not Included







| TAN-225GAL   | 225 GAL. DIMENSIONS, 49"L X 38"W X 41"H |  |
|--|---|--|
| STEEL TANK STRAPS ADDITIONAL COST FOR 225 GAL. POLY WATER TANK |   |  |

TAN-325GAL 325 GAL. DIMENSIONS, 68" L X 38"W X 43"H TAN-525GAL 525 GAL. DIMENSIONS, 72" L X 49"W X 54"H

STEEL TANK STRAPS ADDITIONAL COST FOR 325 & 525 GAL. POLY WATER TANK

740 GAL, W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH PIPE FRAME


# STEAM OPTIONS

- MACHINE OPTIONS & ACCESSORIES

STEAM OPTION KITS - \*Must Be Ordered With A Pressure Washer Unit and Factory Installed\*







#### **STANDARD KIT**

KIT-STM OPT-4.3 STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE

STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE KIT-STM OPT-5-3.5 STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE

#### STEAM OPTION KITS - DOUBLE UNLOADER TYPE

STEAM OPTION FOR INDUSTRIAL HOT WATER MACHINES - STEAM GAUGE, 3 WAY VALVE, FLOW SWITCH, STEAM HOSE, STEAM WAND - ADD "-STM" TO MODEL #

#### **DRY STEAM KIT**

KIT-DRYSTM DRY STEAM KIT (COMPATIBLE WITH ALL INDUSTRIAL HOT WATER UNITS UP TO 1,000,000 BTU) (HOSE/WAND NOT INCLUDED)

#### PID CONTROL OPTION FOR ALL INDUSTRIAL STEAM MODELS

THR-PID2362 | PID CONTROLLER FOR INDUSTRIAL STEAM MACHINES - HIGH/LOW FIRE ON OIL BURNER



## **WASH BAY**

### MACHINE OPTIONS & ACCESSORIES

#### **SOAP SWITCH CONTROL PANEL** \*Cord not included

To control units with one switch.

SWT-RMS 1 SWITCH, 24-250V 3A 2 SWITCHES, 24-250V 3A SWT-RMS2

SWITCH FUNCTION MUST BE SPECIFIED ON ORDER





SWT-RMS SWT-RMS2

#### **REMOTE WASH BAY CONTROL PANEL**

To control the functions of your pressure washer from the wash-bay location.



| KIT-WBS3 | REMOTE WASH BAY CONTROL PANEL - START-STOP/SOAP/BURNER.<br>LEAD WIRE NOT SUPPLIED   |
|----------|---|
| KIT-WBS4 | 4 SWITCH REMOTE WASH BAY CONTROL PANEL - MOTOR START-<br>STOP/SOAP ON-OFF/WAX ON-OFF/BURNER ON-OFF. LEAD WIRE NOT<br>SUPPLIED. INCLUDES SOAP SOLENOID |

#### **WAND HOLDER**

In bay stainless steel, keeps your gun wands up off the floor.

CAR-WH-17 17"



| Allows  | your | custome   |
|---------|------|-----------|
| alama t | hair | mata ta t |

clamp their mats to the wall so they can easily be sprayed off.



CAR-MATCA10 | STAINLESS STEEL

#### STAINLESS STEEL VACUUM

Stainless steel construction for commercial use with 1\$ accepter and heavy-duty lock box. Powered by twin 1-6 HP motors coupled with hose and claw nozzle.



CAR-VSO-CP STAINLESS STEEL VACUUM, COIN ACCEPTOR INCLUDED

#### **COMPLETE FOAM BRUSH ASSEMBLY**





The assembly comes with a soft bristle brush, as well as a single bay chemical mixer/injector kit for your foam option.

|                | E-principle of the control of the co |
|----------------|--|
| KIT-CAR-FBXS-1 | COMPLETE ASSEMBLY, SINGLE BAY CAR WASH   |
| KIT-CAR-FBXS-2 | COMPLETE ASSEMBLY, DOUBLE BAY CAR WASH   |
| CAR-FBHH       | FOAM BRUSH HANDLE HOLDER   |


#### **TRUCK WASH BRUSH**



A stiff bristle brush to help remove stuck on grease, mud, dirt, and grime.

ACC-TWB10 TRUCK WASH BRUSH, 2 1/2 " X 10 ", C/W BUMPER


#### **OVERHEAD BOOM**



CAR-OBO OVERHEAD BOOM, 360° PIVOT, 3000 PSI, 5'5"

#### **FESTOON SYSTEM**

To hold the hose off the floor.



| FST-T100C-10T | SYSTEM WITH 100' CABLE, WHEEL TROLLEY KIT          |
|---------------|--|
| FST-T60N-9T   | FESTOON SYSTEM, 60 FEET NYLON CABLE C/W 9 TROLLEYS |

# STAINLESS STEEL COILS

- MACHINE OPTIONS & ACCESSORIES





| 보면 하는 것들은 사람들은 사람들이 가는 사람들은 사람들이 가장 하는 것이 되었다. 그는 사람들이 되었다면 하는 것이 되었다면 하는 것이 없는 것이 없는 것이 없는데 없는데 없었다. |   |  |
|---|---|--|
| STAINLESS STEEL COILS - OIL FIRED   |   |  |
| COI-EK4232-SP40   | 16" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO200, EZO350)                |  |
| COI-EK4105-SP80   | 18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO300)                        |  |
| COI-EK4426-SP80   | 18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO400)                        |  |
| COI-EK4122-SP80   | 20" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO440)                        |  |
| COI-EK4465-SP80   | 20" COIL & TANK ASSEMBLY, OIL FIRED, (FOR EZO600, EZO700, EZO800, 1/2") |  |
| COI-EK4128-SP80   | 24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO700, EZO900 3/4")           |  |
| COI-EK4455-SP80   | 24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1000)                       |  |
| COI-EK4132-SP80   | 30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1200)                       |  |
| COI-EK9600-1-SP80   | 30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO 1800)                      |  |
|   |   |  |

| STAINLESS STEEL COILS - GAS FIRED   |  |
|-------------------------------------|--|
| COI-EK4232-SP40                     | 16" COIL & TANK ASSEMBLY, GAS FIRED195,000 BTU                       |
| COI-EK4117-SP80<br>COI-EK4117-SP160 | 18" COIL & TANK ASSEMBLY, GAS FIRED, 295,000 BTU                     |
| COI-EK4118-SP80                     | 20" COIL & TANK ASSEMBLY, GAS FIRED, 395,000 BTU                     |
| COI-EK4109-SP80                     | 24" COIL & TANK ASSEMBLY, GAS FIRED, 510,000 / 600,000 / 720,000 BTU |
| COI-EK4132-SP80                     | 30" COIL & TANK ASSEMBLY, GAS FIRED, 940,000 BTU                     |

| CERTIFIED CRN COILS - OIL OR GAS FIRED |   |  |
|--|---|--|
| ADD "-CRN" TO MODEL NUMBER             | COIL WITH CANADIAN REGISTERED NUMBER - 3/4", 1/2", AND 1" COILS |  |

## **MISCELLANEOUS ITEMS**

- UPGRADES & ADDITIONS

# PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

#### Ask about CAT, GIANT & PRAT Optional Pumps!

#### **EMPEROR PUMP UPGRADE**



High temperature pump. Rated @ 185° F. Nickel plated, forged brass manifold, run-dry seals.

PMP-G0915HTC

2 HP EMPEROR PUMP UPGRADE - UP TO 180°F WATER, 2.1 GPM, 1500 PSI, 1750 RPM

#### **GENERAL PUMP UPGRADE**



For all cold or hot water units with 2 HP electric or 6.5 HP gas motors.

| PMP-G0915E17ET | PUMP UPGRADE FOR COLD OR HOT WATER 2 HP UNIT TO GENERAL PUMP, <b>2.1 GPM @ 2610 PSI</b> |
|----------------|---|
| PMP-G0815G6ET  | PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO GENERAL PUMP. 3.4 GPM @ 2610 PSI      |

#### **AR PUMP UPGRADE**



For all cold or hot water units with 6.5 HP gas motors.

PMP-ARRCV3G27D-F7

PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO AR PUMP, 3 GPM @ 2700 PSI

#### **HOUR METER**



Add to a pressure washer to easily track maintenance intervals.

| ELS-HR-MTR-12/24V | 12/24 HOUR METER |
|-------------------|------------------|
| ELS-HR-MTR-120V   | 120 HOUR METER   |

#### **OUTLET TEMPERATURE GAUGE**



For metering boiler outlet temperature.

| THR-T3X4B500 | INLINE OUTLET TEMPERATURE GAUGE - 3" - 0° TO 500°F |
|--------------|--|
|--------------|--|

#### easykleen.com

1-800-315-5533

#### **PUMP KITS**

| PRK-EK-33-61 | REPAIR KIT, UNLOADER ASSEMBLY, EK PUMPS        |
|--------------|--|
| PRK-EK-21-28 | PACKING KIT, EK3435H, EK440, EK215 FOR EK PUMP |
| PRK-EK-64-65 | VALVE KIT, EK3435H, EK440, EK215 FOR EK PUMP   |
| PRK-G001     | VALVE KIT FOR GENERAL PUMP                     |
| PRK-G028     | PACKING KIT WITH BRASS FOR GENERAL PUMP        |
| PRK-G069     | PACKING KIT WITHOUT BRASS FOR GENERAL PUMP     |
| PRK-G123     | VALVE KIT FOR GENERAL PUMP                     |
| PRK-G156     | PACKING KIT FOR GENERAL PUMP                   |
|              |  |

#### HOT WATER PACKING VALVE KIT GENERAL PUMP



Allows you to run hot water through your pump up to  $185^{\circ}$  F

Note: On new machines higher temp TPI will be required.

| PRK-G220 | HOT WATER PACKING KIT / VALVE KIT |
|----------|-----------------------------------|
| PRK-G209 | (TSF SERIES EXCEPT 2421)          |
| PRK-G211 | TSF2421 ONLY                      |

#### **INLINE FILTERS**





Keeps debris from damaging pump.

|               | 그리아 하시아 얼마를 보면 어떻게 하시아 되었다. 그 중에 대한 사람들은 얼마를 받는데 하시아 그리는 사람들이 아무지 않는데, 아름이 없다.                                |
|---------------|---|
| FIL-CBF12-80  | INLINE FILTER, CLEAR, 1/2" 80 MESH  |
| FIL-CBF34-80  | INLINE FILTER, CLEAR, 3/4" 80 MESH  |
| FIL-CBF1-80   | INLINE FILTER, CLEAR, 1" 80 MESH  |
| FIL-CBF114-80 | INLINE FILTER, CLEAR, 1-1/4" 80 MESH  |
| FIL-CBF112-80 | INLINE FILTER, CLEAR, 1-1/2" 80 MESH  |
| FIL-GCF12     | GREEN CAP INLINE FILTER, 1/2 " FPT INLET/MPT OUTLET, TWO 1/4" SIDE PORTS, 6 GPM MAX FLOW 145 PSI MAX PRESSURE |

#### **UNLOADER - FLOW ACTIVATED**



Flow Activated instead of Pressure activated (easier on piped in systems).

| UNL-FA10835-K73 | <b>6.6-10.8 GPM</b> @ <b>3500 PSI.</b> 165°. 3/8″BSP-F. 3/8″BSP-F. 3/8″BSP-M |
|-----------------|--|
| UNL-FA13258-K9  | <b>2.5-13.2 GPM</b> @ <b>5800 PSI.</b> 165°. 1/2″BSP-F. 1/2″BSP-F. 1/2″BSP-M |

#### **VOLT METER**



To confirm voltage in 12 volt systems.

| FLS-VOLT-MTR  | FOR 12 VOLT SYSTEMS    |
|---------------|------------------------|
| LL3 VOLI WITH | I ON 12 VOLI 3131LIVI3 |



# MISCELLANEOUS ITEMS

- CONTINUED

#### PRESSURE GAUGE



Shows operating PSI of machine, great for applications where PSI is changing frequently from job to job.

| THR-PG1000                                | PRESSURE GAUGE 1000/2000/3000 PSI |
|---|-----------------------------------|
| THR-PG2000                                | PRESSURE GAUGE 2000 PSI           |
| THR-PG3000                                | PRESSURE GAUGE 3000 PSI           |
| THR-PG5000                                | PRESSURE GAUGE <b>5000 PSI</b>    |
| THR-PG6000                                | PRESSURE GAUGE 6000 PSI           |
| THR-PG10000                               | PRESSURE GAUGE 10,000 PSI         |
| THR-PG20000                               | PRESSURE GAUGE <b>20,000 PSI</b>  |
| SPECIFY APPROX. 60% OF OPERATING PRESSURE |                                   |
| EXTRA CHARGE FOR MOUNTING                 |                                   |
|   |                                   |

#### **SUCTION KIT**





Allows you to pick up water from lake, bay, ocean, and wash out on your aquaculture site. For industrial cold water gas units.

KIT-SUCTION

SUCTION KIT - 6'3/4" HOSE - INLINE WATER FILTER - FOOT VALVE - PRIMER VALVE (COLD WATER GAS DRIVEN)

#### HYDROSTATIC VALVE AND ASSEMBLY KIT

For pressure testing lines with your pressure washer.

KIT-HDT HYDROSTATIC VALVE AND ASSEMBLY KIT (FACTORY INSTALL)

#### **GENERATORS**



For pressure washers to run on 120 Volt burners. Replacement for built on generators.

| 126.1 | GEN-MC300      | GENERATOR - ELECTRIC/AC - 3000 WATT - 3600 RPM |
|-------|----------------|--|
|       | PLEASE SPECIFY | MODEL OF YOUR MACHINE WHEN ORDERING            |

#### **FUEL FILTERS**







| FIL-FF14     | FUEL FILTER ASSEMBLY, 1/4" (HO87099420)                                       |
|--------------|---|
| FIL-FF14-AL  | FUEL FILTER ASSEMBLY, 1/4 ", ALUMINUM   |
| FIL-FFWS-CMP | FUEL FILTER/ WATER SEPARATOR, COMPLETE UNIT (87497700) (HO87497710)           |
| FIL-FFWS-E   | ELEMENT, FUEL FILTER/ WATER SEPARATOR (87497710)<br>(HO87253070) (HO87497700) |

#### **ELECTRIC CLUTCH UPGRADE** - 12 VOLT BELT DRIVEN MACHINES



Work with hydraulic motor on boats to run the pump.

| PMP-DGC-12-WP12 | ELECTRIC CLUTCH UPGRADE (BELT/GASOLINE DRIVEN<br>- OIL FIRED UNITS) UP TO 24HP                                 |
|-----------------|--|
| PMP-DGC12-WP7   | DOUBLE GROOVE CLUTCH UPGRADE ADAPTER KIT<br>C/W 7" PULLEY, 12V, FOR GENERAL PUMPS 47, ES &<br>ESN SERIES PUMPS |

#### **PRIMARY CONTROL**



Safety drive that turns off burner to prevent flooding.

| OIL-7556A0000U  | 12V   |
|-----------------|---|
| OIL-7575A0000U  | 120V  |
| OIL-7580A0000-U | 230V  |
| OIL-52082U      | BECKETT GENESIS BURNER CONTRACTOR PRIMARY CONTROL DIAGNOSTIC TOOL |

#### **ELECTRIC START UPGRADE KITS - COLD WATER**



For use only on commercial gas units with same size engine. Turns your pull start (recoil) unit into an electric start.

| ELECTRIC START UPGRADE KIT |                           |
|----------------------------|---------------------------|
| KOH-CH440-ES               | GAS ENGINE, KOHLER, 14 HP |
| HON-GX390E18               | GAS ENGINE, HONDA, 13 HP  |

#### 12 VOLT BURNER - PRIMARY CONTROL



A 12 VDC primary safety control for oil burners used on pressure washers. It can provide interrupted or intermittent duty ignition, and it has a 15 second lockout time.

KIT-BNR12-MSR-UPGRADE 12V BURNER PRIMARY CONTROL

# **MISCELLANEOUS ITEMS**

- CONTINUED

# PRESSURE SYSTEMS LTD. MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

#### **REMOTE SWITCH - ELECTRIC DRIVEN ONLY**



To control functions on pressure washers with electrical or mechanical controls.

SWT-RMS-50 REMOTE SWITCH C/W 50' OF CORD - ELECTRIC DRIVEN ONLY

#### **FITTINGS - STEEL**



| FIT-S1003-B  | HEX COUPLING, 1/4", FNPT                         |
|--------------|--|
| FIT-S1022-C  | HEX NIPPLE, 3/8", (WMM0003GS)                    |
| FIT-S1022-CB | HEX NIPPLE, REDUCING, 3/8" X 1/4", (WMM0302GS)   |
| FIT-S1022-D  | HEX NIPPLE, 1/2 ", (WMM0004GS)                   |
| FIT-S1022-DB | HEX NIPPLE, REDUCING, 1/2" X 1/4", (RCF0402SS)   |
| FIT-S1022-DC | HEX NIPPLE, REDUCING, 1/2 " X 3/8 ", (WMM0403GS) |
| FIT-S1022-EC | HEX NIPPLE, REDUCING, 3/4" X 3/8"                |

#### **SPARK ARRESTOR**

Reduces any sparks from engines.

KIT-ESA ENGINE SPARK ARRESTOR FOR MINING OR OILFIELD APPLICATIONS

#### **COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNITS**

Option for older propane with millivolt controls.

| X PRO-KIT-LP400MV | COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNIT, 400,000 BTU |
|-------------------|--|
|-------------------|--|

#### **THERMOSTAT**



THR-EK220



| THR-EK302 THERMOSTAT, 302°F, EK, 7000 PSI |             | MOSTAT, 302°F, EK, 7000 PSI   | 17 113  |              |
|---|-------------|---|---|--------------|
| TOWN THE T                                | THR-BC200C  | TEMPERATURE CONTROLLER, 200°F, BOX STYLE, 90-240 VAC INPUT, 5AMP/240 VAC OUTPUT |   | A Parallella |
|   | HIGH LIMIT  | rs  |   | 10.0         |
|   | THR-HL12WL- | 230   | HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 230°F                     | 16.50        |
| 16.1                                      | THR-HL12WL- | 330   | HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 330°F                     | -            |
| A 10 10 10 10 10 10 10 10 10 10 10 10 10  | THR-HL12WL- | 375SS   | HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 375°F, STAINLESS<br>STEEL | A Post Pater |

THERMOSTAT, 220°F, EK, 7000 PSI 802829352311 (HO87500950) (HO955940)

#### **BRASS FLOW SWITCH**



Designed to operate in response to low volume, low pressure flow, and still allow for high pump output flow. Provides reliable ON/OFF for STOP/START systems.

| ĕ | SWT-FS1068 | <b>25 GPM</b> @ <b>3000 PSI</b> MAX, 1/2", 180°F MAX TEMP                    | 8   |
|---|------------|--|-----|
|   | SWT-FS329  | <b>0.75 -16 GPM</b> @ <b>5000 PSI</b> MAX, 3/8", 165°F MAX TEMP              | 1   |
|   | SWT-FS975  | REEDLESS, <b>12 GPM</b> @ <b>5000 PSI</b> MAX, 3/8", 180°F MAX TEMP (100975) | 1   |
|   | SWT-FS011  | <b>01-8 GPM @ 4350 PSI</b> MAX, 3/8", 165°F MAX TEMP                         | 2   |
|   | SWT-FS879  | <b>01-8 GPM @ 4350 PSI</b> MAX, 3/8", 165°F MAX TEMP                         | 100 |
|   | SWT-FS1068 | <b>01-8 GPM @ 4350 PSI</b> MAX, 3/8", 165°F MAX TEMP                         | 3   |

#### BATTERY





| ELS-BATT-12V    | 12V BATTERY COMMERCIAL SERIES |
|-----------------|-------------------------------|
| ELS-BATT-12V-HD | 12V HEAVY-DUTY BATTERY        |
|                 |                               |

#### **BURNER PARTS**



We have all Oil Burner Nozzle sizes in stock.

| OIL-2.00X80B | OIL BURNER NOZZLE, 2.00X80B (HO900771)                                |
|--------------|---|
| OIL-31812-12 | IGNITER KIT W/O TIMER, 12V, MSR. WAYNE - 802829352076<br>(HO91075070) |

#### THERMAL RELIEF VALVES







| UNL-TRV38 3/8" (100557) (HO921421) |                                    | 3/8" (100557) (HO921421)       |
|------------------------------------|------------------------------------|--------------------------------|
|                                    | UNL-TRV12 1/2" (100558) (HO921422) |                                |
|                                    | UNL-TRV12HT                        | 1/2 ", HIGH TEMPERATURE, 190°F |

#### **DELAY TIMER**



Solid state timer delay on break timing module. For use on auto STOP/START systems.

ELS-TSB222 SOLID STATE TIMER

#### PRESSURE SWITCH



Used primarily for the burner system to ignite the burner, also used in Auto Start Systems.

| SWT-PSW14   | <b>4000 PSI</b> , 1/4" MNPT                    |
|-------------|--|
| SWT-PSW38SS | 3/8", STAINLESS STEEL, <b>8700 PSI</b> , 195°F |

#### **FLOW SWITCH**



Designed to provide control on solenoids, timers, and indicator lights on cold and hot water systems.

| SWT-FS505ST | <b>1-7.8 GPM</b> @ <b>8700 PSI</b> MAX, 3/8" INCH, STAINLESS STEEL, 180°F MAX TEMP |  |
|-------------|--|--|
| SWT-FSI     | SWT-FSI <b>01-8 GPM @ 4350 PSI</b> MAX, 3/8", 165°F MAX TEMP                       |  |

# **CHEMICALS**

## - CLEANING TOOLS & SUPPLIES

#### **EASY-KLEEN'S EASY EIGHT!**

Check Out Our Top 8 Performers — These hard-working chemicals are always ready to get the job done.

#### **KLEEN-BREAK**



Strong de-greaser. Great for heavy equipment like trucks and trailers. Can be mixed and not lose its great cleaning power.

| CHM-KLEENBREAK20  | 20L PAIL  |
|-------------------|-----------|
| CHM-KLEENBREAK205 | 205L DRUM |

#### **SANI-KLEEN**



Sanitizes as it cleans! Perfect for food prep sanitation. Great for farms and restaurants. Chlorine with citrus for a fresh, clean smell. Citrus adds that extra punch!

| CHM-SANIKLEEN20  | 20L PAIL  |
|------------------|-----------|
| CHM-SANIKLEEN205 | 205L DRUM |

#### **KLEEN-RIP HD**



Used when extra de-greasing power is desired. Incredibly strong. Great for things like forestry equipment and great to help extend the life of radiators. Not to be used on painted vehicles - Construction Equipment only.

| CHM-KLEENRIPHD20  | 20L PAIL  |
|-------------------|-----------|
| CHM-KLEENRIPHD205 | 205L DRUM |

#### **KLEEN-RIP LT**



Light De-greaser. Works magic on vinyl siding. Very good all-around cleaner and great for road film.

| CHM-KLEENRIPLT20  | 20L PAIL  |
|-------------------|-----------|
| CHM-KLEENRIPLT205 | 205L DRUM |

#### **KLEEN-SHINE**



Best cold water cleaner. Great for fleet vehicles, RVs, ATVs. Perfect for cold water pressure washers. High foaming detergent.

| CHM-KLEENSHINE20  | 20L PAIL  |
|-------------------|-----------|
| CHM-KLEENSHINE205 | 205L DRUM |

#### **KLEEN-SHINE PLUS**



Best cold water cleaner. Great for fleet vehicles, RVs, ATVs. Perfect for cold water pressure washers. With a better rinse and wax to help combat dirt and grime.

| CHM-KLEENSHINEPLUS20  | 20L PAIL  |
|-----------------------|-----------|
| CHM-KLEENSHINEPLUS205 | 205L DRUM |

#### **CARBON-KLEEN**



De-greaser. Great for cleaning bugs from vehicles, diesel soot and road film. Awesome general purpose cleaner when mixed.

| CHM-CARBONKLI | EEN20 | 20L PAIL  |
|---------------|-------|-----------|
| CHM-CARBONKLI | EN205 | 205L DRUM |

#### **CARBON-KLEEN PLUS**





All the same cleaning power of Carbon Kleen, PLUS a wax additive for keeping the dust and dirt off and better rinsing.

| CHM-CARBONKLEENPLUS20  | 20L PAIL  |
|------------------------|-----------|
| CHM-CARBONKLEENPLUS205 | 205L DRUM |

#### **ANTI-RUST APW ADDITIVE**



Anti-rust keeps your aqueous parts washer from developing rust. It also keeps the parts being washed from rusting. A must have foe Automatic Parts Washers

| CHM-APW-ANTIRUST-1G | 1 GAL. |
|---------------------|--------|
|---------------------|--------|

#### **CABINET WASHER POWDER**



This cleaner is a necessary item used in our Parts Washing Cabinets to strip away grease, dirt, and other elements. Cleans parts very quickly and thoroughly. This compound is biodegradable, low foaming, has a high alkaline content, and a rust inhibiting agent. The cleaner is also aluminum safe.



**GLASS CLEANER** 

Unbelievable streak-proof glass cleaner.

CHM-UNBELIEVABLE AEROSOL CAN 500G.

#### **APW LIQUID PHOSPHATIZER**



Great as a pre-treatment for painting. Can also be used through a pressure washer for the same application.

| 175 | CHM-IRONPHOSFIGHT20  | 20L PAIL  |
|-----|----------------------|-----------|
|     | CHM-IRONPHOSFIGHT205 | 205L DRUM |

#### **APW PRO WHITE 500**



Powdered detergent for automatic parts washers. Mixes according to cleaning need. Anti corrosion compounds, non foaming. Phosphate free.

| 2000 | CHM-APW-PROWHITE40   | 40 LB.  |
|------|--|---|
| 1    | CHM-APW-PROWHITE450  | 450 LB.   |
|      | Programme and the control of the con | THE RESERVE OF THE CONTROL OF THE PROPERTY OF |

### sales@easykleen.com

# "HOW TO" ON SELECTING YOUR UNIT FRAME OPTIONS

# EASY-KLEEN PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

#### HOW TO FIND THE RIGHT FRAME FOR YOUR MODEL

For all your needs, we can build what your job requires. Follow the below guide to make the best frame for you!

| RECIPE TO ORDER                                  |                         |   |                            |          |     |    |    |           |          |  |  |
|--|-------------------------|---|----------------------------|----------|-----|----|----|-----------|----------|--|--|
| FRAME+UNIT TYPE + HORSE POWER + DRIVE + ADDITION |                         |   |                            |          |     |    |    |           |          |  |  |
| FRAME  | ALWAY:                  | ALWAYS MUST BE AT START OF MODEL NUMBER |                            |          |     |    |    |           |          |  |  |
| UNIT TYPE  | TYPE O                  | F M                                     | ACHINE                     |          |     |    |    |           |          |  |  |
|  | CW                      | CC                                      | OLD WATER                  |          |     |    |    |           |          |  |  |
|  | GF                      | G/                                      | AS FIRED                   |          |     |    |    |           |          |  |  |
|  | OF                      | OI                                      | L FIRED                    |          |     |    |    |           |          |  |  |
| HORSE POWER                                      | THE HO                  | THE HORSE POWER OF THE UNIT             |                            |          |     |    |    |           |          |  |  |
|  | 2 HP                    | 2 HP 5 HP 7.5 HP 10 HP 15 HP            |                            |          |     |    |    |           |          |  |  |
|  | 20 HP 25 HP 30 HP 50 HP |   |                            |          |     |    |    |           |          |  |  |
| DRIVE  | THE DE                  | RIVE                                    | OF THE UNIT                | <u> </u> |     |    |    |           |          |  |  |
|  | BD                      | BE                                      | LT DRIVEN                  |          |     |    |    |           |          |  |  |
|  | DD                      | DI                                      | RECT DRIVE                 |          |     |    |    |           |          |  |  |
|  | FC                      | FL                                      | ANGE COUPL                 | ER DRI   | VE  | N  |    |           |          |  |  |
| ADDITION   | THE AD                  | DIT                                     | IONS YOU W                 | ANT TO   | ) A | DD | то | THE UNI   | Г        |  |  |
|  | ERC                     | ELE                                     | CTRIC ROLL C               | AGE      |     | AL |    | ALUMIN    | IIUM     |  |  |
|  | FBWS                    |   | T BASE WITH<br>ROUD        |          |     | SS |    | STAINLE   | SS STEEL |  |  |
|  | FFW                     | FOAM FILLED WHEELS W WHEELED            |                            |          |     |    |    |           | D        |  |  |
|  | FB                      | FLA                                     | T BASE                     |          |     | ST |    | STATION   | NARY     |  |  |
| NOTE   |                         |   | IT NUMBERS<br>ON IN THE MO |          |     |    |    | VE THE CO | OMPONENT |  |  |




| EXA | MPLE                   |  |
|-----|------------------------|--|
| OG  | FRAME-CW57510DDERC     | COLD WATER SERIES, 5, 7.5, OR 10 HP, DIRECT DRIVE, ELECTRIC ROLL CAGE                            |
| 1   | FRAME-CW57510DDFBWS-SS | COLD WATER SERIES, 5, 7.5, OR 10<br>HP, DIRECT DRIVE, FLAT BASE WITH<br>SHROUD - STAINLESS STEEL |
| 2   | FRAME-LS-3FT-ST575DDFB | STATIONARY SERIES, 5 OR 7.5 HP,<br>DIRECT DRIVE, FLAT BASE                                       |

# **CUSTOM ORDERS**

We offer complete aluminum, stainless steel, galvanizing, powder coated, engineered frames, and systems to meet your specific needs. We utilize solid works 3D design software. Please do not hesitate to inquire about any special requests.

### IF YOU CAN DREAM IT, WE CAN BUILD IT! Call today!

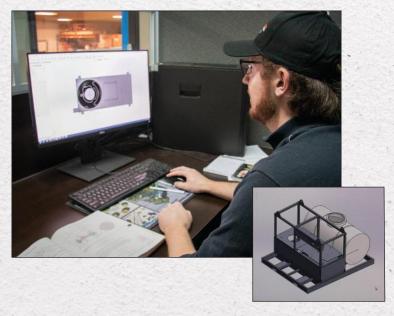



**Water Diesel** 40 GPM @ 1500 PSI Used for Humidification to Cure Concrete During Bridge and **Building Construction.** 





## **NOZZLE CHART**

### **EXAMPLE:** To help you size your Nozzle

- Pressure washer is 4000 PSI @ 3.5 GPM
- Tip size is 3.5



|                         | POUNDS PER SQUARE INCH (PSI) |    |       |       |          |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-------------------------|------------------------------|----|-------|-------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| STANDARD<br>NOZZLE SIZE | HOLE SIZE                    |    | 500   | 750   | 1000     | 1250  | 1500  | 1750  | 2000  | 2250  | 2500  | 2750  | 3000  | 3250  | 3500  | 3750  | 4000  | 4500  | 5000  |
| 2.0                     | .034"/0.86mm                 |    | 0.71  | 0.87  | 1.00     | 1.12  | 1.22  | 1.32  | 1.41  | 1.50  | 1.58  | 1.66  | 1.73  | 1.80  | 1.87  | 1.94  | 2.00  | 2.12  | 2.24  |
| 2.5                     | .042"/1.07mm                 |    | 0.88  | 1.08  | 1.25     | 1.40  | 1.53  | 1.65  | 1.77  | 1.88  | 1.98  | 2.07  | 2.17  | 2.25  | 2.34  | 2.42  | 2.50  | 2.65  | 2.80  |
| 3.0                     | .043"/1.09mm                 | L  | 1.06  | 1.30  | 1.50     | 1.68  | 1.84  | 1.98  | 2.12  | 2.25  | 2.37  | 2.49  | 2.60  | 2.70  | 2.81  | 2.90  | 3.00  | 3.18  | 3.35  |
| 3.5                     | .048"/1.22mm                 |    | 1.24  | 1.52  | 1.75     | 1.96  | 2.14  | 2.32  | 2.47  | 2.63  | 2.77  | 2.90  | 3.03  | 3.15  | 3.27  | 3.39  | 3.50  | 3.71  | 3.91  |
| 4.0                     | .052"/1.32mm                 | L  | 1.41  | 1.73  | 2.00     | 2.24  | 2.45  | 2.65  | 2.83  | 3.00  | 3.16  | 3.32  | 3.46  | 3.61  | 3.74  | 3.87  | 4.00  | 4.24  | 4.47  |
| 4.5                     | .055"/1.40mm                 | ı  | 1.59  | 1.95  | 2.25     | 2.52  | 2.76  | 2.98  | 3.18  | 3.38  | 3.56  | 3.73  | 3.90  | 4.06  | 4.21  | 4.36  | 4.50  | 4.77  | 5.03  |
| 5.0                     | .057"/1.45mm                 | L  | 1.77  | 2.17  | 2.50     | 2.80  | 3.06  | 3.31  | 3.54  | 3.75  | 3.95  | 4.15  | 4.33  | 4.51  | 4.68  | 4.84  | 5.00  | 5.30  | 5.59  |
| 5.5                     | .060"/1.52mm                 | ı  | 1.94  | 2.38  | 2.75     | 3.07  | 3.37  | 3.64  | 3.89  | 4.13  | 4.35  | 4.56  | 4.76  | 4.96  | 5.14  | 5.33  | 5.50  | 5.83  | 6.15  |
| 6.0                     | .062"/1.63mm                 |    | 2.12  | 2.60  | 3.00     | 3.35  | 3.67  | 3.97  | 4.24  | 4.50  | 4.74  | 4.97  | 5.20  | 5.41  | 5.61  | 5.81  | 6.00  | 6.36  | 6.71  |
| 6.5                     | .064"/1.63mm                 | -  | 2.30  | 2.81  | 3.25     | 3.63  | 3.98  | 4.30  | 4.60  | 4.88  | 5.14  | 5.39  | 5.63  | 5.86  | 6.08  | 6.29  | 6.50  | 6.89  | 7.27  |
| 7.0                     | .067"/1.70mm                 | _  | 2.47  | 3.03  | 3.50     | 3.91  | 4.29  | 4.63  | 4.95  | 5.25  | 5.53  | 5.80  | 6.06  | 6.31  | 6.55  | 6.78  | 7.00  | 7.42  | 7.83  |
| 7.5                     | .070"/1.78mm                 | •  | 2.65  | 3.25  | 3.75     | 4.19  | 4.59  | 4.96  | 5.30  | 5.63  | 5.93  | 6.22  | 6.50  | 6.76  | 7.02  | 7.26  | 7.50  | 7.95  | 8.39  |
| 8.0                     | .072"/1.83mm                 |    | 2.83  | 3.46  | 4.00     | 4.47  | 4.90  | 5.29  | 5.66  | 6.00  | 6.32  | 6.63  | 6.93  | 7.21  | 7.48  | 7.75  | 8.00  | 8.49  | 8.94  |
| 8.5                     | .074"/1.88mm                 | ٨L | 3.01  | 3.68  | 4.25     | 4.75  | 5.21  | 5.62  | 6.01  | 6.38  | 6.72  | 7.05  | 7.36  | 7.66  | 7.95  | 8.23  | 8.50  | 9.02  | 9.50  |
| 9.0                     | .076"/1.93mm                 | L  | 3.18  | 3.90  | 4.50     | 5.03  | 5.51  | 5.95  | 6.36  | 6.75  | 7.12  | 7.46  | 7.79  | 8.11  | 8.42  | 8.71  | 9.00  | 9.55  | 10.06 |
| 9.5                     | .078"/1.98mm                 | ı  | 3.36  | 4.11  | 4.75     | 5.31  | 5.82  | 6.28  | 6.72  | 7.13  | 7.61  | 7.88  | 8.23  | 8.56  | 8.89  | 9.20  | 9.50  | 10.08 | 10.62 |
| 10.0                    | .080"/2.03mm                 | L  | 3.54  | 4.33  | 5.00     | 5.59  | 6.12  | 6.61  | 7.07  | 7.50  | 7.91  | 8.29  | 8.66  | 9.01  | 9.35  | 9.68  | 10.00 | 10.61 | 11.18 |
| 11.0                    | .083"/2.11mm                 | ı  | 3.89  | 4.76  | 5.50     | 6.15  | 6.74  | 7.28  | 7.78  | 8.25  | 8.70  | 9.12  | 9.53  | 9.96  | 10.29 | 10.65 | 11.00 | 11.67 | 12.30 |
| 12.0                    | .087"/2.21mm                 |    | 4.24  | 5.20  | 6.00     | 6.71  | 7.35  | 7.94  | 8.49  | 9.00  | 9.49  | 9.95  | 10.39 | 10.86 | 11.22 | 11.62 | 12.00 | 12.73 | 13.42 |
| 12.5                    | .098"/2.26mm                 | -  | 4.42  | 5.41  | 6.25     | 6.99  | 7.65  | 8.27  | 8.84  | 9.38  | 9.88  | 10.36 | 10.83 | 11.27 | 11.69 | 12.10 | 12.50 | 13.26 | 13.98 |
| 13.0                    | .091"/2.31mm                 | L  | 4.60  | 5.63  | 6.50     | 7.27  | 7.96  | 8.60  | 9.19  | 9.75  | 10.28 | 10.78 | 11.26 | 11.72 | 12.16 | 12.59 | 13.00 | 13.79 | 14.53 |
| 15.0                    | .096"/2.44mm                 | ı  | 5.30  | 6.50  | 7.50     | 8.39  | 9.19  | 9.92  | 10.61 | 11.25 | 11.86 | 12.44 | 12.99 | 13.52 | 14.03 | 14.52 | 15.00 | 15.91 | 16.77 |
| 20.0                    | .109"/2.77mm                 |    | 7.07  | 8.66  | 10.00    | 11.18 | 12.25 | 13.23 | 14.14 | 15.00 | 15.71 | 16.58 | 17.32 | 18.03 | 18.71 | 19.36 | 20.00 | 21.21 | 22.36 |
| 25.0                    | .125"/3.18mm                 |    | 8.84  | 10.83 | 12.50    | 13.98 | 15.31 | 16.54 | 17.68 | 18.75 | 19.76 | 20.73 | 21.65 | 22.53 | 23.39 | 24.21 | 25.00 | 26.52 | 27.95 |
| 30.0                    | .141"/3.58mm                 |    | 10.61 | 12.99 | 15.00    | 16.77 | 18.37 | 19.84 | 21.21 | 22.50 | 23.72 | 24.87 | 25.98 | 27.04 | 28.06 | 29.05 | 30.00 | 31.82 | 33.54 |
| 40.0                    | .156"/3.96mm                 |    | 14.14 | 17.32 | 20.00    | 22.36 | 24.49 | 26.46 | 28.28 | 30.00 | 31.62 | 33.17 | 34.64 | 36.06 | 37.42 | 38.73 | 40.00 | 42.43 | 44.72 |
| 50.0                    | .172"/4.37mm                 |    | 17.68 | 21.65 | 25.00    | 27.95 | 30.62 | 33.07 | 35.36 | 37.50 | 39.53 | 41.46 | 43.30 | 45.07 | 46.77 | 48.41 | 50.00 | 53.03 | 55.90 |
| 60.0                    | .188"/4.78mm                 |    | 21.21 | 25.98 | 30.00    | 33.54 | 36.74 | 39.69 | 42.43 | 45.00 | 47.43 | 49.75 | 51.96 | 54.08 | 56.12 | 58.09 | 60.00 | 63.64 | 67.08 |
|                         |                              | -3 |       |       | The same |       |       |       |       |       | -     |       |       |       |       |       |       |       | A     |

#3. THEN FIND YOUR ANSWER HERE!

#2. THEN FIND YOUR GPM IN THESE ROWS

**NOTE:** Ensure correct orifice nozzle in machine to prevent overheating and pump cavitation



Red (Cutting Nozzle) - 0° Uses - Powerful pinpoint for spot cleaning of hard, unpainted surfaces or for high reach areas Surfaces - Unpainted metal or concrete; DO NOT use on wood

Delivers the most concentrated stream possible. Capable of cutting through some materials and cleaning off very stubborn stains on concrete and other hard surfaces. Can cause damage to home siding, wood, and other materials so use with caution.



Yellow (Intense Washing Nozzle) - 15°

Uses - Intense cleaning of unpainted hard surfaces Surfaces - Grills, driveways, concrete or brick walkways, unpainted brick or stucco

Provides enough force to work like a scraper, stripping paint, grease, and other materials from hard surfaces.



Green (Washing Nozzle) - 25°

Uses - Standard cleaning nozzle for most applications Surfaces - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco,

gutters and eaves, concrete,

brick surfaces

Perfect for cleaning dirt and grime from home siding, sidewalks, and metal furniture.



White (Rinsing Nozzle) - 40°

Uses - Cleaning of painted or delicate surfaces Surfaces - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco, gutters and eaves, concrete, brick surfaces

The wide spray allows you to wash a large area fast. Safe for most surfaces, excluding aluminum siding, windows, and vehicles.



Black (Detergent Application Nozzle) - Low Pressure

Uses - Applies cleaning solutions

**Surfaces** - Low pressure spray is safe on all surfaces. Always verify compatibility of cleaning solution prior to use

When using detergent or other chemicals in your pressure washer, the black nozzle will siphon it into the water spray evenly. Spray is wide and low pressure.

# THANK YOU FOR CHOOSING EASY-KLEEN



**Great care and attention is taken** at each of our pre-assembly stations to prepare the components for each of our three specialized assembly lines: cold water, hot water, and industrial. Each unit has a number of quality control checks throughout the production process with a final test to ensure peak performance. We appreciate your business and thank you for choosing the highest-quality, rugged equipment in the industry that lasts and is easy to service.







easykleen.com

1-800-315-5533

sales@easykleen.com



# INDEX

| Symbols  |          | Kleen-Break  | 78                 |
|--|----------|--|--------------------|
| 12 Volt Burner - Primary Control   | 76       | Kleen-Rip HD   | 78                 |
| 12V Or 120V Hose Reel - Industrial   | 62       | Kleen-Rip LT   | 78                 |
| 50HZ Electric Motors   | 66       | Kleen-Shine  | 78                 |
| 360° Pivot Hose Reel   | 63       | Kleen-Shine Plus   | 78                 |
| A  | UU .     | Sani-Kleen   | 78                 |
| <b>A</b>   |          | Chemical Sprayer   | 64                 |
| Acid Pump  | 64       | Clear Chemical Hose - 1/4"   | 62                 |
| A-Frame Hose Reel - Industrial   | 62       | Clutch Electric Clutch Upgrade - 12 Volt Belt Driven Machines  | 76                 |
| Aluminum   |          | Coils  | 70                 |
| Aluminum & Stainless Commercial Roll Cage Frame Aluminum & Stainless Steel Options | 68<br>56 | Aluminum & Stainless Steel Options   | 56                 |
| Cold Water Cart  | 66       | In-House Coil Manufacturing  | 4                  |
| Stainless Steel Cold Water Roll Cages  | 66       | Stainless Steel Coils - Machine Options & Accessories  | 74                 |
| Aluminum & Stainless Commercial Roll Cage Frame                                    | 68       | Coin Operated Car Wash   | 53                 |
| Aluminum & Stainless Steel Options   | 56       | Cold Water Cart  | 66                 |
| Anti-Rust APW Additive   | 78       | Cold Water Leg Frame - For Shroud & Flat Base Units  | 67                 |
| APW Liquid Phosphatizer  | 78       | Cold Water Shroud & Flat Base Frames   | 67                 |
| APW Pro White 500  | 78       | Cold Water Stacked Pump Frames   | 67                 |
| AR Pump Upgrade  | 75       | Cold Water Units   |                    |
| Auto Stop/Start  |          | Coin Operated Car Wash   | 53                 |
| Delay Timer  | 77       | Cold Water Cart  | 66                 |
| Heavy Duty Auto Stop/Start With Shutdown Timers                                    | 66       | Commercial Cold Water Electric   | 8                  |
| Pressure Switch  | 77       | Commercial Cold Water Gas  | 13                 |
| В  |          | Commercial Cold Water Soft Wash  Dust Suppression Trailer  | 12<br>42           |
| Ball Valves  | 63       | Easy-Kleen Demucker  | 56                 |
| Barracuda Rotary Nozzle  | 58       | Electric Start Upgrade Kits  | 76                 |
| Battery  | 77       | Explosion Proof - Cold Water   | 11                 |
| Belt Driven  |          | Firehouse & Car Detailing Series   | 9                  |
| Electric Clutch Upgrade - 12 Volt Belt Driven Machines                             | 76       | Flow Switch  | 77                 |
| Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI                       | 61       | Frame Options & Wheel Kits   | 66-67<br>36        |
| Bracket Options  | 67       | Hydraulic Systems - Marine & Truck<br>Hydrostatic Testers  | 52                 |
| Brass Flow Switch  | 77       | Industrial Cold Water Electric   | 10                 |
| Brass Quick Couplers   | 60       | Industrial Cold Water Gas & Diesel   | 14                 |
| Burner Parts   | 77       | In-Plant Systems   | 48-49              |
| Burners  |          | Jetters  | 40-41              |
| 12 Volt Burner - Primary Control   | 76       | RV & Car Lot Wash Trailer  | 43                 |
| Burner Parts   | 77       | Suction Kit  | 76<br>66-67        |
| Pressure Switch  | 77       | Cold Water Units - Frame Options & Wheel Kits     Cold Water Cart  | 66                 |
| Primary Control  | 76       | Cold Water Cart Cold Water Leg Frame - For Shroud & Flat Base Units  | 67                 |
|  | 100      | Cold Water Shroud & Flat Base Frames   | 67                 |
| Cabinets   |          | Cold Water Stacked Pump Frames   | 67                 |
| Fully Enclosed Hot Water Heaters - Plug & Play Cabinets                            | 35       | Firehouse Display Base   | 66                 |
| Carbon-Kleen   | 78       | Stainless Steel Casters  | 66                 |
| Carbon-Kleen Plus  | 78       | Stainless Steel Cold Water Roll Cages Wall Mount For Direct Drive  | 66<br>67           |
| Casters  |          | Commercial Cold Water Electric   | 8                  |
| Industrial Hot Water Electric Wheel Kits   | 67       | Commercial Cold Water Gas  | 13                 |
| Stainless Steel Casters  | 66       | Commercial Cold Water Soft Wash  | 12                 |
| Chemical Control & Injection Kits  | 64       | Commercial Hot Water Electric - Oil Fired  | 15                 |
| Acid Pump<br>Chemical Mixer  | 64<br>64 | Commercial Hot Water Electric - Oil, Propane, Or Natural G.  |                    |
| Chemical Sprayer   | 64       |  |                    |
| Clear Chemical Hose - 1/4"   | 62       | Commercial Hot Water Gasoline & Diesel - Oil Fired   | 24                 |
| Dema Inline High Pressure Chemical Injector  | 64       | Commercial & Industrial Gas & Diesel - Frame Options & W Aluminum & Stainless Commercial Roll Cage Frame   | heel Kits 68<br>68 |
| High Volume Foamer   | 64       | Commercial Wheel Kit - Crab Leg Extension  | 68                 |
| Solenoid Controls  | 64       | Foam Filled Tires  | 68                 |
| Chemical Mixer   | 64       | Industrial Wheel Kit   | 68                 |
| Chemicals - Cleaning Tools & Supplies  | 78       | Rental Roll Cage - With Grab Bar   | 68                 |
| Anti-Rust APW Additive   | 78       | Commercial Wheel Kit - Crab Leg Extension  | 68                 |
| APW Liquid Phosphatizer APW Pro White 500  | 78<br>78 | Complete Foam Brush Assembly   | 74                 |
| Cabinet Washer Powder  | 78<br>78 | Complete Millivolt Kit For Propane Gas Units   | 77                 |
| Carbon-Kleen   | 78       | Customized Units & Frame Options   | 54-55              |
| Carbon-Kleen Plus  | 78       | Custom Orders  | 71, 79             |
| Glass Cleaner  | 78       | and the second of the second o |                    |



| D   |       | Flat Base Frame  |        |
|---|-------|--|--------|
| De-Greaser  |       | Cold Water Shroud & Flat Base Frames   | 67     |
| Carbon-Kleen  | 78    | Wall Mount For Direct Drive  | 67     |
| Kleen-Break   | 78    | Flex Wands & Push Pull Lance   | 61     |
| Kleen-Rip HD  | 78    | Float Tank   | 73     |
| Kleen-Rip LT  | 78    | Flow Switch  | 77     |
| Delay Timer   | 4 77  | Foam Cannons   | 59     |
| Dema Inline High Pressure Chemical Injector   | 64    | Foam Filled Tires  | 68     |
| Diesel Engine Shutdown System   | 76    | Foot Pedal Inline  | 72     |
| Draft Hood  | 65    | Frames   |        |
| Dry Steam Generators  | 38-39 | 225G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired                            | 70     |
| Dry Steam Generators - Frame Options & Wheel Kits   | 69    | 325G Fill & Play Frame, Industrial Hot Water Diesel - Oil Fired                              | 71     |
| Dry Steam Skid - Horizontal   | 69    | 325G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired                            |        |
| Dry Steam Skid - Vertical   | 69    | 525G Fill & Play Frame, Industrial Hot Water Diesel - Oil Fired                              | 71     |
| Dry Steam Wheel Kit - Horizontal  | 69    | 525G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired<br>740G Fill & Play Frame, | 70     |
| Dry Steam Wheel Kit - Vertical  | 69    | Industrial Hot Water Diesel - Oil Fired  | 71     |
| Dual Lance Wands  | 60    | Aluminum & Stainless Commercial Roll Cage Frame  | 68     |
| Dust Suppression Trailer  | 42    | Aluminum & Stainless Steel Options   | 56     |
|   |       | Cold Water Leg Frame - For Shroud & Flat Base Units  | 67     |
| Easy-Kleen Demucker   | 56    | Cold Water Shroud & Flat Base Frames   | 67     |
| Easy-Kleen - Stainless Steel Hose Reel  | 62    | Cold Water Stacked Pump Frames   | 67     |
| Electrically Heated Timer   | *^ 66 | Customized Units & Frame Options   | 54-55  |
| Electric Clutch Upgrade - 12 Volt Belt Driven Machines  | 76    | Dry Steam Skid - Horizontal  | 69     |
| Electric Motor Controls   | 65-66 | Dry Steam Skid - Vertical<br>Frame Fabrication   | 69     |
| 50HZ Electric Motors  | 66    | Hose Reel Stands (Only)  | 63     |
| Electrically Heated Timer   | 66    | Industrial Fully Electrically Heated - Frame Options & Wheel Kit                             |        |
| Emergency Shut-Offs   | 66    | Leg Frame  | 67     |
| Ground-Fault Circuit Interrupters   | 65    | Pickup Skid, Fill & Play Frame Options   | 70     |
| Nema Box  | 65    | Rental Roll Cage - With Grab Bar   | 68     |
| VFD For Electric Motor Controls   | 65    | Stainless Steel Frames   | 67.    |
| Electric Start Upgrade Kits - Cold Water  | 76    | Wall Mount For Direct Drive  | 67     |
| Emergency Shut-Offs   | 66    | Fuel Filters   | 76     |
| Enclosed Trailer Options  |       | Fuel Tanks, Gas Caps, & Tank Bracket   | 72     |
| 7000lb Tandem Axes  | 47    | Fully Enclosed Hot Water Heaters - Plug & Play Cabinets                                      | 35, 78 |
| Draft Hood  | 65    | <b>G</b>   |        |
| Interior LED Light  | 47    | Gauges   |        |
| Power Venter  | 65    | Outlet Temperature Gauge   | 75     |
| Enclosed Trailers 8' Enclosed Trailer Package 225G  | 46-47 | Pressure Gauge   | 76     |
| & 14' Enclosed Trailer Package 525G   | 46    | General Pump Upgrade   | 75.    |
| 16' Enclosed Trailer Package 525G & 740G  | 46    | Generators   | 76     |
| Engines   |       | Giant Rotary Nozzles   | 58     |
| Diesel Engine Shutdown System   | 76    | Glass Cleaner  | 78     |
| Spark Arrestor  | 77    | Greaseable Super Swivels   | 63     |
| Explosion Proof - Cold Water - Standard & Off-Shore Series  | 11    | Ground-Fault Circuit Interrupters  | 65     |
| Explosion Proof - Hot Water - Standard & Off-Shore Series   | 21    | Guns   | 03     |
| Extension Wands   | 60    | Gun & Wand Combos  | 61     |
| Harness   | 60    | Gun/Wand/Quick Coupler Assembly  | 60     |
| F. Commission of the contract |       | Trigger Guns   | 59     |
| Festoon System  | 74    | Gun & Wand Assemblies  | 59-61  |
| Fill & Play   | /4    | Dual Lance Wands   | 60     |
| Industrial Hot Water Diesel - Oil Fired, 325G Frame   | 71    | Extension Wands  | 60     |
| Industrial Hot Water Diesel - Oil Fired, 525G Frame   | 71    | Fittings   | 60     |
| Industrial Hot Water Diesel - Oil Fired, 740G Frame   | 71    | Flex Wands & Push Pull Lance   | 61     |
| Industrial Hot Water Gasoline - Oil Fired, 225G Frame   | 70    | Gun & Wand Combos  | 61     |
| Industrial Hot Water Gasoline - Oil Fired, 325G Frame   | 70    | Gun/Wand/Quick Coupler Assembly  | 60     |
| Industrial Hot Water Gasoline - Oil Fired, 525G Frame   | 70    | Harness<br>O-Rings   | 60     |
| Pickup Skid, Fill & Play Frame Options  | 70    | Stainless Steel Quick Couplers   | 60     |
| Fill & Play Equipment Series - Diesel & Gas Units   | 30    | Steam Wand   | 60     |
| Filters   |       | Trigger Guns   | 59     |
| Fuel Filters  | 76    | Wands  | 60     |
| Inline Filters  | 75    | Gutter Cleaner   | 59     |
| Firehouse & Car Detailing Series  | 9     | H  |        |
| Fittings  | 60    | Harnoon  | 60     |
| Fittings - Steel  | 77    | Harness  | 00     |



| Hoovy Duty Auto Ston/Stort With Shutdown Timoro                                 | 66       | Hudraulia Cuatama Marina & Truak                                  | 36    |
|---|----------|---|-------|
| Heavy Duty Auto Stop/Start With Shutdown Timers                                 | 66       | Hydraulic Systems - Marine & Truck                                |       |
| High Low Gas Valves With Dual Temperature Controls                              | 64       | Hydro Excavation Nozzle   | 59    |
| High Volume Foamer  | 64       | Hydrostatic Testers   | 52    |
| Hose - 1/2"   | 61       | Hydrostatic Valve And Assembly Kit                                | 76    |
| Hose - 1/2" 15,000 PSI  | 61       |   |       |
| Hose - 3/8"   | 61       | Industrial Cold Water Electric                                    | 10    |
| Hose Reel - Roller Bracket Guide  | 63       | Industrial Cold Water Gas & Diesel                                | 14    |
| Hose Reels  | 62-63    | 12kg - 12 - 12 : 12 : 12 : 12 : 12 : 12 : 12                      |       |
| 12V Or 120V Hose Reel - Industrial  | 62       | Industrial Fully Electrically Heated - Frame Options & Wheel Kits | 69    |
| 360° Pivot Hose Reel  | 63       | Industrial Hot Water Diesel - Oil Fired                           | 27    |
| A-Frame Hose Reel - Industrial  | 62       | Industrial Hot Water Electric - Natural Gas & Propane Fired       | 18-19 |
| Aluminum & Stainless Steel Options  | 56       | Industrial Hot Water Electric - Oil Fired                         | 17    |
| Ball Valves   | 63       | Industrial Hot Water Electric Units - Frame Options & Wheel Kits  | 67    |
| Easy-Kleen - Stainless Steel Hose Reel  | 62       | Bracket Options   | 67    |
| Greaseable Super Swivels  | 63       | Industrial Hot Water Electric Wheel Kits                          | 67    |
| Hose Reel - Roller Bracket Guide  | 63       | Leg Frame   | 67    |
| Hose Reel Stands (Only)   | 63       | Stainless Steel Frames  | 67    |
| Hose Reel Trolley Kits  | 62       | Industrial Hot Water Fully Electrically Heated                    | 20    |
| Hydraulic Hose Reel - High Pressure   | 63       | Industrial Hot Water Gasoline - Oil Fired                         | 28    |
| Jetter Hose Reel Kit  | 72<br>63 | Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam     | 26    |
| Pivoting Hose Guards  | 63       | Industrial Wheel Kit  | 68    |
| Spring Driven Hose Reel U-Frame Hose Reel                                       | 62       | Inline Filters  | 75    |
|   |          | In-Plant Systems  | 48-49 |
| Hose Reel Stands (Only)   | 63       | III-Fiant Systems   | 40 49 |
| Hose Reel Trolley Kits  | 62       |   |       |
| Hoses   | 61-62    | Jetter Accessories  | 72    |
| Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI                    | 61       | Foot Pedal Inline   | 72    |
| Clear Chemical Hose - 1/4"  | 62       | Heater Pack   | 41    |
| Hose - 1/2"   | 61       | Jetter Hose Reel Kit  | 72    |
| Hose - 3/8"   | 61       | Jetter Hoses  | 72    |
| Jetter Hoses<br>Joiner Hose - 4000 PSI  | 72<br>61 | Jetter Nozzle Kits  | 72    |
| Low Pressure Hose - 3/4"  | 62       | Sewer / Culvert Nozzles   | 72    |
| Mega-Flex Drain Cleaning Kit  | 62       | Winterization Kit   | 72    |
| Standard Hose - 4000 PSI  | 61       | Jetter Hose Reel Kit  | 72    |
| Swivel  | 61       | Jetter Hoses  | 72    |
| Wet Steam Hose  | 61       | Jetter Nozzle Kits  | 72    |
| Hot Water Packing Valve Kit General Pump  | 75       | Jetters   | 40-41 |
| Hot Water Units   | , ,      | Joiner Hose - 4000 PSI  | 61    |
| Commercial Hot Water Electric - Oil Fired                                       | 15       | V   |       |
| Commercial Hot Water Electric - Oil, Propane, Or Natural Gas I                  |          | · · · · · · · · · · · · · · · · · · ·                             |       |
| Commercial Hot Water Gasoline & Diesel - Oil Fired                              | 24       | Kleen-Break   | 78    |
| Dry Steam Generators  | 38-39    | Kleen-Rip HD  | 78    |
| Enclosed Trailers   | 46-47    | Kleen-Rip LT  | 78    |
| Explosion Proof - Hot Water   | 21       | Kleen-Shine   | 78    |
| Fill & Play Equipment Series - Diesel & Gas Units                               | 30-31    | Kleen-Shine Plus  | 78    |
| Flow Switch   | 77       |   |       |
| Fully Enclosed Hot Water Heaters - Plug & Play Cabinets                         | 35       |   |       |
| Industrial Hot Water Diesel - Oil Fired   | 27       | Large Poly Water Tanks  | 73    |
| Industrial Hot Water Electric - Natural Gas & Propane Fired                     | 18-19    | Leg Frame   | 67    |
| Industrial Hot Water Electric - Oil Fired                                       | 17       | Cold Water Leg Frame - For Shroud & Flat Base Units               | 67    |
| Industrial Hot Water Fully Electrically Heated                                  | 20       | Light Kit   | 71    |
| Industrial Hot Water Gasoline - Oil Fired                                       | 28-29    | Low Pressure Hose - 3/4"  | 62    |
| Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam                   | 26       | M   |       |
| In-Plant Systems  | 48-49    | 한 대통령 가게 되었다. 이 이 전에 가게 하면 하지 않아 하셨다면 하는데 하는데 하는데 하다 때 하다 했다.     |       |
| Marine Mount Series   | 37       | Marine  | 0.0   |
| Modular Hot Water Heaters - Gas Fired Or Electric On Demand Electrically Heated | 32<br>23 | Hydraulic Systems - Marine & Truck                                | 36    |
| Open Modular Hot Water Heaters - Oil Fired                                      | 33       | Marine Mount Series   | 37    |
| Open Trailers   | 44-45    | Marine Mount Series   | 37    |
| Parts Washer  | 50       | Mat Clamps  | 74    |
| Portable Pickup Truck Skid  | 25       | Mega-Flex Drain Cleaning Kit                                      | 62    |
| Rocket Series - Industrial Hot Water Electrically Heated                        | 22       | Meg Nozzle  | 58    |
| Tote-Box Washer   | 51       | Meters  |       |
| Vac Truck Hot Water Heaters - Oil Fired   | 34       | Hour Meter  | 75    |
| Hour Meter  | 75       | Volt Meter  | 75    |
| "How To" On Selecting Your Unit Frame Options                                   | 79       | Miscellaneous Items - Upgrades & Additions                        | 75-77 |
| Hydraulic Hose Reel - High Pressure   | 63       | 12 Volt Burner - Primary Control                                  | 76    |



| AR Pump Upgrade  | 75      | 0  |        |
|--|---------|--|--------|
| Battery  | 77      | Oil Fired Draft Inducers   | 65     |
| Brass Flow Switch  | 77      | Oil & Gas Fired Options  | 64-65  |
| Burner Parts   | 77      | Draft Hood   | 65     |
| Complete Millivolt Kit For Propane Gas Units                   | 77      | High Low Gas Valves With Dual Temperature Controls   | 64     |
| Delay Timer  | 77      | Oil Fired Draft Inducers   | 65     |
| Diesel Engine Shutdown System                                  | 76      | Power Damper - 120 Volt  | 65     |
| Electric Clutch Upgrade - 12 Volt Belt Driven Machines         | 76      | Power Dampers - 24 Volt - LP/NG  | 65     |
| Electric Start Upgrade Kits - Cold Water                       | 76      | Power Venter   | 65     |
| Emperor Pump Upgrade   | 75      | Power Venter - Kits  | 65     |
| Fittings - Steel   | 77      |  | 65     |
| Flow Switch  | 77      | Rain Cap   |        |
| Fuel Filters   | 76      | On Demand Electrically Heated  | 23     |
| General Pump Upgrade   | 75      | Open Modular Hot Water Heaters - Oil Fired   | 33     |
| Generators   | 76      | Open Trailer Options   |        |
| High Limits Thermostat   | 77      | 12V Or 120V Hose Reel - Industrial   | 45     |
| Hot Water Packaging Valve Kit General Pump                     | 75      | 360° Pivot Hose Reel   | 45     |
| Hour Meter   | 75      | A-Frame Hose Reel - Industrial   | 45     |
| Hydrostatic Valve And Assembly Kit                             | 76      | Easy-Kleen - Stainless Steel Hose Reel   | 12, 45 |
| Inline Filters   | 75      | Float Tank   | 45     |
| Outlet Temperature Gauge                                       | 75      | Fuel Tanks, Gas Caps, Tank Bracket, & Winterization Kit  | 45     |
|  | 76      | Hose Reel - Roller Bracket Guide   | 45     |
| Pressure Gauge   |         | 마음이 있는 그렇게 하는 아니를 살아 있다면 하는 것이 없는 사람들이 되었다면 하는 사람들이 되었다면 하는 사람들이 되었다면 하는 것이 없는 것이 없는데 그렇게 하는데 되었다면 하는데 없다면 없다. | 45     |
| Pressure Switch  | 77      | Hydraulic Hose Reel - High Pressure  | 45     |
| Primary Control  | 76      | Large Poly Water Tanks   |        |
| Pump Kits  | 75      | Rain Cap   | 65     |
| Remote Switch - Electric Driven Only                           | 77      | Small Poly Water Tanks   | 45     |
| Spark Arrestor   | 77      | Open Trailers  | 44-45  |
| Suction Kit  | 76      | 8' Open Trailer Package  | 44     |
| Thermal Relief Valves  | 77      | 14' Open Trailer Package   | 44     |
| Thermostat   | 77      | O-Rings  | 60     |
| Unloader - Flow Activated                                      | 75      | Outlet Temperature Gauge   | 75     |
| Volt Meter   | 75      | 에게 되었다면 하는데, 그는 어느에, 그리기가 없는 모든 사람이라고 싶어지는 사람이 하는데 사람이 있다는 때문 나라보다는 유명이 하는데 하는데 그렇게 되었다.                       |        |
| Mobile & On-Site Service Repair                                | 57      | Overhead Boom  | 74     |
| Modular Hot Water Heaters - Gas Fired Or Electric              | 32      | P  |        |
| Widdular Flot Water Fleaters - Gas Fired Of Liectific          | 32      | Parts Washer   | 50     |
|  |         |  |        |
| Natural Gas  |         | Pickup Skid, Fill & Play Frame Options   | 70-71  |
| Commercial Hot Water Electric - Oil, Propane, Or Natural Gas F | ired 16 | Commercial Cold Water Pickup Skid  | 10     |
| Industrial Hot Water Electric - Natural Gas & Propane Fired    | 18      | and 225 Gallon Water Tank Options'   | 13     |
| Modular Hot Water Heaters - Natural Gas, Propane Fired, Or Ele |         | Fill & Play 225G Frame, Industrial Hot Water Gasoline - Oil Fired  |        |
|  |         | Fill & Play 325G Frame, Industrial Hot Water Diesel - Oil Fired  | 71     |
| Nema Box   | 65      | Fill & Play 325G Frame, Industrial Hot Water Gasoline - Oil Fired  |        |
| Non-Marking Hose   |         | Fill & Play 525G Frame, Industrial Hot Water Diesel - Oil Fired  | 71     |
| Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI   | 61      | Fill & Play 525G Frame, Industrial Hot Water Gasoline - Oil Fired  |        |
| Nozzle Chart   | 80      | Fill & Play 740G Frame, Industrial Hot Water Diesel - Oil Fired  | 71     |
| Nozzles  | 58      | Light Kit  | .71    |
| Barracuda Rotary Nozzle  | 58      | Pickup Skid  | 70     |
| Foam Cannons   | 59      | Propane Pickup Skid  | 70     |
| Giant Rotary Nozzles   | 58      | Pit Boss   | 58     |
| Hydro Excavation Nozzle  | 59      | Pivoting Hose Guards   | 63     |
| Jetter Nozzle Kits   | 72      |  |        |
| Meg Nozzle   | 58      | Portable Pickup Truck Skid   | 25     |
|  |         | Power Damper - 120 Volt  | 65     |
| Nozzle Chart   | 80      | Power Dampers - 24 Volt - LP/NG  | 65     |
| Quick Coupler Nozzles  | 58      | Power Venter   | 65     |
| Rotary Nozzles - Commercial Duty                               | 58      | Power Venter - Kits  | 65     |
| Rotary Nozzles - Heavy Duty                                    | 58      |  |        |
| Rotary Sewer / Culvert Nozzles                                 | 58      | Pressure Gauge   | 76     |
| Rotary Tip Filter  | 58      | Pressure Switch  | 77     |
| Sewer / Culvert Nozzles  | 58,72   | Primary Control  | 76     |
| Steam Nozzles  | 59      | Production   |        |
| Nozzles & Wand Accessories                                     | 58-59   | Thank You For Choosing Easy-Kleen  | 81     |
| Foam Cannons   | 59      | 그리고 아이는 이 이 하는데 보다 이 아이를 하는데 이 회에서 하는데 회사를 받아 아니라는데 가게 되었다. 그는 모든 모든데 되었다.                                     |        |
| Gutter Cleaner   | 59      | Propane  | 77     |
| Hydro Excavation Nozzle  | 59      | Complete Millivolt Kit For Propane Gas Units   | 77     |
| Pit Boss   | 58      | Direct Drive Propane Fired Units   | 18     |
| Steam Nozzles  | 59      | Industrial Hot Water Electric - Natural Gas & Propane Fired  | 18     |
| Surface Cleaner  | - 59    | Modular Hot Water Heaters - Natural Gas, Propane Fired,  | 32     |
| Undercarriage Cleaner  | 59      | Or Electric  Pickup Skid Pranana Fired Units Are Available   |        |
| Water Broom  | 59      | Pickup Skid Propane Fired Units Are Available  | 25     |
| Wet Sandblast Kit  | 58      | Propane Pickup Skid  | 70     |
| The Gallablade Me  | 30      | Propane Tank Bracket   | 67     |



| Propane Pickup Skid  | 70       | Aluminum & Stainless Commercial Roll Cage Frame                               | 68       |
|--|----------|---|----------|
| Propane Tank Bracket   | 67       | Aluminum & Stainless Steel Options  | 56       |
| Pump Kits  | 75       | Chemical Sprayer  | 64       |
| Pumps  |          | Easy-Kleen - Stainless Steel Hose Reel  | 62       |
| AR Pump Upgrade  | 75       | Greaseable Super Swivels  | 63       |
| Emperor Pump Upgrade   | 75       | Gun & Wand Combos   | 61       |
| General Pump Upgrade   | 75       | Mega-Flex Drain Cleaning Kit  | 62<br>63 |
| Hot Water Packaging Valve Kit General Pump   | 75       | Spring Driven Hose Reel<br>Stainless Steel Casters                            | 66       |
| Miscellaneous Items - Upgrades & Additions   | 75       | Stainless Steel Casters Stainless Steel Coils - Machine Options & Accessories | 74       |
| Pump Kits  | 75       | Stainless Steel Cold Water Roll Cages   | 66       |
| Thermal Relief Valves  | 77       | Stainless Steel Frames  | 67       |
| Q A A A A A A A A A A A A A A A A A A A  |          | Stainless Steel Quick Couplers  | 60       |
| Quick Coupler Nozzles  | 58       | Stainless Steel Vacuum  | 74       |
| Quick Couplers   | 30       | Standard Hose - 4000 PSI  | 61       |
| Brass Quick Couplers   | 60       | Steam   |          |
| Quick Coupler Nozzles  | 58       | Dry Steam Generators  | 38-39    |
| Stainless Steel Quick Couplers   | 60       | Dry Steam Generators - Frame Options & Wheel Kits                             | 69       |
|  | 00       | Dry Steam Skid - Horizontal   | 69       |
| R  |          | Dry Steam Skid - Vertical   | 69       |
| Rain Cap   | 65       | Dry Steam Wheel Kit - Horizontal  | 69       |
| Remote   |          | Dry Steam Wheel Kit - Vertical  | 69       |
| Jetter Remote Option   | 41       | Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam                 | 26       |
| Remote Switch - Electric Driven Only   | 77       | Steam Nozzles   | 59       |
| Remote Wash Bay Control Panel  | 74       | Steam Option Kits   | 73       |
| Remote Wash Bay Control Panel  | 74       | Steam Options - Machine Options & Accessories                                 | 73       |
| Rental Roll Cage - With Grab Bar   | 68       | Steam Wand  | 60       |
| Rental Unit  |          | Wet Steam Hose  | 61       |
| Rental Roll Cage - With Grab Bar   | 68       | Steam Nozzles   | 59       |
| Repairs  |          | Steam Options - Machine Options & Accessories                                 | 73       |
| Mobile & On-Site Service Repair  | 57       | Steam Wand  | 60       |
| Rocket Series - Industrial Hot Water Electrically Heated   | 22       | Suction Kit   | 76       |
| Roll Cage  | 22       | Surface Cleaner   | 59       |
| Aluminum & Stainless Commercial Roll Cage Frame  | 68       | Swivel  | 61       |
| Rental Roll Cage - With Grab Bar   | 68       | Swiver  | 01       |
| Stainless Steel Cold Water Roll Cages  | 66       |   |          |
| Rotary Nozzles - Commercial Duty   | 58       | Tanks   | 72-73    |
| 전문 경기 사람들은 사람들이 되었다면 가는 사람들이 되었다면 하지만 하는데 되었다면 하지만 하지만 하지만 하지만 하지만 하다면 하지만 하다면 하지만 하다면 하지만 하다면 하지만 하다면 하다면 하지만 하다면 하지만 하다면 하지만 하다면 하지만 하다면 하지만 |          | Float Tank  | 73       |
| Rotary Nozzles - Heavy Duty  | 58       | Fuel Tank Option  | 72       |
| Rotary Sewer / Culvert Nozzles   | 58       | Fuel Tanks, Gas Caps, & Tank Bracket  | 72       |
| Rotary Tip Filter  | 58       | Large Poly Water Tanks  | 73       |
| RV & Car Lot Wash Trailer  | 43       | Small Poly Water Tanks  | 73       |
| S  |          | Winterization Kit   | 72       |
| Sani-Kleen   | 78       | Thermal Relief Valves   | 77       |
|  | 70       | Thermostat  | 77       |
| Service  Mahila & On Sita Sarviga Panair   | 57       | Timers  |          |
| Mobile & On-Site Service Repair  |          | Electrically Heated Timer   | 66       |
| Sewer / Culvert Nozzles  | 58, 72   | Flow Switch   | 77       |
| Shroud   | <u> </u> | Heavy Duty Auto Stop/Start With Shutdown Timers                               | 66       |
| Cold Water Shroud & Flat Base Frames   | 67       | Tote-Box Washer   | 51       |
| Industrial Hot Water Fully Electrically Heated<br>- 11 Gauge Bent Steel Tip Ahead Shroud   | 20       | Trailer Options   |          |
| Tip Ahead Shroud with Integrated Belt Guard  | 19       | 12V Or 120V Hose Reel - Industrial  | 45       |
| Wall Mount For Direct Drive  | 67       | 360° Pivot Hose Reel  | 45       |
| Shut-Offs  |          | A-Frame Hose Reel - Industrial  | 47       |
| Emergency Shut-Offs  | 66       | Easy-Kleen - Stainless Steel Hose Reel  | 12, 45   |
| Skids  | 00       | Float Tank  | 45       |
| Dry Steam Skid - Horizontal  | 69       | Hose Reel - Roller Bracket Guide  | 45       |
| Dry Steam Skid - Vertical  | 69       | Hose Reel Stands  | 47       |
| Pickup Skid  | 70       | Hydraulic Hose Reel - High Pressure   | 63       |
| Pickup Skid, Fill & Play Frame Options   | 70       | Large Poly Water Tanks  | 47       |
| Propane Pickup Skid  | 70       | Light Kit   | 47       |
| Small Poly Water Tanks   | 73       | Rain Cap  | 65       |
| 이 보다 있는 것이 없는 것이다. 그렇지 않는 것이 아들 것이 아들이 아들이 아들이 있는 것이 되었다. 그렇지 않는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없다.  |          | Trailers  |          |
| Soap Switch Control Panel  | 74       | 8' Enclosed Trailer Package 225G  | AC       |
| Solenoid Controls  | 64       | & 14' Enclosed Trailer Pačkage 525G   | 46<br>44 |
| Spark Arrestor   | 77       | 8' Open Trailer Package<br>14' Open Trailer Package                           | 44       |
| Spring Driven Hose Reel  | 63       | 16' Enclosed Trailer Package 525G & 740G                                      | 44       |
| Stainless Steel  |          | Dust Suppression Trailer  | 42       |

1-800-315-5533



| Easy-Kleen Portable Skid Unit - DOT Bolt On Trailer Package<br>Enclosed Trailers<br>Fill & Play Bull Moose With Trailer Kit | 25<br>46-47<br>31 | NOTES: |
|---|-------------------|--------|
| Fuel Tanks, Gas Caps, Tank Bracket, & Winterization Kit Industrial Hot Water Gas Unit With Trailer Kit                      | 45<br>29          |        |
| Jetter Trailers Large Poly Water Tanks  | 41 73             |        |
| Light Kit Open Trailers   | 71<br>44-45       |        |
| RV & Car Lot Wash Trailer<br>Small Poly Water Tanks   | 43<br>45          |        |
| Trigger Guns<br>Truck Wash Brush  | 59<br>74          |        |
| II  | /4                |        |
| U-Frame Hose Reel   | 62                |        |
| Undercarriage Cleaner   | 59                |        |
| Unloader - Flow Activated   | 75                |        |
| V   |                   |        |
| Vac Truck Hot Water Heaters - Oil Fired   | 34                |        |
| Valves  Hot Water Packaging Valve Kit General Pump Hydrostatic Valve And Assembly Kit                                       | 75<br>76          |        |
| Thermal Relief Valves  VFD For Electric Motor Controls  | 77<br>65          |        |
| Volt Meter  | 75                |        |
| W   |                   |        |
| Wall Mount For Direct Drive   | 67                |        |
| Wand Accessories  |                   |        |
| Gutter Cleaner  | 59                |        |
| Pit Boss  | 58                |        |
| Surface Cleaner<br>Undercarriage Cleaner  | 59<br>59          |        |
| Water Broom   | 59                |        |
| Wet Sandblast Kit   | 58                |        |
| Wand Holder   | 74                |        |
| Wands   | 60                |        |
| Dual Lance Wands  | 60                |        |
| Extension Wands   | 60                |        |
| Flex Wands & Push Pull Lance<br>Gun & Wand Combos   | 61<br>61          |        |
| Gun/Wand/Quick Coupler Assembly   | 60                |        |
| Wash Bay  |                   |        |
| Complete Foam Brush Assembly<br>Festoon System  | 74<br>74          |        |
| Mat Clamps  | 74                |        |
| Overhead Boom   | 74                |        |
| Remote Wash Bay Control Panel<br>Soap Switch Control Panel  | 74<br>74          |        |
| Stainless Steel Vacuum  | 74                |        |
| Truck Wash Brush  | 74                |        |
| Wand Holder   | 74                |        |
| Wash Bay - Machine Options & Accessories  | 74                |        |
| Water Broom   | 59                |        |
| Wet Sandblast Kit   | 58                |        |
| Wet Steam Hose  | 61                |        |
| Wheel Kits Commercial Wheel Kit - Crab Leg Extension  | 68                |        |
| Dry Steam Generators - Frame Options & Wheel Kits   | 69                |        |
| Dry Steam Wheel Kit - Horizontal  | 69                |        |
| Dry Steam Wheel Kit - Vertical  | 69                |        |
| Foam Filled Tires   | 68                |        |
| Industrial Fully Electrically Heated - Frame Options & Wheel Ki<br>Industrial Hot Water Electric Wheel Kits                 | its 69<br>67      |        |
| Industrial Hot Water Electric Wheel Kits Industrial Wheel Kit   | 68                |        |
| Stainless Steel Caster  | 66                |        |
| Winterization Kit   | 72                |        |

# EASY-KLEEN ===

# PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT







HYPRO

GIANT

**Pratissoli** 





### Easy-Kleen Sussex

Head Office 1-800-315-5533 sales@easykleen.com

## Easy-Kleen Nova Scotia

1-902-403-5825

# Easy-Kleen Montreal

1-800-563-5570 montreal@easykleen.com

# Easy-Kleen Ottawa

1-613-294-2992

#### Easy-Kleen Cambridge

1-800-265-7146 cambridge@easykleen.com

#### **Easy-Kleen Concord**

1-800-800-9017 concord@easykleen.com

#### Easy-Kleen Red Deer

1-877-317-9274 reddeer@easykleen.com

#### Easy-Kleen Edmonton

1-844-720-5933 edmonton@easykleen.com

1-800-315-5533 easykleen.com



