

Brighten Every Moment

Value Series

Indoor



Cable-Free Design



Ultra-Slim



Plastic-Steel

Cable-Free Design

• Easier Installation


Eliminating the need for complicated cable sorting, simply place and connect the components to efficiency

• Easier Lamp Alignment

With no cables underneath, aligning the lamp boards is much easier, and the splicing becomes more seamless

• Less Lamp Dropping

Cable-free quick installation avoids collisions and prevents potential lamp dropping

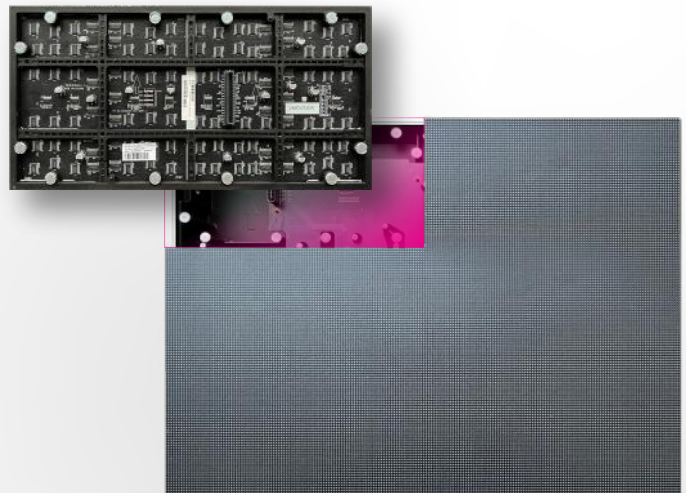

Plastic-Steel Back Frame

Hikvision Value series LED displays adopt a **PLASTIC-STEEL** back frame. Compared to conventional plastic materials, it is:




Super Lightweight



Extra Durable




Ultra Slim

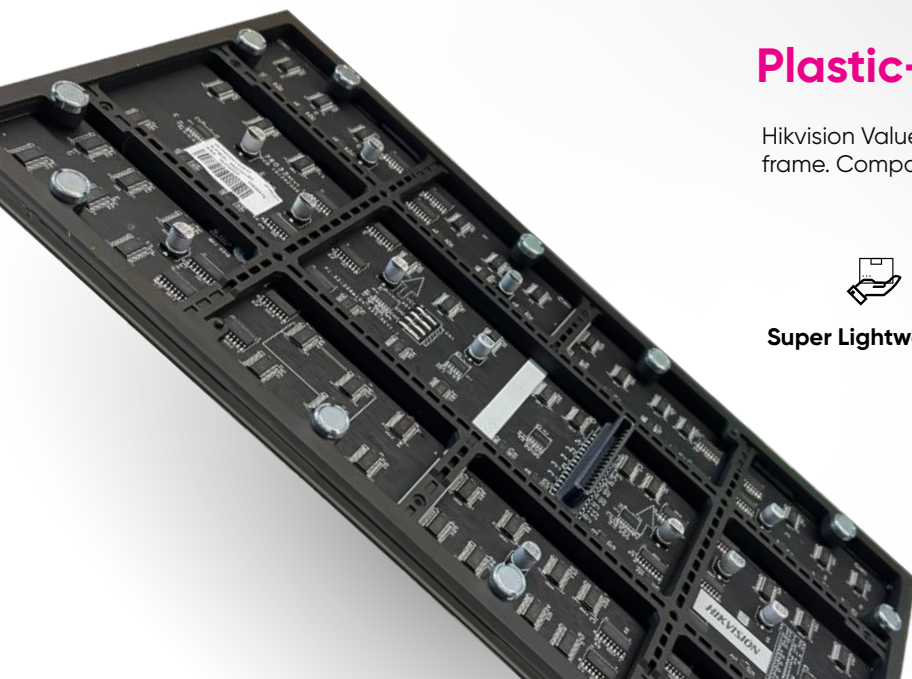

Versatile Cabinet Sizes

- Both 640*480 mm and 320*160 mm models available, with the same pixel pitch
- Seamlessly integrated to form a unified video wall

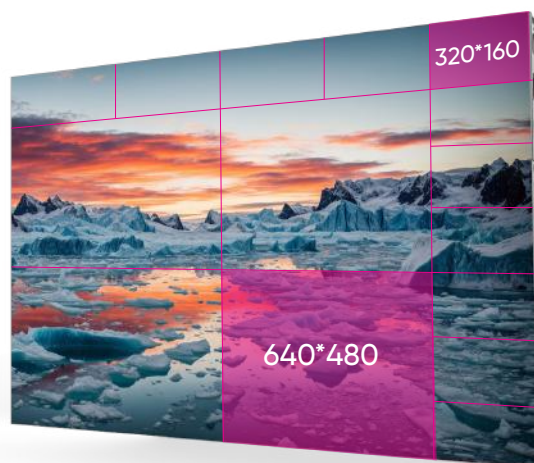

Application Scenarios



Monitoring Center



Meeting Room



Retail Store



Auditorium & Lecture Hall

Key Spec

	DS-D4012CS-1F	DS-D4015CS-1F	DS-D4018CS-1F	DS-D4020CS-1F	DS-D4025CS-1F	Small Size Cabinet
Pixel Configuration	SMD Triad LED					
Pixel Pitch	1.25	1.538	1.86	2.0	2.5	1.25/1.538/1.86/2.0/2.6
Cabinet Dimension (W × H × D, mm)	640 × 480 × 58.6 (25.20" × 18.90" × 2.31")					320 × 160 × 58.6 (12.60" × 6.30" × 2.31")
Cabinet Resolution (W × H)	512 × 384	416 × 312	344 × 258	320 × 240	256 × 192	256 × 128/208 × 104/172 × 86/160 × 80 /128 × 64
Cabinet Weight	755 kg					1.8 kg
Cabinet Material	Die cast aluminum box					
Maintenance Method	Complete pre maintenance					
White Balance Brightness	600 cd/m ²					
Color Temperature	3000-10000 K adjustable					
Viewing Angle	160° (H)/160° (V)					
Max. Consumption	450 W/m ²					25 W/m ²
Average Consumption	150 W/m ²					9 W/m ²
Refresh Rate	3840 Hz					
Grey Level	Up to 16 bit					



Hikvision

HikvisionHQ

HikvisionHQ

Hikvision Corporate Channel

hikvisionoverseas

Hikvision Commercial Display

HikvisionOverseas

HIKVISION