BIGFOOT

You

Tuhe

- 36 & 48V AC powered
- 12 mph (19 km/h) speed
- 30-40 mi (48-64 km) range
- 3,000 lb (1360 kg) load capacity*

ERGONOMIC COMFORT & VEHICLE PERFORMANCE

BIGFOR



Taylor-Dunn's BIGFOOT, with its game changing design, offers a large operator's compartment, tilted steering, and sliding adjustable seats, which increases legroom and reduces operator fatigue.

Additional standard features include our GT Drive system, AC power, Smart View Display, hydraulic disc brakes, recessed tie-downs, 12 gauge smooth skin, unitized steel body, DC/DC converter and a heavy duty all gear drive train that ensures reliability and low maintenance costs.

Visit our website for additional vehicle images, videos, information and custom modifications at www.taylor-dunn.com.

VOLTAGE	36 & 48 volt	
SPEED	up to 12 mph	up to 19 km/h
RANGE	30-40 mi	48-64 km
LOAD CAPACITY	up to 3,000 lb	1360 kg
TOW CAPACITY	up to 7,500 lb	3400 kg
BED SIZE (W x L)	44 x 77 in	112 x 196 cm
TURNING RADIUS	137 in	348 cm

* Standard Configuration

Actual load capacity depends on application & vehicle configuration. * Maximum Towing Configuration The Bigfoot can be configured to tow up to 17,500 pounds.

FEATURES & BENEFITS:

- Large Operator's Compartment
- Tilted Steering
- Adjustable Seats







Dual USB Port





cy Cut-off Recessed Tie-downs

wns Large Compartment

LED Lighting

Tilted Steering

MIPA AWARDED

www.taylor-dunn.com contact@taylor-dunn.com Toll Free (800) 688-8680




2114 West Ball Road Anaheim, CA 92804 (714) 956-4040





PERFORMANCE

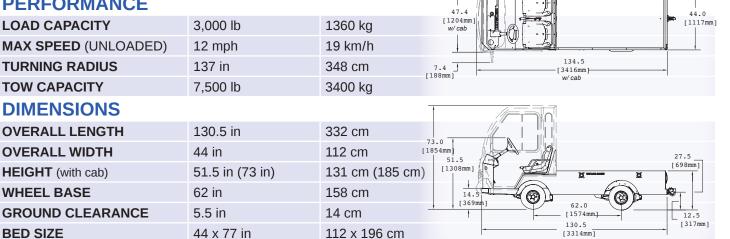

POWER SUPPLY / DRIVE TRAIN

SYSTEM VOLTAGE	36 or 48 volt configuration		
MOTOR	36V: 7.5 hp, 5.5 kW, AC, 48V: 12.5 hp, 9.5 kW AC		
DRIVE AXLE	Helical gear, oil bath transaxle, GT automotive differential		
BATTERIES	210 amp-hour, lead acid, 6 volt		
CHARGER	Built-in, 115 VAC/60 Hz, 1kW with interlock, 48V: 17 amp SCR		
CONTROLLER	Solid state self diagnostic AC speed controller		
CHASSIS	The second se		
FRAME	Fully welded, unitized, 12 gauge, smooth skin steel body		
STEERING	Rack and pinion		
SUSPENSION	Multi-leaf springs, front and rear		
BRAKES	Rear hydraulic disc brakes with hand-operated parking brake GT Automotive Drive		
BUMPERS	Heavy duty steel integrated front & rear		
TIRES	5.70 x 8, load range C, pneumatic		
GENERAL			
UNIT WEIGHT	36V: 1450 lb (658 kg), 48V: 1565 lb (710 kg)		
SEATS	Black adjustable bucket seats, driver's seat electrical interlock, 2 person		
INSTRUMENTATION	Smart View Display: (battery status indicator, hour meter, fault code display), reverse buzzer, F-N-R switch, key switch, light switch, high/low speed switch, emergency power cut-off switch, DC/DC converter, dual USB port, electric horn		
LIGHT ACCESSORIES	Dual LED headlights, taillights and brake lights (Halogen headlights with deluxe cab)		
CONFORMANCE	Type E OSHA 1910.178, ANSI B56.8		

OPTIONS

- FOLD-AWAY SEATS
- STAKE SIDES
- LADDER RACK
- PORTABLE CHARGER
- STROBE LIGHT
- DIAMOND PLATE DECK



- ALUMINUM DROP-DOWN SIDES
- ECONO CAB & VINYL DOORS
- MID-RANGE CAB W/ STEEL DOORS
- DELUXE CAB W/ STEEL DOORS
- LOCKABLE CARGO BOX
- LIFT-OUT BATTERY BOX



BATTERY WATERING SYSTEM

77.0 [1955mm]

- FRONT DISC BRAKES
- VARIOUS HITCHES
- UNDERCOATING
- GALVANIZED FRAME
- OPTIONAL PAINT COLORS

*Specifications, standard equipment, accessories and modifications are all subject to change without notice.