



EVERYTHING YOU NEED TO POWER YOUR FARM.

CHOOSE IKON MACHINERY



Iconic Brands With Trusted Local Expertise

Ikon Machinery: Your Trusted Partner in Agricultural Innovation

Proudly family-owned, delivering world-class quality farm machinery across New Zealand.

Ikon Machinery is an importer and retailer of Agricultural Machinery. We are a family owned and operated business, specialising in high quality machinery.



Our brands are class-leading, 'iconic' in their markets! Each brand specialises in their field, they concentrate on making the very best machines, by the mark of quality not quantity. Ikon has selected these brands for their build quality and class-leading working operation.

The Ikon team pride ourselves on our quality products, customer service and the aftercare that we provide to our valued clients.







CONTENTS

KÖCKERLING	6-19
STEWART	20-29
SILOKING	30-33
SCHÄFFER	34-35
SPEARHEAD	36-37
GRAHAM EDWARD TRAILERS	38
GÜSTROWER	39
AGRIWELD	40-41
BUNNING	42-43
KIVI-PEKKA	44-45



Founded in 1955, the Köckerling family business builds on generations of agricultural craftsmanship.

Today, Köckerling focuses on ploughless soil cultivation, combining decades of experience with close collaboration with farmers to deliver innovative, practical solutions for the future.





 **KÖCKERLING**



Allrounder Classic

The Allrounder Classic is a versatile machine designed for seedbed preparation after ploughing and for secondary stubble cultivation.

With a high, spacious frame, it goes beyond a traditional seedbed harrow to perform a wide range of soil cultivation tasks, making it ideal for both mechanical weed control and first or second stubble passes.

Capacity

↔ 4.05 - 7.05m working width

🚜 100 - 230 HP

⚖️ 2,000 - 3,300 kg



Capacity

↔ 3.0 - 5.7m working width

🚜 140 - 240 HP

⚖️ 3,300 - 5,800 kg



KÖCKERLING



Quadro

The working depth of the Quadro is adjustable from 5cm to 25cm, enabling precise soil penetration.

The Quadro also reliably incorporates large amounts of organic residues, due to it's high frame clearance and four-bar frame which creates an optimal mulch seedbed.

Because of high-quality components, the Quadro ensures a long lifetime with a high level of operational safety and ease of use.

With the benefit of hydraulic depth adjustment the perfect working depth can be easily and continuously regulated, even while working.



Allrounder Profiline

Thanks to its high, spacious frame design (under 60cm frame clearance), the Allrounder Profiline isn't just a standard seedbed harrow. It's a versatile cultivator suitable for a wide range of tasks.

The Profiline runs smoothly and precisely, guided by its front support wheels and roller, even when working at very shallow depths. It's ideal for secondary stubble cultivation, weed control, and improving straw distribution.

Few other soil cultivation machines offer such universal usability as the Allrounder Profiline.

Capacity

↔ 6.0 - 14.3m working width

🚜 180 - 400 HP

🏠 4,600 - 12,980 kg





Capacity



5.0 - 12.5m working width



160 - 350 HP




5,060 - 12,000 kg

Rebell Classic T

The Rebell Classic T is a compact, short disc harrow designed for shallow soil cultivation, seedbed preparation, and post-harvest work.

It features 22-98 sprung-loaded discs (510mm diameter), maintenance-free disc hubs, triple lip sealed bearings, and large front depth control wheels.

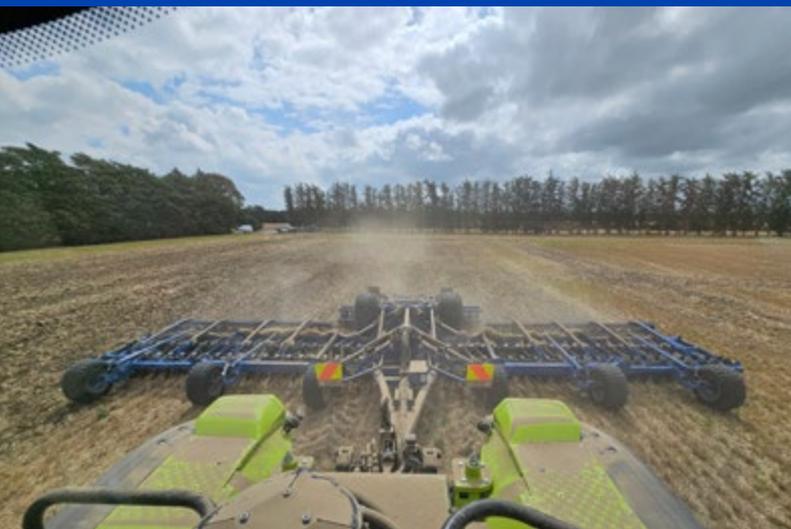

Capacity

↔ 5.0 - 8.0m working width

🚜 220 - 300 HP

📏 7,220 - 10,150 kg



Rebell Profiline



The Rebell Profiline is a heavy-duty disc harrow for high performance stubble cultivation, seedbed preparation, and cover crop incorporation. It offers hydraulic parallel depth adjustment and large front depth wheels.

It has 32–52 sprung-loaded 620mm discs with maintenance free disc hubs, triple-lip sealed bearings, and 85cm beam clearance for effective mixing and levelling. The Contour double STS roller with rear levelling boards delivers a smooth finish.

 **KÖCKERLING**





Grasmaster

The Grasmaster is a special scarifying harrow that removes all old grass, moss and weeds.

The cross board is very effective in levelling molehills, dung pats, and also breaking clods when reseeding on plough ground to provide a level seedbed.

Capacity

- ↔ 3.0 - 6.0m working width
- 🚜 60 - 80 HP
- ⚖️ 680 - 910 kg



Capacity

↔ 3.0 - 5.3m working width

🚜 160 - 400 HP

📊 4,450 - 10,020 kg

Vario

The Vario is a versatile cultivator for optimal straw distribution and soil mixing, supporting stable mulch sowing. It features hydraulic parallel depth adjustment, a 2-point drawbar, and large front depth wheels.

Equipped with 23–57 sprung-loaded tines and 60 16 mm reversible points, the Vario thoroughly mixes soil and straw. It's double STS roller reconsolidates the seedbed, creating a finely crumbled, firm structure ideal for seed embedding in a single pass.





Capacity

↔ 4.6 - 9.0m working width

🚜 200 - 400 HP

⚖️ 5,950 - 9,710 kg

Vector

The Vector is a 4-bar cultivator for shallow stubble cultivation and deep soil loosening.

With 6–9m working widths and a 3m transport width, hydraulic depth adjustment, 17–33 auto-reset tines, and BETEK 80 x 30mm tungsten carbide points, it mixes soils efficiently.

The double STS roller with levelling board ensures even straw distribution and an improved seedbed.

Large transport wheels and a 40kph axle provide efficient movement, while goosefoot points enable shallow cultivation.

Additional outer wings expand the working width.





Vitu

The Vitu is a versatile seed drill designed for precise sowing, even at high speeds.

It features 22-42 sprung-loaded disc coulters at 133mm spacing, a 450mm disc harrow, and a double-staggered tyre packer for accurate seed placement and soil reconsolidation.

Capacity

↔ 3.0 - 6.0m working width

🚜 140 - 250 HP

📊 4,410 - 8,300 kg





KÖCKERLING

Capacity



5.0 - 8.2m working width



150 - 250 HP



3,000 - 4,140 kg

PWA

The PWA cultivator combines efficiency and flexibility in one robust machine.

Its three-section folding design makes transport simple, while the double staggered prism roller and 2-row offset layout deliver uniform reconsolidation, excellent self-cleaning, and perfect soil crumbling.

Ideal for solo use or subsequent rolling.





Capacity

↔ 2.5 - 4.0m working width

🚜 80 - 140 HP

📏 1,460 - 2,480 kg


Trio

The Trio is a compact, 3-bar linkage mounted cultivator designed for versatile soil preparation.

It features 10 tines with double spring auto-reset, arranged in 3 rows with 30cm spacing, and BETEK 80 30mm carbide points with soil guides.

Sweeping levellers in front of the double STS roller ensure even levelling and reconsolidation.



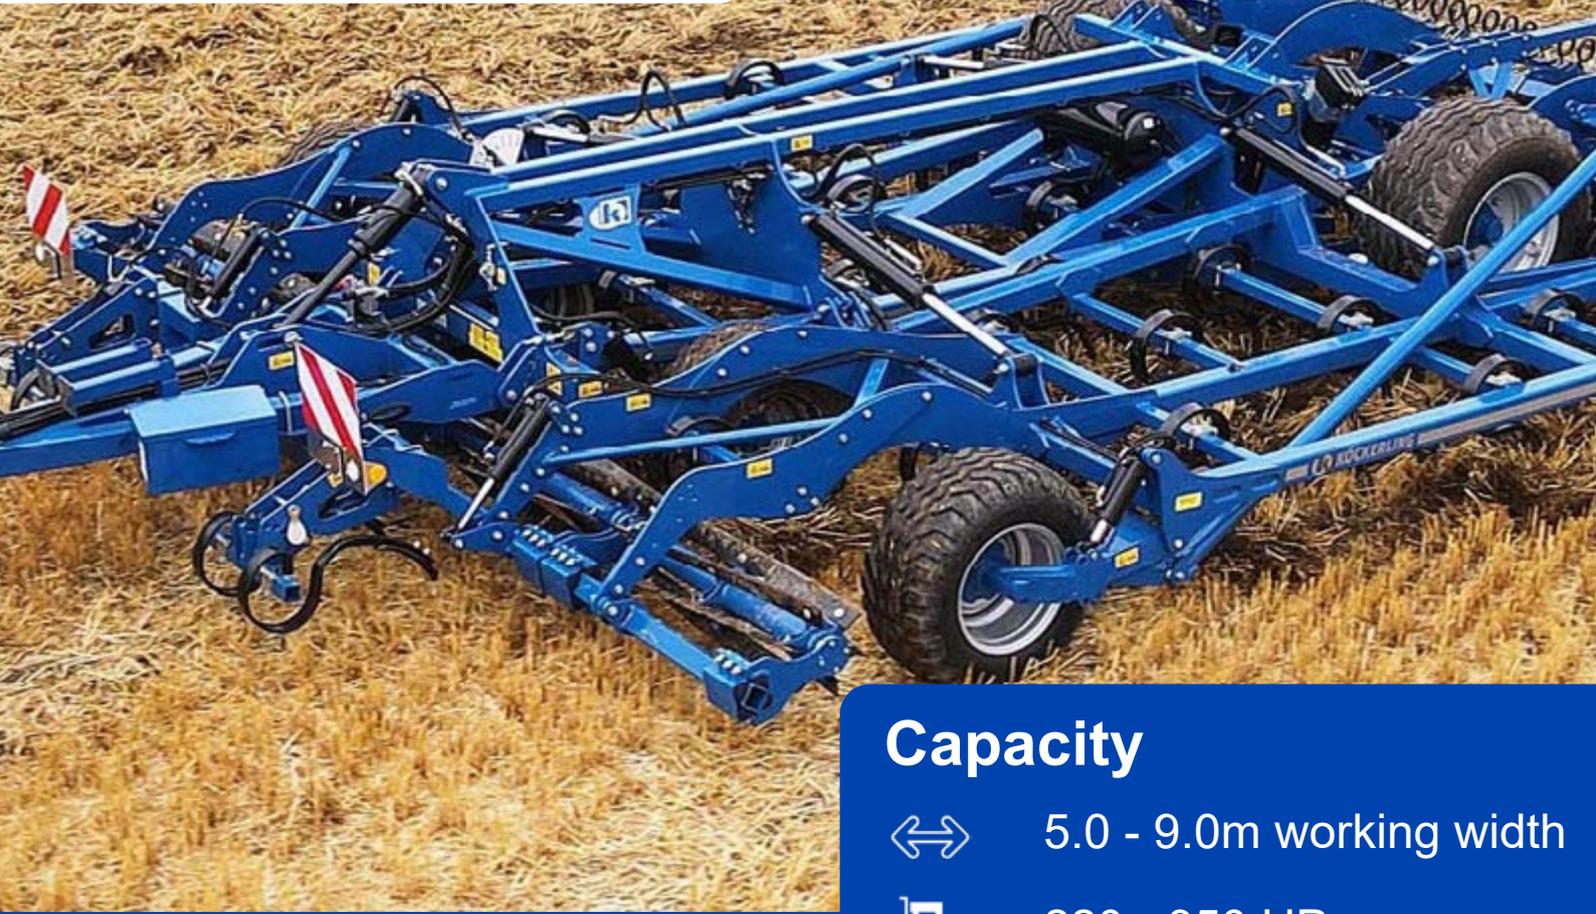

Capacity



5.0 - 9.0m working width



220 - 350 HP



7,540 - 10,750 kg

Allrounder Flatline

The Allrounder Flatline cultivator provides precise, hydraulically adjustable depth control with excellent contour following for consistent results, even in shallow or uneven conditions.

Its robust tine layout and versatile tool options ensure effective residue incorporation and high quality soil cultivation up to 13cm deep.





Stewart Trailers are specialists in the trailer market, from tip trailers to live-stock floats.

Made in Scotland, the business was established in 1988 and operates from a modern manufacturing facility in the rolling Aberdeenshire countryside in north-east Scotland.

Their high build quality and clever design, allow us to supply a complete range of high quality trailers from 4 to 22 tonne.





STEWART





Legend

The new Legend Range sets a new standard in trailer design, combining enhanced safety and usability with familiar features and competitive pricing.

Built for heavy-duty transport, the Legend tip trailer offers an 11-25 tonne carrying capacity with a robust chassis and sided box section.

Capacity

11 -12.5 tonne



Grain: 15 - 26m³

Silage: 27 - 44m³



STEWART

Pro Series 18 to 23 H



Capacity

20,000 kg



Grain: 23m³

Silage: 39m³

The Pro Series trailers are built for durability, versatility, and reliable performance in demanding agricultural tasks.

Constructed with robust Hardox steel, they combine manoeuvrability with strength and offer ample capacity to handle heavy loads.

With a range of customisable options, these trailers can be tailored to meet specific operational needs.



STEWART



Capacity

20 tonne



Pro 15: 11.4m³

Pro 20: 13.7m³

The Construction Pro 15 & 20 are multipurpose, heavy-duty trailers built for strength and stability.

Their unique chassis, robust axles, and pressed Hardox steel “bath-tub” body ensure durability, manoeuvrability, and reliable towing, even on hills.

The sides are quick to remove, and trailers can be custom-built to suit your requirements.

Construction Pro 15 & 20





Capacity & Features

8-10 tonne



4.6 -7.3m³

Hydraulic braking

Edge

The Edge range is built for tough conditions, offering small dropside trailers with versatile, multi-functioning back doors.

The Hardox steel body is stronger and more durable than mild steel, while the integral body prop ensures maintenance can be carried out safely.

STEWART



Capacity & Features

16 tonne




Hydraulic brakes

Hardox body

NZ 5500 Tip Trailer

The NZ5500, specifically designed for the New Zealand market, combines versatility with strength.

Its long deck, fixed headboard, and options for hay extensions, silage bins, gravel, and grain sides make it a highly adaptable trailer for a variety of farming needs.

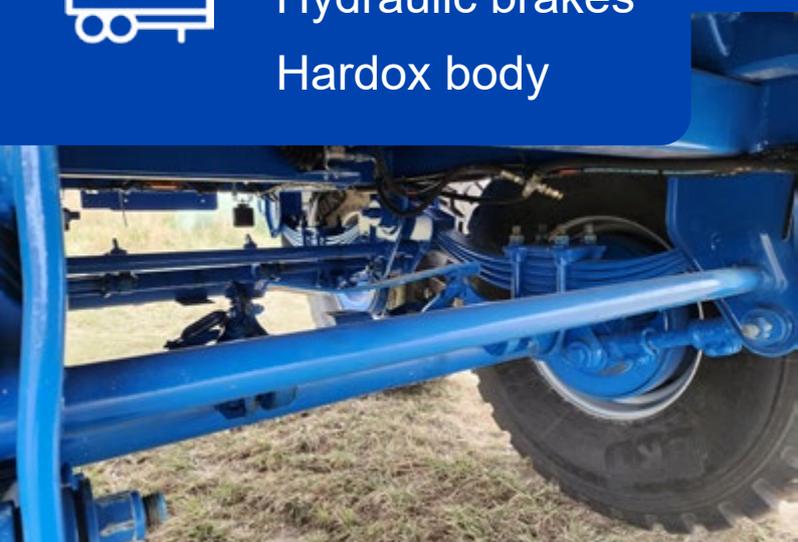

STEWART



NZ 6100 Tip Trailer

Capacity & Features

20 tonne



Tandem sprung axles

Sprung drawbar

The NZ 6100 is built tough for heavy workloads and versatile use. Designed with Kiwi input to handle New Zealand conditions, it offers a longer 6.1m body and a 20t load capacity while keeping the 2.7m bed width for stability and manoeuvrability.

Optional extras include silage or grain sides, NZ grain chute, upgraded tyres, roll-over cover, hydraulic brake load sensing, and air brakes.



STEWART



GX Flat Deck

Capacity & Features

8 - 18 tonne



Mechanical suspension

Hyd. braking system

The GX Flat Deck trailer is built bigger, stronger and tougher - ready for reliable performance in any conditions.

It's sprung drawbar and tandem suspension provide a smooth, stable ride, while the heavy-duty braking system ensures confident control.

With full LED lighting for maximum visibility and robust, high-capacity tyres, the GX Flat Deck is designed to handle hard work day after day.



STEWART



GX Low Loader

Capacity & Features

15 - 26 tonne



Keruing timber floor

Hyd. operated ramps

The GX Low Loader is built for strength and versatility, ready to handle heavy loads with ease.

Its robust chassis, durable timber deck, and tandem or tridem suspension provide a smooth, stable ride.

Hydraulic ramps and optional upgrades give you the flexibility to tackle every load with ease.



SILOKING

Siloking specialises in advanced feeding technology for ruminants. What began in 1993 with the silage comb has grown into a global leader in innovation and market presence.

Maintain structure, mix long and short, as well as dry and moist materials, and deliver uniform precise rations.

Siloking technology is built to meet these demands 365 days a year - with reliability and operator comfort at it's core.



SILOKING



SILOKING



TrailedLine Classic

12 - 25m³

8 - 18 Adjustable XS knives

17/33 Mixing auger speed



-

Premium Duo

9 - 14m³

7 - 9 Adjustable XS knives

24 - 17/33 Mixing auger speed

TrailedLine Classic & Premium Duo

The Siloking TrailedLine Classic & Premium Duo, equipped with two powerful turbo augers, are designed for large farms and operations with narrow barn passages.

Their turbo augers provide high capacity, even over long transport distances and for large herds.

The standard manual transmission and optimised hopper geometry ensure easy towing and excellent feed mixing.



TrailedLine & StaticLine 4.0

SILOKING



Siloking is designed to deliver reliable performance for high-volume operations. Its three turbo augers with adjustable XS knives and SILONOX wear protection ensure efficient mixing and long-lasting durability.

Hydraulic brakes on all axles provide added safety, complemented by a sturdy mechanical jack and SILOKING Data E scales for precise load monitoring.

TrailedLine

27 - 32m³ Hopper volume

24 - 32 Adjustable XS knives

22/40 Mixing auger speed

-

StaticLine 4.0

22 - 40m³ Tank volume

18 - 27 Adjustable XS knives

19/38 Mixing auger speed





Schaffer telescopic wheel loaders are engineered to deliver power, precision, and exceptional versatility on every job.

Their 4-cylinder Deutz TCD 3.6 diesel engine works seamlessly with a hydrostatic four-wheel drive system to provide smooth, consistent traction.

Load-sensing hydraulics and proportional telescopic arm control gives operators the accuracy they need, while heavy-duty planetary axles with limited-slip differentials ensure dependable performance in challenging conditions.



Schäffer



Features



Load-sensing hydraulics

Touchscreen display

Limited-slip differentials



SPEARHEAD



Capacity

 1.9 - 3.0m cutting width

 50 - 180 HP

 159mm dia - Std rotors
219mm dia - HD rotors



Sniper

The Sniper HD flail mower is built for demanding agricultural work, delivering a clean, consistent cut in material up to 60mm. Heavy-duty hammer flails arranged in a double helical pattern work on an electronically balanced rotor with enclosed, self-aligning bearings.

The Sniper HD offers a 400mm hydraulic side shift for working around obstacles, and a reversible headstock for front or rear mounting.



SPEARHEAD

Multicut Rotary Mulcher



The Multicut is a 3-point linkage mounted rotary mulcher. Inward folding wings keep transport under 2.8m, while it's delta-style design ensures smooth material flow.

Powered by a heavy-duty driveline with three rotors and HD blades, it cuts up to 100mm at over 80m/s, handling tough conditions with ease.

Capacity

 4.25 - 6.28m cutting width

 80 - 120 HP

 3 - 5 rotors





Features



- NZ rope rails
- Hot-dipped galvanised
- Tandem or Tri-Axle



Graham Edwards Trailers are built for strength, reliability, and versatility. Designed to handle the toughest transport tasks with ease.

From robust agricultural trailers to custom heavy-duty solutions, each trailer combines durable construction with practical features to make loading, hauling, and unloading efficient and safe.

From farm to field to construction site, Graham Edward Trailers provide dependable strength and performance you can count on.



Güstrower



Capacity & Features



5 - 10m³

Scraper floor

Electronic controls

GDK spreaders combine precision, durability, and efficiency in one high-performance package.

Their steep-sided, high-strength steel body and hydraulically driven scraper chain deliver accurate application rates.

Precision Urea discs reach up to 36m, while the Deflector II ensures clean border spreading.

Built to last, these spreaders are engineered with heavy-duty construction and stainless steel fittings to withstand years of demanding use.



A large red and black ASL Low Disturbance Toolbar is shown in operation, attached to a tractor in a field of harvested crops. The toolbar has multiple legs and hydraulic hoses.

ASL Low Disturbance Toolbar

The ASL Low Disturbance Toolbar works seamlessly with mounted combination drills or trailed drills and cultivators to create a one-pass system that saves time and reduces fuel costs.

Its auto-reset legs with low disturbance points lift and shatter soil up to 300mm deep, relieving compaction across the full width of the machine.

The ASL features optional row cleaner discs to clear debris ahead of the legs, while auto-reset leg protection ensures consistent, efficient operation.

Capacity

3 - 4m rigid or 4m folding width

6 - 8 legs

300mm max. working depth





Features



Height adj depth wheels

50mm towing clevis

Hyd. 'tap' locks for transport

Assist & Compact Assist

Made in the UK, the Assist and Compact Assist Subsoilers deliver efficient, minimum disturbance soil loosening while enabling one-pass operations with drills or disc cultivators.

With 6-8m working widths and low disturbance SUMO-pointed legs, they reduce compaction and save time and fuel.

Hydraulic folding keeps transport under 3m, and adjustable Cat 3 linkages with front depth control wheels provide precision and versatility for modern minimum-tillage farming.





Lowlander Manure Spreader

The Bunning Lowlander Manure Spreader delivers reliable performance and heavy-duty durability for modern farming. Its fully welded body and robust frame support twin heat-treated BORON steel augers that shred and spread manure evenly.

Hydraulic floor drive and high-tensile floor chains ensure smooth, consistent discharge, while adjustable floor speed and reversible cutters make handling all types of material simple.

Built for long service life, the Lowlander combines durability, efficiency, and ease of maintenance for demanding farm conditions.

Features




Hyd. floor drive

BORON steel vertical augers

Heavy-duty welded body



KIVI PEKKA

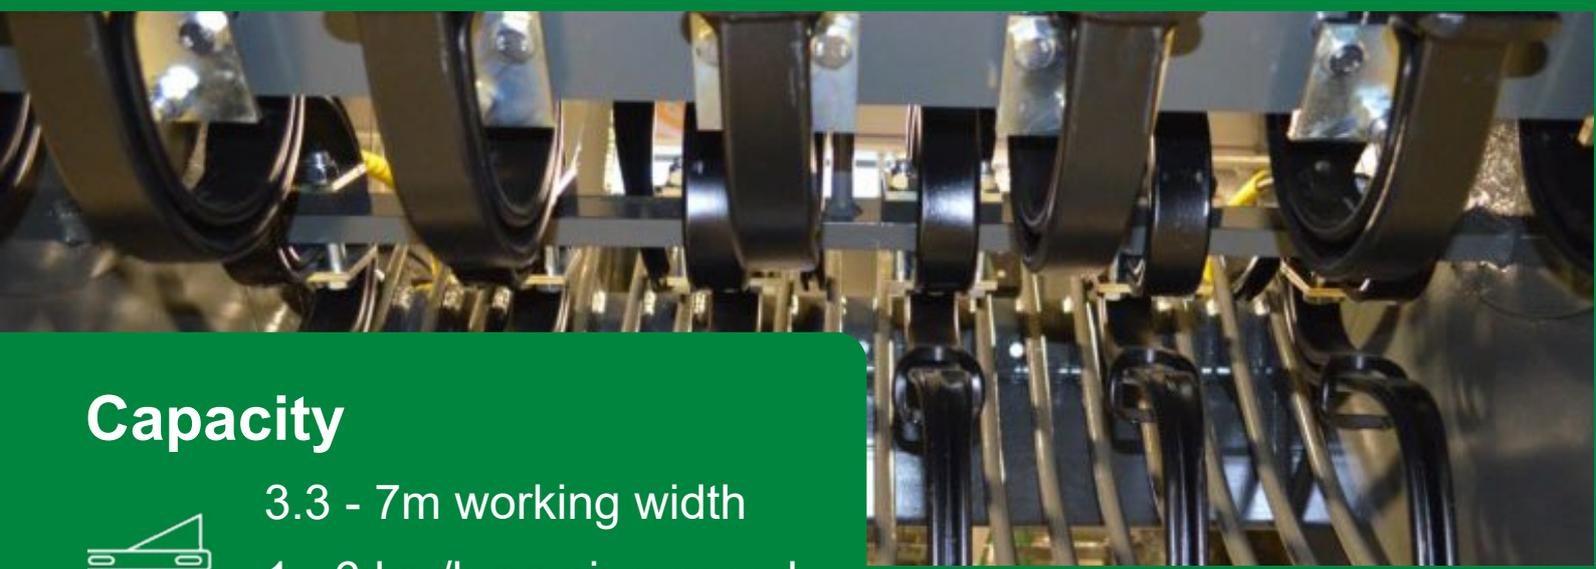

Capacity



3.3 - 7m working width

1 - 6 km/h running speed

60 - 100 HP

Kivi-Pekka's advanced mechanical traction system reduces power consumption and lowers environmental impact - helping you work smarter and more efficiently.

Designed to remove stones and solid debris from all soil types, the Kivi-Pekka rock picker makes field preparation faster and more effective.

Stone Picker



Every Kivi-Pekka rock picker is manufactured from high-grade steels and premium components, ensuring long-lasting performance in demanding conditions.

Kivi-Pekka is also ideal for road foundation work, golf course construction, and landscaping projects.

KIVI PEKKA



YOUR LOCAL AGRICULTURAL MACHINERY SPECIALIST

We specialise in sourcing and supplying world-class quality machinery tailored to New Zealand's unique farming needs.

KÖCKERLING



STEWART



MACHINERY

SILOKING



Schäffer





RY LIMITED





IKON MACHINERY LIMITED
Tel: +64 3 693 6777
Email: info@ikonmac.nz
ikonmac.nz