


**f** bestrongworld


o bestrongworld

global.bestrong.com info@bestrong.com

## **Muscle Groups Focus**



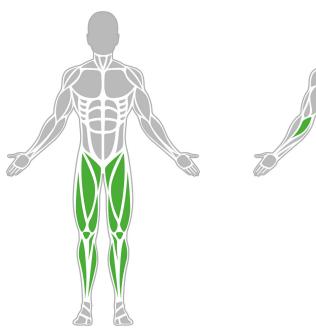

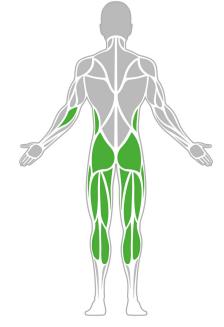

### **Resistance Band Anchor Pro**

The Resistance Band Anchor provides the user with the possibility to increase or decrease the difficulty depending on the exercise and position. In the case of the Lateral Plyobox Pro, it will increase difficulty by adding resistance when attached to the waist. Meanwhile, when coupled with the Nordic Hamstring Station Pro, it reduces exercise difficulty by helping suspend the user from a higher position.


#### **Attributes**

Product code 1-1-164 Certificate EN 16630 Age group 14 + years Capacity 1 person Max. weight load 99 kg Туре **Sport Specific** Difficulty level Easy


### **QR** Code



### **Side View**

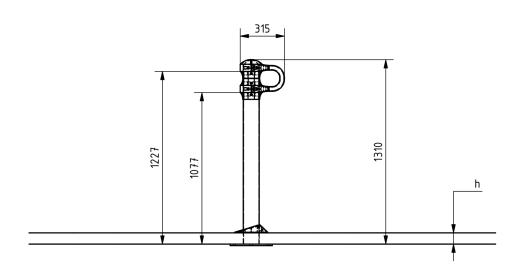

## **Plan View**

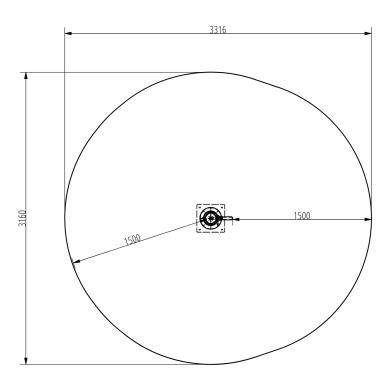

### Installation information

Number of installers (concrete) At least 2 people Total installation time (concrete) 30-60 min. Number of installers (equipment) At least 2 people 30-60 min. Total installation time (equipment) Excavation volume  $0.2 \, \text{m}^3$ Concrete volume  $0.2 \, \text{m}^3$ 0,5 x 0,5 x 0,8 m Size of the base structure Anchoring options In-g
In combined structures, the volume of concrete required varies In-ground or surface

## **Technical specification**


Safety surfice area Around 1,5 m radius Net weight 19 kg Material S235 Critic fall height - Color options
For more color options, discuss with your sales representative.

### Warranty

Structure
Steel
Paint
Plastic
Rubber
Moving parts
Detailed information in the warranty document

10 years 5-10 years 2 years 5-10 years 1-3 years 2 years

# Material specification

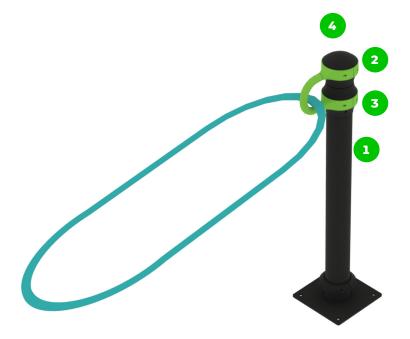



The element is made of high quality S235 steel, which has been cleaned via sandblasting. A corrosion resistant powder coating finish is then applied. Also available with galvanized surface for even greater protection and longevity!



The clamp system allows for easy assembly and extreme stability.



connecting ments are fastened with vandal-proof stainless steel screws and nuts.



The ends of the bars and posts are sealed with injection-moulded plastic caps.







