


InertSearch™ for LC

Inertsil® Applications

Asulam

Data No. LA265-0000

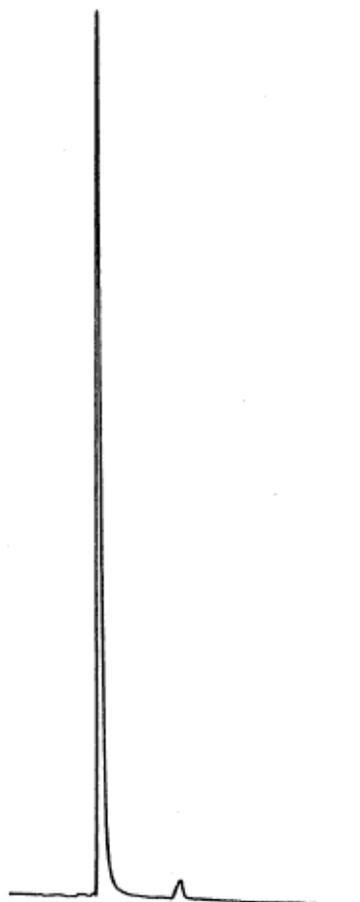

0 | 5min

Column : ODS-Cu
5 μ m
150 \times 4.6mm I.D.

Column Cat. No. : 5020-02501

Eluent : CH₃OH/CH₃COOC₂H₅/H₂O=5/5/90

Flow rate : 1.0 mL/min.

Col. Temp. : 40°C

Detection : UV 270 nm

Injection Vol. :

Sample :

Solutes : 1. Asulam