

# SLICE










# CREATING ARCHITECTURAL BEAUTY IN A SPECIFIC ENVIRONMENT

Performance, Uniqueness, Responsibility, Aesthetics,  
Technology, Innovation (PURATI). Those are our value and our foundation.  
Our light save space, save resources, and offer greater quality. We  
offer architectural lighting of premium quality and performance  
and with unique design

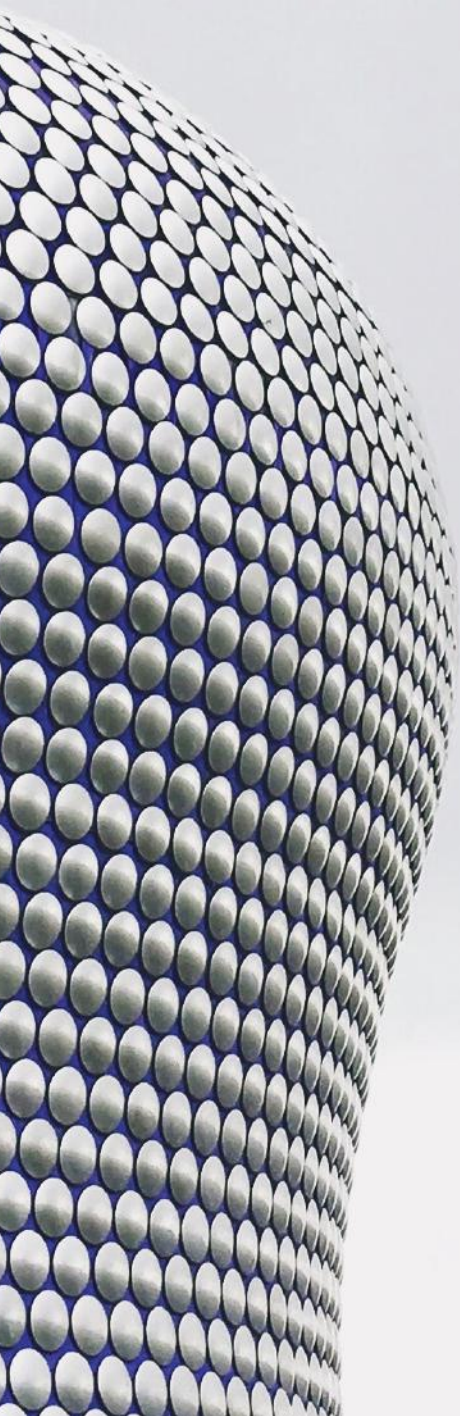

**PURATI**

SLICE SERIES



THE MARKET WHERE THE

# BEST OF BOTH WORLDS

PURATI IS A EUROPEAN-DESIGNED PREMIUM LIGHTING BRAND WITH OUR OWN PRODCUTION. PERFORMANCE, UNIQUENESS, RESPONSIBILITY, AESTHETICS, TECHNOLOGY, INNOVATION (PURATI). THOSE ARE OUR VALUE AND FOUNDATION. OUR LIGHTS SAVE SPACE, SAVE RESOURCES, AND OFFER GREATER QUALITY. WE OFFER ARCHITECTURAL LIGHTING OF PREMIUM QUALITY AND PERFORMANCE WITH UNIQUE DESIDN.

PURATI  
SYDNEY, AUSTRALIA

MANUFACTURED BY PURATI OWN FACTORY  
NINGBO, CHINA

NPK DESIGN IS ONE OF THE MOST VALUED INTERNATIONAL DESIGN AGENCIES IN THE NETHERLANDS, WITH OVER 40 YEARS OF EXPERIENCE. THE COMPANY OFFERS A WIDE RANGE OF SERVICES INCLUDING STRATEGIC ADVICE, INDUSTRIAL DESIGN, SERVICE DESIGN, GRAPHIC DESIGN, AND PUBLIC DOMAIN PROJECTS, AS WELL AS SUPPLY MANAGEMENT.

NPK DESIGN

LEIDEN, THE NETHERLANDS









# HAPPINESS STARTS AT LIGHT

## Own lighting manufacturer

With over 20 years of manufacturing experience in delivering electronic products, we are one of the most established lighting businesses in China. The company has built a first-class assembly line and a complete set of electronic and photometric inspection equipment.

In 2010, we cooperated with a strong partner, NPK design agency in the Netherlands, and have since succeeded in adding new innovative design with new functionality to our product series every year. As a result, we produce premium quality and high-performance LED luminaires, which are distributed to more than 30 countries around the world.

# THE IF AWARDS IS ONE OF THE MOST PRESTIGIOUS DESIGN COMPETITION IN THE WORLD



In 2014 the Slice series has been awarded the IF product design award. The product line consists of 3 shapes (The round, square and rectangle) with various sizes.

## PURATI

SLICE SERIES



SLICE LONG  
**minimalism**





PURATI

SLICE SERIES





### Slice Square 400

The Slice Series comprises of three classic shapes (Round . Square . Rectangle) that will suit a wide range of projects. The Slice Circle with minimalist design, in rich colors, fine finishing and four sizes. The combination of functionality and performance that can be perfectly suited for both consumer and professional applications. Expertly designed and engineered a build-in driver, quick wiring connection, push lock or turning lock system with quick release buttons which results in making the installation easy.



PURATI

SLICE SERIES







### Slice Circle 600

The Slice Series comprises of three classic shapes (Round . Square . Rectangle) that will suit a wide range of projects. The Slice Circle with minimalist design, in rich colors, fine finishing and four sizes.

The combination of functionality and performance that can be perfectly suited for both consumer and professional applications.

Expertly designed and engineered a build-in driver, quick wiring connection, push lock or turning lock system with quick release buttons which results in making the installation easy.



PURATI

SLICE SERIES



PURATI  
SLICE SERIES





Discover  
The  
Endless Possibilities  
And Advantages  
Of  
**PURATI**  
Ceiling Luminaires

We focus on outstanding design, unlimited functions,  
versatile application and ease of installation.  
Offering a 5-year warranty  
on all of our lights.

**DESIGN**



**PURATI**

SLICE SERIES



PURATI

SLICE SERIES






PURATI  
SLICE SERIES







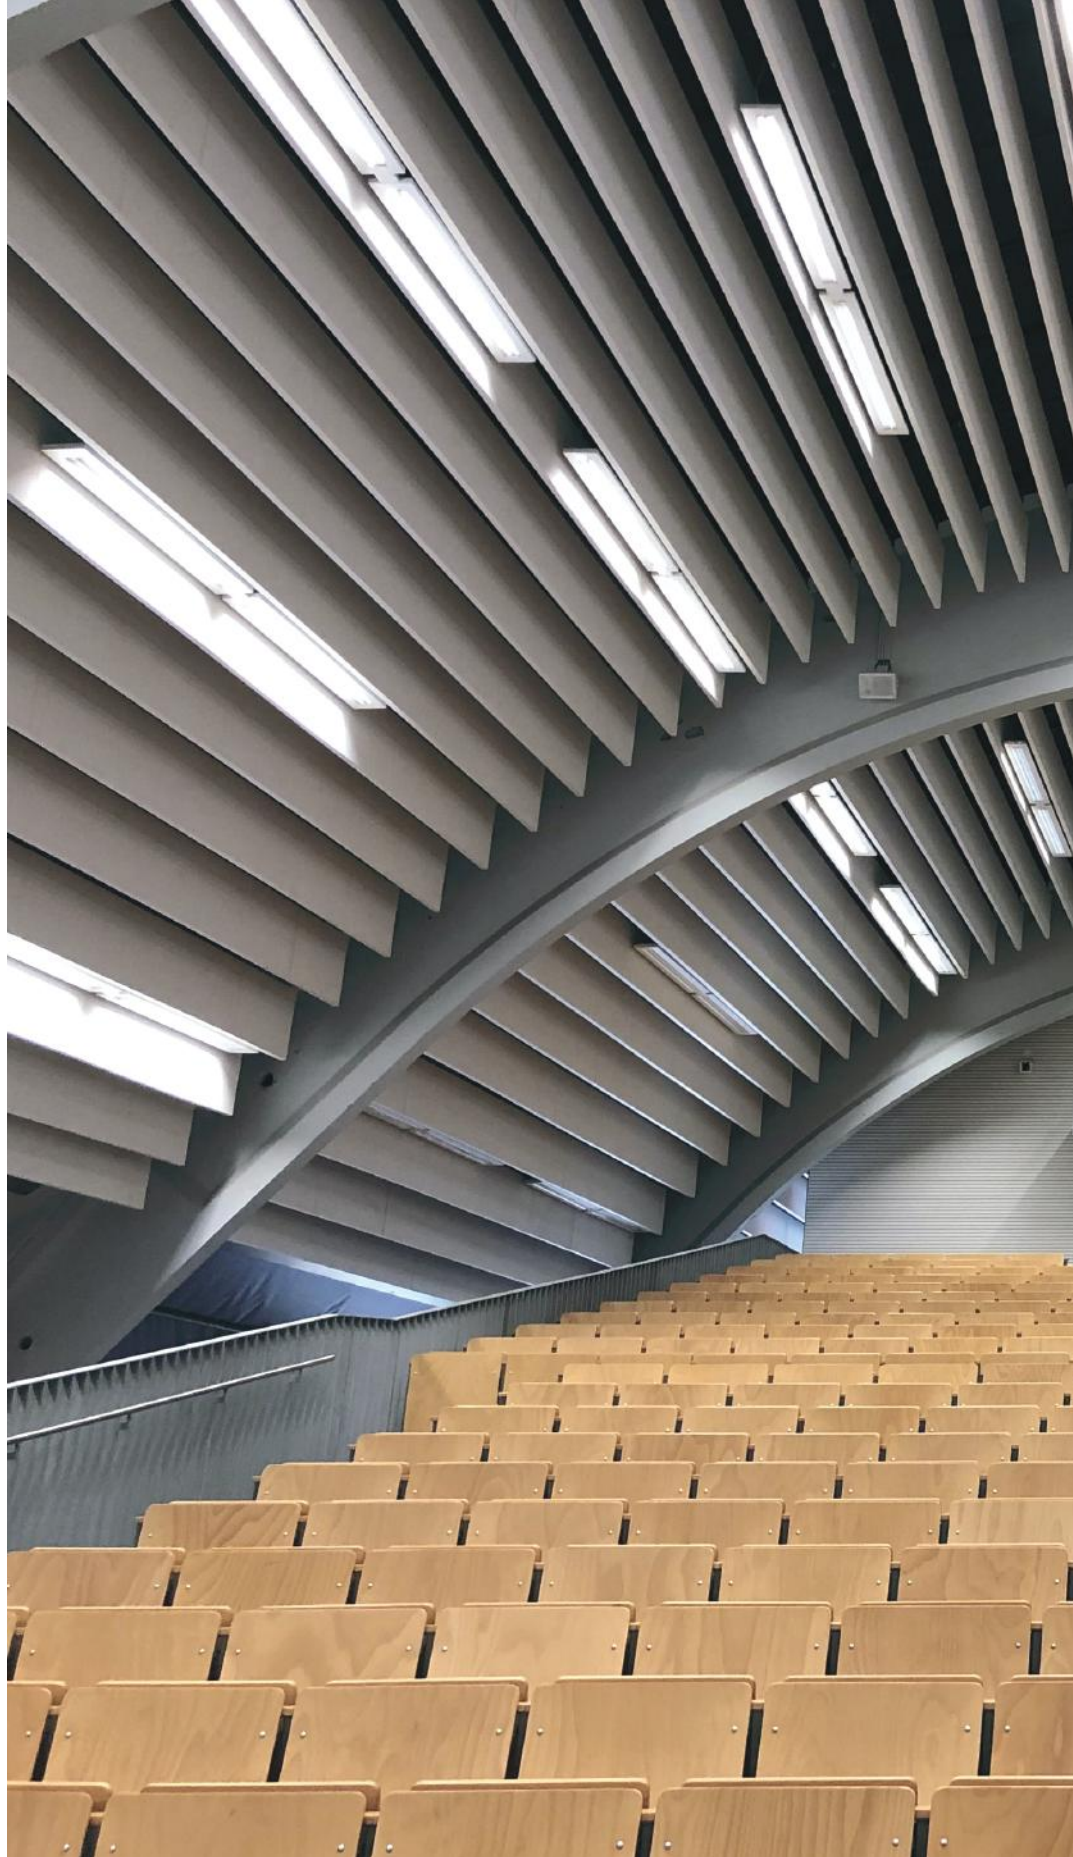

## Slice Long 1200

The Slice Series comprises of three classic shapes (Round . Square . Rectangle) that will suit a wide range of projects. The Slice Long with minimalist design, in rich colors, fine finishing and four sizes. The combination of functionality and performance that can be perfectly suited for both consumer and professional applications. Expertly designed and engineered a build-in driver, quick wiring connection, push lock or turning lock system with quick release buttons which results in making the installation easy.



# PURATI

SLICE SERIES





PURATI

SLICE SERIES



PURATI

SLICE SERIES





SLICE LONG 1200




PURATI

SLICE SERIES



SLICE LONG 1200

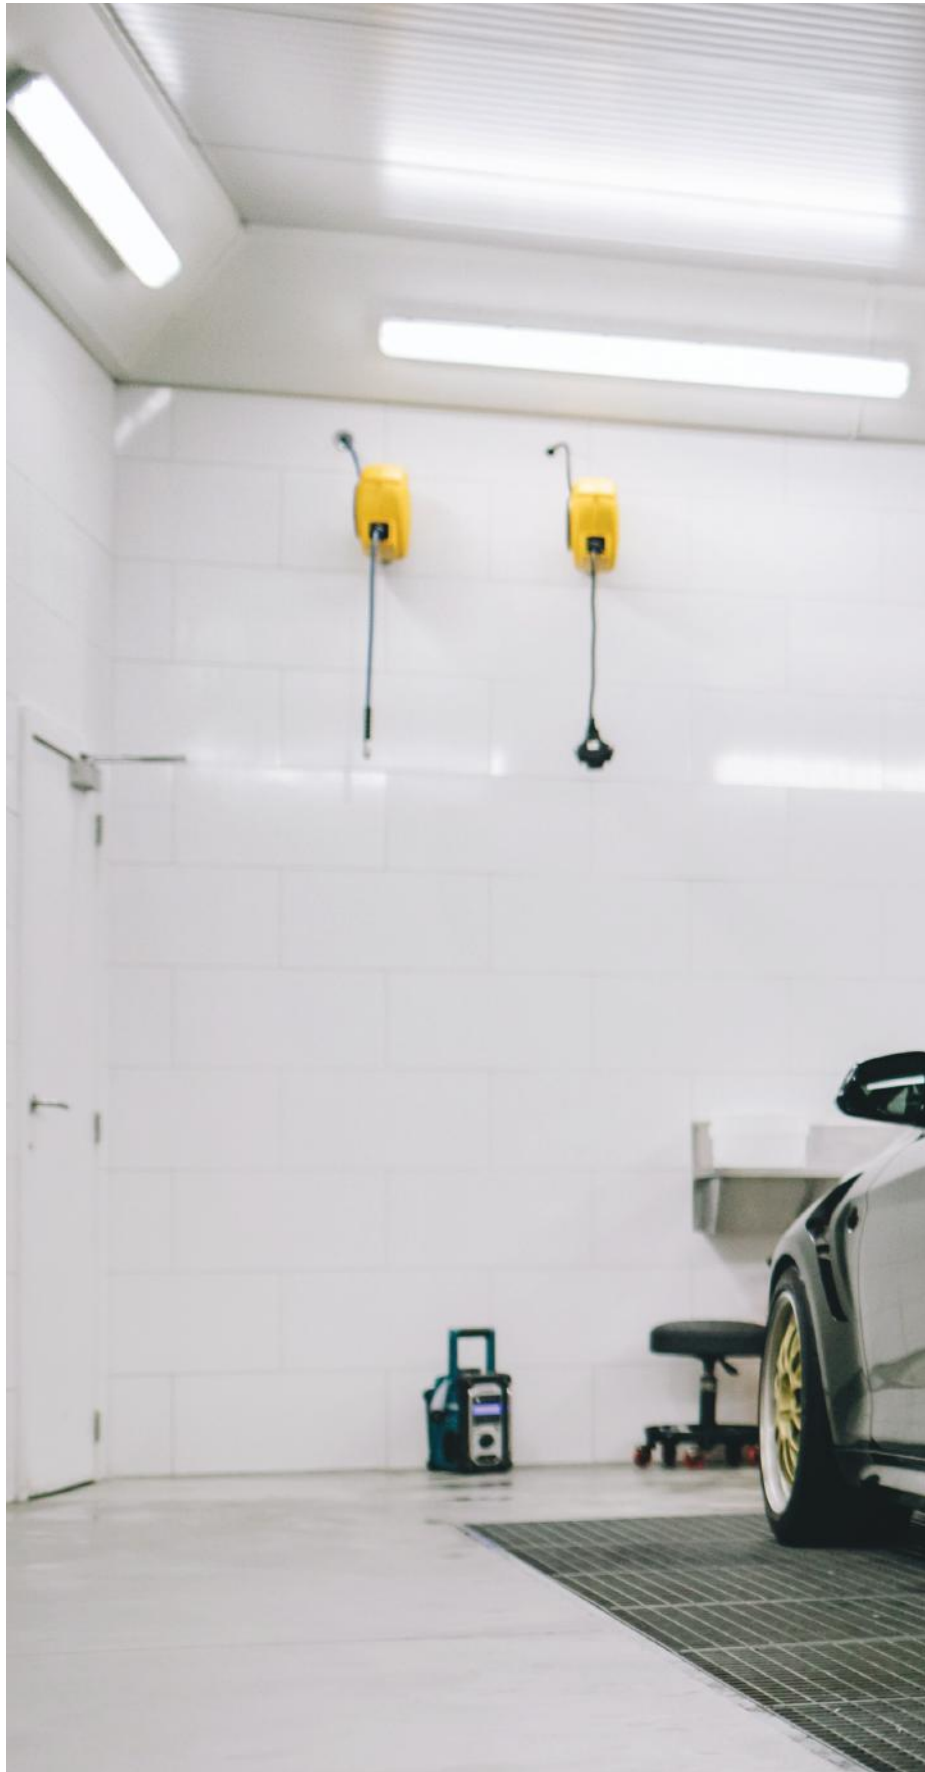

PURATI

SLICE SERIES



PURATI

SLICE SERIES




PURATI

SLICE SERIES





PURATI  
SLICE SERIES

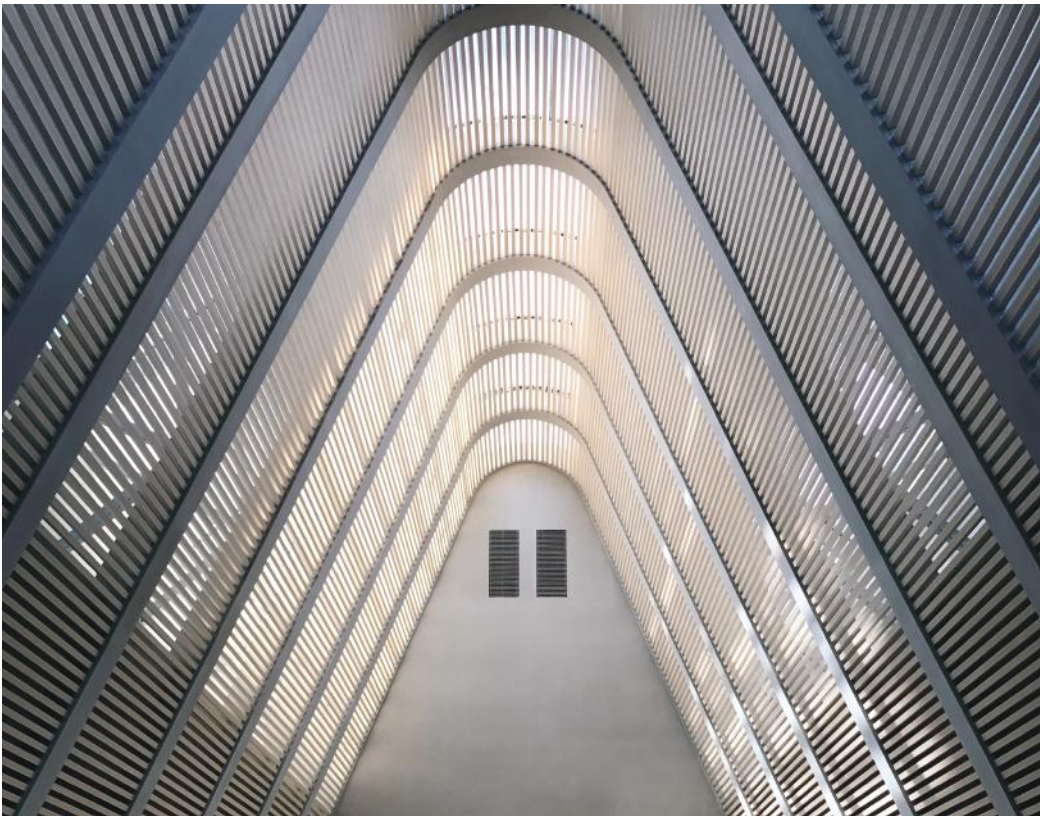

## Slice Series

The winner of IF design award 2014

The Slice Series comprises of three classic shapes (Circle - Square - Rectangle) that will suit a wide range of projects. The Slice Circle with minimalist design, in rich colors, fine finishing and four sizes. The combination of functionality and performance can be perfectly suited for both consumer and professional applications. Expertly designed and engineered a build-in driver, quick wiring connection, push lock and turning lock system with quick release buttons which result in making the installation easy.

### Features & Details

- Can be surface mounted, wall mounted, recessed, suspended or on track
- Power and color temperature switchable by using the switch in the installation base
- Available in 4 sizes, 3 finishes and 3 color temperatures
- General light with CRI>90, SDCM<3, UGR<23
- Non-Dim, Triac dimming & DALI2 dimming options
- Non-flickering build-in driver
- Provide functions for Motion detection, PIR sensor, Emergency light, Motion detection + Emergency lighting
- Min.80% of the luminous flux after >50000 hours

### Accessories (optional)

- Installation with pendant kit (1.6m cable)
- Installation with recessed kit (Only for Slice Circle 270)
- Installation with track kit





# SLICE SERIES



H 52  
Φ 270



H 65  
Φ 400



H 65  
Φ 600



H 65  
Φ 400

W 1200

H1 130  
H2 55



PURATI

SLICE SERIES

SLICE SERIES

# SLICE CIRCLE SERIES



**Slice Circle 220**  
Surface mounted  
Matte White



**Slice Circle 220**  
Surface mounted  
Matte Black



**Slice Circle 220**  
Surface mounted  
Matte Silver



**Slice Circle 270**  
Surface mounted, Suspended,  
recessed, on track  
Matte White



**Slice Circle 270**  
Surface mounted, Suspended,  
recessed, on track  
Matte Black



**Slice Circle 270**  
Surface mounted, Suspended,  
recessed, on track  
Matte Silver



**Slice Circle 400**  
Surface mounted  
Matte White



**Slice Circle 400**  
Surface mounted  
Matte Black



**Slice Circle 400**  
Surface mounted  
Matte Silver



**Slice Circle 600**  
Surface mounted, Suspended  
Matte White



**Slice Circle 600**  
Surface mounted, Suspended  
Matte Black





## Slice Circle 220

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	1500lm 15W / 1000lm 10W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 60 mins @ 3W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Circle 220

m	Φ cm	Lux AVG	Lux MAX
1	378.74	62.36	272.3
2	757.48	15.59	68.07
3	1127.22	6.929	30.25
4	1502.96	3.898	17.02
5	1878.71	2.494	10.89

Angle: 123.95°

m	Φ cm	Lux AVG	Lux MAX
1	378.22	62.99	293.7
2	752.43	15.75	73.43
3	1128.65	6.999	32.64
4	1504.88	3.937	18.36
5	1881.08	2.520	11.75

Angle: 124.01°

m	Φ cm	Lux AVG	Lux MAX
1	377.88	91.30	401.2
2	743.76	22.83	100.3
3	1115.63	10.14	44.57
4	1487.51	5.706	25.07
5	1859.39	3.652	16.05

Angle: 123.46°

m	Φ cm	Lux AVG	Lux MAX
1	377.77	97.25	425.5
2	745.55	24.31	106.4
3	1124.32	10.81	47.28
4	1499.10	6.078	26.59
5	1873.87	3.890	17.02

Angle: 123.83°

## Slice Circle 270

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Aluminium + Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	2400lm 24W/1800lm 18W/1000lm10W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 90 mins @ 2W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Circle 270

m	Φ cm	Lux AVG	Lux MAX
1	327.81	83.82	314.3
2	643.61	20.95	78.57
3	955.42	9.313	34.92
4	1267.23	5.239	19.64
5	1609.03	3.353	12.57

Angle: 116.28°

m	Φ cm	Lux AVG	Lux MAX
1	327.74	93.52	350.6
2	643.49	23.38	87.66
3	955.23	10.39	38.96
4	1266.98	5.845	21.92
5	1608.72	3.741	14.03

Angle: 116.27°

m	Φ cm	Lux AVG	Lux MAX
1	323.25	153.5	575.1
2	646.50	38.38	143.8
3	969.76	17.06	63.90
4	1293.01	9.594	35.95
5	1616.26	6.140	23.01

Angle: 116.51°

m	Φ cm	Lux AVG	Lux MAX
1	323.12	170.3	638.6
2	644.24	42.59	159.6
3	966.36	18.93	70.95
4	1288.48	10.65	39.91
5	1610.60	6.814	25.54

Angle: 116.33°

m	Φ cm	Lux AVG	Lux MAX
1	323.62	200.6	752.2
2	643.24	50.15	188.0
3	964.86	22.29	83.57
4	1286.48	12.54	47.01
5	1608.09	8.024	30.09

Angle: 116.25°

m	Φ cm	Lux AVG	Lux MAX
1	323.12	218.8	820.3
2	644.24	54.71	205.1
3	966.36	24.32	91.15
4	1288.48	13.68	51.27
5	1610.60	8.754	32.81

Angle: 116.33°

### Notes:

Track mounted or recessed application is only suitable for Slice Circle 270

## TECHNICAL DATA

### Slice Circle 400

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	3200lm 32W / 2400lm 24W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 90 mins @ 2W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Circle 400

m	Φ cm	Lux AVG	Lux MAX
1	338.94	169.5	679.9
2	673.88	42.38	170.0
3	1010.82	18.83	75.55
4	1347.76	10.59	42.50
5	1684.70	6.780	27.20
Angle: 118.62°			

m	Φ cm	Lux AVG	Lux MAX
1	331.48	175.7	704.3
2	674.95	43.83	176.1
3	1012.43	19.52	78.25
4	1349.91	10.98	44.02
5	1687.39	7.028	28.17
Angle: 118.70°			

m	Φ cm	Lux AVG	Lux MAX
1	334.41	219.6	865.3
2	668.82	54.90	221.3
3	1003.23	24.40	98.37
4	1337.63	13.72	55.33
5	1672.04	8.784	35.41
Angle: 118.24°			

m	Φ cm	Lux AVG	Lux MAX
1	338.14	224.9	903.6
2	672.28	56.22	225.9
3	1008.41	24.99	100.4
4	1344.55	14.06	56.47
5	1680.69	8.996	36.14
Angle: 118.50°			

### Slice Circle 600

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	5500lm 55W / 3800lm 38W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 90 mins @ 2W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Circle 600

m	Φ cm	Lux AVG	Lux MAX
1	328.42	344.1	1312
2	656.83	86.02	328.0
3	985.25	38.23	145.8
4	1313.67	21.50	81.99
5	1642.09	13.76	52.47
Angle: 117.32°			

m	Φ cm	Lux AVG	Lux MAX
1	328.61	359.9	1372
2	657.22	89.97	343.0
3	985.83	39.99	152.4
4	1314.44	22.49	85.75
5	1643.06	14.40	54.88
Angle: 117.35°			

m	Φ cm	Lux AVG	Lux MAX
1	328.76	478.6	1831
2	657.53	119.6	457.7
3	987.29	53.10	203.4
4	1303.05	29.91	114.4
5	1628.82	19.14	73.23
Angle: 116.90°			

m	Φ cm	Lux AVG	Lux MAX
1	328.01	491.0	1871
2	656.01	122.8	467.7
3	984.02	54.56	207.9
4	1312.03	30.69	116.9
5	1640.03	19.64	74.83
Angle: 117.25°			



SLICE SERIES

# SLICE SQUARE SERIES



**Slice Square 210**  
Surface mounted  
Matte White



**Slice Square 20**  
Surface mounted  
Matte Black



**Slice Square 210**  
Surface mounted  
Matte Silver



**Slice Square 260**  
Surface mounted  
Matte White



**Slice Square 260**  
Surface mounted  
Matte Black



**Slice Square 260**  
Surface mounted  
Matte Silver



**Slice Square 400**  
Surface mounted  
Matte White



**Slice Square 400**  
Surface mounted  
Matte Black



**Slice Square 400**  
Surface mounted  
Matte Silver



## TECHNICAL DATA

### Slice Square 210

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	1500lm 15W / 1000lm 10W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 60 mins @ 3W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Square 260

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Aluminium + Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	2400lm 24W/1800lm 18W/1000lm 10W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 90 mins @ 2W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Square 400

<b>Mounting:</b>	Surface mounted
<b>Material:</b>	Polycarbonate
<b>Finishes:</b>	White / Black / Silver
<b>IP / IK Rating:</b>	54 / 10
<b>Lumens Flux:</b>	3200lm 32W / 2400lm 24W
<b>Voltage:</b>	220-240V AC / 216(186-260)DC
<b>Functions:</b>	On/Off motion sensor, 90 mins @ 2W Emergency
<b>CCT:</b>	3000 / 4000K
<b>CRI:</b>	>90
<b>SDCM:</b>	<3
<b>Lifetime:</b>	L80 / 50,000h
<b>Warranty:</b>	5 Years
<b>Dimming options:</b>	No Dim / DIM / DALI (DL6)



### Slice Square 210

### Slice Square 400

m	Φ cm	Lux AVG	Lux MAX
1	333.09	177.2	713.6
2	666.17	44.30	178.4
3	999.26	19.69	79.29
4	1332.35	11.07	44.60
5	1665.44	7.087	28.54

Angle: 118.04°

m	Φ cm	Lux AVG	Lux MAX
1	333.37	181.6	729.8
2	666.73	45.41	182.4
3	1000.10	20.18	81.09
4	1333.46	11.35	45.61
5	1671.83	7.265	29.19

Angle: 118.23°

m	Φ cm	Lux AVG	Lux MAX
1	333.68	225.8	909.0
2	667.36	56.46	227.3
3	1001.04	25.09	101.0
4	1334.72	14.11	56.81
5	1668.40	9.033	36.36

Angle: 118.13°

m	Φ cm	Lux AVG	Lux MAX
1	333.55	234.8	944.2
2	667.10	58.69	236.0
3	1000.65	26.08	104.9
4	1334.20	14.67	59.01
5	1667.74	9.390	37.77

Angle: 118.11°

m	Φ cm	Lux AVG	Lux MAX
1	388.13	60.30	280.6
2	776.26	15.07	70.15
3	1164.39	6.700	31.18
4	1552.52	3.769	17.54
5	1940.65	2.412	11.22

Angle: 125.48°

m	Φ cm	Lux AVG	Lux MAX
1	388.48	87.90	410.2
2	776.96	21.98	102.6
3	1165.45	9.767	45.58
4	1541.93	5.494	25.64
5	1927.41	3.516	16.41

Angle: 125.16°

m	Φ cm	Lux AVG	Lux MAX
1	388.88	64.39	299.5
2	777.76	16.10	74.88
3	1166.64	7.154	33.28
4	1555.52	4.024	18.72
5	1939.40	2.576	11.98

Angle: 125.45°

m	Φ cm	Lux AVG	Lux MAX
1	388.38	92.84	433.1
2	776.76	23.21	108.3
3	1165.14	10.32	48.13
4	1543.52	5.802	27.07
5	1941.90	3.714	17.33

Angle: 125.51°

### Slice Square 260

m	Φ cm	Lux AVG	Lux MAX
1	323.00	85.61	310.7
2	646.00	21.40	77.68
3	969.00	9.512	34.52
4	1292.00	5.350	19.42
5	1615.00	3.424	12.43

Angle: 115.99°

m	Φ cm	Lux AVG	Lux MAX
1	323.37	92.05	343.7
2	646.74	23.01	85.93
3	970.11	10.23	38.19
4	1286.82	5.753	21.48
5	1603.54	3.682	13.75

Angle: 116.05°

m	Φ cm	Lux AVG	Lux MAX
1	323.06	159.1	593.9
2	646.12	39.77	148.5
3	969.18	17.68	65.99
4	1284.24	9.944	37.12
5	1605.29	6.364	23.76

Angle: 116.16°

m	Φ cm	Lux AVG	Lux MAX
1	323.18	208.5	778.5
2	646.37	52.13	194.6
3	969.55	23.17	86.50
4	1284.73	13.03	48.66
5	1605.92	8.340	31.14

Angle: 116.18°

m	Φ cm	Lux AVG	Lux MAX
1	323.31	162.3	605.7
2	646.62	40.58	151.4
3	970.92	18.03	67.30
4	1285.23	10.14	37.85
5	1606.54	6.492	24.23

Angle: 116.20°

m	Φ cm	Lux AVG	Lux MAX
1	323.87	210.2	784.4
2	647.74	52.56	196.1
3	971.61	23.36	87.16
4	1287.49	13.14	49.03
5	1609.36	8.409	31.38

Angle: 116.29°



# SLICE LONG SERIES



**Slice Long 900**  
Surface mounted  
Matte White



**Slice Long 900**  
Surface mounted  
Matte Black



**Slice Long 900**  
Surface mounted  
Matte Silver



**Slice Long 1200**  
Surface mounted  
Matte White



**Slice Long 1200**  
Surface mounted  
Matte Black



**Slice Long 1200**  
Surface mounted  
Matte Silver



**Slice Long 1500**  
Surface mounted  
Matte White



**Slice Long 1500**  
Surface mounted  
Matte Black

## Slice Long 900

**Mounting:** Surface mounted

---

**Material:** Polycarbonate

---

**Finishes:** White / Black / Silver

---

**IP / IK Rating:** 54 / 10

---

**Lumens Flux:** 3200ml 32W / 2400ml 24W

---

**Voltage:** 220-240V AC / 216(186-260)DC

---

**Functions:** On/Off motion sensor, 90 mins @ 2W Emergency

---

**CCT:** 3000 / 4000K

---

**CRI:** >90

---

**SDCM:** <3

---

**Lifetime:** L80 / 50,000h

---

**Warranty:** 5 Years

---

**Dimming options:** No Dim / DIM / DALI (DL6)



m	Φ cm	Lux AVG	Lux MAX
1	338.06	188.5	720.0
2	654.12	47.12	180.0
3	996.19	20.94	80.00
4	1328.25	11.78	45.00
5	1660.31	7.539	28.80

Angle: 117.88°

m	Φ cm	Lux AVG	Lux MAX
1	328.42	207.3	792.7
2	656.84	51.83	198.2
3	985.26	23.04	88.07
4	1313.68	12.96	49.54
5	1642.10	8.293	31.71

Angle: 117.32°

m	Φ cm	Lux AVG	Lux MAX
1	327.07	243.7	927.1
2	654.14	60.92	231.8
3	981.21	27.08	103.0
4	1308.28	15.23	57.94
5	1635.35	9.748	37.08

Angle: 117.11°

m	Φ cm	Lux AVG	Lux MAX
1	334.23	265.6	1016
2	660.47	66.41	254.0
3	990.70	29.52	112.9
4	1320.93	16.60	63.49
5	1651.17	10.63	40.84

Angle: 117.60°

## Slice Long 1200

**Mounting:** Surface mounted

---

**Material:** Polycarbonate

---

**Finishes:** White / Black / Silver

---

**IP / IK Rating:** 54 / 10

---

**Lumens Flux:** 3800ml 38W / 2900ml 29W

---

**Voltage:** 220-240V AC / 216(186-260)DC

---

**Functions:** On/Off motion sensor, 90 mins @ 2W Emergency

---

**CCT:** 3000 / 4000K

---

**CRI:** >90

---

**SDCM:** <3

---

**Lifetime:** L80 / 50,000h

---

**Warranty:** 5 Years

---

**Dimming options:** No Dim / DIM / DALI (DL6)



m	Φ cm	Lux AVG	Lux MAX
1	418.26	160.6	794.7
2	836.53	40.14	198.7
3	1242.79	17.84	88.30
4	1657.06	10.04	49.67
5	2071.32	6.423	31.79

Angle: 128.46°

m	Φ cm	Lux AVG	Lux MAX
1	418.53	163.5	814.5
2	837.05	40.87	203.6
3	1240.58	18.16	90.50
4	1654.11	10.22	50.90
5	2067.63	6.539	32.58

Angle: 128.38°

m	Φ cm	Lux AVG	Lux MAX
1	418.68	204.8	1013
2	833.35	51.21	253.3
3	1250.03	22.76	112.6
4	1666.71	12.80	63.33
5	2083.38	8.193	40.53

Angle: 128.72°

m	Φ cm	Lux AVG	Lux MAX
1	418.80	209.8	1045
2	827.51	52.46	261.2
3	1241.41	23.31	116.1
4	1655.21	13.11	65.29
5	2069.01	8.393	41.79


Angle: 128.41°

## OVERVIEW


A complete range of ceiling luminaires with an aesthetics, clear and modern design

### SLICE SERIES

Circle

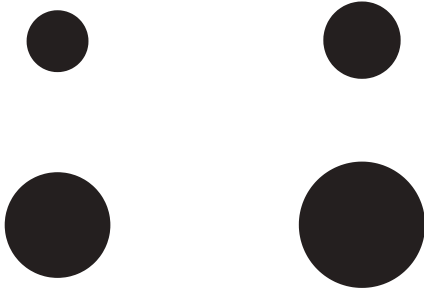

Square

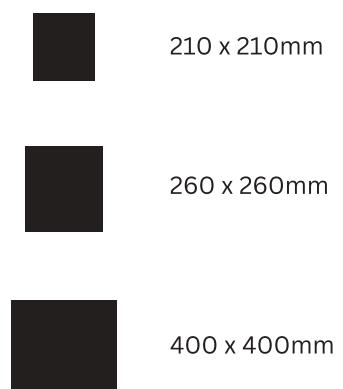

Long



### PURA TRIM SERIES

Round



### PURA BUILD-ON 150

Round



### DISC SERIES

Round







## MOUNTING

### Versatile application, suitable for any project.


All Purati products can be installed in a few simple steps. Drivers are integrated in the product or already connected and ready to use. No rewiring is necessary. The luminaires can be mounted easily using just a few screws. All luminaires come with easy-to-use mounting brackets or push lock or turning lock systems. Whether they are mounted, recessed, pendant or on track, a special kit comes along to make the installation easy and more efficient.




On the ceiling




On the wall



On the track



Pendant



Recessed

---

Carefully selecting designed a full range of accessories suitable for multiple application fields.

Depending on your structural engineering requirement can the Purati Luminaires mounted, built-in or to be semi-built in and on the track.

Using specific pendant sets the Purati extension becomes architecturally convincing pendant luminaires.

#### Accessories

- Pendant kit
- Recessed kit
- Track kit

## FUNCTIONS

Creating a smart design for all in one base to enable you to deliver unlimited functions

### EMERGENCY LIGHTS

Emergency lights from switch automatically between normal operation and emergency operation.

- Normal operation from a mains voltage > 180V
- Emergency operation from a mains voltage < 155V +/- 10V



Emergency lights from Purati have an internal clock showing 48 hours starts after the first installation. Monthly and annually, the Emergency lights including the battery tested automatically. Monthly switch the emergency lights 120s to emergency operation, the battery discharged. Both can also be carried out manually



Precisely designed for 360 degrees integrated PIR motion sensor on Slice Circle 220, 270.

### SENSOR LIGHTS

High frequency sensor lights from Purati come both in buildings as well as outdoors for use. Active motion sensors send high-frequency magnetic signals waves (5.8 GHz), receive their Echo again and lets at smallest movements in the detection area turn on the light. The sensors can move through thin walls, Detect glass panes and doors.



The corridor function complements the high-frequency sensor-controlled lights from the Purati lights and lowers the light intensity Don't use parts of the corridor. These lights can be controlled via DIP switches can be set precisely: distance, time, twilight and for the corridor function time and dimming level. Inner part sensor light Setting options sensor light. Available in all shapes (round, square and long), colors and sizes.

## INSTALLATION


### Ease Installation System

Redesign for internal plug connection wiring, only 5 minutes faster to install, thanks to the easy-to-install click system save you valuable time during installation

### Installation Key Features



- Center mounting holes with rubber grommets
- Side cable entry center cable entry for easier installation
- Power switch & Color switch



- Redesign plug connection wiring and click & push release makes it fast and easy to install
- Design a hook to link for drop protection
- Non-flickering build-in driver features plug connection wiring for easy installation

---

#### NEED MORE INFORMATION ON A SPECIFIC PRODUCT?

Download the specification sheet from the product pages on our website for technical further information such as; Installation instructions, IES files, product images and line drawings.



# INTERESTED?

Contact us for samples

## Head Office

Unit 10, 80 O'Riordan Street,  
Alexandria NSW 2015

## Phone

+61 2 8065 8181

## Sales

[sales@purati.com](mailto:sales@purati.com)

Follow us



Unique & performance

This work is subject to copyright  
All rights reserved  
Permission of the copyright owner must  
be obtained for any kind of use

Copyright © 2023 Purati

