

Hikvision Distribution Brochure for

HOT-SELLING PRODUCTS




2025 H2

HIKVISION®

About Hikvision

Hikvision is committed to serving various industries through its cutting-edge technologies of IoT perception, artificial intelligence, and big data, leading the future of AIoT.

R&D Investment

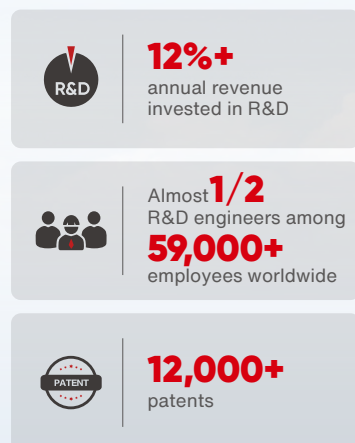

Leading the Future of AIoT

Breakthroughs in large-scale and multimodal AI models are powering the rapid spread of intelligent applications and blurring the boundary between the physical and digital worlds. Hikvision harnesses this momentum through a three-stage framework that drives scenario-based digitalization beyond security.



Perception Bridge

IoT Perception

Push the boundaries of IoT perception technologies that serve as a “bridge” between the physical and digital worlds.



Intelligence Engine

Artificial Intelligence

Enhance product intelligence by transforming perception data into structured, meaningful insights for scenarios and business needs.



Value Amplifier

Big Data

Foster big-data analytics integration with IoT perception, enabling effective data organization and analysis to unlock full value.

CONTENTS

01 CCTV

- 01 CCTV Highlights
- 04 Network Cameras
- 13 Cable-Free Series
- 15 Thermal
- 16 NVR
- 19 Turbo HD
- 22 DVR
- 23 Display
- 24 UPS & Cable

44 SOFTWARE

- 44 Hik-Partner Pro
- 44 Hik-Connect

25 NON-CCTV

- 25 Video Intercom
- 28 Access Control
- 30 Wireless Alarm System
- 34 Entrance & Exit Management
- 36 Audio
- 39 Networking
- 42 Commercial Displays

45 SMB SOLUTIONS

- 47 SMB Solution for Shops
- 49 SMB Solution for Offices
- 51 SMB Solution for Villas

CCTV Highlights

ColorVu 3.0

HikAI-ISP uses AI noise reduction to capture dynamic scenes with sharp and vibrant details, even in low light. 3D LUT color correction ensures accurate color calibration and precise color matching. Additionally, AI WDR enables the camera to automatically decide whether to activate WDR based on the brightness of the environment.



AcuSense 3.0

AcuSearch allows users to easily locate an object of interest with a single click and access the relevant footage immediately. Upgrades to both the perimeter protection and Motion Detection 3.0 algorithms have greatly reduced false alarms, minimizing the repeated detection of stationary cars exposed to lights at night.



Motion Detection 3.0

Motion Detection 3.0 reduces false alarms by up to 80% with algorithm upgrades.



Audio 2.0

Arrayed Dual-Mic delivers excellent noise reduction, enhancing vocal clarity and audio quality. Smart Power Amplifier (PA) speaker system provides wider sound coverage, better warning capabilities, and optimal two-way audio.



Motorization 3.0

After PTRZ introduced the era of Motorization 2.0, Motorization 3.0 is characterized by Point-to-Point Zoom, which combines 2.8 mm and 4 mm focal lengths into a single lens and camera system, simplifying product selection and inventory.



One Cable, Two Video Channels

Dual-Lens Point-to-Point Zoom Turret Network Camera design reduces deployment costs with a single installation, requiring only one IP address and providing two video channels. It offers flexible coverage, wide-angle monitoring, and detailed capture to address the dynamic security needs of various SMB scenarios.



AOV (Always on Video)

The camera continuously records video. It uses low frame rates during normal periods and switches to high frame rates during critical events to capture essential details.



EasyLink Wi-Fi Kit

The kit features Wi-Fi 6 for enhanced wireless connections, significantly reducing latency and buffering. It includes dedicated network video storage, offering secure, centralized storage and supporting up to 512 GB SD card capacity.



User-Friendly Cameras

○ Innovative Socket Design

The innovative structure for connecting and routing the cables inside the camera housing enables neat installation and IP67 water resistance, eliminating the need for junction boxes. A quick mounting plate is included, making the camera installation process easier.




○ PTRZ

Dome cameras have evolved from single-axis zoom to multi-axis control: pan, tilt, rotate, zoom, plus a fifth axis for advanced lighting. This enables complete area coverage with smart lighting control.



○ PT

Pan and tilt allows flexible adjustment of the monitoring angle and offering a larger field of view, and supports auto tracking to acquire richer event information.

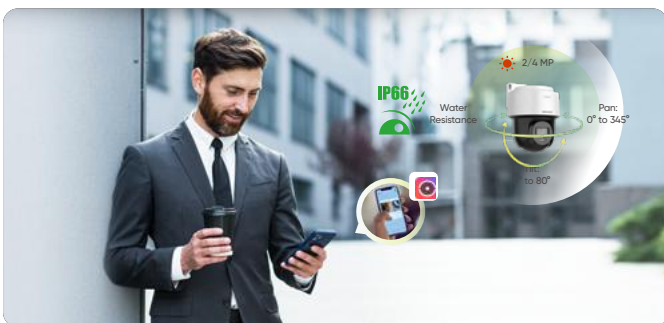

Easy-to-Use DVRs & NVRs

○ Easy Installation

HDD plug-and-play design: No wiring required for HDD installation.

5-step startup wizard: Complete device activation in just 5 steps within 1 minute. The interface is intuitive and easy to operate.



○ Easy Configuration

Effortless plug-and-play: Eliminates complex, time-consuming configurations when adding IP cameras. Multi-platform camera setup: Configure cameras across multiple platforms with ease.



○ Easy Operation

Smart video stream management: Say goodbye to "insufficient decoding resources." Adaptive stream adjustment enables live viewing of all channels in one view.

One-click activation/deactivation: Users can quickly enable or disable the alarm linkage with simple operation across multiple platforms.



○ Easy Maintenance

Retrieve & reset passwords in seconds: Hikvision provides several easy ways to retrieve passwords. OTA: Over-the-air upgrades for the EUI of NVRs and DVRs ensure that users can easily receive the latest system upgrades across multiple platforms.



NETWORK CAMERAS

Pro Series Network Cameras with ColorVu 3.0



ColorVu 3.0 AcuSense 3.0

DS-2CD20X763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD21X763-LIS2UY

- X=4/6/8 MP
- HiAI-ISP, 4 MP, 0.0001 lux @ F1.0
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD23X763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD2TX763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD26X763-LIS2UY/SL

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- HiAI-ISP, 4 MP, 0.0005 lux@F1.2
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

ColorVu 3.0 AcuSense 3.0

DS-2CD2HX763-LIS2UY/SL(RB)

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- HiAI-ISP, 4 MP, 0.0005 lux@F1.2
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging

Pro Series Network Cameras with Smart Hybrid Light



Smart Hybrid Light AcuSense 3.0

DS-2CD20X362-LI2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD21X362-LI

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- IP67, IK10



Smart Hybrid Light AcuSense 3.0

DS-2CD23X362-LI2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-LIS2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-2LI2U

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-4LI2U

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 80 m
- Arrayed Dual-Mic
- IP67

NETWORK CAMERAS

Pro Series Network Cameras with Smart Hybrid Light



Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD26X362-LIZS2U/SL(RB)

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, IK10



Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD27X362-LIZS2U/SL

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, IK10



NEW

Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD204362-LIZ2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD234362-LIZ2UY/SL(RB)

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD2T4362-LIZ2UY/SL(RB)

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Powered by **Hybrid Light** + **AcuSense 3.0**

DS-2CD2T4362-2(4)LIZ2UY

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60(-2I)/80(-4I) m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion

Pro Series Network Cameras with Powered by DarkFighter



NEW

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD204663-IZ2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD234663-IZS2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2T4663-IZS2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2T4663-2IZY

- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2T4663-4IZY

- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 80 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD20X662H-IU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67
- Eco-friendly Packaging

NETWORK CAMERAS

Pro Series Network Cameras with Powered by DarkFighter



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD21X6G2H-ISU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67, IK10
- Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD23X6G2H-IU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67
- Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2TX6G2H-2I

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 60 m
- IP67
- Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2TX6G2H-4I

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 80 m
- IP67
- Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD26X6G2HT-IZS

- 2.8-12 mm
- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 60 m
- IP67
- Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD26X6G2HT-IZS2U/SL(RB)

- Strobe light & audio alarm
- 2.8-12 mm, X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, Eco-friendly Packaging



Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2746G2HT-IZS

- 2.8-12 mm
- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10
- Eco-friendly Packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H46G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 4 MP, 0.001 lux@F1.0
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H66G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 6 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H86G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H46G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 0.001 lux@F1.0
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H66G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by
DarkFighter + **AcuSense 3.0**

DS-2CD2H86G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging

NETWORK CAMERAS

Pro Series Network Cameras with PTRZ



DS-2CD2747G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



DS-2CD2767G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



DS-2CD2787G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



DS-2CD2746G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10



DS-2CD2766G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10



DS-2CD2786G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10

Pro Series Network Cameras with Dual-Lens



NEW



DS-2CD2346G3D-IZ2UY/SL(RB)

- 1 cable, 1 IP, 2 channels
- Innovative socket design
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 30 m
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free packaging



NEW



DS-2CD2346G2D-LIZ2UY/SL(RB)

- 1 cable, 1 IP, 2 channels
- Innovative socket design
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.005 lux
- IR/white light up to 30 m
- IP67, NEMA 4X anti-corrosion



DS-2CD23X7G2P-LSU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6/8 MP
- 0.0005 lux@F1.0
- White light up to 30 m
- IP67



DS-2CD2TX7G2P-LSU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6/8 MP
- 0.0005 lux@F1.0
- White light up to 40 m
- IP67



DS-2CD23X6G2P-ISU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6 MP
- 0.003 lux@F1.6
- IR light up to 30 m
- IP67



DS-2CD2TX6G2P-ISU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6 MP
- 0.003 lux@F1.6
- IR light up to 40 m
- IP67

NETWORK CAMERAS

Pro Series Network Cameras with Dual-Lens



• NEW

Smart Hybrid Light Motion Detection 2.0

DS-2SE2C200MWG-E/12

- Mini TandemVu
- Strobe light & audio alarm
- 2 MP
- IP66
- Static channel: 2.8 mm, IR/white light up to 30 m
- PT channel: 6/8 mm, IR light up to 30 m



• NEW

Smart Hybrid Light Motion Detection 2.0

DS-2SE2C400MWG-E/14

- Mini TandemVu
- Strobe light & audio alarm
- 4 MP
- IP66
- Static channel: 2.8 mm, IR/white light up to 30 m
- PT channel: 6/8 mm, IR light up to 30 m

Special Pro Series Network Cameras



AcuSense 3.0

DS-2CD2955G0-ISU

- 1.05 mm
- Horizontal/vertical/diagonal FOV: 180°
- 5 MP
- 0.017 lux@F2.25
- IR light up to 8 m
- 120 dB



Powered by DarkFighter+ AcuSense 3.0

DS-2CD21X6G2-IMS

- Built-in Micro HDMI
- HDMI output: 50/60 Hz
- X=2/8 MP
- 2 MP, 0.002 lux@F1.4
- 8 MP, 0.003 lux@F1.6
- IR light up to 30 m
- 130 dB, IK10



AcuSense 3.0

DS-2CD2EX362-U

- Recessed installation
- X=2/4 MP
- 0.005 lux@F1.6
- Tilt: 0° to 75°
- 120 dB WDR

Value Series Network Cameras with ColorVu 3.0



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD10X7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67
- Two-way audio



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD13X7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67
- Two-way audio



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD1TX7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67
- Two-way audio



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD18X7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67
- Two-way audio



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD10X7G3H-LIUF

- X=2/4/6/8 MP
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67



• NEW

ColorVu 3.0 Motion Detection 2.0

DS-2CD13X7G3H-LIUF

- X=2/4/6/8 MP
- HiAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67

NETWORK CAMERAS

Value Series Network Cameras with ColorVu 3.0



• NEW

ColorVu 3.0
Motion Detection 2.0

DS-2CD1TX7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67



• NEW

ColorVu 3.0
Motion Detection 2.0

DS-2CD1BX7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67



• NEW

ColorVu 3.0
Motion Detection 2.0

DS-2CD11X7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67, IK08

Value Series Network Cameras with Dual-Lens



ColorVu
Dual-Lens
Two-Way Audio

DS-2CD1367G2HP-LIUF/SL(RB)

- 180° panoramic view
- Strobe light & audio alarm
- Two-way audio
- 6 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu
Dual-Lens
Two-Way Audio

DS-2CD1T67G2HP-LIUF/SL(RB)

- 180° panoramic view
- Strobe light & audio alarm
- Two-way audio
- 6 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



Dual-Lens
Two-Way Audio

DS-2CD1363G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 6 MP, 1/2.5" CMOS sensor
- 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens
Two-Way Audio

DS-2CD1383G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 8 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens
Two-Way Audio

DS-2CD1T63G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 6 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens
Two-Way Audio

DS-2CD1T83G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 8 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67

Value Series Network Cameras with ColorVu 2.0



ColorVu
Motion Detection 2.0

DS-2CD10X7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu
Motion Detection 2.0

DS-2CD13X7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu
Motion Detection 2.0

DS-2CD1TX7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 50 m
- IP67

NETWORK CAMERAS

Value Series Network Cameras with ColorVu 2.0



DS-2CD18X7G2H-LIUF/SL(RB)

- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 50 m
- IP67



DS-2CD11X7G2H-LIUF

- X=2/4/6 MP
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- Built-in Mic
- IP67, IK08

Value Series Network Cameras with Smart Hybrid Light



DS-2CD10X3G2-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67



DS-2CD13X3G2-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67



DS-2CD1TX3G2-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 50 m
- DWDR
- IP67



DS-2CD18X3G2-LIUF/SL

- X=2/4 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- DWDR
- IP67



DS-2CD11X3G2-LIUF

- X=2/4/6/8 MP
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67, IK08



DS-2CD16X3G2-LIZSU/SL

- X=2/4/6 MP
- 2.8-12 mm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 50 m
- DWDR
- IP67



DS-2CD17X3G2-LIZSU

- X=2/4/6 MP
- 2.8-12 mm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67, IK10

NETWORK CAMERAS

Value Series PT Network Cameras



Motion 2.0 Two-Way Audio

DS-2DE2C200MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 2 MP, 0.01 lux@F2.0
- IR/white light up to 30 m
- IP66



Motion 2.0 Two-Way Audio

DS-2DE2C400MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 4 MP, 0.01 lux@F2.0
- IR/white light up to 30 m
- IP66



Motion 2.0 Two-Way Audio

DS-2DE2C600MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 6 MP, 0.001 lux@F1.6
- IR/white light up to 30 m
- IP66

Value Series PTZ Cameras



NEW

AcuSense Technology

DS-2DE2A404IWG1-E

- 4 MP@25/30 fps, 4x optical zoom
- Pan: 0° to 355°, tilt: 0° to 90°
- IR range: 20 m
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66, IK10



NEW

AcuSense Technology

DS-2DE2A404IWG1-E/W

- 4 MP@25/30 fps, 4x optical zoom
- Pan: 0° to 355°, tilt: 0° to 90°
- IR range: 20 m
- Built-in microphone and speaker
- Wi-Fi communication
- Power-over-Ethernet
- IP66, IK10



NEW

ColorVu **AcuSense** Technology

DS-2DE3A400BW-DE

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Pan: 0° to 350°, tilt: 0° to 90°
- White light range: 30 m
- Strobe light and audio alarm
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66



ColorVu **AcuSense** Technology

DS-2DE3A404IWG-E

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Pan: 0° to 350°, tilt: 0° to 90°
- White light range: 30 m
- Strobe light and audio alarm
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66



TandemVu **AcuSense** Technology

DS-2SE3C404MWG-E/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 7°-17°
- PTZ: 4 MP@25/30 fps, 4x optical zoom, Pan: 0° to 350°, tilt: -5° to 90°
- Smart linkage between bullet camera and PTZ channels for Auto Tracking Lite
- Built-in microphone and speaker
- White light (30 m) and IR light (40 m)
- IP66



NEW

TandemVu **AcuSense** Technology

DS-2SE3C404MWG-4G/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, tilt: 7°-17°
- PTZ: 4 MP@25/30 fps, 4x optical zoom, Pan: 0° to 350°, tilt: -5° to 90°
- Smart linkage between bullet camera and PTZ channels for Auto Tracking Lite
- Built-in microphone and speaker
- White light (30 m) and IR light (40 m)
- 4G communication
- IP66

NETWORK CAMERAS

Pro Series PTZ Cameras



AcuSense
Technology

DS-2DE3C210IX-DE(C1)(0-STD)(T5)

- 1/2.8" 2 MP CMOS, 10x optical zoom
- 2 MP @25/30 fps
- AcuSense, people counting
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- Strobe light and audio alarm
- 50 m IR
- IP66



NEW

AcuSense
Technology

DS-2DE4425IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- 100 m IR
- IP67



NEW

AcuSense
Technology

DS-2DE4825IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- 100 m IR
- IP67



NEW

AcuSense
Technology

DS-2DE4A425IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto tracking 2.0
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -5° to 90°
- 50 m IR
- IP67



NEW

TandemVu Audio2C
AcuSense Technology

DS-2SE4C425MWG1-E/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm lens, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-E/26

- Panoramic: 2 x 1/2.5" CMOS, 6 MP, 180° FOV
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- 4 MP@25/30 fps
- Smart linkage between bullet and PTZ channels for auto tracking
- 30 m white light and 100 m IR
- IP66



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-E/RB/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- Red & blue strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-4G/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- 4G communication
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-E/14 (Black)

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360° (continuous rotation), tilt: -15° to 90°
- AcuSense
- Smart linkage between bullet and PTZ channels for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

AcuSense
Technology

DS-2DE5432IWG1-E

- 1/2.8" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 150 m
- IP67



NEW

AcuSense
Technology

DS-2DE7A432IWG1-E

- 1/1.8" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0
- White strobe light and audio alarm
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 200 m
- IP67, IK10



NEW

AcuSense
Technology

DS-2DE7A825IWG1-E

- 1/1.8" 8 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 8 MP@25/30 fps
- Auto Tracking 2.0
- White strobe light and audio alarm
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 200 m
- IP67, IK10

CABLE-FREE SERIES

EasyLink Wi-Fi NVS Kit



NKS422WBTH

2 MP Wi-Fi Bullet Camera
3 MP Wi-Fi PT Turret Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NKS422WBH

2 MP Wi-Fi Bullet Camera x2
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS422WBPH

2 MP Mini PT Camera
2 MP Wi-Fi Bullet Camera
4-chl NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS4245WBTH

4 MP Wi-Fi Bullet Camera
5 MP Wi-Fi PT Turret Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NKS424WBH

4 MP Wi-Fi Bullet Camera x2
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NKS424WBPH

4 MP Mini PT Camera
4 MP Wi-Fi Bullet Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NK842WBH

2 MP Wi-Fi Bullet Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NK844WBH

4 MP Wi-Fi Bullet Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NK844WDH

4 MP Wi-Fi Dome Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- People Detection
- Water and dust resistant (IP66)

CABLE-FREE SERIES

EasyLink Wi-Fi Cameras



• NEW

Wi-Fi 6 Motion 2.0

DS-2CFW06-P

- 3 MP+3 MP, 1/2.5"CMOS
- 180° Field of view
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Two-way audio
- IP67



• NEW

Wi-Fi 6 Motion 2.0

DS-2CFW06-D

- 3 MP+3 MP, 1/2.8"CMOS
- Panoramic and detail view
- Smart Tracking
- One-tap Privacy Mode
- IR/white light up to 10 m
- Two-way audio

Pro Solar-powered Security Camera Setup



• NEW

AOV

DS-2CFS04/4G

- 4 MP
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP 66



• NEW

AOV

DS-2CFSP4/4G

- 4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP 66



• NEW

AOV

DS-2CFSP8-D/4G

- 4 MP+4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio

THERMAL

HeatPro Series Thermal Cameras



• NEW

HM-TD2618/G0/T1A

- Thermal: 160 x 120@12 μ m, NETD < 25 mk
- Optical: 5 MP
- 100 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67, IK10



• NEW

HM-TD2628/G1/T3A

- Thermal: 256 x 192 @12 μ m, NETD < 25 mk
- Optical: 5 MP
- 120 m perimeter protection
- GUANLAN Large-Scale AI Model
- Smart Hybrid Light and audible warning
- IP67, IK10



• NEW

HM-TD1218/G0/T1A

- Thermal: 160 x 120@12 μ m, NETD < 25 mk
- Optical: 5 MP
- 70 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67



• NEW

HM-TD1228/G1/T3A

- Thermal: 256 x 192@12 μ m, NETD < 25 mk
- Optical: 5 MP
- 84 m perimeter protection
- GUANLAN Large-Scale AI Model
- Smart Hybrid Light and audible warning
- IP67



• NEW

HM-TD2628T/G1/T3A

- Thermal: 256 x 192@12 μ m, NETD < 25 mk
- Optical: 5 MP
- Anomaly temperature detection and smoke detection with GUANLAN Large-Scale AI Model
- -20 - 650°C temperature range with ± 2 °C or $\pm 2\%$ accuracy
- Smart Hybrid Light and audible warning
- IP67, IK10



• NEW

HM-TD1228T/G1/T3A

- Thermal: 256 x 192@12 μ m, NETD < 25 mk
- Optical: 5 MP
- Anomaly temperature detection and smoke detection with GUANLAN Large-Scale AI Model
- -20 - 650 °C temperature range with ± 2 °C or $\pm 2\%$ accuracy
- Smart Hybrid Light and audible warning
- IP67



HM-TD3028T/Q(B)

- 256x192@12 μ m, NETD < 40 mk; Optical 4Mp
- 90°/50° HFOV
- Anomaly temperature detection -20 - 550 °C temperature range with ± 2 °C or $\pm 2\%$ accuracy
- Smart whitelight supplement
- IP67



HM-TD3118T/Q

- 160 x 120@12 μ m, NETD < 40 mk
- 110°/90° HFOV
- Anomaly temperature detection -20 - 550 °C temperature range with ± 2 °C or $\pm 2\%$ accuracy
- IP67



HM-TD1017

- 160 x 120@17 μ m, NETD < 50 mk
- 110°/90° HFOV
- People number exception and people counting
- Healthy tracking for anomaly behavior detection
- 2.4 GHz Wi-Fi
- Tpye-C and PoE



HM-TD1018

- 160 x 120@12 μ m, NETD < 50 mk
- 90° HFOV
- People number exception and people counting
- Falling detection based on radar
- PoE



DS-2TD4228/S2

- 256 x 192@12 μ m, NETD < 35 mk;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection -20 - 150 °C temperature range with ± 8 °C accuracy
- Linkage smart tracking




DS-2TD4228T/S2

- 256 x 192@12 μ m, NETD < 35 mk;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection
- -20-550 °C temperature range with ± 2 °C or $\pm 2\%$ accuracy
- Linkage smart tracking

AcuSeek by Guanlan AI Model




AcuSeek

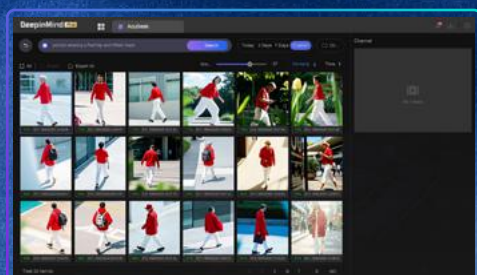

Search by Text


AcuSeek NVR supports natural-language-based video/image retrieval applications, allowing second-level retrieval on target images by inputting phrases or words.

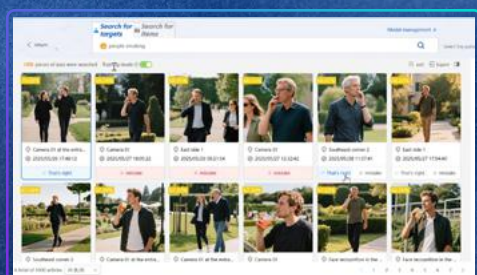

Manual Online Optimization

Allowing for manual correction of search results when an error is identified.

Note: Only supported by New DeepinMind NVR and Fusion Server Ultra

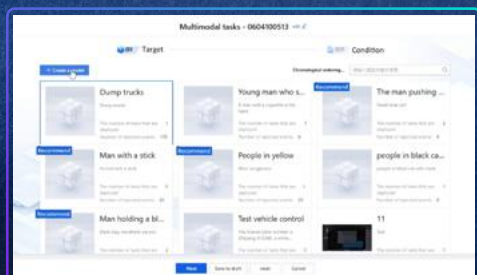

Self-Defined Application by Text

Supports text description of object features, quick initiation of warning tasks, and immediate alarm triggering once the object appears.

Note: Only supported by Fusion Server Ultra

NVR

I/VP Pro Series



NEW

AcuSeek

DS-7608NXI-I2(/8P)/VPro

- 8-ch IP video input; /P: PoE
- Up to 96 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7616NXI-I2(/8P)/VPro

- 16-ch IP video input; /P: PoE
- Up to 192 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7716NXI-I4(/8P)/VPro

- 16-ch IP video input; /P: PoE
- Up to 192 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7732NXI-I4(/16P)/VPro

- 32-ch IP video input; /P: PoE
- Up to 384 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC

I Series with AcuSense(E)



NEW

AcuSense
Technology

DS-7608NXI-I2(/8P)/S(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 4-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream



NEW

AcuSense
Technology

DS-7616NXI-I2(/16P)/S(E)

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 16-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream



NEW

AcuSense
Technology

DS-7732NXI-I4(/16P)/S(E)

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 32-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream

K series with AcuSense



NEW

AcuSense
Technology

DS-7604NXI-K1(/4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels for perimeter protection
- Up to 4 channels facial recognition for picture stream
- Up to 4 channels Motion Detection 2.0



NEW

AcuSense
Technology

DS-7608NXI-K1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 8 channels Motion Detection 2.0



NEW

AcuSense
Technology

DS-7608NXI-K2(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 8 channels Motion Detection 2.0

NVR

K series with AcuSense



• NEW

AcuSense
Technology

DS-7616NXI-K2(/16P)(E)

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 16 channels Motion Detection 2.0



• NEW

AcuSense
Technology

DS-7732NXI-K4(/16P)(E)

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 4 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 32 channels Motion Detection 2.0

76Q Series



• NEW

DS-7604NI-Q1(/4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 1-ch Motion Detection 2.0



• NEW

DS-7608NI-Q1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- Up to 4-ch Motion Detection 2.0



• NEW

DS-7608NI-Q2(/8P)(E)

- 16-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 2 SATA interface, up to 8 TB
- Up to 4-ch Motion Detection 2.0



• NEW

DS-7616NI-Q2(/8P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 1-ch Motion Detection 2.0

71Q Series



DS-7104NI-Q1(/4P)(D)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



DS-7108NI-Q1(D)

- 8-ch IP video input
- Up to 60 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



DS-7108NI-Q1/8P(D)

- 8-ch IP video input; /P: PoE
- Up to 60 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB

TURBO HD

ColorVu Cameras with Two-way Audio



NEW

ColorVu Two-Way Audio

DS-2CE10DF0T-LP(X)TS
DS-2CE10KF0T-LP(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-Way Audio

DS-2CE10DF0T-L(X)TS
DS-2CE10KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-Way Audio

DS-2CE12DF0T-L(X)TS
DS-2CE12KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-Way Audio

DS-2CE19DF0T-L(X)TS
DS-2CE19KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm, 6mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-Way Audio

DS-2CE72DF0T-LP(X)TS
DS-2CE72KF0T-LP(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-Way Audio

DS-2CE72DF0T-L(X)TS
DS-2CE72KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm

Smart Hybrid Light Cameras with Two-way Audio



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE16D0T-LP(X)TS
DS-2CE16K0T-LP(X)TS
DS-2CE16U0T-LP(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE16D0T-L(X)TS
DS-2CE16K0T-L(X)TS
DS-2CE16U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE17D0T-L(X)TS
DS-2CE17K0T-L(X)TS
DS-2CE17U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE19D0T-L(X)TS
DS-2CE19K0T-L(X)TS
DS-2CE19U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm, 6mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE78D0T-LP(X)TS
DS-2CE78K0T-LP(X)TS
DS-2CE78U0T-LP(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-Way Audio

DS-2CE78D0T-L(X)TS
DS-2CE78K0T-L(X)TS
DS-2CE78U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm

TURBO HD

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF3T-L(P)FS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE12DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE50DF3T-VPLFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF3T-LMFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF3T-LPFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion (NEMA4X)



DS-2CE12KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion design (NEMA4X)



DS-2CE72KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion design (NEMA4X)



DS-2CE12KF3TP-DLS

- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67



DS-2CE72KF3TP-DLS

- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67

TURBO HD

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF0T-LPFS
DS-2CE10KF0T-LPFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10DF0T-LFS
DS-2CE10KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE12DF0T-LFS
DS-2CE12KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LMFS
DS-2CE70KF0T-LMFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LPFS
DS-2CE70KF0T-LPFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF0T-LFS
DS-2CE72KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

Smart Hybrid Light Cameras



DS-2CE16D0T-L(P)FS
DS-2CE16G0T-L(P)FS
DS-2CE16K0T-L(P)FS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE17D0T-LFS
DS-2CE17G0T-LFS
DS-2CE17K0T-LFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE18D0T-LFS
DS-2CE18K0T-LFS

- 2 MP, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE76D0T-LPFS
DS-2CE76G0T-LPFS
DS-2CE76K0T-LPFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE76D0T-LMFS
DS-2CE76G0T-LMFS
DS-2CE76K0T-LMFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE78D0T-LFS
DS-2CE78G0T-LFS
DS-2CE78K0T-LFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

DVR

PowerX DVR



AcuSense Technology Two-Way Audio

iDS-7204HQHI-M1/XT

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 2 channels perimeter protection
- 1 channel facial recognition
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HQHI-M1/XT

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 8 channels AcuSearch
- 4 channels perimeter protection
- 2 channels facial recognition
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HQHI-M1/XT

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 16 channels AcuSearch
- 8 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 16 channels



AcuSense Technology Two-Way Audio

iDS-7204HUHI-M1/XT

- 4-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps(1-ch), 3K/5 MP@12 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 4 channels perimeter protection
- 2 channels facial recognition
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HUHI-M2/XT

- 8-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 8 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HUHI-M2/XT

- 16-ch analog video input
- Up to 32-ch IP video input
- Up to 4K/8MP@8 fps, 3K/5MP@12 fps encoding capability
- 2 SATA interfaces
- 16 channels AcuSearch
- 16 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 16 channels

Value Series



NEW

Two-Way Audio

DS-7104HGHI-M1/T

- 4-ch analog video input
- Up to 5-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 4 channels



NEW

Two-Way Audio

DS-7108HGHI-M1/T

- 8-ch analog video input
- Up to 10-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 8 channels



NEW

Two-Way Audio

DS-7116HGHI-M1/T

- 16-ch analog video input
- Up to 18-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 16 channels



AcuSense Technology Two-Way Audio

iDS-7204HQHI-M1/T

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 2 channels perimeter protection
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HQHI-M1/T

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels perimeter protection
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HQHI-M1/T

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels perimeter protection
- Motion Detection 2.0 for all 16 channels

DISPLAY

SOHO Monitors



DS-D5022F2-1V2
DS-D5022F2-1V2S

- 21.5"
- 1080p
- 250 nits
- 100 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker (Optional)
- HDMI, VGA, Headphone socket



DS-D5024F2-AV2
DS-D5024F2-BV2S

- 23.8"
- 1080p
- 250 nits
- 100 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker (optional)
- HDMI, VGA, Headphone socket



• NEW

DS-D5027F3-2P2
DS-D5027F3-2P2S

- 27"
- 1080p
- 300 nits
- 100 Hz refresh rate
- IPS Panel, 1300 : 1
- Built-in speaker (Optional)
- HDMI, VGA, Headphone socket

Security Monitors



DS-D5222F2-1V1S

- 21.5"
- 1080p
- 250 nits
- 75 Hz refresh rate
- VA Panel, 3000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, Headphone socket



DS-D5224F2-1V1S

- 23.8"
- 1080p
- 250 nits
- 75 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, Headphone socket



DS-D5227U3-1P0

- 27"
- 3840 × 2160 4K
- 350 nits
- 60 Hz refresh rate
- IPS Panel, 1200 : 1
- Display Port 1.4
- HDMI, Headphone socket



DS-D5032F3-1V0S

- 32"
- 1080p
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker
- HDMI, VGA, Headphone socket



DS-D5232F2-1V1S

- 32"
- 1080p
- 350 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, DVI, Headphone socket



DS-D5043F3-1V0S

- 43"
- 1080p
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB
- HDMI, VGA, Headphone socket

4K UHD Monitors



DS-D5043U3-1V0S

- 43"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB, DP
- HDMI, VGA, Headphone socket



DS-D5050U3-1V0S

- 50"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB
- HDMI, VGA, Headphone socket



DS-D5055U3-1V0S

- 55"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB, DP
- HDMI, VGA, Headphone socket

UPS & CABLE

Online Series UPS



UPS 1/2/3 KVA , with built-in battery

DS-UPS01K24-R/TJS(/X)
DS-UPS02K48-R/TJS(/X)
DS-UPS03K72-R/TJS(/X)

External battery pack

DS-UPSB0924B-R/TJ(C)
DS-UPSB0948B-R/TJ(C)
DS-UPSB0972B-R/TJ(C)

- High Power Factor up to 0.9
- Easy management with LCD display, local and remote monitoring
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and Emergency Power Off function (EPO)
- Rack & tower type switchable



UPS 6/10 KVA, without built-in battery

DS-UPS06K-R/TJL
DS-UPS10K-R/TJL

External battery pack

DS-UPSB09192A-R/TJ
DS-UPSB09240A-R/TJ

- High Power Factor up to 1.0
- Easy management with LCD display, local and remote monitoring
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and Emergency Power Off function (EPO)
- Rack & tower type switchable



UPS 1/2/3 KVA , with built-in battery

DS-UPS01K24-R/TS(/X)
DS-UPS02K48-R/TS(/X)
DS-UPS03K72-R/TS(/X)

External battery pack

DS-UPSB0924B-R/T(C)
DS-UPSB0948B-R/T(C)
DS-UPSB0972B-R/T(C)

- High Power Factor up to 0.9
- Easy management with LCD display, local and remote monitoring
- Comprehensive protection including surge / short circuit / overcharge / overdischarge protection and Emergency Power Off function (EPO)

Backup Series UPS



DS-UPS600(-x)
DS-UPS1000(-x)
DS-UPS2000(-x)
DS-UPS3000(-x)

- 600 VA/1000 VA/2000 VA/3000 VA
- Uninterrupted and stable power supply
- Built-in AVR supports automatic voltage regulation
- Wide input voltage range & frequency range
- Built-in sealed lead-acid battery
- Overload & short circuit protection

Network IT CCTV Rack Cabinet



DS-XSxxxx Series

- 19-inch international standard
- 4U/6U/9U/12U/18U/22U/27U/32U/37U/42U
- Depth from 450 to 1200 mm
- Made of high-quality cold-rolled sheet metal
- Designed to rack mount equipment for cabling, telecommunications, IT, data industrial, and office installations

Network Cables



Cat5e Cable – Indoor

DS-1LN5E-S

- Cat5e, U/UTP, 305 meters
- Oxygen-free Solid Copper (99.95%)
- Core diameter: 24 AWG
- Sheath: PVC, grey
- UL CM, CPR Eca



Cat6 Cable – Indoor

DS-1LN6U-G
DS-1LN6U-SCO
DS-1LN6U-UU

- Cat6, U/UTP, 305 meters
- Oxygen-free Solid Copper (99.95%)
- Core diameter: 23 AWG
- Sheath: PVC, grey/orange
- CPR Fca; UL CM, CPR Eca optional



Outdoor Options

Cat5e – DS-1LN5E0-UU/E
Cat6 – DS-1LN60UTPE


- U/UTP, 305 meters
- Oxygen-free Solid Copper (99.95%)
- Core diameter: 24 AWG
- Sheath: PE, black
- CPR Fca

Video Intercom - IP Series


A simple touch - Step up to a new level of convenience

Hikvision's IP Series Video Intercom System delivers a new level of convenience for a wide range of scenarios including apartments and suburban homes.


The IP Series products boast great image quality, along with mobile controls, friendly touchscreens, visualized interfaces, and more.

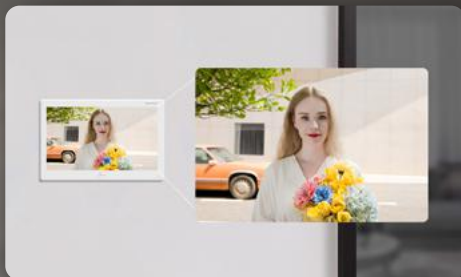

HD image quality

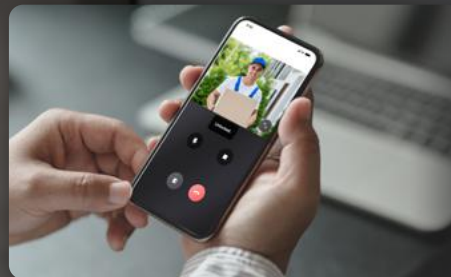

Mobile control

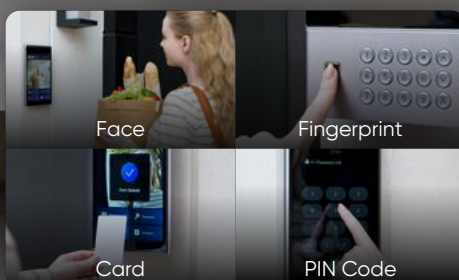

Intelligent authentication



Friendly touchscreen

VIDEO INTERCOM

IP Intercom Door Station



NEW

DS-KV6124-WBE1

- 4 MP camera
- Horizontal view: 150°, Vertical view: 75°
- One-press to call
- IR illumination, WDR
- IP66, PoE
- Built-in card reader module and keypad
- Convenient Hik-Connect App mobile control



DS-KV6133-WME1

- 2 MP camera, H: 129°, V: 75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control



DS-KV8113-WME1

- 2 MP camera, H: 124°, V: 75°
- One-press to call
- IR illumination, WDR
- IP65 & IK08, PoE
- Built-in card reader module
- Convenient Hik-Connect app mobile control

IP Indoor Station



DS-KH8350-WTE1

- 7" IPS touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH8381-WTE1

- 7" IPS touch screen, 1024 x 600
- 8-ch alarm inputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6350-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KH6110-WTE1

- 4.3" touch screen, 1024 x 600
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Easy and quick setup

VIDEO INTERCOM

IP Kit



DS-KIS603-P(C)

Door Station: DS-KV6113-WPE1(C)

- 2 MP camera, H: 131°, V: 78°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KIS604-P(C)

Door Station: DS-KV8113-WME1(C)

- 2 MP camera, H: 124°, V: 75°
- One-press to call
- IR illumination, WDR
- IP65 & IK08, PoE
- Built-in card reader module
- Convenient Hik-Connect app mobile control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control



DS-KIS608-P

Door Station: DS-KV6133-WME1

- 2 MP camera, H: 129°, V: 75°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect app mobile control

Indoor Station: DS-KH6350-WTE1 White

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages
- Elevator access control

2-Wire Kit



DS-KIS702Y

Door Station: DS-KD8003Y-IME2/Surface

- 2 MP camera, H: 146°, V: 82°
- One-press to call
- IR illumination, WDR
- IP65
- Modular design

Indoor Station: DS-KH6320Y-WTE2

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages

Distributor: DS-KAD704Y

- Supports cascading
- Din rail mounting



KIS703Y-P

Door Station: DS-KB2412T-IM

- 2 MP camera, H: 140°, V: 85°
- One-press to call
- IR illumination
- IP65

Indoor Station: DS-KH6320Y-WTE2

- 7" touch screen, 1024 x 600
- 2-wire digital IP
- 8-ch alarm inputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect app mobile control
- Supports voice messages



DS-KIS704EY

Door Station: DS-KH7300EY-WTE2/White

- 2 MP camera, H: 133°, V: 82°
- One-press to call
- IR illumination, WDR
- IP65, IK08
- Modular design

Indoor Station: DS-KD7003EY-IME2

- 7" touch screen, 1024 x 600
- 2-wire HD
- 1-ch alarm input
- Wi-Fi
- Convenient Hik-Connect app mobile control
- Real plug & play

Distributor: DS-KAD7040EY

- 4 interface indicators show device status, 1 Reset button
- Din rail mounting

4-Wire Kit



4-Wire HD DS-KIS213

Door Station: DS-KB2422T-IM

- 2 MP camera, H: 117°, V: 70°
- HD TVI video quality
- IP65, metal
- One-press to call
- 4-wire plug & play interfaces

Indoor Station: DS-KH2230T

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play interfaces
- Supports monitoring door station and external analog camera



4-Wire Analog DS-KIS203T

Door Station: DS-KB2421T-IM

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, anti-oxidant aluminum alloy

Indoor Station: DS-KH2220

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Hybrid DS-KIS313-P

Door Station: DS-KB2422T-IM

- 2 MP camera, H: 117°, V: 70°
- HD TVI video quality
- IP65, metal
- One-press to call
- 4-wire plug & play interfaces

Indoor Station: DS-KH6352-WTDE6

- 7" touch screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play interfaces
- Wi-Fi
- Convenient Hik-Connect app mobile control

Access Control

MinMoe Face Recognition Terminal

Superior recognition in any environment

Recognition speed < 0.2 s & accuracy rate > 99%

Easy to manage and operate

Multiple authentication methods, web/GUI configuration, Hik-Connect mobile control

Top level security

Face anti-spoofing, user data encryption & optional privacy protection mode

Extensive functionality via one device

Video security, intercom & access control integrated in one



ACCESS CONTROL

MinMoe Face Recognition Terminal



DS-K1T320 Series

- 2.4-inch non-touch screen
- Memory capacity: 500 users; 500 faces; 1,000 cards; 1,000 fingerprints
- TCP/IP, Wi-Fi (optional), USB
- PC & Mobile web (AP mode)
- On-device attendance



DS-K1T321 Series

- 2.4-inch non-touch screen
- Memory capacity: 500 users; 500 faces; 3,000 cards; 3,000 fingerprints
- TCP/IP, Wi-Fi (optional), RS-485, USB
- PC & Mobile web (AP mode)
- On-device attendance



• NEW

DS-K1T323 Series

- 2.4-inch non-touch screen
- Memory capacity: 1,000 users; 1000 faces; 3,000 cards; 3,000 fingerprints
- TCP/IP, Wi-Fi (optional), Wiegand, Bluetooth
- PC & Mobile web (AP mode)
- PoE
- IP65



DS-K1T343 Series

- 4.3-inch touch screen
- Memory capacity: 1,500 users; 1,500 faces; 3,000 cards; 3,000 fingerprints
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, USB
- PC & Mobile web
- On-device attendance



DS-K1T342 Series

- 4.3-inch touch screen
- Memory capacity: 1,500 users; 1,500 faces; 3,000 cards; 3,000 fingerprints
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, USB
- PC & Mobile web
- PoE
- IP65



• NEW

DS-K1T344 Series

- 4.5-inch touch screen
- Memory capacity: 3,000 users; 3000 faces; 3,000 cards; 3,000 fingerprints
- TCP/IP, Wi-Fi (optional), RS-485, Wiegand, Bluetooth, USB
- PC & Mobile web (AP mode)
- Alarm in/out
- PoE
- IP65

Access Control Terminal



DS-K1T502 Series

- Multi-function: access control, video, and video intercom
- Card: 100,000
- Fingerprint: 10,000
- AP mode
- Web configuration (PC & Mobile)
- HC management
- IP65, IK09



• NEW

DS-K1T510 Series

- Multi-function: access control, video, and video intercom
- Card: 10,000
- Fingerprint: 3,000
- AP mode
- Web configuration (PC & Mobile)
- PoE
- IP65



• NEW

DS-K1T807 Series

- Access control
- 2.4-inch non-touch LCD screen
- Card: 5,000
- Fingerprint: 5,000
- AP mode
- Web configuration (Mobile)
- PoE
- IP65



DS-K1T805 Series

- Access control
- Card: 10,000
- Fingerprint: 3,000
- AP mode
- Web configuration (PC & Mobile)
- HC management
- IP65, IK08



• NEW

DS-K1T808 Series

- Access control
- 2.4-inch LCD screen
- Card: 3,000
- Fingerprint: 3,000
- AP mode
- Web configuration (PCS Mobile)



• NEW

DS-K1T809 Series

- Access control
- User: 1,000
- Card: 1,000/5,000
- AP mode
- Web configuration (Mobile)
- IP65

Wireless Alarm System - AX PRO Series

Simplicity through innovation

Seamless ARC connection

- Wi-Fi, LAN, 2G or 4G automatically switching for seamless connection
- Supports 2 ARC connection for redundancy

Audio + video verification

- Full-duplex intercom for instant communication
- Stay informed with real-time visual verification

Cutting-edge RF tech

- TRI-X & CAM-X working independently, for stable ultra-long distance wireless transmission
- Extended transmission distance with great reliability, up to 2,000 m



INTRUSION ALARM – AX HOME

AX HOME Series



• NEW

AX HOME Control Panel

DS-PA201PS-16WB
DS-PA201PS-32WE

- Budget-friendly
- 2000 m transmission distance
- Low power consumption & data usage
- Installation wizard
- User-friendly app
- Hassle-free installation
- Supports 24/7 monitoring with alarm response



Wireless Keyfob

DS-PKF201-WE/WA/WB

- Remote Arm/Disarm
- Custom keys for more advanced operations
- 900/500 m transmission distance
- Up to 2 years battery life



Wireless LED Keypad

DS-PK201B-WE/WA/WB

- One-Push FIRE, PANIC, and MEDICAL alarm
- Duress code used in emergency situation
- 1200/1000 m transmission distance
- LED indication for the system status
- Up to 2 years battery life



Wireless Magnetic Contact

DS-PD201MC-WE/WA/WB

- Door opening detection
- 25 mm gap detection
- 1600 / 1200 m transmission distance
- Up to 2 years battery life



Wireless PIR Detector

DS-PD201P10-WE/WA/WB

- Detection range: 10m / 90°
- 2 ~ 2.4 m mounting height
- 1600 / 1200 m transmission distance
- Up to 24 Kg pet immunity
- 3 levels sensitivity, High/Normal/Low
- Up to 2 years battery life



Wireless PIR-CAM Detector

DS-PD201PC10-WE/WA/WB

- Detection range: 10m / 90°
- 2 ~ 2.4 m mounting height
- 1600 / 1200 m transmission distance
- Up to 10 Kg pet immunity
- Picture verification
- Up to 2 years battery life



Wireless Sounder Indoor

DS-PS201-WE/WA/WB

- Strobe light and audio alarm
- 80-95 dB at 1 m distance
- 1600 / 1200 m transmission distance
- FIRE, PANIC, MEDICAL and INTRUSION alarm
- Blue/red version available
- Up to 2 years battery life



AX HOME Kit

the kit includes:

- Control panel
- Keypad
- PIR
- Magnetic contact
- Sounder indoor
- Keyfob
- AA batteries
- Screw package & sponge tape



AX HOME Kit

the kit includes:

- Control panel
- PIR
- Magnetic contact
- Keyfob
- AA batteries
- Screw package & sponge tape

INTRUSION ALARM – AX PRO

AX PRO Series



AX PRO Control Panel
DS-PWA96-M-WE/WB

- TCP/IP, Wi-Fi, and 3/4G network
- Video verification by mobile app
- Voice guide
- Supports 24/7 monitoring with alarm response
- Kits available



Wireless PIR-Camera Detector
DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12 m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life



Wireless PIR Detector
DS-PDP15P-EG2-WE(B)/WB(B)

- Detection range: 12 m / 85.9°
- 1600 / 1200 m transmission distance
- 3D optics design for creep zone detection
- Up to 5 years battery life



Magnetic Contact
DS-PDMC-EG2-WE(B)/WB(B)

- Door opening detection
- 42 mm gap detection
- 1600 / 1200 m transmission distance
- Up to 5 years battery life



• NEW

Wireless Double PIRCAM Detector
DS-PDPC18-HM-WE/WB

- 2 PIR
- Up to 20 pictures for verification
- Detection range and angle: 18 m/90°
- Up to 800 m transmission range
- Up to 3 years battery life



• NEW

Wireless Smoke Detector Smoke & Heat & CO
DS-PD452SMK-WE/WB

- Detection range: 30-80, 4-12 m
- ≥ 85 dB
- Up to 1,000 m transmission range
- Up to 3 years battery life



Wireless LCD Keypad
DS-PK1-LT-WE/WB

- LCD screen and LED to indicate system status
- 1200 / 800 m transmission distance
- Up to 2 years battery life



Wireless Keyfob
DS-PKF1-WE(B)/WB(B)

- Quick arm / disarm
- 900 / 500 m transmission distance



Wireless External Sounder
DS-PS1-E-WE/WB

- 110 dB
- 1,200 / 900 m transmission distance



• NEW

Wireless Intercom Sounder Plus
DS-PS403I-WE/WB

- Supports full-duplex
- Up to 800 m transmission range
- 85-105 dB
- Up to 4 years battery life



Wall Switch
DS-PM1-01H-WE/WB

- Smart design for putting into hiding places
- Automation operating, one button turn on/off from app / Keyfob / Keypad
- Supports setting scenarios by different events

FIRE ALARM SYSTEM

Fusion Camera



HF-VH243

- High temperature/differential temperature alarm
- Real-time temperature display
- 10+ AI algorithms to detect flame, smoke, smoking behaviors, on/off duty, exit channel blockage



HF-VR343

- Sensitive detection of CO2 released from burning materials
- 10+ AI algorithm to detect flame, smoke, smoking behaviors, on/off duty, exit channel blockage



HF-VT343

- Fire check mode to achieve low false alarms
- Non-contact temperature measurement
- 10+ AI algorithms to detect flame, smoke, smoking behaviors

Standalone Alarm



HF-S3E-R(8)

- 8 Years Interlinked Smoke Alarm



HF-S3-WF

- 3 Years Wi-Fi Smoke Alarm

Conventional FAS



HF-C104(8)

- Conventional fire alarm system is made up of one control panel and multiple detectors. The system divides the building into different sections, and the panel can identify the location of fire.

Vehicle Access Control Management Portfolio

Easy and efficient vehicle access control



Easy deployment



Seamless vehicle access



Precise plate recognition



Centralized management



VEHICLE ACCESS CONTROL MANAGEMENT

ANPR Camera



DS-TC6406-E

- 4 MP 1/1.8" progressive scan CMOS sensor
- Embedded IR and white supplement lights
- Supports ANPR, vehicle type / color / brand recognition
- Supports Wiegand for integration with access control systems



• NEW

DS-TMC200-E1

- 2 MP 1/3" progressive scan CMOS sensor
- Optional IR/white supplement lights
- Customizable multi-language LED display & voice broadcast
- Supports ANPR, vehicle type / color / brand recognition
- All-in-one, plug-and-play design

Entrance & Exit Radar



DS-TM6035

- 60/79 GHz MMIC with higher resolution and more stable detection
- Able to recognize target's moving direction
- Convenient installation and maintenance featuring quick deployment and low manual input
- Strong environmental adaptability
- Instruction on App

Barrier Gate



• NEW

DS-TM6320

- Motor: DC brushless motor
- Mean Cycles Between Failure(MCBF): 2,500,000
- Supports Bluetooth connection with App for barrier gate configuration
- Maximum rising speed 3 m@3 s
- Standardized chuck, one chuck fits all types of boom pole
- Rightward/leftward direction



• NEW

DS-TM6320/B

- Motor: DC brushless motor
- Mean Cycles Between Failure(MCBF): 2,500,000
- Supports Bluetooth connection with App for barrier gate configuration
- Maximum rising speed 3 m@3 s
- Standardized chuck, one chuck fits all types of boom pole
- Rightward/leftward Direction
- Body indicator



• NEW

DS-TM6001-3D

- 3/4 m Octagonal Pole
- 2.6-4 m Telescopic Pole
- 3.6-6 m Telescopic Pole



• NEW

DS-TM6002-3D

- 1.5+1.5 m Folding Pole
- 2+2 m Folding Pole
- 2.5+2.5 m Folding Pole



• NEW

DS-TM6001-6L

- 3/4 m light pole with reinforced wall thickness



• NEW

DS-TM6002-6L

- 1.5 m+1.5 m/ 2 m+2 m light folding pole with reinforced wall thickness

Notes: All the boom poles are normal boom poles without anti-collision function. For anti-collision function, please order anti-collision accessories separately.

UHF System



DS-TRI900-1/A

- 840 to 960 MHz (Optional) working frequency
- Reading distance up to 9 m
- Wiegand 34/26
- Universal wall-mounted or pole
- Mount bracket



DS-TRC902-1/A

- Single-band/Dual-band
- Working frequency: 860-960 MHz
- 10 years data life



DS-TME200-D/P

- Embedded Linux operation system
- Supports Entrance Exit management of 4 lanes
- Massive storage with 50,000 cards information and 50,000 card swiping records
- Supports 4 Wiegand interface for accessing card reader

Audio

Smarter audio, made easy

Hikvision audio products feature diverse broadcasting modes, offering versatility for various contexts. From live and scheduled broadcasts to alarm linkage and emergency mustering-linked broadcasts, these audio products seamlessly meet your needs.

Whether used for background music, security protection, or paging and notifications, Hikvision audio products are designed to effectively convey crucial messages.

TTS
(text-to-speech)



Built-in
eMMC



Easy
Operation & Maintenance



Two-way
Audio



Video & Audio
Linkage



Multiple
Broadcast Modes



AUDIO – Public Address

Network Audio



DS-QAZ1307G1T-E(C)

- Rated Power: 7 W
- Max. Acoustic Pressure: 121 dBSPL
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio



DS-QAZ1325G1T-E

- Rated Power: 25 W
- Max. Acoustic Pressure: 124 dBSPL
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio



DS-QAZ1120G1R-B(/BLACK)

- Rated Power: 20 W
- Full frequency 5.25" × 1
- Max. Acoustic Pressure: 103 dBSPL
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Supports up to 1 x 20 W sub speaker



• NEW

DS-QAZ1606G1-BE(/BLACK)

- Rated Power: 6 W
- Full frequency 6.5" × 1
- Max. Acoustic Pressure: 94 dBSPL
- Frequency Response: 140 Hz to 15 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Supports up to 6 x 6 W sub speakers



• NEW

DS-QAZ1610G1-BE(/BLACK)

- Rated Power: 10 W
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 98 dBSPL
- Frequency Response: 120 Hz to 20 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Supports up to 4 x 6 W sub speakers



• NEW

DS-QAZ1630G1-BE(/BLACK)

- Rated Power: 30 W
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 104 dBSPL
- Frequency Response: 80 Hz to 20 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio



• NEW

DS-QAZ1506G1-BE(/BLACK)

- Rated Power: 6 W
- Full frequency 6.5" × 1
- Max. Acoustic Pressure: 94 dBSPL
- Frequency Response: 140 Hz to 15 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Suitable for no-ceiling scenarios



• NEW

DS-QAZ1510G1-BE(/BLACK)

- Rated Power: 10 W
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 98 dBSPL
- Frequency Response: 120 Hz to 20 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Suitable for no-ceiling scenarios



• NEW

DS-QAZ1530G1-BE(/BLACK)

- Rated Power: 30 W
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 104 dBSPL
- Frequency Response: 80 Hz to 20 kHz
- Supports live/scheduled/alarm/emergency broadcast
- Supports 2-way audio
- Suitable for no-ceiling scenarios



• NEW

DS-QAZ0606G1-S(/BLACK)

- Rated Power: 6 W
- Full frequency 6.5" × 1
- Max. Acoustic Pressure: 94 dBSPL
- Frequency Response: 140 Hz to 15 kHz
- Supports connection to main speaker



• NEW

DS-QAZ0610G1-S(/BLACK)

- Rated Power: 10 W
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 98 dBSPL
- Frequency Response: 120 Hz to 20 kHz
- Supports connection to main speaker



DS-QAE1A80G1-VB

- Supports live / schedule broadcast
- Supports alarm input / alarm schedule / audio linkage
- Multiple audio input: MIC/USB/Bluetooth/RCA
- Supports 2-zone content / volume adjustment
- Built-in eMMC

AUDIO – Public Address

Analog Audio



• NEW

DS-QAE0KA60206-4

- Analog Audio Kit with 60 W Analog Amplifier and 4 x 6 W Ceiling Speakers
- 4 types of audio input: Microphone, RCA, Bluetooth, and USB flash drive
- Independent microphone volume control and two-channel output partition volume control



• NEW

DS-QAE0KA60120-2

- Analog Audio Kit with 60 W Analog Amplifier and 2 x 20 W Cabinet Speakers
- 4 types of audio input: Microphone, RCA, Bluetooth, and USB flash drive
- Independent microphone volume control and two-channel output partition volume control



DS-QAE0120G1R(BLACK)

- Rated Power:
- 70 V: 5 W/10 W/15 W/20 W
- 100 V: 5 W/10 W/15 W/20 W
- Max. Acoustic Pressure: 103 dB SPL
- Frequency Response: 130 Hz to 17.5 kHz



DS-QAE0206G1-V

- Rated Power: 6 W
- Full frequency 5.25" × 1
- Max. Acoustic Pressure: 98 dB SPL
- Rated Power: 6 W
- Frequency Response: 90 Hz to 20 kHz
- Supports speaker spring terminal audio line input



DS-QAE0210G1-V

- Adjustable Power: 5/10 W
- Full frequency 5" × 1
- Max. Acoustic Pressure: 104 dB SPL
- Frequency Response: 80 Hz to 20 kHz



DS-QAE0215G1-V

- Adjustable Power: 10/15 W
- Coaxial tweeter 5" × 1
- Max. Acoustic Pressure: 106 dB SPL
- Frequency Response: 70 Hz to 18 kHz



• NEW

DS-QAZ0610G1(/BLACK)

- Rated Power:
- 70 V: 10 W/5 W/2.5 W/1.25 W
- 100 V: 10 W/5 W/2.5 W
- 8 Ω
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 98 dB SPL
- Frequency Response: 120 Hz to 20 kHz
- Supports audio line input



• NEW

DS-QAZ0630G1 (/BLACK)

- Rated Power:
- 70 V: 10 W/5 W/2.5 W/1.25 W
- 100 V: 10 W/5 W/2.5 W
- 8 Ω
- Tweeter 1" × 1, Woofer 6.5" × 1
- Max. Acoustic Pressure: 104 dB SPL
- Frequency Response: 80 Hz to 20 kHz
- Supports audio line input



DS-QAE0330G1T-V

- Rated Power:
- 70 V: 2.5 W/5 W/7.5 W/15 W/30 W
- 100 V: 5 W/10 W/15 W/30 W
- 34-core Mids & Tweets 2" × 1
- Max. Acoustic Pressure: 120 dB SPL
- Frequency Response: 250 Hz to 8 kHz



DS-QAE0A60G1-VB

- Rated Power: 60 W
- Audio input: USB/Bluetooth/MIC/RCA
- Supports two-zone volume adjustment
- Supports multiple amplifiers cascaded via RCA cables



DS-QAE0A120G1-VB6

- Rated Power: 120 W
- Audio input: EMC in × 1, 6.5 mm Microphone × 2, AUX in × 2, Bluetooth, USB 2.0, SD card
- Supports 6-zone volume adjustment
- Supports multiple amplifiers cascaded via RCA cables



DS-QAE0A240G1-VB6

- Rated Power: 240 W
- Audio input: EMC in × 1, 6.5 mm Microphone × 2, AUX in × 2, Bluetooth, USB 2.0, SD card
- Supports 6-zone volume adjustment
- Supports multiple amplifiers cascaded via RCA cables

Networking

Hikvision networking delivers optimal data transmission through a versatile range of products. Whether for small and medium-sized businesses or homes, Hikvision networking transforms your network into a high-performance, fully visualized system.

SMB Networking

Easy links, all in view




Easy Setup with Phone

- Auto search with SADP
- Batch activation
- Fast cloud connection



Unified Topology for IoT Networking

- One-stop visualized management
- Versatile networking and security operations
- Advanced web/mobile settings



Remote Maintenance & Troubleshooting

- Health monitoring
- Automatic anomaly notification
- One-click port reboot



Wi-Fi Routers



4G Routers



SOHO Switches



Mesh Wi-Fi System

SOHO Networking

Easy links, snap to go

- Instant Setup for Small-Scale CCTV Sites (Camera + DVR/NVR + 4G Router + HPP)
- Hikvision MESH
- Plug and Play
- Support Hik-Connect & Hik-Partner Pro

NETWORKING

Smart Managed Switch



DS-3E1105P-EI V2

- 4 × 10/100 Mbps PoE port, 1 × 10/100 Mbps RJ45 port
- Total PoE Power Budget 60 W
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1106HP-EI

- 4 × 100 Mbps PoE RJ45 ports, 2 × 100 Mbps network RJ45 ports
- Total PoE Power Budget 60 W
- IEEE 802.3at/af/bt standard for Hi-PoE ports
- Up to 300 m long-range transmission
- VIP port ensures important data transmission



DS-3E1309P-EI (B)

- 8 × 10/100M PoE ports, 1 × Gigabit RJ45 port
- Total PoE Power Budget 110 W
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1310HP-EI

- 8 × 10/100 Mbps PoE Ports, 2 × Gigabit Uplink Ports
- Total PoE Power Budget 110 W
- IEEE 802.3at/af/bt standard for Hi-PoE ports
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1318P-EI (B)

- 16 × 100 Mbps PoE ports, 2 × Gigabit combos
- Total PoE Power Budget 230 W
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1326P-EI (B)

- 24 × 100 Mbps PoE ports, 2 × Gigabit combos
- Total PoE Power Budget 370 W
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1526P-EI

- 24 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE Power Budget 230 W
- Up to 300 m long-range transmission
- PoE watchdog
- Supports 802.1Q VLAN
- Supports STP/RSTP Loop prevention



DS-3E1512HP-SI-8P2T2F

- 8 × Gigabit PoE Ports, 2 × Gigabit RJ45, 2 × Gigabit SFP
- Total PoE Power Budget 130 W
- Supports 802.1Q VLAN
- Supports 802.3bt Hi-PoE, Max. 90W for one port
- Supports STP/RSTP Loop prevention, storm control
- Supports SNMP, QoS, DHCP snooping



DS-3E1520HP-SI-16P2T2F

- 16 × Gigabit PoE Ports, 2 × Gigabit RJ45, 2 × Gigabit SFP
- Total PoE Power Budget 230 W
- Supports 802.1Q VLAN
- Supports 802.3bt Hi-PoE, Max. 90W for one port
- Supports STP/RSTP Loop prevention, storm control
- Supports SNMP, QoS, DHCP snooping

Industrial Switch



DS-3T1512HP-SI-8P4F

- 8 × Gigabit PoE ports, 4 × Gigabit SFP fiber optical ports
- Cloud managed
- Supports 802.1Q VLAN
- Supports 802.3bt Hi-PoE, Max. 90W for one port
- Supports STP/RSTP/ERPS Loop prevention, storm control
- Supports SNMP, QoS, DHCP snooping
- Wider Temperature (-40 °C to 75 °C) Design



NEW

DS-3T1506HP-EI-UPS

- 4 × Gigabit PoE Ports, 2 × Gigabit SFP
- Supports 802.3bt Hi-PoE, Max. 90 W for one port
- Supports 24 V passive PoE output for wireless bridge, etc.
- Supports 12 V to 24 V solar power input, DC 54 V input
- Wider Temperature (-40 °C to 75 °C) Design
- Supports battery health monitoring via Hik-Partner Pro and Hik-Connect
- Supports power consumption schedule



DS-3T0510HP-E/HS

- 6 × Gigabit PoE port, 2 × Gigabit Hi-PoE port, 2 × Gigabit SFP fiber optical port.
- IEEE 802.3at/af/bt standard for Hi-PoE port
- Port isolation to improve network security.
- Wire-speed forwarding.
- Wider temperature (-30 °C to 65 °C) design

NETWORKING

Wireless Bridge



DS-3WF0EC-5ACT(B)

- 500 m, 5Ghz, 867 Mbps, 802.11ac
- Built-in 8 dBi 2 x 2 MIMO antenna
- Automatic pairing
- 2 x 100 m Ethernet ports
- Standard PoE Input & output
- Cloud managed



DS-3WF1000-EI-2N (Kit) DS-3WF1000S-EI-2N(Single)

- 1 km, 2.4 Ghz, 300 Mbps, 802.11n
- Built-in 7 dBi 2 x 2 MIMO antenna
- Automatic pairing
- 2 x 100 m Ethernet ports
- Standard PoE Input & output
- IP55 weatherproof
- Cloud managed



DS-3WF3000-EI-5AC/P(Kit) DS-3WF3000S-EI-5AC/P(Single)

- 3 km, 5 Ghz, 867 Mbps, 802.11ac
- Built-in 8 dBi 2 x 2 MIMO antenna
- Automatic pairing
- 2 x 100 m Ethernet ports
- Standard PoE Input & output
- IP55 weatherproof
- Cloud managed

Wireless Access Points & Smart Managed Router



DS-3WAP622G-SI

- 1 Gigabit port with PoE input
- 802.11ax, Wi-Fi 6, 1775 Mbps
- 100+ concurrent user connections
- Auto RF optimization
- Supports intelligent fast roaming



DS-3WAP521-SI

- 2 Gigabit LAN ports with 1 PoE input
- 802.11ac, Wave 2, 1167 Mbps
- 86 mm wall junction box for easy installation
- 50+ concurrent user connections
- Auto RF optimization
- Supports intelligent fast roaming



DS-3WG2106P-SI

- 2 Gigabit WAN ports with 1 WAN/LAN switchable
- 8 Gigabit PoE LAN ports with 2 LAN/WAN switchable
- 75 W power budget 1000 Mbps throughput
- Recommend 200 users access
- Supports multiple VPNs
- Supports behavior management

SOHO Networking Products



DS-3WR30X

- 3000 Mbps, Wi-Fi 6
- 1 x 10/100/1000 Mbps Adaptive WAN Port
- 3 x 10/100/1000 Mbps Adaptive LAN Ports
- Parental Control
- Dual band in one and 5G first
- Hikvision Mesh
- Dual app management HC & HPP



• NEW

DS-3WR12C-E

- 1200 Mbps Wi-Fi 5
- 1 x 10/100 Mbps WAN Port
- 3 x 10/100 Mbps LAN Ports
- Four 5-dBi amplified antennas
- Parental Control
- Dual band – Smart signal switching
- Dual app management HC & HPP



DS-3WR4612C

- AC1200 4G CAT4 Wireless Router
- Dual-band Wi-Fi
- 4G for faster speed
- Instantly access to mobile network with a SIM card



• NEW

DS-3WRM30X

- 3000 Mbps, Wi-Fi 6
- 4 x 10/100/1000 Mbps Ports
- Parental Control
- 5 x Internal Antennas
- Hikvision Mesh
- Dual app management HC & HPP



DS-3E0105D-0

- 5 x 10/100 Mbps ethernet ports
- Supports ADI/ADIX
- Store-and-forward switching
- Supports MAC address auto-learning and aging
- Plug & play, easy to use



DS-3E0508P-0

- Gigabit PoE and non-PoE ports for multiple use
- Plug-and-play with easy connection
- Built to last with a rugged metal case
- Desktop/Wall-mounted installation

WonderHub

Touch. Teach. Wonder to reach.

- **Ultra Smooth**

Every pixel echoes your mind

- **AI Co-Pilot**

Idea engine inspires the future

- **Smartphone Ease**

Touch & go, wonder in flow

- **Ops Genius**

Remote control with zero hassle



COMMERCIAL DISPLAYS

WonderHub Interactive Display

		 NEW
Value Series DS-D5BxxRB/EL DS-D5BxxRB/FL	Performance Series DS-D5BxxRB/EP DS-D5BxxRB/FP	Select Series DS-D5CxxRB/A2L DS-D5CxxRB/B2L
· 55"/65"/75"/86" · 4-core CPU, 8 GB + 64 GB (FL model: 8 GB + 128 GB) · Android 13 · 4K, 400 nits brightness · 8MP camera and 8-mic array for FL model	· 65"/75"/86" · 8-core CPU, 8 GB + 128 GB · Android 14, Google EDLA certified · 4K, 400 nits brightness · 65W Type-C port x 1 · 8MP camera and 8-mic array for FP model	· 65"/75"/86" · 8-core CPU, 8 GB + 128 GB · Android 14, Google EDLA certified · 4K, 480 nits brightness · Temperature & humidity sensor · 100W Type-C port x 2 · 8MP camera and 8-mic array for B2L model

Digital Signage

		
DS-D60xxUN-DP	DS-D60xxUH-DP	DS-D60xxUN-DL
· 32"/43"/50"/55"/65" · 4K (32" model: 1080p), 500 nits brightness, 25% haze · 4 GB + 32 GB · Min. 9 mm even bezel, 40 mm thickness	· 43"/50" · 4K, 700 nits brightness, 25% haze · 4 GB + 32 GB · Min. 9 mm even bezel, 40 mm thickness	· 43"/50"/55"/65"/75" · 4K, 500 nits brightness, 25% haze · 4 GB + 32 GB · Min. 9 mm even bezel, 70 mm thickness
		
DS-D6055UN-D/S	DS-D6055UT-D/S	DS-D60E-B
· 55" · 4K, 500 nits brightness · 4 GB + 32 GB · Slim design	· 55" · 4K, 500 nits brightness · 4 GB + 32 GB · Slim design · 10-point capacitive touch	· 4-core CPU, 2 GB + 16 GB · Audio in x 1, audio out x 1, HDMI out x 1, LAN x 1, USB 2.0 x 2

Software



Hik-Partner Pro

Security Business Assistant. At Your Fingertips.

Seamless delivery just via mobile app

- Automated device discovery in LAN
- Automated device setup
- Easy handover to end users

Remote maintenance improves efficiency

Remote parameter configuration, firmware upgrading, and password resetting

Subscription services for ongoing revenues

- Health monitoring
- Subscription plan management



Hik-Connect

Unified Security, From Residence to Business

Team Mode for SMB & enterprise use

- Accessible via web portal / mobile app
- Streamlined multi-site management
- Precise role-based permissions
- Serverless deployment & scalability
- Seamless integration with OpenAPI

Personal Mode for individual use

- Interact with taps and swipes
- Remote management on the go
- Accurate and timely notifications
- Stay secure with all data encrypted

Solutions for Small & Medium Sized Businesses

Grow your business with one-stop SMB solutions

SMB



AB



Shops



Offices



Villas



SMB Solution for Shops

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- One-stop procurement and management
- Less maintenance cost with remote troubleshooting

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Secure backup with cloud storage
- Paperless promotion display

How Our Solution Works

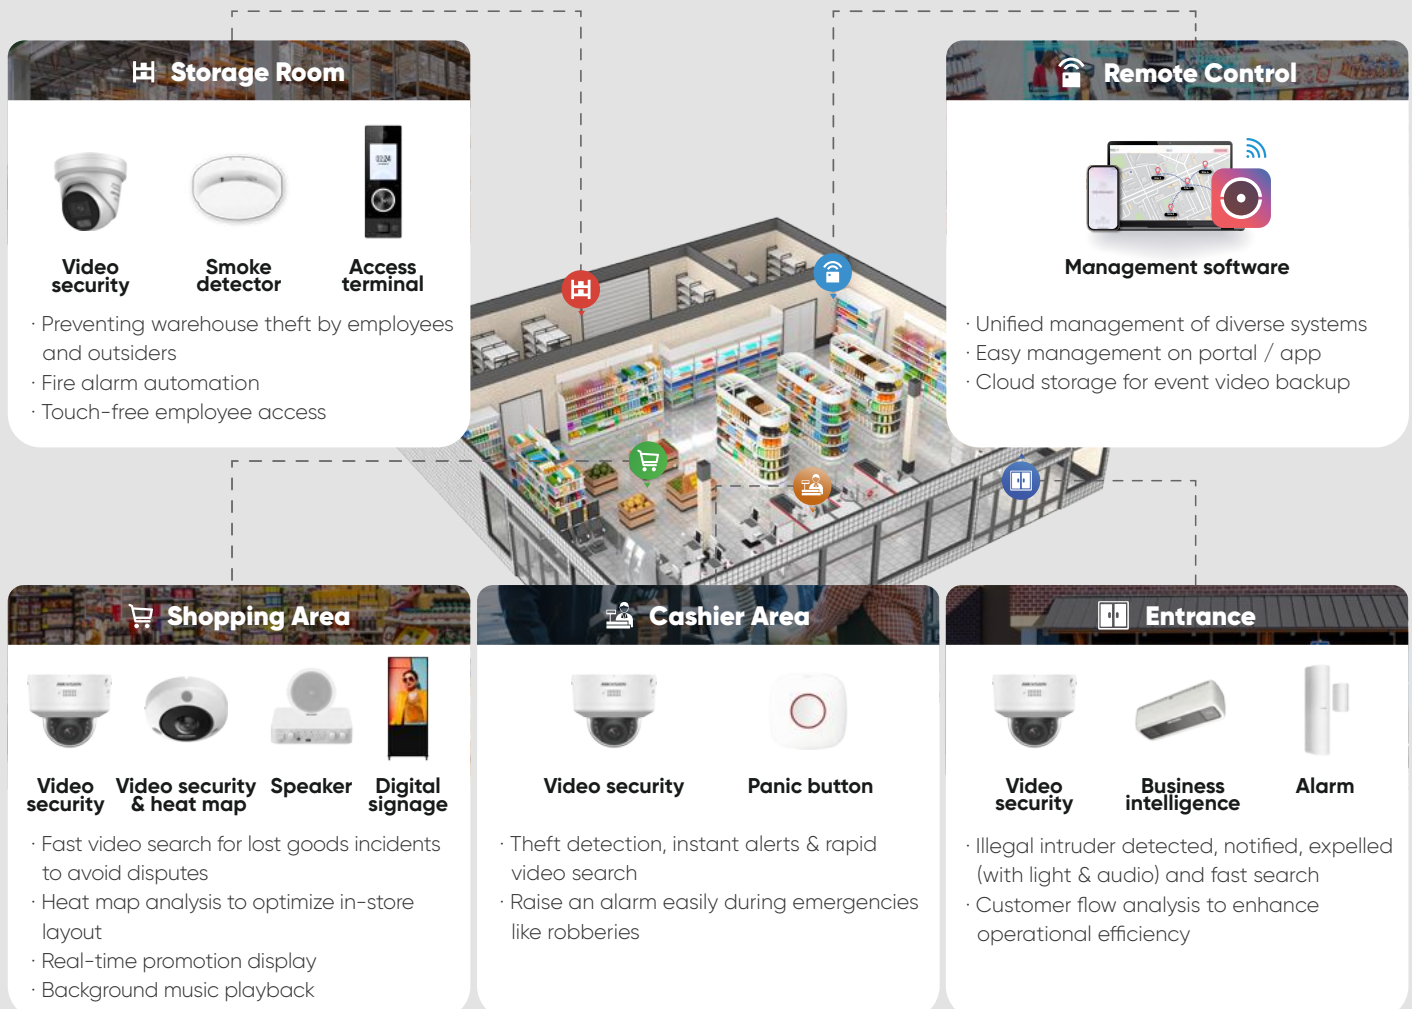

Product Showcase

Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect

For end-users

- Remote monitoring and management on portal / app
- Free access* (channels, doors, ANPRs, panels) to cover most SMB scenes

*Quantity varies by region. Contact local provider for details.



Scan to download

Video Security



Network Camera with PTRZ

DS-2CD2747G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- 2.8-12 mm
- 4 MP, 0.0028 lux @ F1.2
- IR / white light up to 40 m
- IP66, IK10, eco-friendly packaging



Network Camera with ColorVu

DS-2CD2347G3-LIS2UY/SL

- 4 MP
- ColorVu 3.0, AcuSense 3.0, Smart Hybrid Light
- Two-way audio, built-in dual-microphone
- Strobe light and audio alarm
- IR / white light up to 60 m
- IP67, NEMA 4X anti-corrosion



NVR with AcuSense

- 8-ch IP video input
- Up to 32-ch @ 1080p decoding capability
- AcuSearch for all channels
- 4-ch perimeter protection



Business intelligence



DeepinView Series Fisheye Camera

DS-2CD63C5G1-IVS

- Up to 360° coverage, 12 MP UHD
- Built-in AI algorithm: People Counting, Queue Management, Heat Map, Intersection Analysis
- Built-in mic and speaker



Dual-Lens People Counting Camera

DS-2CD6825G0/C-IVS

- Highly accurate vertical-view people counting
- Applicable for wide-door and high-ceiling scenarios

Access Control



MinMoe Face Recognition Terminal

DS-K1T321 Series

- 2.4-inch LCD screen
- Max. 500 faces
- Face recognition < 0.2 s / user



MinMoe Face Recognition Terminal

DS-K1T323 Series

- 2.4-inch LCD screen
- Max. 1,000 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom

Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones / outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM card)



Wireless Emergency Button

DS-PDEB1-EG2-WE(B)/WB(B)

- Fully remote configurable through App
- IP66 waterproof



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life

Networking, Display and Accessory



Network Amplifier

DS-QAE1A80G1-VB

- 80 W, PoE
- Supports live / schedule broadcast
- Supports TTS (Text-To-Speech) (only for 1 channel)
- Multiple audio input: MIC / USB / Bluetooth / RCA
- Two-zone volume adjustment
- Built-in eMMC



Analog Ceiling Speaker

DS-QAE0206G1-V

- 6 W
- Constant voltage 100 V



Digital Signage

DS-D6055UN-D/S

- 55-inch screen
- Floor-standing installation
- Variable materials, static and dynamic materials, including pictures, video, pop-up, etc.



Smart Managed Switch

DS-3E1510P-EI

- 8 Gigabit PoE ports, 2 Gigabit RJ45 ports
- Total PoE power budget 110 W
- VLAN configuration



Monitor

DS-D5022F2

- 1080p
- 21.5"
- HDMI, VGA, Audio out



Online UPS

DS-UPS01K24-R/TS

- Capacity 1000 VA / 900 W, PF up to 0.9
- Easy management with local and remote monitoring
- Surge / short circuit / overcharge / over discharge protection and Emergency Power Off function (EPO)

SMB Solution for Offices

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- One-stop procurement and management
- Less maintenance cost with remote troubleshooting

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Digital management for employees & visitors
- Robust protection against theft

How Our Solution Works

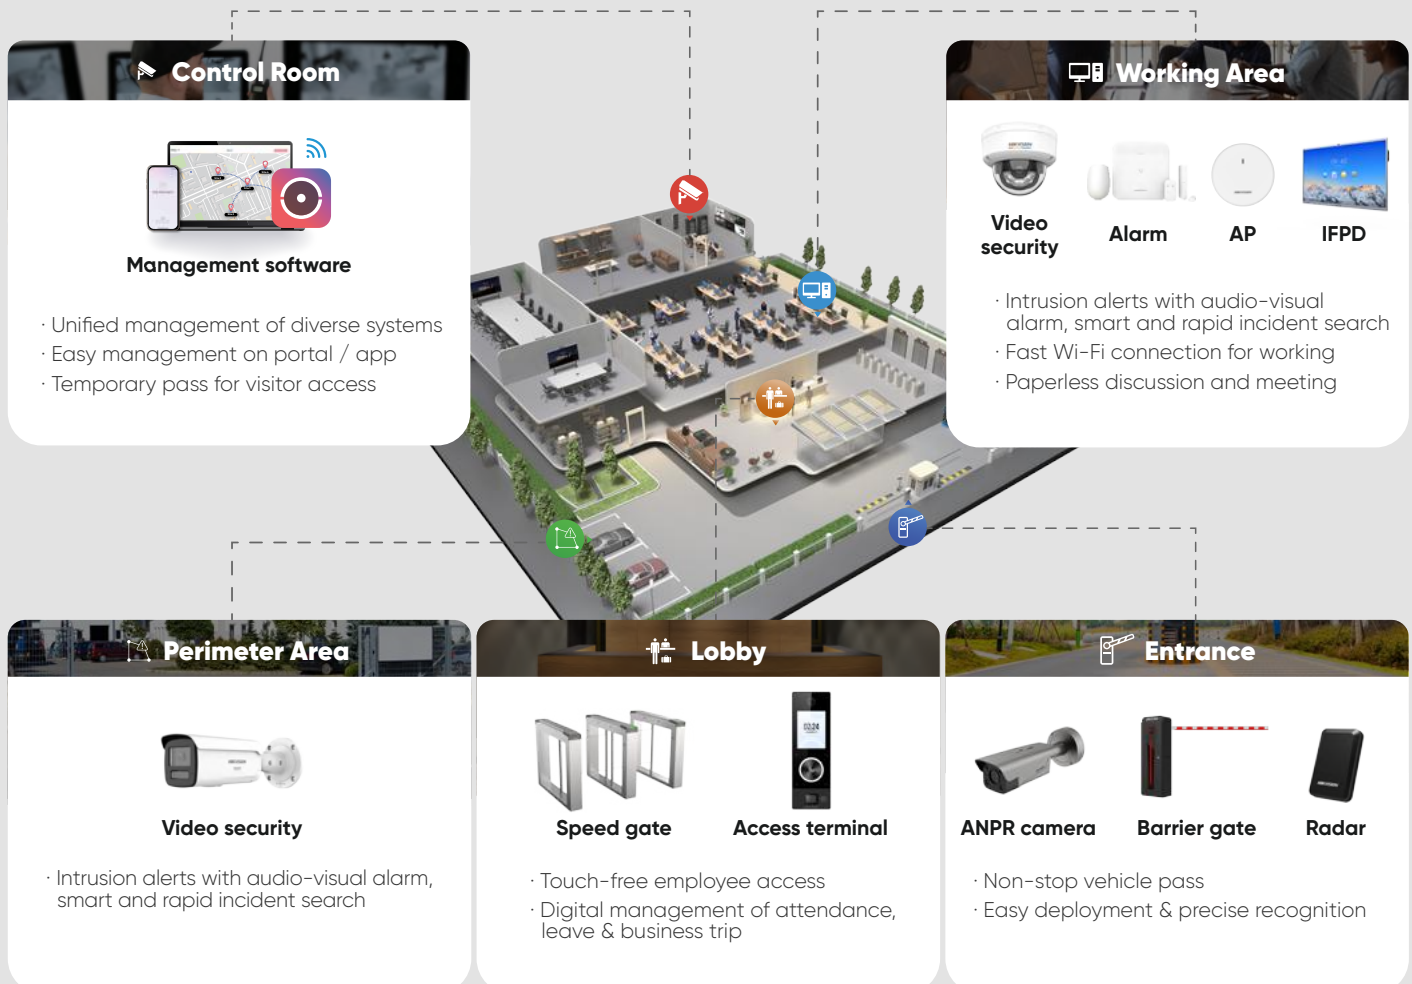

Product Showcase

Cloud-based Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect

For end-users

- Remote monitoring and management on portal / app
- Free access* (channels, doors, ANPRs, panels) to cover most SMB scenes

*Quantity varies by region. Contact local provider for details.



Scan to download

Video Security



Turbo HD Camera

DS-2CE78D0T-LI(X)TS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- 20 m white light and 25 m IR



Turbo HD Camera with ColorVu

DS-2CE72DF3T-LXTS

- 2 MP
- Two-way audio
- Smart Hybrid Light
- IR / white light up to 40 m
- WDR ≥ 120 dB
- IP67



PowerX DVR

DS-7208HQHI-M1/XT

- 8-ch Motion Detection 2.0
- 4-ch perimeter protection
- 8-ch AcuSearch
- All channels two-way audio



Network Camera with ColorVu

DS-2CD1147G3H-LIUF

- HikAI-ISP, 4 MP
- ColorVu 3.0, Motion Detection 3.0, Smart Hybrid Light
- 0.0001 lux @ F1.0
- IR/white light up to 30 m
- IP67, IK08



Network Camera with ColorVu

DS-2CD2T47G3-LIS2UY/SL

- 4 MP
- ColorVu 3.0, AcuSense 3.0, Smart Hybrid Light
- Two-way audio, built-in dual-microphone
- Strobe light and audio alarm
- IR / white light up to 60 m
- IP67, NEMA 4X anti-corrosion



NVR with AcuSense

DS-7608NXI-K1(8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 10 × 4 MP / 20 × 1080p decoding capability
- AcuSearch for all channels
- 2-ch perimeter protection



Access Control



MinMoe Face Recognition Terminal

DS-K1T321 Series

- 2.4-inch LCD screen
- Max. 500 faces
- Face recognition < 0.2 s / user



MinMoe Face Recognition Terminal

DS-K1T323 Series

- 2.4-inch LCD screen
- Max. 1,000 faces
- Face recognition < 0.2 s / user
- IP65, PoE, video intercom



Speed Gate

DS-K3B211LX

- 4 pairs of infrared sensors
- Lane width: 550 mm to 900 mm
- MCBF > 3 millions times



Barrier Gate

DS-TMG32 series

- Max. rising speed 3 m @ 3 s,
- DC brushless motor
- MCBF: 2.5 million times
- App-based configuration via Bluetooth



ANPR Camera

DS-TCG406 Series

- 2688 × 1520 resolution
- 4 built-in LEDs (integrated white light and IR)
- LPR accuracy > 98%
- IP67, IK10



Anti-fall Radar

DS-TMG035 Series

- Response time 50 ms
- Detection area 0-2 m
- IP67

Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones/outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM Card)



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life

Networking and Display



Wi-Fi 6 Ceiling Access Point

DS-3WAP622G-SI

- 1800 Mbps
- Interface: 1 GE RJ45 port
- Users (Max. / Recommend): 256 / 100
- Spatial stream: 2.4G 2 x 2 MIMO, 5G 2 x 2 MIMO



AC Router

DS-3WG1056P-SI

- 4 Gigabit PoE ports, 2 Gigabit RJ45 ports
- Users: 100
- AP numbers: 32
- PoE 60 W



Smart Managed Switch

DS-3E1510P-EI

- 8 Gigabit PoE ports, 2 Gigabit RJ45 ports
- Total PoE power budget 110 W
- VLAN configuration



Interactive Flat Panel

DS-D5C75RB/B

- UHD 4K display
- 75-inch touch screen
- Dual systems of Android and Windows



Monitor

DS-D5022F2

- 1080p
- 21.5"
- HDMI, VGA, Audio out

SMB Solution for Villas

Grow your business with one-stop SMB solutions



Core Benefits


For installers

- One-stop procurement and management
- Less maintenance cost with remote troubleshooting
- Easy Installation

For end-users

- One software for all devices
- Less costs with no need for servers / VPN
- Vehicle gate automatic unlocking
- High-level protection to deter theft

How Our Solution Works

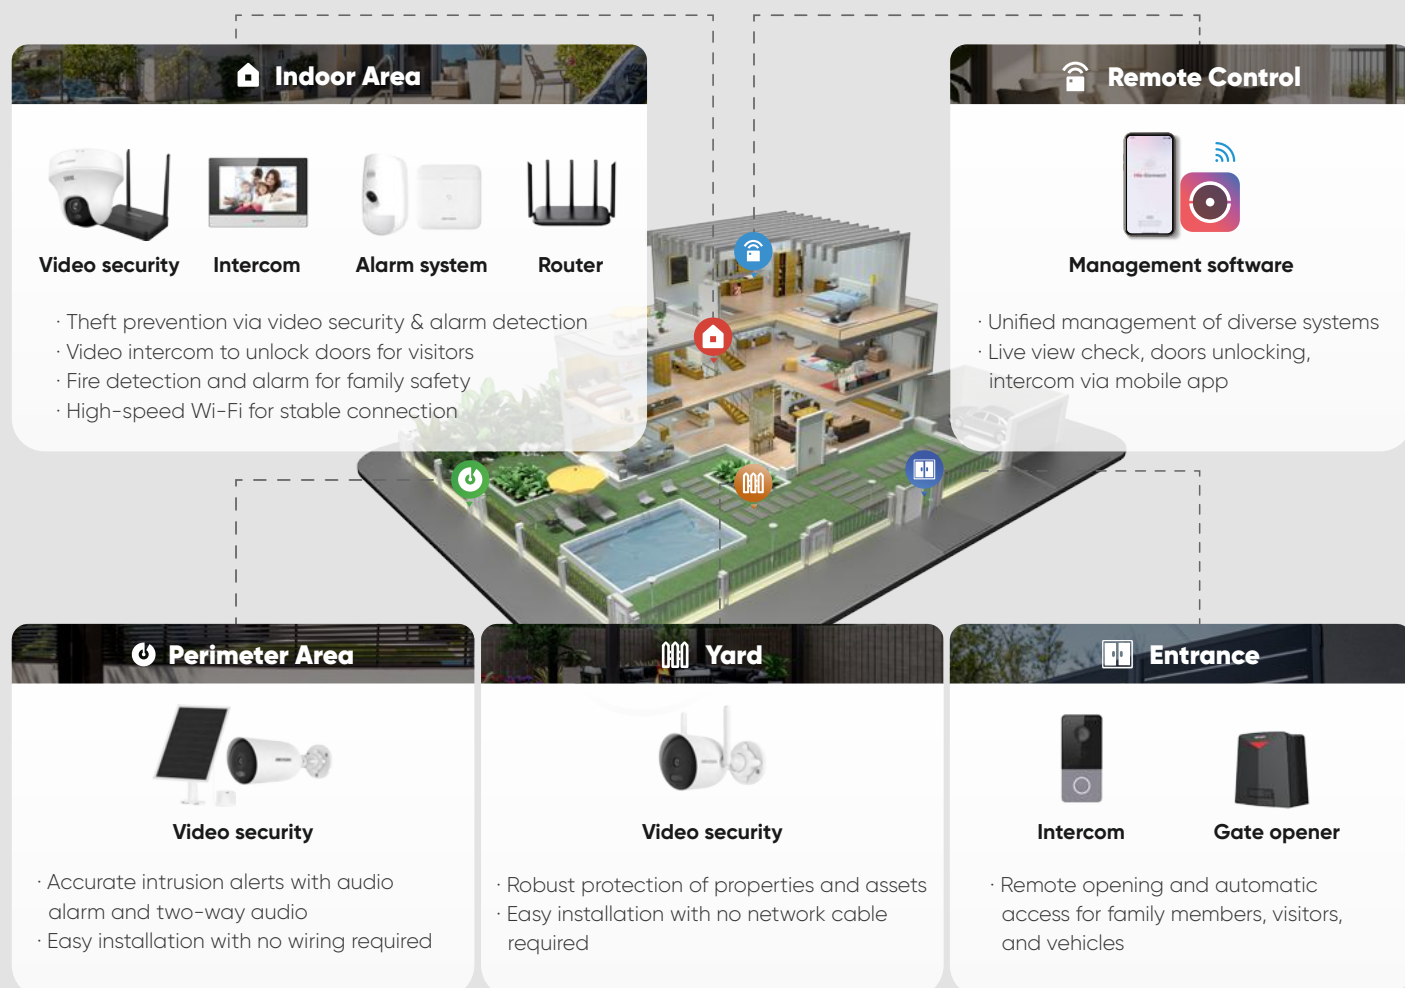

Product Showcase

Cloud-based Software



Hik-Partner Pro

For installers

- Remote health monitoring and troubleshooting on portal / app



Hik-Connect (Personal Mode)

For end-users

- Remote monitoring and management on app



Scan to download

Video Security

Wireless Solution



AOV Solar Camera

DS-2CFS04/4G

- 4 MP, 1/3" CMOS
- 0.005 lux @ F1.6
- IR / white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP66



AOV Solar Camera

DS-2CFS04/4G

- 4 MP, 1/2.8" CMOS
- 0.005 lux @ F1.6
- Smart tracking
- IR / white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP66



EasyLink Wi-Fi NVS Kit

NKS4223WBTH

- Smart Hybrid Light
- Two-way audio
- Smart tracking (PT Camera)
- One-tap privacy mode (PT Camera)
- 2 Micro SD card slots, up to 512GB each
- 4-ch IP video input

2 MP Wi-Fi Bullet Camera
3 MP Wi-Fi PT Turret Camera
4-ch NVS



Wired Solution



Network Camera with ColorVu

DS-2CD1047G3H-LIUF/SL(RB)

- Strobe light & audio alarm, two-way audio, Smart Hybrid Light
- HikAI-ISP, 4 MP
- 0.0001 lux @ F1.0
- IR / white light up to 40 m
- IP67



Network Camera with ColorVu

DS-2CD1147G3H-LIUF

- HikAI-ISP, 4 MP
- ColorVu 3.0, Motion Detection 3.0, Smart Hybrid Light
- 0.0001 lux @ F1.0
- IR / white light up to 30 m
- IP67, IK08



NVR with AcuSense

DS-7608NXI-K1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 10 × 4 MP / 20 × 1080p decoding capability
- 8-ch AcuSearch
- 2-ch perimeter protection

AcuSense

Video Intercom and Gate Opener



Hybrid HD Intercom Kit

DS-KIS313 Series

- Includes 1 indoor station, and 1 outdoor station
- App control
- Hybrid connection, plug & play



IP Video Intercom Kit

DS-KIS603 Series

- Includes 1 indoor station, and 1 outdoor station
- App control
- IP connection



Sliding Gate Opener

DS-K3G606 Series

- Gate mass ≤ 600 kg
- Support Wi-Fi and LAN
- Open gate via keyfob, app, intercom, etc.

Alarm



AX PRO Kit

DS-PWA64-Kit-WE/WB

- Includes 1 panel, 1 keyfob, 1 PIR detector, and 1 magnetic contact
- Up to 64 wireless zones / outputs (including 48 PIRCAMs)
- LAN, Wi-Fi, GPRS (Single SIM card)



Wireless PIRCAM Detector

DS-PDPC12P-EG2-WE(B)/WB(B)

- Detection range: 12 m / 85.9°
- Up to 20 pictures for verification
- 800 m transmission distance
- Up to 5 years battery life



Wireless Smoke Detector

DS-PD451SMK-WE/WB

- Smoke & Heat
- Detection range: 30-80 m², 4-12 m
- Buzzer ≥ 85 dB @ 3 m
- Up to 1,000 m transmission range
- Up to 5 years battery life



Wireless Portable Emergency Button

DS-PDEBP1-EG2-WE(B)/WB(B)

- Fully remote configurable through app
- IP66 waterproof



Wireless PIR Glass Break Detector

DS-PDPG12P-EG2-WE/WB

- PIR detection range: 12 m / 85.9°
- Glass break detection range: 8 m / 120°
- Up to 30 kg pet immunity

Networking, Display and Accessory



Wi-Fi 6 Wireless Router

DS-3WR30X

- 3,000 Mbps, Wi-Fi 6
- Hikvision Mesh
- Dual app management via Hik-Connect & Hik-Partner Pro



Smart Managed Switch

DS-3E1309P-EI (B)

- 10/100 M PoE port: 8
- Gigabit RJ45 port: 1
- Total PoE power budget 110 W



Online UPS

DS-UPS01K24-R/TS

- Capacity 1000 VA / 900 W, PF up to 0.9
- Easy management with local and remote monitoring
- Surge / short circuit / overcharge / over discharge protection and Emergency Power Off function (EPO)

Hikvision Distribution Brochure for

HOT-SELLING PRODUCTS

2025 H2



www.hikvision.com
support@hikvision.com



HIKVISION®