


InertSearch for LC

Inertsil Applications

Analysis of Water-soluble Vitamins (InertSustain AX-C18)

Data No. LB733-0806

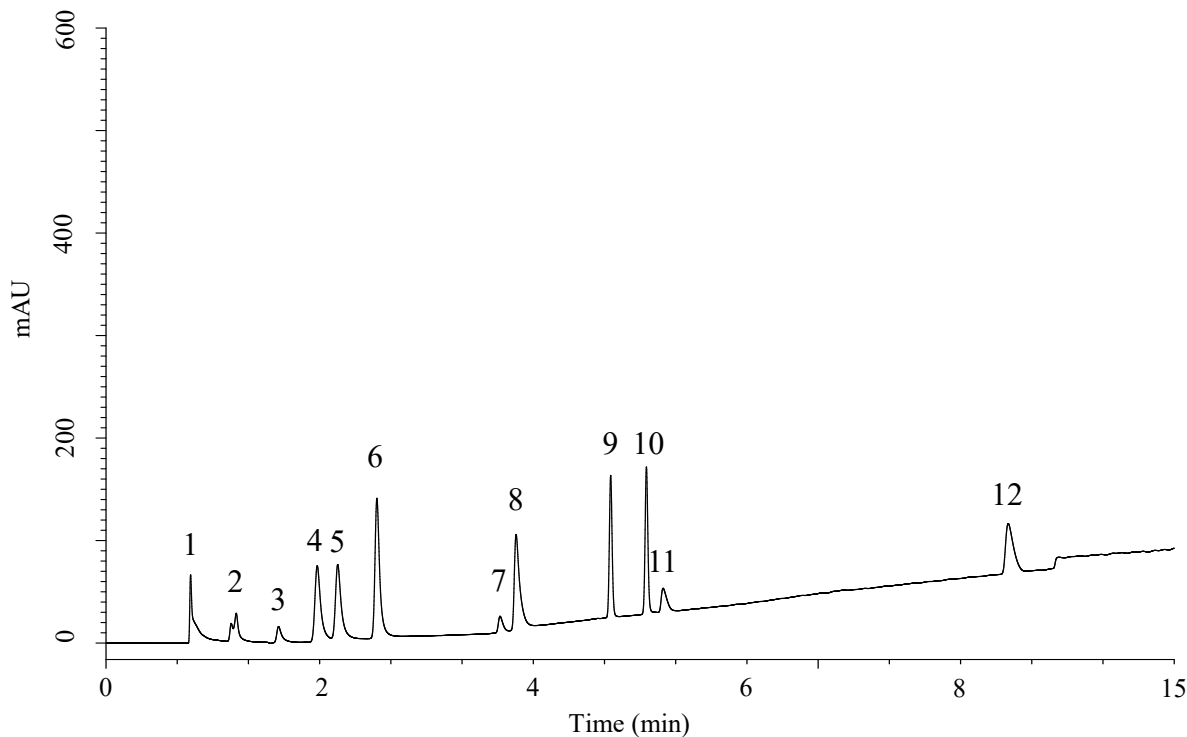

Conditions

System : Chromaster HPLC system (HITACHI)
Column : InertSustain AX-C18 (GL Sciences Inc.)
(3 μ m, 150 x 2.1 mm I.D.)
Column Cat. No. : 5020-91039
Eluent : A) 10 mM HCOONH₄ in
(CH₃CN/H₂O = 90/10, v/v)
B) 10 mM HCOONH₄ in H₂O

Time (min)	A (Vol%)	B (Vol%)
0.0	1	99
15.0	60	40

Flow Rate : 0.3 mL/min
Col. Temp. : 40 °C
Detection : UV 220 nm
Injection Vol. : xx μ L
Sample : Standard

Analyte:

1. Pyridoxamine
2. Thiamine
3. Ascorbic acid
4. Pyridoxal
5. Pyridoxine
6. Nicotinamide
7. Pantothenic acid
8. Nicotinic acid
9. Cyanocobalamin
10. Riboflavin
11. Biotin
12. Folic acid

(xxx mg/L each)