



Stay Ahead of the Flames

Hikvision Thermal Products

ABOUT HIKVISION



An Industry Pioneer

Hikvision is an IoT solution provider with video as its core competency. Featuring an extensive and highly skilled R&D workforce, Hikvision manufactures a full suite of comprehensive products and solutions for a broad range of vertical markets. In addition to the security industry, Hikvision extends its reach to smart home tech, industrial automation, and automotive electronics industries to achieve its long-term vision. Hikvision products also provide powerful business intelligence for end users, which can enable more efficient operations and greater commercial success.

Global Operations

Hikvision has established one of the most extensive regional networks in the industry, comprising 66 international subsidiaries and branch offices to ensure quick responses to the needs of customers, users, and partners.

Core Technologies



Imaging
Technology



Artificial
Intelligence



Cloud
Computing



Multi-Dimensional
Perception




Big
Data



Video
Codec

THE BASICS OF THERMAL CAMERAS

Each type of radiation has a unique wavelength. Any object with a temperature above absolute zero can emit a detectable amount of infrared radiation. The higher an object's temperature, the more infrared radiation is emitted.

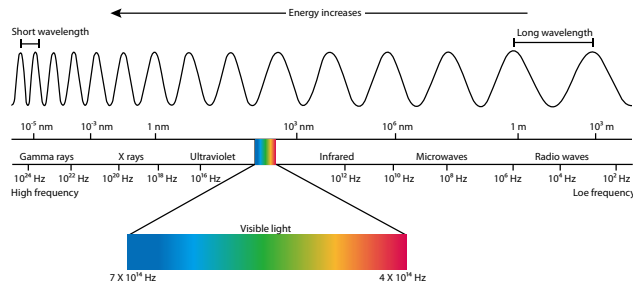


While invisible to human eyes, thermal cameras detect this kind of radiation (from wavelength 8 to 14 μm, or 8,000 – 14,000 nm) and produce images using temperature differences, making it possible to see the environment without visible light.

An infrared camera's effective range is what is meant by "seeing an object". Defined thresholds, known as Johnson's Criteria, refer to the minimum number of pixels necessary to either detect, recognize, or identify targets captured by scene imagers. The lower limits of detection, recognition, and identification (DRI), according to Johnson criteria are:

Detection: In order to distinguish an object from the background, the image must be covered by 1.5 or more pixels.

Recognition: In order to classify the object (animal, human, vehicle, boat, etc.), the image must have at least 6 pixels across its critical dimension.


Identification: In order to identify the object and describe it in details, the critical dimension must be at least 12 pixels across.

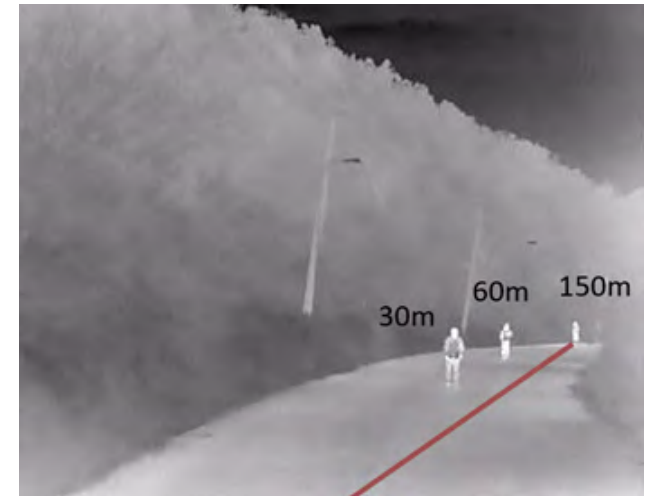

Detection, recognition and identification distances (with 8 mm lens)

Detection Distance

Notice: This distance is based on a 17-μm detector.

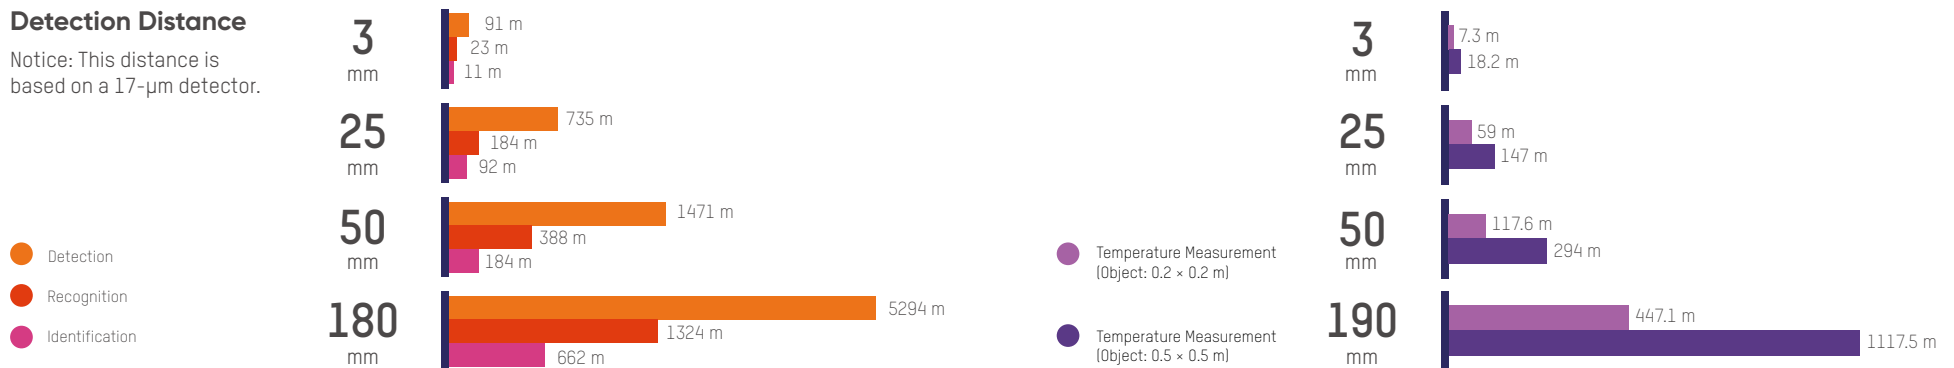



WHY DO WE USE THERMOGRAPHY CAMERAS FOR TEMPERATURE MEASUREMENT?

Hikvision thermography cameras have been widely used in detecting temperature anomalies before a fire starts, finding hot spots and invisible defects on machinery or electrical systems that could indicate a potential problem. These cameras are also used for surveying areas that are hard to reach with conventional measurement tools.

Detect Fire Risks Right Away



Hikvision thermography cameras can efficiently identify temperature anomalies with visualized images. When the surface temperature of an object is abnormal, the camera will immediately trigger the alarm for fast and accurate troubleshooting.

Real-Time Warnings




Identifies temperature anomalies within a few seconds to help protect your property.

Non-Contact Inspection



Prevents damage to facilities and operations while providing continuous monitoring.


Get Accurate Temperatures Instantly

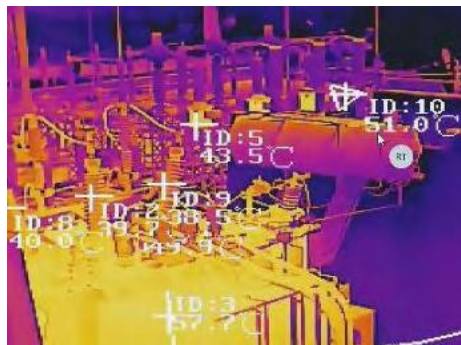

Through strict calibration and standardized testing procedures, Hikvision has established a temperature measurement model that offers high accuracy up to $\pm 2^\circ\text{C}$ or $\pm 2\%$ (whichever is greater), along with a wide range from 20 to 550° C (-4° F to 1,022° F).

Flexible measurement rules help create more sensing methods.

Visualized Image

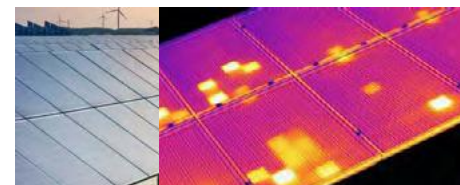


Presents heating distribution clearly to visualize fire locations easily.

SMALL-AREA FIRE PREVENTION

Indoors




Outdoors

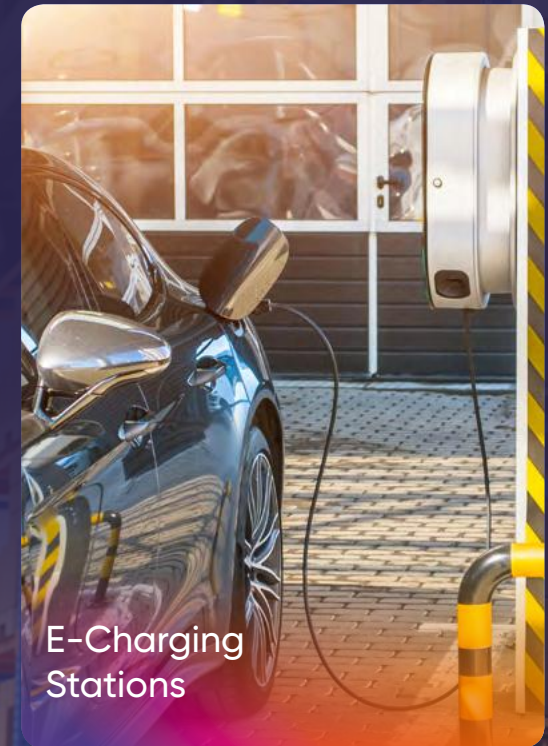



Temperature Detection

Provides non-contact temperature measurement for fast and visible detection, so actions can be taken early enough to prevent a fire before the worst happens.

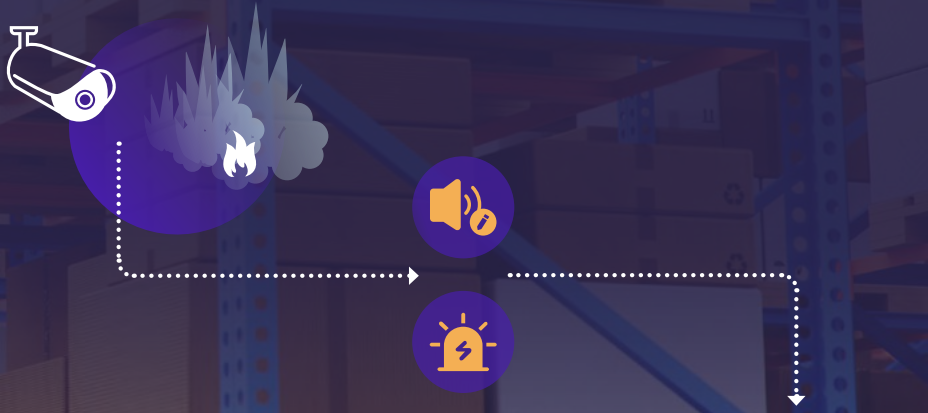

Light & Audio Warning

Detects threats in a timely manner and triggers a strobe light with customizable audio alarms.



HeatPro

MEDIUM-AREA FIRE PREVENTION



Forklift Filter

With the help of an AI algorithm, Hikvision thermography cameras recognize and ignore the heat from forklift engines to reduce unwanted alarms.



Sun Reflection



Our thermography cameras can analyze potential fire points. In the case of overexposure, the alarm will be filtered out.

Certified
CNPP





Industrial Scenarios

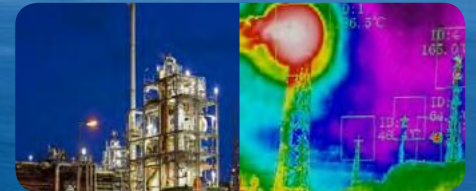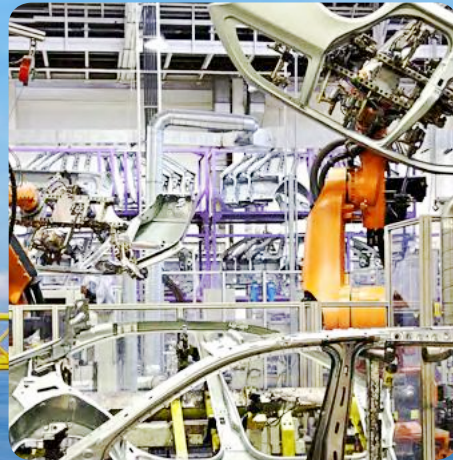

Electrical

Manufacturing

Waste & Recycling

Energy

LARGE-AREA FIRE PREVENTION

Excellent for protection in natural areas, both public and private



Wide Coverage

Hikvision thermal PT cameras cover vast areas with fewer installation points for maximum cost reduction.



Stability

Since remote device replacement is difficult, Hikvision products are designed for maximum stability and durability.



Accuracy

Our solution boosts low false alarm rates and timely, accurate detections to reduce potential losses.



Timeliness

Our solution provides 24/7 monitoring and detects fires as early as possible, deploying patrol routes to shorten intervals.

Thermal Channel: Fire Source Detection

Thermal fire source detection algorithms locate suspicious heat sources. They compare temperatures between a target and environment to detect differences against the set threshold.

Optical Channel: Smoke Detection

Optical lenses in PTZ cameras deliver smoke detection as a supplement to thermal fire-source detection. Since smoke comes before fire, and fire may be covered by leaves or terrain, the smoke detection algorithm helps to locate hazards early.



National Forests



High-Value Plantations



Wildlife Parks



Large Resorts

PRODUCT MODELS

DS-2TD2628T/QA

Thermographic Network
Bullet Camera



Thermal: 256 x 192, 12 μ m, Optical: 2688 x 1520
Lens (Thermal): 3 / 7 mm
Lens (Optical): 4 / 6 mm
FOV (Thermal): 3 mm: 50.0 x 37.3°; 7 mm: 24.9 x 18.7° Audible Alert and Strobe Light
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 150° C
Temperature Accuracy: $\pm 8^\circ$ C
Operating Temperature: -40 to 65° C
[-40 to 149° F]
IP67

DS-2TD1228T/QA

Thermographic Network
Turret Camera



Thermal: 256 x 192, 12 μ m, Optical: 2688 x 1520
Lens (Thermal): 2 / 3 mm
Lens (Optical): 2 / 4 mm
FOV (Thermal): 2 mm: 90.0 x 65.4°; 3 mm: 50.0 x 37.3° Audible Alert and Strobe Light
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 150° C
Temperature Accuracy: $\pm 8^\circ$ C
Operating Temperature: -40 to 65° C
[-40 to 149° F]
IP66

DS-2TD3017T

Thermographic Network
Cube Camera



Thermal: 160 x 120, 17 μ m;
Optical: 1600 x 1200
Lens (Thermal): 2 / 3 mm
Lens (Optical): 2 mm
FOV (Thermal): 2 mm: 90.0 x 66.4°; 3 mm: 50.0 x 37.2° Audible Alert and Strobe Light
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 150° C / 20 to 550° C
Temperature Accuracy: $\pm 2^\circ$ C or 2%
Operating Temperature: -20 to 50° C
[-4 to 122° F]
IP67

HM-TD2037T-4X/7X/10X

Thermographic Network
Automation Camera



Thermal: 384 x 288, 17 μ m
Lens (Thermal): 4 / 7 / 10 mm
FOV: 4 mm: 90 x 65.2°; 7 mm: 60 x 44.1°; 10 mm: 37.5 x 28.5°
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550° C [-4 to +1,022° F]
Temperature Accuracy: Max ($\pm 2^\circ$ C, $\pm 2\%$)
Alarm Input: 1 ch. of input (0-3.3 VDC)
Alarm Output: 1 ch. of relay outputs, alarm response actions configurable
Operating Temperature: From -20 to 50° C [-40 to 149° F];
Humidity: 90% or less
IP40

DS-2TD2137T-4P/7P

Thermographic Network
Bullet Camera



Thermal: 384 x 288, 17 μ m
Lens: 4 / 7 mm
FOV: 4 mm: 90 x 65.3°; 7 mm: 60 x 44.1°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20° C to 550° C [-4 to +1,022° F]
Temperature Accuracy: Max ($\pm 2^\circ$ C, $\pm 2\%$)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65° C [-40 to 149° F]
IP67

DS-2TD2167T-7/P

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 17 μ m
Lens: 7 mm
FOV: 7 mm: 88.5 x 73.2°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550° C [-4 to +1,022° F]
Temperature Accuracy: Max ($\pm 2^\circ$ C, $\pm 2\%$)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65° C [-40 to 149° F]
IP67

DS-2TD2637T-10P/15P

Thermographic Network
Bullet Camera



Thermal: 384 x 288, 17 μ m, Optical: 2688 x 1520
Lens: 10 / 15 mm
FOV: 10 mm: 37.5 x 28.5°; 15 mm: 42.5 x 33.6°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550° C [-4 to +1,022° F]
Temperature Accuracy: Max ($\pm 2^\circ$ C, $\pm 2\%$)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65° C [-40 to 149° F]
IP67

DS-2TD2667T-15/P

Thermographic Network
Bullet Camera



Thermal: 640 x 512, 17 μ m, Optical: 2688 x 1520
Lens: 15 mm
FOV: 15 mm: 42.5 x 33.6°
VCA: Line crossing / Intrusion / Region entry & exit
Temperature Exception / Anomaly
Temperature Exception Range: -20 to 550° C [-4 to +1,022° F]
Temperature Accuracy: Max ($\pm 2^\circ$ C, $\pm 2\%$)
Alarm Input: 2 ch. of inputs (0-5 VDC)
Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
Operating Temperature: -40 to 65° C [-40 to 149° F]
IP67

HM-TD2067T-6/X

Thermographic Network Automation Camera



Thermal: 640 512, 17 μm
 Lens (Thermal): 6 mm
 FOV: 6 mm: 88.5 x 73.2°
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: 1 ch. of input (0-3.3 VDC)
 Alarm Output: 1 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: From -20 to 50° C (-40 to 149° F);
 Humidity: 90% or less
 IP40

DS-2TD4228T-10/W

Network Bi-Spectrum Speed Dome



Thermal: 256 x 192 12 μm
 Optical: 2688 x 1520
 Lens (Thermal): 10 mm; Optical: 4.8-153 mm, 32X
 FOV: 10 mm: 18 x 13.5°
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD4237T-10/V2

Network Bi-Spectrum Speed Dome



Thermal: 384 x 288, 17 μm,
 Optical: 1920 x 1080
 Lens (Thermal): 10 mm; Optical: 4.8-153 mm
 FOV: 10 mm: 37.7 x 28.7°
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD4137T-9W/25W

Network Bi-Spectrum Speed Dome



Thermal: 384 x 288, 17 μm,
 Optical: 2688 x 1520
 Lens (Thermal): 9 / 25 / 50 mm; Optical: 6-240 mm
 FOV: 9 mm: 37.9 x 28.7°; 25 mm: 14.9 x 11.2°;
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD4167T-9W/25W

Network Bi-Spectrum Speed Dome



Thermal: 640 x 512, 17 μm
 Optical: 2688 x 1520
 Lens (Thermal): 9 / 25 mm; Optical: 6-240 mm
 FOV: 9 mm: 72.0 x 56.1°; 25 mm: 24.5 x 19.7°
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD5537T-W

Bi-spectrum Mini PTZ Camera



Thermal: 384 x 288, 17 μm,
 Optical: 2560 x 1440
 Thermal: 7 / 15 / 25 mm, Optical: 5-160 mm
 FOV: 7 mm: 54.8° (H) x 42.5° (V) / 15 mm: 24.55° (H) x 18.54° (V) / 25 mm: 24.9° (H) x 20° (V)
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: 2 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD6237T-W

Network Bi-Spectrum Positioning System



Thermal: 384x288, 17 μm,
 Optical: 2688 x 1520
 Thermal: 25 / 50 mm, Optical: 6-240 mm
 FOV: 25 mm: 14.88 x 11.19°; 50 mm: 7.47 x 5.61°
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD6267T-25H4LW/50H4LW

Network Bi-Spectrum Positioning System



Thermal: 640 x 512, 17 μm,
 Optical: 2688 x 1520
 Lens (Thermal): 9 / 25 mm, Lens (Optical): 6-240 mm
 FOV: 25 mm: 24.55 x 19.75°; 50 mm: 12.42 x 9.95°
 VCA: Line crossing / Intrusion / Region entry & exit
 Temperature Exception / Anomaly
 Temperature Exception Range:
 -20 to 550° C (-4 to +1,022°F)
 Temperature Accuracy: Max (±2° C, ±2%)
 Alarm Input: Up to 7 ch. of input (0-5 VDC)
 Alarm Output: 2 ch. of relay outputs, alarm response actions configurable
 Operating Temperature: -40 to 65° C (-40 to 149° F)
 IP66

DS-2TD8167-ZC(E/GIF(LJ)W(Y)

Network Bi-Spectrum
Positioning System



Thermal : 640 × 512, 17 μm
Optical : -C: 2688 × 1520 / -E: 1920 × 1080
Lens (thermal) : 150 / 190 / 230 mm
Lens (optical) : C (6.7-330 mm) / E (12.5-775 mm) / G (16.7-1000 mm)
FOV: 150 mm: 20.56° × 16.51° / 190 mm: 17.19° × 13.79° / 230 mm: 26.61° × 21.43°
VCA: Line crossing / Intrusion / Region entrance / Region exiting
Temperature Exception
Temperature Exception Range : -20 to 150°C
Temperature Accuracy : ±8°C
Working Temperature : -40°C to 65°C (-40° F to 149° F)
Anti-corrosion Coating (PY)
IP66

DS-2TD2528T/Q

Thermography
Explosion-proof Bullet



Thermal : 256 × 192, 12 μm
Optical : 2688 × 1520
Lens (thermal) : 3 / 7 / 10 mm
Lens (optical) : 3.3 / 4 / 8 mm
FOV: 3 mm: / 7 mm: / 10 mm: 50.0° × 37.3° / 24.9° × 18.7° / 18° × 13.5° (H × V)
Temperature Exception Range : -20°C to 550°C (-4°F to 1,022°F)
Temperature Accuracy : Max (± 2°C, ± 2%)
Working Temperature : -40°C to 60°C (-40°F to 140°F), 90% or less
IP68 Standard

DS-2TD2537T/Q

Thermography
Explosion-proof Bullet



Thermal : 384 × 288, 17 μm
Optical : 2688 × 1520
Lens (thermal) : 10 / 15 mm
Lens (optical) : 4 / 4 mm
FOV: 10 mm: / 15 mm: 37.9° × 28.7° / 24.2° × 18.4° (H × V)
Temperature Exception Range : -20°C to 550°C (-4°F to 1,022°F)
Temperature Accuracy : Max (± 2°C, ± 2%)
Working Temperature : -40°C to 60°C (-40°F to 140°F), 90% or less
IP68 Standard, ATEX, IECEx

DS-2TD6567T-H4LX/W

Thermography
Explosion-proof
Positioning system



Thermal : 640×512, 17 μm
Optical : 2688 × 1520
Lens (thermal) : 25 / 50 mm
Lens (optical) : 5.7-205.2mm, 36X
FOV: 25 mm: / 50 mm: 24°×19°/12.12.4°×10° (H × V)
Temperature Exception Range : -20°C to 550°C (-4°F to 1,022°F)
Temperature Accuracy : Max (± 2°C, ± 2%)
Working Temperature : -40°C to 60°C (-40°F to 140°F), 90% or less
IP68 Standard, ATEX, IECEx

Effective Coverage

Small & Medium Area Fire Prevention

■ Temperature Measurement (Object: 0.2 × 0.2 m) ■ Temperature Measurement (Object: 0.5 × 0.5 m)

DS-2TD1228T-2/QA 7.0 17.5

HM-TD2037T-6X 14.6 36.5

DS-2TD1228T-3/QA 12 30
DS-2TD2628T-3/QA

HM-TD2037T-7X 15.3 38.2
DS-2TD2137T-7/P
DS-2TD2167T-7/P


DS-2TD1228T-7/QA 23 57.5
DS-2TD2628T-7/QA

HM-TD2037T-10/X 22.8 57.1
DS-2TD2637T-10/P

HM-TD2037T-4X 10.4 25.9
DS-2TD2137T-4/P


DS-2TD4228T-10/W 32 81

DS-2TD2637T-15/P 35.3 88.2
DS-2TD2667T-15/P

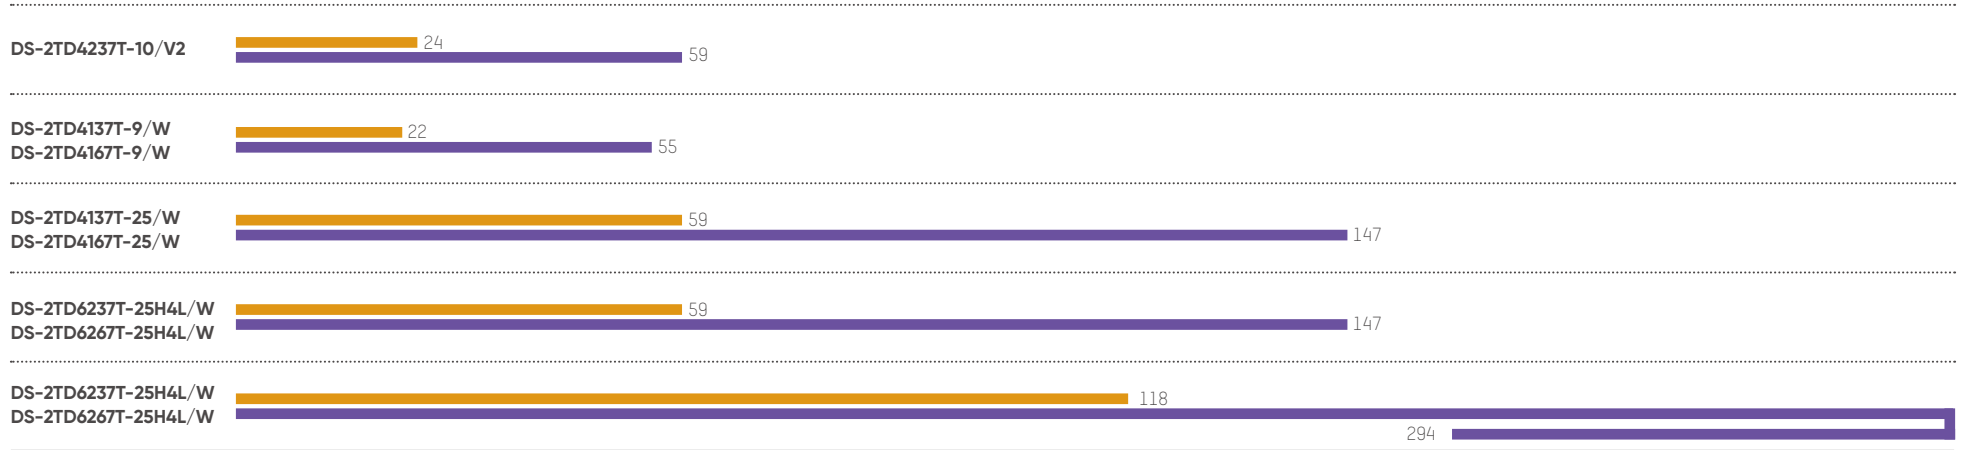

Effective Coverage

Large Area Fire Prevention

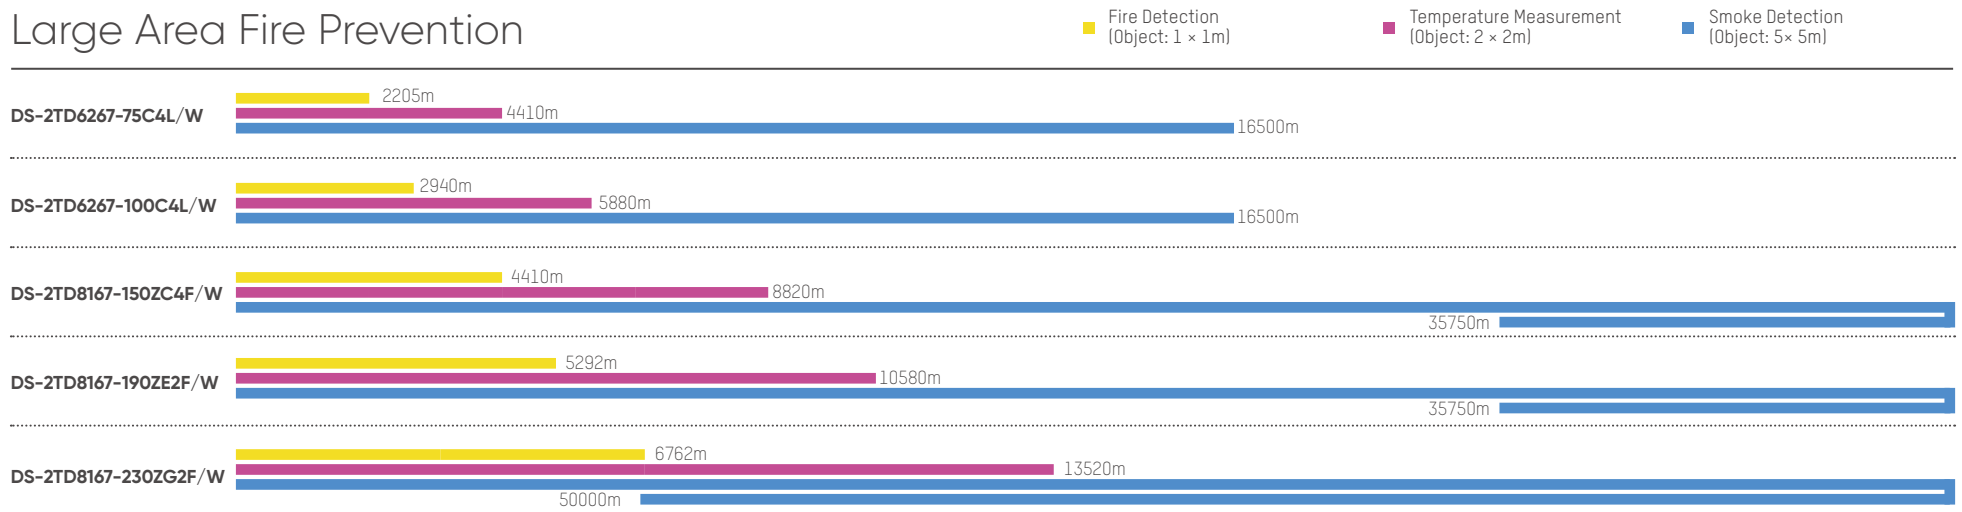



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Business: overseasbusiness@hikvision.com
Technical Support: support@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Azerbaijan
T +994 50 369 81 57
Azerbaijan.CATC@hikvision.com

Hikvision Brazil
T +55-11-3318-0050
Latam.support@hikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

Hikvision Czech
T +420 29 6182640
info.cz@hikvision.com

Hikvision Egypt
T +20223066117
sales.eg@hikvision.com

Hikvision Europe
T +31 23 5542770
sales.eu@hikvision.com

Hikvision France
T +33(0)1 85 330 450
info.fr@hikvision.com

Hikvision Germany
sales.dach@hikvision.com

Hikvision Hong Kong , China
sales.hk@hikvision.com

Hikvision Hungary KFT
info.hu@hikvision.com

Hikvision India
T +91-22-6855 9944
sales@pramahikvision.com

Hikvision Indonesia
T +6221 2933 9366
Sales.Indonesia@hikvision.com

Hikvision Israel
T +972 79 5555590
sales.israel@hikvision.com

Hikvision Italy
T +39 0438 6902
info.it@hikvision.com

Hikvision Kazakhstan
T +7 (727) 291-75-88
support@hikvision.kz

Hikvision Kenya
wangchengbin@hikvision.com

Hikvision Korea
T +82-1661-8138
sales.korea@hikvision.com

Hikvision Malaysia
T +60327224000
sales.my@hikvision.com

Hikvision Mexico
T +52 55 2624 0110
sales.mexico@hikvision.com

Hikvision New Zealand
T 09 217 3127
salesnz@hikvision.com

Hikvision New Panama
Sales.centralamerica
@hikvision.com

Hikvision Pakistan
T +92-2135147526
support.pk@hikvision.com

Hikvision Philippines
support.ph@hikvision.com

Hikvision Poland
T +48 22 460 01 50
info.pl@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Romania
marketing.ro@hikvision.com

Hikvision Singapore
T +65 6684 4718
sg@hikvision.com

Hikvision South Africa
T +27 877018113
sale.africa@hikvision.com

Hikvision Spain
T +34 91 737 16 55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Thailand
sales.thailand@hikvision.com

Hikvision Turkey
T +90 216 521 70 70
support.tr@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision UK & Ireland
T +44(0)1628 902 140
info.uk@hikvision.com

Hikvision Uzbekistan
T +998-71-233-55-50
uzbekistan@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Vietnam
T +84 24 7300 7586
sale.vn@hikvision.com

Follow us on social media to get the latest product and solution information

