



UKAI PRODUCTS

Casters & Wheels

General Catalog E2014-1



Gifu Sanken Kogyo Co.,Ltd.



It is us that supplies the best UKAI casters.

Wheels for various industries, UKAI brand casters and wheels, known and loved locally and internationally, are highly evaluated with their quality and performance.

Casters and wheels that support smooth movement are widely utilized in various industries as contribution of conveyance rationalization and lightened labor.

We strive to develop quality, and also we will keep our persistent efforts to create and develop our products with our advanced technique.



Casters
& Wheels



Ogaki Factory / Caster Division



UKAI casters are manufactured in Ogaki Factory, and distributed inside Japan and also around the world.

CONTENTS

■ The Usage Notice of Casters	P.5
■ The Model Number of UKAI Casters	P.7
■ Caster, Bracket and Wheel Parts	P.7
■ Basic data of Tire Material	P.8
■ RoHS Compliant	P.8
■ Caster Selection	P.9
■ Wheel Selection	P.11

■ Medium Weight Caster Series	Swivel Caster	J Type	P.15
	Rigid Caster	K Type	P.21
	Swivel Caster with Stopper	JB Type	P.27
	Rigid Caster with Stopper	KBZ Type	P.33

■ Stainless Steel Caster Series	Swivel Caster	JA Type	P.39
	Rigid Caster	KA Type	P.45
	Swivel Caster with Stopper	JAB Type	P.51
	Rigid Caster with Stopper	KABZ Type	P.57

■ Heavy Duty (Small Type) Caster Series	Swivel Caster (Small Type)	JM Type	P.63
	Adjuster	AD-12/AE-12 Type	P.64
	Rigid Caster (Small Type)	KH Type	P.65

■ Heavy Duty Caster Series	Swivel Caster	JM Type	P.67
	Rigid Caster	KH Type	P.69
	Swivel Caster with Stopper	JMB Type	P.71
	Super Heavy Duty Swivel Caster	JH Type	P.73
	Super Heavy Duty Swivel Caster with Stopper	JHB Type	P.75

■ Towing Caster Series	Swivel Caster	JHW Type	P.77
	Rigid Caster	KHW/KW Type	P.78

■ Low Height Caster Series	Swivel Caster	T Type	P.79
	Dust-Proof Swivel Caster	TN Type	P.80
	Heavy Duty Swivel Caster	TH Type	P.81
	Adjuster	AE Type	P.82

■ Medium Weight Wheel Series	Steel Rim	Polybutadiene Rubber Wheel	S Type		P.83
		Polybutadiene Red Rubber Wheel	SR Type		P.83
		Polybutadiene High-Rebound Rubber Wheel	SH Type		P.84
		Chloroprene Heat-resistance Rubber Wheel	CR Type		P.84
		Urethane Rubber Wheel	SUI Type		P.85
		Anti-Static Urethane Rubber Wheel	Buid-to-order manufacturing	SUIE Type	
	Nylon Rim	Polybutadiene Rubber	PN Type		P.86
		Polybutadiene Rubber (Including Stainless Steel Bearings)	PND Type		P.86
		Urethane Rubber	PNU Type		P.87
		Urethane Rubber (Including Stainless Steel Bearings)	PNUD Type		P.87
		Polybutadiene Rubber (Spindle Sleeve)	PNA Type		P.88
		Urethane Rubber (Spindle Sleeve)	PNUA Type		P.88
		Nylon	PB Type		P.89
		Nylon (Including Stainless Steel Bearings)	PBD Type		P.89
		Nylon (Spindle Sleeve)	P Type		P.90
	Steel Rim	Polybutadiene Rubber (Including Radial Bearings)	SV Type		P.90
		Polybutadiene High-Rebound Rubber (Including Radial Bearings)	SHV Type		P.90



■ Heavy Duty Wheel Series	Reinforced Nylon	RGN Type	P.91
	Polybutadiene Rubber	RG Type	P.91
	Aluminum Rim • Urethane Rubber	R Type	P.92
	Steel Rim • Urethane Rubber	RF Type	P.92
	MC Nylon	RR Type	P.93
	Aluminum Rim • MC Nylon	RR Type	P.93
	MC Nylon	UWB Type	P.94
	MC Nylon (Including Stainless Steel Bearings)	UWBD Type	P.95
	MC Nylon (Spindle Sleeve)	UWA Type	P.96
	MC Nylon [Slim Type]	UWBS Type	P.97
	MC Nylon [Slim Type] (Including Stainless Steel Bearings)	UWBSD Type	P.97
	Steel	F Type	P.98
	Steel (Spindle Sleeve)	FA Type	P.98
■ Medium Weight Caster Series	Swivel Caster	HJ Type	P.99
	Rigid Caster	HK Type	P.100
	Swivel Caster with Stopper	HJS Type	P.101
	Steel Rim • Polybutadiene Rubber Wheel	H Type	P.102
■ Silent Running Caster Series	Swivel Caster	PCJC Type	P.104
	Rigid Caster	PCKE Type	P.105
		PCKC Type	P.106
	Swivel Caster with Stopper	PCJCS Type	P.107
	Nylon Rim • Polybutadiene Rubber Wheel	PC Type	P.108
■ Pneumatic Rubber / Airless Wheel Caster Series	Swivel Caster	HLJ/HFJF Type	P.111
	Rigid Caster	HLK/HFKF Type	P.113
	Swivel Caster with Stopper	HLJB/HFJBF Type	P.115
■ Pneumatic Rubber / Airless Wheel		6 $\frac{1}{2}$ ×2-3HL	P.116
		6 $\frac{1}{2}$ ×2-4HL	P.117
		6 $\frac{1}{2}$ ×2-4HF	P.117
		2.00-4HL	P.118
		2.50-4HL	P.118
		3.00-4HL	P.119
		8×3.00-4HL	P.119
		3.50-5HL	P.120
		Pneumatic Wheel Parts	P.121
		The Model Number of UKAI Pneumatic Wheels	P.121
		The Usage Notice of Pneumatic Wheels	P.121

The Usage Notice of Casters

(I) Application

Casters are attached to transportation equipment and other devices inside rooms and facilities, with the purpose of facilitating the relocation or transfer of cargoes, excluding people and animals, and moved by human power intermittently.

(II) Choice of the Casters and Usage Conditions

1. Load Capacity and Adequate Load

Load Capacity Upper limit for safe, smooth use for a long period of time

Adequate Load When casters are attached to a cart (use of 4 casters), the load needs to be supported at 3 points. Accordingly, please calculate the load, assuming 80% of the maximum load, as shown in the following equation:

$$\text{Adequate Load} = \text{Load Capacity per 1 pcs (daN)} \times 4 \text{ pcs} \times 0.8$$

*About a Unit.

1daN=10N $\approx$ 1.02kgf (1kgf $\approx$ 9.8N=0.987daN)
(Scale factor:9.8 $\rightarrow$ 9.80665)

2. Speed Limits

Use the casters intermittently on a flat road at less than the speed tabulated below. This is the same also for using casters for towing, and using the power of a trailer or the like. Please avoid the continuous use, which generates heat.

Wheel Diameter	Speed Limits
Below 75mm	Below 2km/h
Above 100mm	Below 4km/h

3. Usage Conditions

Please determine the following items, according to equipment (loading and usage conditions).

Type of Bracket Swivel, Rigid, With Stopper, etc.
Installation Method, Material

Type of Wheel Diameter, Material

4. Usage Environment

In general, casters are designed, assuming that they are used indoors at room temperature. Please avoid exposure to the caustic environment (Ex.acidity, alkali, sea, oil). There is a risk that products will deteriorate.

If you want to use the casters at high or low temperatures, please consult with us. You would require brackets, wheels, and grease according to usage.

Some materials of the wheels may stain floor surfaces.

5. Stopper

Long-term abrasion or damage may degrade the functions before you notice. In addition, hard wheels, such as nylon wheels, have less braking force, from shipment.

If necessary for safety, please take measures, such as wheel clamps and floor locks, to complement the braking performance.

(III) Installation of Casters

1. Attach each caster to the fixated joint part properly with a bolt, a nut, a washer, etc. that fits the hole part for attaching, so that it will not loosen.
2. Attach each caster so that the attachment plane is horizontal.
3. Attach each swivel caster so that the swivel axis is vertical.
4. Attach rigid casters so that they are parallel to each other.

(IV) The Usage Notice

1. Setting Condition

Please do not use the products for any purposes other than those specified in the setting conditions, because they could place excessive burdens on casters, leading to deformation and damage.

- Please avoid overloading.
- Please avoid partial loading.
- Please do not use the casters with incorrect and unsecure fitting and installation.
- Please avoid excessive shock load (Please be cautious about the shocks from steps and loading goods).
- Please do not use the casters on a significantly uneven surface and move them across over a sharp protrusion.
- Please do not move the cart forward to the opposite direction of its rigid casters.
- Please do not use the casters using the power of a trailer, excluding when using towing casters.
- Please do not place a person or animal on a cart with casters.
- Please do not attach casters to a cart for the purpose of moving people or animals.

2. Stopper

Since a stopper may loosen unexpectedly due to a shock, please avoid the following operations.

- Please use the stopper pedal surely with the foot while wearing shoes.
- Please do not park the cart on a slope even if the caster stoppers are locked.
- Please do not move the cart when the caster stoppers are locked.
- Please do not step on the stopper pedals too hard or knock the pedals with a hammer.
- Please do not use the stopper pedal during driving.

3. Handling of the Casters

Use protective gears, such as gloves, to handle casters safely.

4. Remodeling of the Product

We will not take responsibility for the remodeling, reassembly, coating, welding, and attachment conducted by you. We would appreciate your understanding.

(V) Maintenance Checkup

Deterioration, including the loosening of screws and the corrosion of parts, may occur according to usage conditions and period. Check the following items regularly.

- Whether the caster mounting part is clamped tightly
If not, clamp it again.
- Swivel Part of Swivel Casters
If you find the swaged part has loosened, replace swivel casters.
- Whether the caster/shaft part has loosened or corroded
If you find screws have loosened, tighten them. If you find corroded parts, replace the parts.
- Whether there is the abrasion or deterioration of the tire part, the corrosion of the bearing part, or the like
If you find deteriorated parts, replace the parts.
- Whether there are foreign materials in the swivel or shaft part
If there are any foreign materials, remove them.
- Whether there are any damage, cracks, or deformation
If any, replace the parts.

As for pneumatic rubber / airless wheel, please refer to "The Usage Notice of Pneumatic / Airless Wheels" on page 121


If there are any questions, please ask us before use.

Warning




The following usage is prohibited.


Wrong usage could lead to a serious accident.




Please avoid overloading.




Please avoid partial loading.




Please do not use the casters with incorrect and unsecure fitting and installation.




Please avoid excessive shock load (Please be cautious about the shocks from steps and loading goods).



Please do not use the casters on a significantly uneven surface and move them across over a sharp protrusion.




Please avoid exposure to the caustic environment (Ex.acidity, alkali, sea, oil), and do not exceed the specified temperature.




Please do not exceed the following speed limits.


Wheel Diameter	Speed Limits
Below 75mm	Below 2km/h
Above 100mm	Below 4km/h

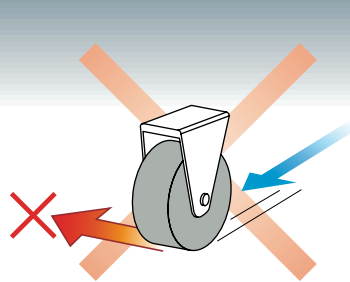


Please do not move the cart forward to the opposite direction of its rigid casters.




Please do not park the cart on a slope even if the caster stoppers are locked.



Please do not move the cart when the caster stoppers are locked.



Please do not step on the stopper pedals too hard or knock the pedals with a hammer.



Please do not place a person or animal on a cart with casters.

The Model Number of UKAI Casters

●The Model Number of UKAI Casters


S	J	-	150	SJ-150
150mm Medium Weight Rubber Wheel with Swivel Bracket				
RR	JM	-	150	RRJM-150
150mm Heavy Duty MC Nylon Wheel with Swivel Bracket				
Wheel Type P.11/P.12	Bracket Type P.9/P.10	—	Wheel Size (mm)	

●The Model Number of UKAI Wheels

S	-	150	S-150
150mm Rubber Wheel			
RR	-	150	RR-150
150mm MC Nylon Wheel			
Wheel Type P.11/P.12	—	Wheel Size (mm)	

Build-to-order manufacturing Ordinarily, the turnaround time is 30 to 60 days.
For details, please ask us when placing an order.

Caster, Bracket and Wheel Parts

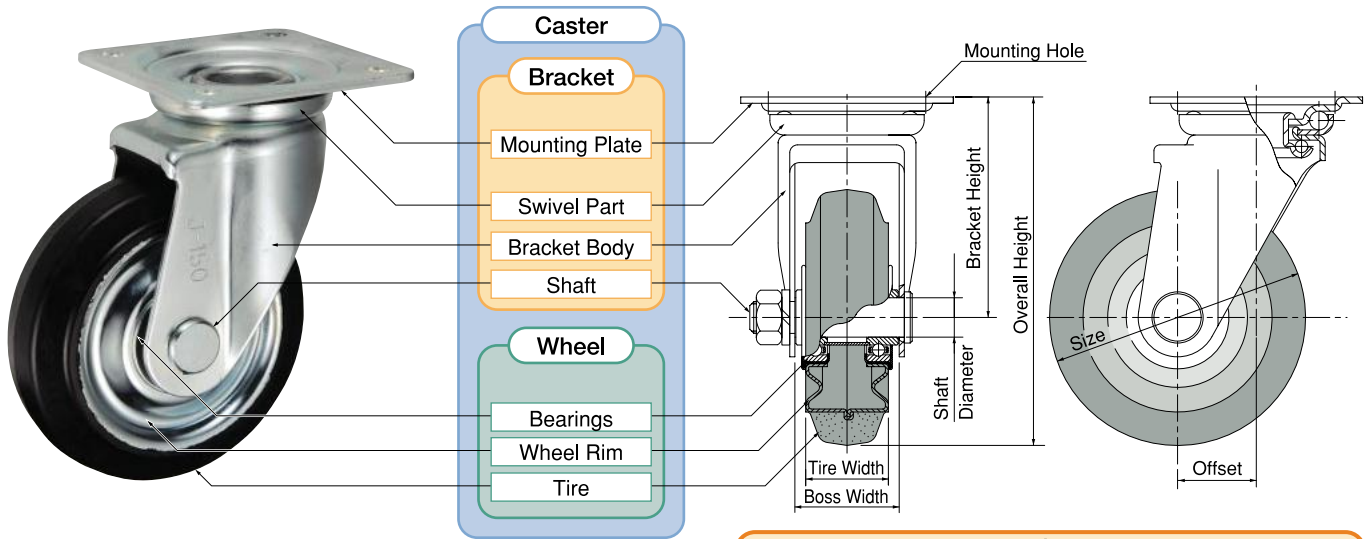

As for pneumatic rubber / airless wheel, please refer to page 121.

Basic Data of Tire Material

Tire Material	Natural Rubber	Polybutadiene Rubber	Polybutadiene High-Rebound Rubber	Polybutadiene Red Rubber
Model Number of Wheel	—	S•PN•PNA•PND•RG•H•PC	SH	SR
Hardness	HS80	HS65	HS58	HS60
Elasticity	○	☆	☆	☆
Compression Set	○	○	○	○
Wear-resistance	○	◎	◎	◎
Weather-resistance	○	○	○	○
Oil Proof (Machine Oil)	△	△	△	△
Gasoline-resistance	×	×	×	×
Heat-resistance (°C)	90	80	80	80
Cold-resistance (°C)	-20	-40	-20	-20
Water-resistance	○	△	△	△
Chemical-resistance (Acidity, Alkali)	△	△	△	△
Starting Resistance	○	◎	☆	◎

Tire Material	Chloroprene Heat-resistance Rubber	Polyurethane Rubber (thermosetting)	Nylon	Monomer Cast Nylon
Model Number of Wheel	CR	SUI•SUIE•PNU•PNUA•PNUD•RF•R	P•PB•PBD•RGN	RR•UWB•UWBS•UWA•UWBD•UWBSD
Hardness	HS70	HS95 (SUIE:HS90)	HR120	HR120
Elasticity	○	◎	×	×
Compression Set	○	☆	△	◎
Wear-Resistant	◎	☆	○	☆
Weather-Resistant	○	☆	☆	☆
Oil Proof (Machine Oil)	△	☆	☆	☆
Gasoline-Resistant	△	◎	◎	◎
Heat-Resistant (°C)	100	70	70	130
Cold-Resistant (°C)	-20	-30	-40	-40
Water-Resistant	△	△	○	○
Chemical-Resistant (Acidity, Alkali)	○	×	◎	◎
Starting Resistance	○	☆	◎	☆

* Hardness HS:Shore hardness, HR:Rockwell hardness ☆ : Excellent ◎ : Very Good ○ : Good △ : Acceptable × : Improper

* General characteristics of materials only. Please refer to them when selecting or judging materials, because the products are influenced by usage conditions and environments.

* If you use the products outside the above temperature range, we recommend you to use iron wheels.

* Bracket usage temperature range : -20°C~135°C

If you want to use the brackets at out of the above temperature range, please consult with us.

RoHS Compliant

UKAI casters in this English catalog follow RoHS Directive (Restriction of Hazardous Substances).

<Substances restricted by RoHS Directive and their maximum allowable concentrations>


Material	Maximum Allowable Concentration
Lead : Pb	0.1% (1000ppm)
Mercury : Hg	0.1% (1000ppm)
Cadmium: Cd	0.01% (100ppm)
Hexavalent Chromium: Cr ⁶⁺	0.1% (1000ppm)
PBBs	0.1% (1000ppm)
PBDEs	0.1% (1000ppm)

Caster Selection



		Swivel	Rigid	Swivel with Stopper	Rigid with Stopper	Adjuster
Medium Weight		J Type	K Type	JB Type	KBZ Type	
		 P.15	 P.21	 P.27	 P.33	
Stainless Steel		JA Type	KA Type	JAB Type	KABZ Type	
		 P.39	 P.45	 P.51	 P.57	
Small Type		JM Type	KH Type			AD Type
		 P.63	 P.65			 P.64
Heavy Duty		JM Type	KH Type	JMB Type		
		 P.67	 P.69	 P.71		
Super Heavy Duty		JH Type		JHB Type		
		 P.73		 P.75		
Towing		JHW Type	KHW/KW Type			
		 P.77	 P.78			

	Swivel	Rigid	Swivel with Stopper
Medium Weight	HJ Type  P.99	HK Type  P.100	HJS Type  P.101
	PCJC Type  P.104	PCKE Type  P.105	PCKC Type  P.106
Silent Running			PCJCS Type  P.107




	Swivel	Rigid	Swivel with Stopper
Pneumatic Rubber / Airless Wheel	HLJ/HFJF Type  P.111	HLK/HFKF Type  P.113	HLJB/HFJBF Type  P.115

	Swivel			Adjuster
Low Height	T Type  P.79	TN Type (Dust-Proof)  P.80	TH Type (Heavy Duty)  P.81	AE Type  P.82

Wheel Selection

Medium Weight		Wheel Materials				
		Rubber		Urethane Rubber		Nylon
Steel Rim		S Type	SR Type (Red Rubber)	SUI Type	SUIE Type (Anti-Static)	
		 P.83	 P.83	 P.85	 P.85	Build- to-order manufacturing
		SH Type (High-Rebound)	CR Type (Heat-resistance)			
		 P.84	 P.84			
	Radial Bearing	SV Type	SHV Type (High-Rebound)			
		 P.90	 P.90			
Nylon Rim		PN Type		PNU Type		PB Type
		 P.86		 P.87		 P.89
	Stainless Steel Bearing	PND Type		PNUD Type		PBD Type
		 P.86		 P.87		 P.89
	Spindle Sleeve ⊗	PNA Type		PNUA Type		P Type
		 P.88		 P.88		 P.90
		Pneumatic Rubber / Airless Wheel	Rubber Wheel Steel Rim	Silent Running Wheel	Steel Spindle Sleeve⊗	
		HL/HF Type	H Type	PC Type	F Type	FA Type
		 P.116	 P.102	 P.108	 P.98	 P.98

* The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel including bearings.

Heavy Duty		Wheel Materials			
		Rubber	Urethane Rubber	Nylon	MC Nylon
Steel Rim	RG-200	RF Type			
	 P.91	 P.92			
Aluminium Rim	RG-100~150 Type	R Type		RR-130~200 Type	
	 P.91	 P.92		 P.93	
Nylon Rim			RGN Type		
			 P.91		
MC Nylon Rim				RR-50~100 Type	
				 P.93	
				UWB Type	UWBS Type
				 P.94	 P.97
Stainless Steel Bearing				UWBD Type	UWBSD Type
				 P.95	 P.97
Spindle Sleeve ⊗				UWA Type	
				 P.96	

* The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel including bearings.



UKAI CASTERS

Casters

J Type

Size: 75mm

Medium Weight Swivel Bracket



SJ-75



SUIJ-75

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity									Weight (g) 							
																				
				(daN)	(kgf)															
75	■Steel Rim·Rubber Wheel																			
	SJ-75	Rubber	B/B	80	81.6	32	10	101	82/82	63/63	9.5	22	570							
	SRJ-75	Red Rubber	B/B	60	61.2								570							
	CRJ-75	Heat-resistance	B/B	80	81.6								590							
	■Steel Rim·Urethane Rubber Wheel																			
	SUIJ-75	Urethane	B/B	120	122.4	32	10	101	82/82	63/63	9.5	22	650							
	SUIEJ-75	Anti-Static	B/B										650							
	■Nylon Rim·Rubber Wheel																			
	PNJ-75	Rubber	B/B	70	71.4	32	10	101	82/82	63/63	9.5	22	550							
	PNDJ-75	Rubber	SUS										550							
	PNAJ-75	Rubber											510							
	■Nylon Rim·Urethane Rubber Wheel																			
	PNUJ-75	Urethane	B/B	100	102.0	32	10	101	82/82	63/63	9.5	22	540							
	PNUDJ-75	Urethane	SUS										540							
	PNUAJ-75	Urethane		70	71.4								490							
	■Nylon																			
	PJ-75	Nylon		100	102.0	32	10	101	82/82	63/63	9.5	22	460							
	PBJ-75	Nylon	B/B	120	122.4								520							
	PBDJ-75	Nylon	SUS										520							
	■Monomer Cast Nylon																			
	UWBJ-75	MC Nylon	B/B	120	122.4	24	10	101	82/82	63/63	9.5	22	560							
	UWBDJ-75	MC Nylon	SUS										560							
	UWAJ-75	MC Nylon											520							
	UWBSJ-75	MC Nylon	B/B			26							540							
	UWBSDJ-75	MC Nylon	SUS										540							

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

J Type

Size: 100mm

Medium Weight Swivel Bracket



SJ-100



SUIJ-100

Medium Weight Caster Series

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D		Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)									
				(daN)	(kgf)																	
100	■Steel Rim·Rubber Wheel																					
	SJ-100	Rubber	B/B	130	132.6	35	12	144	95/95	71/71	11	35	1,100									
	SRJ-100	Red Rubber	B/B	100	102.0								1,100									
	CRJ-100	Heat-resistance	B/B	130	132.6								1,130									
	■Steel Rim·Urethane Rubber Wheel																					
	SUIJ-100	Urethane	B/B	180	183.6	32	12	144	95/95	71/71	11	35	1,170									
	SUIEJ-100	Anti-Static	B/B										1,170									
	■Nylon Rim·Rubber Wheel																					
	PNJ-100	Rubber	B/B	100	102.0	32	12	144	95/95	71/71	11	35	1,000									
	PNDJ-100	Rubber	SUS										1,000									
	PNAJ-100	Rubber											940									
	■Nylon Rim·Urethane Rubber Wheel																					
	PNUJ-100	Urethane	B/B	150	153.0	32	12	144	95/95	71/71	11	35	980									
	PNUDJ-100	Urethane	SUS										980									
	PNUAJ-100	Urethane		100	102.0	35	12	144	95/95	71/71	11	35	920									
	■Nylon																					
	PJ-100	Nylon		120	122.4								180	183.6								900
	PBJ-100	Nylon	B/B	960																		
	PBDJ-100	Nylon	SUS	960																		
	■Monomer Cast Nylon																					
	UWBJ-100	MC Nylon	B/B	180	183.6	29	12	144	95/95	71/71	11	35	1,110									
	UWBDJ-100	MC Nylon	SUS										1,110									
	UWAJ-100	MC Nylon											1,060									
	UWBSJ-100	MC Nylon	B/B			30							1,060									
	UWBSDJ-100	MC Nylon	SUS										1,060									


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

J Type

Size: 130mm

Medium Weight Swivel Bracket

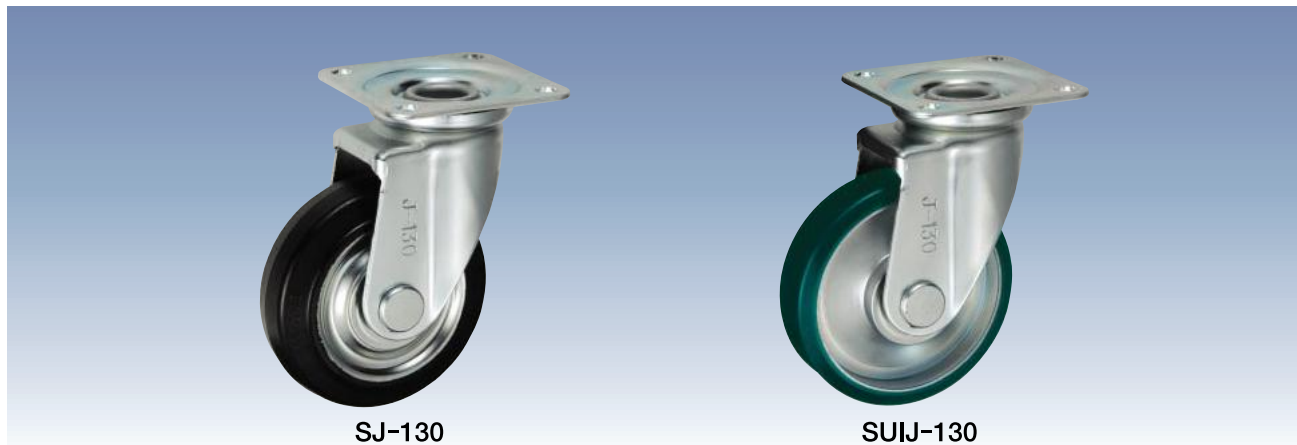

Unit: mm																				
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)							
				(daN)	(kgf)															
130	■Steel Rim・Rubber Wheel																			
	SJ-130	Rubber	B/B	180	183.6	42	20	177	108/108	80/80	11	40	1,870							
	SRJ-130	Red Rubber	B/B	140	142.8								1,870							
	CRJ-130	Heat-resistance	B/B	180	183.6								1,900							
	■Steel Rim・Urethane Rubber Wheel																			
	SUIJ-130	Urethane	B/B	250	255.0	35	20	177	108/108	80/80	11	40	2,000							
	SUIEJ-130	Anti-Static	B/B										2,000							
	■Nylon Rim・Rubber Wheel																			
	PNJ-130	Rubber	B/B	145	147.9	38	20	177	108/108	80/80	11	40	1,670							
	PNDJ-130	Rubber	SUS										1,670							
	PNAJ-130	Rubber											120	122.4	1,480					
	■Nylon Rim・Urethane Rubber Wheel																			
	PNUJ-130	Urethane	B/B	200	204.0	35	20	177	108/108	80/80	11	40	1,610							
	PNUDJ-130	Urethane	SUS										1,610							
	PNUAJ-130	Urethane											120	122.4	1,420					
	■Nylon																			
	PJ-130	Nylon		150	153.0	42	20	177	108/108	80/80	11	40	1,410							
	PBJ-130	Nylon	B/B	250	255.0								1,610							
	PBDJ-130	Nylon	SUS										1,610							
	■Monomer Cast Nylon																			
	UWBJ-130	MC Nylon	B/B	250	255.0	36	20	177	108/108	80/80	11	40	1,890							
	UWBDJ-130	MC Nylon	SUS										1,890							
	UWAJ-130	MC Nylon											1,740							
	UWBSJ-130	MC Nylon	B/B			30							1,630							
	UWBSDJ-130	MC Nylon	SUS										1,630							

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

J Type

Size: 150mm

Medium Weight Swivel Bracket



SJ-150



SUIJ-150

Medium Weight Caster Series

Unit: mm																				
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)							
				(daN)	(kgf)															
150	■Steel Rim·Rubber Wheel																			
	SJ-150	Rubber	B/B	200	204.0	45	20	198	120/120	90/90	11	45	2,510							
	SRJ-150	Red Rubber	B/B	160	163.2								2,510							
	CRJ-150	Heat-resistance	B/B	200	204.0								2,550							
	■Steel Rim·Urethane Rubber Wheel																			
	SUIJ-150	Urethane	B/B	300	306.0	38	20	198	120/120	90/90	11	45	2,700							
	SUIEJ-150	Anti-Static	B/B										2,700							
	■Nylon Rim·Rubber Wheel																			
	PNJ-150	Rubber	B/B	175	178.5	38	20	198	120/120	90/90	11	45	2,220							
	PNDJ-150	Rubber	SUS										2,220							
	PNAJ-150	Rubber											140	142.8	2,060					
	■Nylon Rim·Urethane Rubber Wheel																			
	PNUJ-150	Urethane	B/B	250	255.0	38	20	198	120/120	90/90	11	45	2,180							
	PNUDJ-150	Urethane	SUS										2,180							
	PNUAJ-150	Urethane											150	153.0	1,990					
	■Nylon																			
	PJ-150	Nylon		180	183.6	45	20	198	120/120	90/90	11	45	1,960							
	PBJ-150	Nylon	B/B	300	306.0								2,200							
	PBDJ-150	Nylon	SUS										2,200							
	■Monomer Cast Nylon																			
	UWBJ-150	MC Nylon	B/B	300	306.0	40	20	198	120/120	90/90	11	45	2,640							
	UWBDJ-150	MC Nylon	SUS										2,640							
	UWAJ-150	MC Nylon											2,490							
	UWBSJ-150	MC Nylon	B/B			30							2,240							
	UWBSDJ-150	MC Nylon	SUS										2,240							

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

J Type

Size: 200mm

Medium Weight Swivel Bracket



SJ-200



SUIJ-200

Unit: mm																				
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 							
				(daN)	(kgf)															
200	■Steel Rim・Rubber Wheel																			
	SJ-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	11	58	4,030							
	SRJ-200	Red Rubber	B/B	200	204.0								4,030							
	SHJ-200	High-Rebound	B/B	250	255.0								4,030							
	CRJ-200	Heat-resistance	B/B										4,110							
	■Steel Rim・Urethane Rubber Wheel																			
	SUIJ-200	Urethane	B/B	400	408.0	42	20	250	140/140	112/112	11	58	4,200							
	SUIEJ-200	Anti-Static	B/B										4,200							
	■Nylon Rim・Rubber Wheel																			
	PNJ-200	Rubber	B/B	220	224.4	42	20	250	140/140	112/112	11	58	3,380							
	PNDJ-200	Rubber	SUS										3,380							
	PNAJ-200	Rubber											160	163.2	3,210					
	■Nylon Rim・Urethane Rubber Wheel																			
	PNUJ-200	Urethane	B/B	350	357.0	42	20	250	140/140	112/112	11	58	3,250							
	PNUDJ-200	Urethane	SUS										3,250							
	PNUAJ-200	Urethane											250	255.0	3,080					
	■Nylon																			
	PJ-200	Nylon		250	255.0	45	20	250	140/140	112/112	11	58	3,100							
	PBJ-200	Nylon	B/B	400	408.0								3,310							
	PBDJ-200	Nylon	SUS										3,310							
	■Monomer Cast Nylon																			
	UWBJ-200	MC Nylon	B/B	420	428.4	42	20	250	140/140	112/112	11	58	4,260							
	UWBDJ-200	MC Nylon	SUS										4,260							
	UWAJ-200	MC Nylon											4,110							
	UWBSJ-200	MC Nylon	B/B			34							3,720							
	UWBSDJ-200	MC Nylon	SUS										3,720							

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

J Type

Size: 250mm~300mm

Medium Weight Swivel Bracket



SJ-250



SUIJ-250

														Unit: mm
Size 	Model Number	Wheel	Bearing	Load Capacity									Weight (g) 	
														
				(daN)	(kgf)									
250	■Steel Rim・Rubber Wheel													
	SJ-250	Rubber	B/B	330	336.6	50	25	305	160/160	125/125	14	71	6,080	
	SRJ-250	Red Rubber	B/B	260	265.2								6,080	
	CRJ-250	Heat-resistance	B/B	330	336.6								6,300	
	■Steel Rim・Urethane Rubber Wheel													
	SUIJ-250	Urethane	B/B	500	510.0	45	25	305	160/160	125/125	14	71	6,640	
	■Monomer Cast Nylon													
	UWBSJ-250	MC Nylon	B/B	550	561.0	36	25	305	160/160	125/125	14	71	5,800	
300	■Steel Rim・Rubber Wheel													
	SJ-300	Rubber	B/B	350	357.0	50	25	374	175/175	140/140	14	71	9,290	
	■Steel Rim・Urethane Rubber Wheel													
	SUIJ-300	Urethane	B/B	600	612.0	50	25	374	175/175	140/140	14	71	8,960	

Unit: mm

Bearing: B/B -- Steel bearing


 Build-to-order manufacturing

[Bracket Dimensions]

Unit: mm

Size 	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
75	120	122.4	63	40	370
100	180	183.6	94	43	740
130	250	255.0	112	53	1,090
150	300	306.0	123	56	1,550
200	420	428.4	150	56	2,360
250	550	561.0	180	90	3,560
300	600	612.0	224	110	4,520

* The shaft set is included in the bracket.

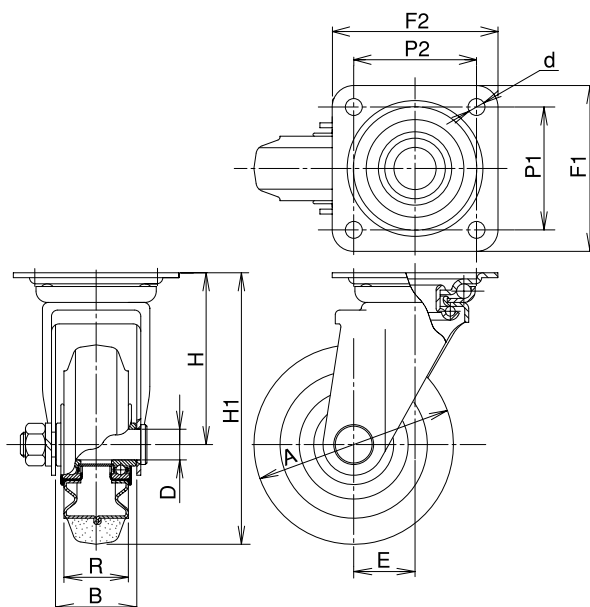

K Type

Size: 75mm

Medium Weight Rigid Bracket



Unit: mm																		
Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D		Overall Height H1		Mounting Hole Spacing P1/P2	Plate Hole d	Weight (g)					
				(daN)	(kgf)													
75	■Steel Rim·Rubber Wheel																	
	SK-75	Rubber	B/B	80	81.6	32	10	101	91/68	63/40	9.5	430						
	SRK-75	Red Rubber	B/B	60	61.2							430						
	CRK-75	Heat-resistance	B/B	80	81.6							450						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIK-75	Urethane	B/B	120	122.4	32	10	101	91/68	63/40	9.5	510						
	SUIEK-75	Anti-Static	B/B									510						
	■Nylon Rim·Rubber Wheel																	
	PNK-75	Rubber	B/B	70	71.4	32	10	101	91/68	63/40	9.5	410						
	PNDK-75	Rubber	SUS									410						
	PNAK-75	Rubber										370						
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUK-75	Urethane	B/B	100	102.0	32	10	101	91/68	63/40	9.5	400						
	PNUDK-75	Urethane	SUS									400						
	PNUAK-75	Urethane		70	71.4							350						
	■Nylon																	
	PK-75	Nylon		100	102.0	32	10	101	91/68	63/40	9.5	320						
	PBK-75	Nylon	B/B	120	122.4							380						
	PBDK-75	Nylon	SUS									380						
	■Monomer Cast Nylon																	
	UWBK-75	MC Nylon	B/B	120	122.4	24	10	101	91/68	63/40	9.5	420						
	UWBDK-75	MC Nylon	SUS									420						
	UWAK-75	MC Nylon										380						
	UWBSK-75	MC Nylon	B/B			26						400						
	UWBSDK-75	MC Nylon	SUS									400						

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

K_{Type}

Size: 100mm

Medium Weight Rigid Bracket

SK-100

SUIK-100

Medium Weight Caster Series

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Weight (g) 						
																		
				(daN)	(kgf)													
100	■Steel Rim·Rubber Wheel																	
	SK-100	Rubber	B/B	130	132.6	35	12	144	115/80	80/45	11	800						
	SRK-100	Red Rubber	B/B	100	102.0							800						
	CRK-100	Heat-resistance	B/B	130	132.6							830						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIK-100	Urethane	B/B	180	183.6	32	12	144	115/80	80/45	11	870						
	SUIEK-100	Anti-Static	B/B									870						
	■Nylon Rim·Rubber Wheel																	
	PNK-100	Rubber	B/B	100	102.0	32	12	144	115/80	80/45	11	700						
	PNDK-100	Rubber	SUS									700						
	PNAK-100	Rubber										640						
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUK-100	Urethane	B/B	150	153.0	32	12	144	115/80	80/45	11	680						
	PNUDK-100	Urethane	SUS									680						
	PNUAK-100	Urethane		100	102.0	32	12	144	115/80	80/45	11	620						
	■Nylon																	
	PK-100	Nylon		120	122.4	35	12	144	115/80	80/45	11	600						
	PBK-100	Nylon	B/B	180	183.6							660						
	PBDK-100	Nylon	SUS									660						
	■Monomer Cast Nylon																	
	UWBK-100	MC Nylon	B/B	180	183.6	29	12	144	115/80	80/45	11	810						
	UWBK-100	MC Nylon	SUS									810						
	UWAK-100	MC Nylon										760						
	UWBSK-100	MC Nylon	B/B			30						760						
	UWBSDK-100	MC Nylon	SUS									760						

Unit: mm


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

K Type

Size: 130mm

Medium Weight Rigid Bracket

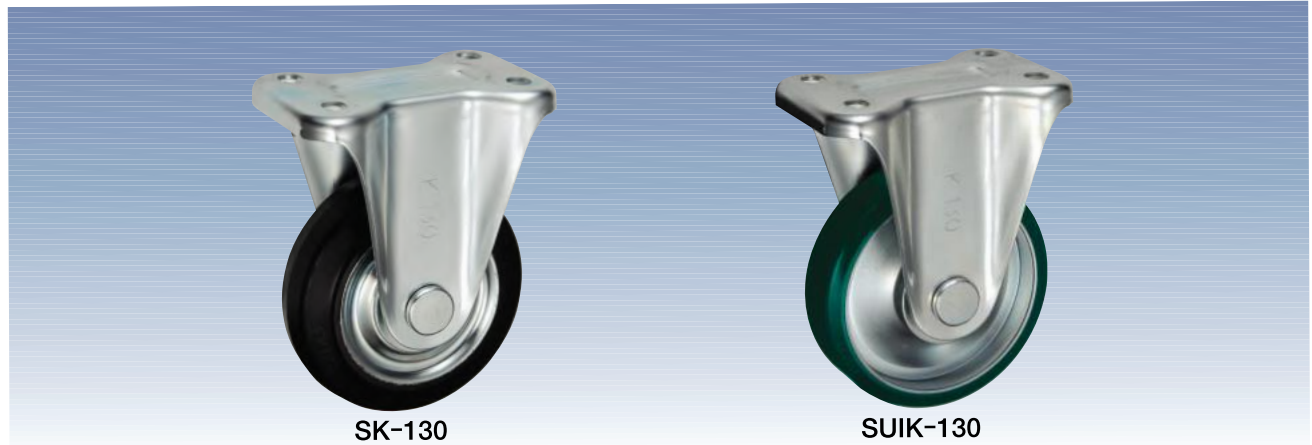

SK-130

SUIK-130

Unit: mm																		
Size 	Model Number	Wheel	Bearing	Load Capacity								Weight (g) 						
				(daN)	(kgf)													
130	■Steel Rim・Rubber Wheel																	
	SK-130	Rubber	B/B	180	183.6	42	20	177	137/93	※100/56 (50)	11	1,580						
	SRK-130	Red Rubber	B/B	140	142.8							1,580						
	CRK-130	Heat-resistance	B/B	180	183.6							1,610						
	■Steel Rim・Urethane Rubber Wheel																	
	SUIK-130	Urethane	B/B	250	255.0	35	20	177	137/93	※100/56 (50)	11	1,710						
	SUIEK-130	Anti-Static	B/B									1,710						
	■Nylon Rim・Rubber Wheel																	
	PNK-130	Rubber	B/B	145	147.9	38	20	177	137/93	※100/56 (50)	11	1,380						
	PNDK-130	Rubber	SUS									1,380						
	PNAK-130	Rubber		120	122.4							1,190						
	■Nylon Rim・Urethane Rubber Wheel																	
	PNUK-130	Urethane	B/B	200	204.0	35	20	177	137/93	※100/56 (50)	11	1,320						
	PNUDK-130	Urethane	SUS									1,320						
	PNUAK-130	Urethane		120	122.4							1,130						
	■Nylon																	
	PK-130	Nylon		150	153.0	42	20	177	137/93	※100/56 (50)	11	1,120						
	PBK-130	Nylon	B/B	250	255.0							1,320						
	PBDK-130	Nylon	SUS									1,320						
	■Monomer Cast Nylon																	
	UWBK-130	MC Nylon	B/B	250	255.0	36	20	177	137/93	※100/56 (50)	11	1,600						
	UWBDK-130	MC Nylon	SUS									1,600						
	UWAK-130	MC Nylon				30						1,450						
	UWBSK-130	MC Nylon	B/B									1,340						
	UWBSDK-130	MC Nylon	SUS									1,340						

※Oval-shaped screw holes

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

K_{Type}

Size: 150mm

Medium Weight Rigid Bracket


SK-150



SUIK-150

Medium Weight Caster Series

Unit: mm																		
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P2') 	Plate Hole d 	Weight (g) 						
				(daN)	(kgf)													
150	■Steel Rim・Rubber Wheel																	
	SK-150	Rubber	B/B	200	204.0	45	20	198	137/93	※100/56 (50)	11	1,960						
	SRK-150	Red Rubber	B/B	160	163.2							1,960						
	CRK-150	Heat-resistance	B/B	200	204.0							2,000						
	■Steel Rim・Urethane Rubber Wheel																	
	SUIK-150	Urethane	B/B	300	306.0	38	20	198	137/93	※100/56 (50)	11	2,150						
	SUIEK-150	Anti-Static	B/B									2,150						
	■Nylon Rim・Rubber Wheel																	
	PNK-150	Rubber	B/B	175	178.5	38	20	198	137/93	※100/56 (50)	11	1,670						
	PNDK-150	Rubber	SUS									1,670						
	PNAK-150	Rubber										140	142.8	1,510				
	■Nylon Rim・Urethane Rubber Wheel																	
	PNUK-150	Urethane	B/B	250	255.0	38	20	198	137/93	※100/56 (50)	11	1,630						
	PNUDK-150	Urethane	SUS									1,630						
	PNUAK-150	Urethane										150	153.0	1,440				
	■Nylon																	
	PK-150	Nylon		180	183.6	45	20	198	137/93	※100/56 (50)	11	1,410						
	PBK-150	Nylon	B/B	300	306.0							1,650						
	PBDK-150	Nylon	SUS									1,650						
	■Monomer Cast Nylon																	
	UWBK-150	MC Nylon	B/B	300	306.0	40	20	198	137/93	※100/56 (50)	11	2,090						
	UWBDK-150	MC Nylon	SUS									2,090						
	UWAK-150	MC Nylon										1,940						
	UWBSK-150	MC Nylon	B/B			30							1,690					
	UWBSDK-150	MC Nylon	SUS										1,690					

※Oval-shaped screw holes

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

K Type

Size: 200mm

Medium Weight Rigid Bracket



SK-200



SUIK-200

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
200	■Steel Rim·Rubber Wheel											
	SK-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,400
	SRK-200	Red Rubber	B/B	200	204.0							3,400
	SHK-200	High-Rebound	B/B	250	255.0							3,400
	CRK-200	Heat-resistance	B/B									3,480
	■Steel Rim·Urethane Rubber Wheel											
	SUIK-200	Urethane	B/B	400	408.0	42	20	250	151/102	112/63	11	3,570
	SUIEK-200	Anti-Static	B/B									3,570
	■Nylon Rim·Rubber Wheel											
	PNK-200	Rubber	B/B	220	224.4	42	20	250	151/102	112/63	11	2,750
	PNDK-200	Rubber	SUS									2,750
	PNAK-200	Rubber										160
	■Nylon Rim·Urethane Rubber Wheel											
	PNUK-200	Urethane	B/B	350	357.0	42	20	250	151/102	112/63	11	2,620
	PNUDK-200	Urethane	SUS									2,620
	PNUAK-200	Urethane										250
	■Nylon											
	PK-200	Nylon		250	255.0	45	20	250	151/102	112/63	11	2,470
	PBK-200	Nylon	B/B	400	408.0							2,680
	PBDK-200	Nylon	SUS									2,680
	■Monomer Cast Nylon											
	UWBK-200	MC Nylon	B/B	420	428.4	42	20	250	151/102	112/63	11	3,630
	UWBDK-200	MC Nylon	SUS									3,630
	UWAK-200	MC Nylon										3,480
	UWBSK-200	MC Nylon	B/B			34						3,090
	UWBSDK-200	MC Nylon	SUS									3,090

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

K_{Type}

Size: 250mm~300mm

Medium Weight Rigid Bracket



SK-250



SUIK-250

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
250	■Steel Rim・Rubber Wheel											
	SK-250	Rubber	B/B	330	336.6	50	25	305	200/140	140/80	14	5,510
	SRK-250	Red Rubber	B/B	260	265.2							5,510
	CRK-250	Heat-resistance	B/B	330	336.6							5,730
	■Steel Rim・Urethane Rubber Wheel											
	SUIK-250	Urethane	B/B	500	510.0	45	25	305	200/140	140/80	14	6,070
	■Monomer Cast Nylon											
UWBSK-250	MC Nylon	B/B	550	561.0	36	25	305	200/140	140/80	14	5,230	
300	■Steel Rim・Rubber Wheel											
	SK-300	Rubber	B/B	350	357.0	50	25	374	220/150	160/90	14	8,830
	■Steel Rim・Urethane Rubber Wheel											
	SUIK-300	Urethane	B/B	600	612.0	50	25	374	220/150	160/90	14	8,500

Bearing: B/B -- Steel bearing


 Build-to-order manufacturing

【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
75	120	122.4	63	40	230
100	180	183.6	94	43	440
130	250	255.0	112	53	800
150	300	306.0	123	56	1,000
200	420	428.4	150	56	1,730
250	550	561.0	180	90	2,990
300	600	612.0	224	110	4,060

* The shaft set is included in the bracket.

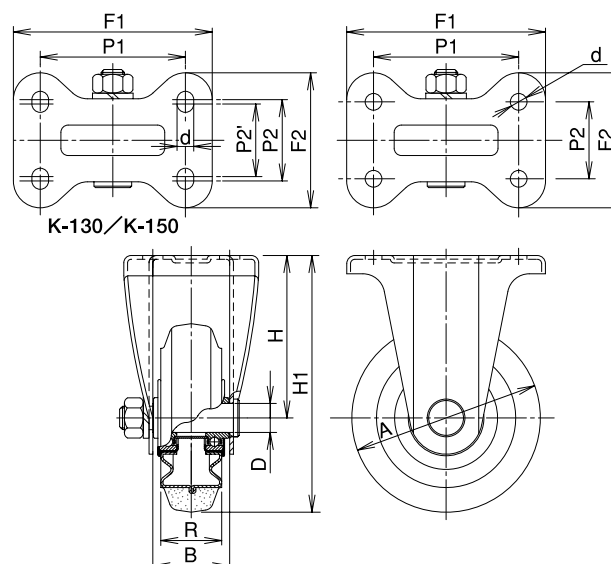

JB Type

Size: 75mm

Medium Weight Swivel Bracket with Stopper



SJB-75



SUIJB-75

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Tire Width R		Shaft Diameter D		Overall Height H1		Plate Size F1/F2		Mounting Hole Spacing P1/P2		Plate Hole d		Offset E		Weight (g)
				(daN)	(kgf)																
75	■Steel Rim·Rubber Wheel																				
	SJB-75	Rubber	B/B	80	81.6	32	10	101	82/82	63/63	9.5	22	620								
	SRJB-75	Red Rubber	B/B	60	61.2								620								
	CRJB-75	Heat-resistance	B/B	80	81.6								640								
	■Steel Rim·Urethane Rubber Wheel																				
	SUIJB-75	Urethane	B/B	120	122.4	32	10	101	82/82	63/63	9.5	22	700								
	SUIEJB-75	Anti-Static	B/B										700								
	■Nylon Rim·Rubber Wheel																				
	PNJB-75	Rubber	B/B	70	71.4	32	10	101	82/82	63/63	9.5	22	600								
	PNDJB-75	Rubber	SUS										600								
	PNAJB-75	Rubber											560								
	■Nylon Rim·Urethane Rubber Wheel																				
	PNUJB-75	Urethane	B/B	100	102.0	32	10	101	82/82	63/63	9.5	22	590								
	PNUDJB-75	Urethane	SUS										590								
	PNUAJB-75	Urethane		70	71.4	32	10	101	82/82	63/63	9.5	22	540								
	■Nylon																				
	PJB-75	Nylon		100	102.0	32	10	101	82/82	63/63	9.5	22	510								
	PBJB-75	Nylon	B/B	120	122.4								570								
	PBDJB-75	Nylon	SUS										570								
	■Monomer Cast Nylon																				
	UWBJB-75	MC Nylon	B/B	120	122.4	24	10	101	82/82	63/63	9.5	22	610								
	UWBDJB-75	MC Nylon	SUS										610								
	UWAJB-75	MC Nylon											570								
	UWBSJB-75	MC Nylon	B/B			26							590								
	UWBSDJB-75	MC Nylon	SUS										590								

● The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing


The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

JB_{Type}

Size: 100mm

Medium Weight Swivel Bracket with Stopper

Medium Weight Caster Series

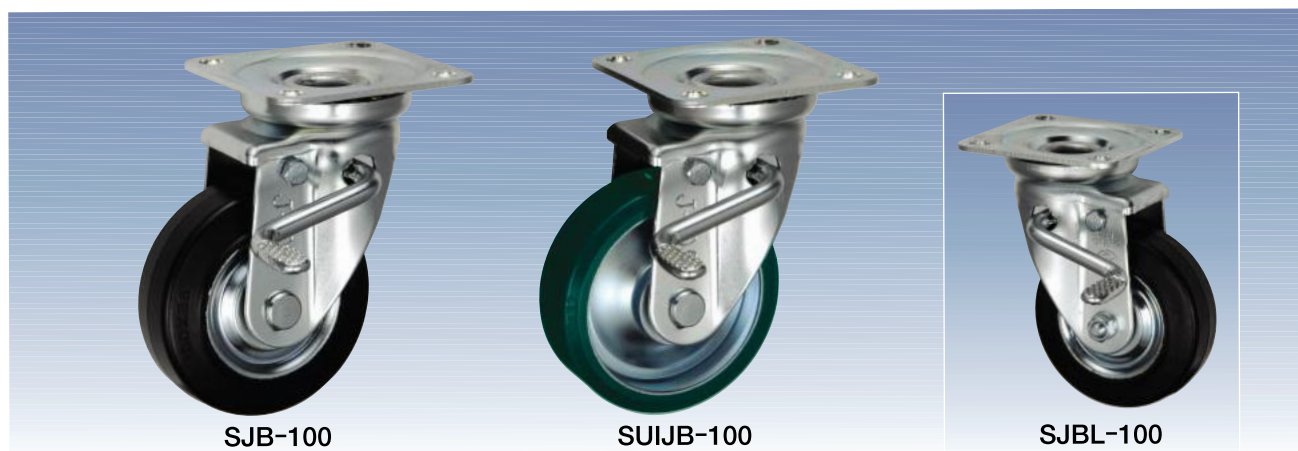

SJB-100

SUIJB-100

SJBL-100

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	Weight  (g)									
				 (kg)	 (daN)																	
				■Steel Rim・Rubber Wheel																		
100	SJB-100	Rubber	B/B	130	132.6	35	12	144	95/95	71/71	11	35	1,230									
	SRJB-100	Red Rubber	B/B	100	102.0								1,230									
	CRJB-100	Heat-resistance	B/B	130	132.6								1,260									
	■Steel Rim・Urethane Rubber Wheel																					
	SUIJB-100	Urethane	B/B	180	183.6	32	12	144	95/95	71/71	11	35	1,300									
	SUIEJB-100	Anti-Static	B/B										1,300									
	■Nylon Rim・Rubber Wheel																					
	PNJB-100	Rubber	B/B	100	102.0	32	12	144	95/95	71/71	11	35	1,130									
	PNDJB-100	Rubber	SUS										1,130									
	PNAJB-100	Rubber											1,070									
	■Nylon Rim・Urethane Rubber Wheel																					
	PNUJB-100	Urethane	B/B	150	153.0	32	12	144	95/95	71/71	11	35	1,110									
	PNUDJB-100	Urethane	SUS										1,110									
	PNUAJB-100	Urethane		100	102.0	35	12	144	95/95	71/71	11	35	1,050									
	■Nylon																					
	PJB-100	Nylon		120	122.4								180	183.6	29	12	144	95/95	71/71	11	35	1,030
	PBJB-100	Nylon	B/B	180	183.6																	1,090
	PBDJB-100	Nylon	SUS	1,090																		
	■Monomer Cast Nylon																					
	UWBJB-100	MC Nylon	B/B	180	183.6	29	12	144	95/95	71/71	11	35	1,240									
	UWBDJB-100	MC Nylon	SUS										1,240									
	UWAJB-100	MC Nylon											1,190									
	UWBSJB-100	MC Nylon	B/B			30							1,190									
	UWBSDJB-100	MC Nylon	SUS										1,190									

● The stopper pedal for left foot is available (JB-100 → JBL-100).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing


Build-to-order manufacturing

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

JB Type

Size: 130mm

Medium Weight Swivel Bracket with Stopper

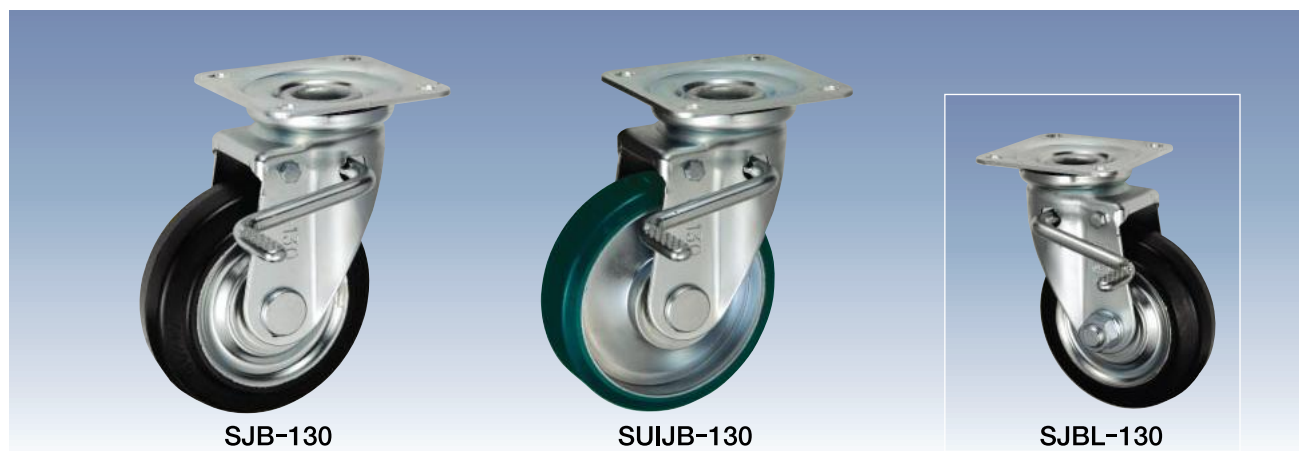

SJB-130

SUIJB-130

SJBL-130

Unit: mm

Unit: mm																				
Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D		Plate Size F1/F2				Weight (g) 							
				(daN)	(kgf)															
130	■Steel Rim・Rubber Wheel																			
	SJB-130	Rubber	B/B	180	183.6	42	20	177	108/108	80/80	11	40	2,040							
	SRJB-130	Red Rubber	B/B	140	142.8								2,040							
	CRJB-130	Heat-resistance	B/B	180	183.6								2,070							
	■Steel Rim・Urethane Rubber Wheel																			
	SUIJB-130	Urethane	B/B	250	255.0	35	20	177	108/108	80/80	11	40	2,170							
	SUIEJB-130	Anti-Static	B/B										2,170							
	■Nylon Rim・Rubber Wheel																			
	PNJB-130	Rubber	B/B	145	147.9	38	20	177	108/108	80/80	11	40	1,840							
	PNDJB-130	Rubber	SUS										1,840							
	PNAJB-130	Rubber											120	122.4	1,650					
	■Nylon Rim・Urethane Rubber Wheel																			
	PNUJB-130	Urethane	B/B	200	204.0	35	20	177	108/108	80/80	11	40	1,780							
	PNUDJB-130	Urethane	SUS										1,780							
	PNUAJB-130	Urethane											120	122.4	1,590					
	■Nylon																			
	PJB-130	Nylon		150	153.0	42	20	177	108/108	80/80	11	40	1,580							
	PBJB-130	Nylon	B/B	250	255.0								1,780							
	PBDJB-130	Nylon	SUS										1,780							
	■Monomer Cast Nylon																			
	UWBJB-130	MC Nylon	B/B	250	255.0	36	20	177	108/108	80/80	11	40	2,060							
	UWBDB-130	MC Nylon	SUS										2,060							
	UWAJB-130	MC Nylon											1,910							
	UWBSJB-130	MC Nylon	B/B			30							1,800							
	UWBSDJB-130	MC Nylon	SUS										1,800							

● The stopper pedal for left foot is available (JB-130 → JBL-130).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

JB_{Type}

Size: 150mm

Medium Weight Swivel Bracket with Stopper

SJB-150

SUIJB-150

SJBL-150

Medium Weight Caster Series

Unit: mm																				
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)							
				(daN)	(kgf)															
150	■Steel Rim·Rubber Wheel																			
	SJB-150	Rubber	B/B	200	204.0	45	20	198	120/120	90/90	11	45	2,700							
	SRJB-150	Red Rubber	B/B	160	163.2								2,700							
	CRJB-150	Heat-resistance	B/B	200	204.0								2,740							
	■Steel Rim·Urethane Rubber Wheel																			
	SUIJB-150	Urethane	B/B	300	306.0	38	20	198	120/120	90/90	11	45	2,890							
	SUIEJB-150	Anti-Static	B/B										2,890							
	■Nylon Rim·Rubber Wheel																			
	PNJB-150	Rubber	B/B	175	178.5	38	20	198	120/120	90/90	11	45	2,410							
	PNDJB-150	Rubber	SUS										2,410							
	PNAJB-150	Rubber											140	142.8	2,250					
	■Nylon Rim·Urethane Rubber Wheel																			
	PNUJB-150	Urethane	B/B	250	255.0	38	20	198	120/120	90/90	11	45	2,370							
	PNUDJB-150	Urethane	SUS										2,370							
	PNUAJB-150	Urethane											150	153.0	2,180					
	■Nylon																			
	PJB-150	Nylon		180	183.6	45	20	198	120/120	90/90	11	45	2,150							
	PBJB-150	Nylon	B/B	300	306.0								2,390							
	PBDJB-150	Nylon	SUS										2,390							
	■Monomer Cast Nylon																			
	UWBJB-150	MC Nylon	B/B	300	306.0	40	20	198	120/120	90/90	11	45	2,830							
	UWBDB-150	MC Nylon	SUS										2,830							
	UWAJB-150	MC Nylon											2,680							
	UWBSJB-150	MC Nylon	B/B			30							2,430							
	UWBSDJB-150	MC Nylon	SUS										2,430							

Unit: mm

● The stopper pedal for left foot is available (JB-150 → JBL-150).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

JB Type

Size: 200mm

Medium Weight Swivel Bracket with Stopper



SJB-200

SUIJB-200

SJBL-200

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1		Mounting Hole Spacing P1/P2		Offset E	Weight (g)
													
				(daN)	(kgf)								
200	■Steel Rim・Rubber Wheel												
	SJB-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	11	58	4,240
	SRJB-200	Red Rubber	B/B	200	204.0								4,240
	SHJB-200	High-Rebound	B/B	250	255.0								4,240
	CRJB-200	Heat-resistance	B/B										4,320
	■Steel Rim・Urethane Rubber Wheel												
	SUIJB-200	Urethane	B/B	400	408.0	42	20	250	140/140	112/112	11	58	4,410
	SUIEJB-200	Anti-Static	B/B										4,410
	■Nylon Rim・Rubber Wheel												
	PNJB-200	Rubber	B/B	220	224.4	42	20	250	140/140	112/112	11	58	3,590
	PNDJB-200	Rubber	SUS										3,590
	PNAJB-200	Rubber											160
	■Nylon Rim・Urethane Rubber Wheel												
	PNUJB-200	Urethane	B/B	350	357.0	42	20	250	140/140	112/112	11	58	3,460
	PNUDJB-200	Urethane	SUS										3,460
	PNUAJB-200	Urethane											250
	■Nylon												
	PJB-200	Nylon		250	255.0	45	20	250	140/140	112/112	11	58	3,310
	PBJB-200	Nylon	B/B	400	408.0								3,520
	PBDJB-200	Nylon	SUS										3,520
	■Monomer Cast Nylon												
	UWBJB-200	MC Nylon	B/B	420	428.4	42	20	250	140/140	112/112	11	58	4,470
	UWBDJB-200	MC Nylon	SUS										4,470
	UWAJB-200	MC Nylon											4,320
	UWBSJB-200	MC Nylon	B/B			34							3,930
	UWBSDJB-200	MC Nylon	SUS										3,930

● The stopper pedal for left foot is available (JB-200 → JBL-200).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

■ Build-to-order manufacturing

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

JB Type

Size: 250mm

Medium Weight Swivel Bracket with Stopper


SJB-250

SUIJB-250

Unit: mm													
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
250	■Steel Rim・Rubber Wheel												
	SJB-250	Rubber	B/B	330	336.6	50	25	305	160/160	125/125	14	71	6,370
	SRJB-250	Red Rubber	B/B	260	265.2								6,370
	CRJB-250	Heat-resistance	B/B	330	336.6								6,590
	■Steel Rim・Urethane Rubber Wheel												
	SUIJB-250	Urethane	B/B	500	510.0	45	25	305	160/160	125/125	14	71	6,930
	■Monomer Cast Nylon												
	UWBSJB-250	MC Nylon	B/B	550	561.0	36	25	305	160/160	125/125	14	71	6,090

Unit: mm

● The stopper pedal for left foot is not available.

Bearing: B/B -- Steel bearing

 Build-to-order manufacturing

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

【Bracket Dimensions】

Unit: mm



Size 	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
75	120	122.4	63	40	420
100	180	183.6	94	43	870
130	250	255.0	112	53	1,260
150	300	306.0	123	56	1,740
200	420	428.4	150	56	2,570
250	550	561.0	180	90	3,850

【Pedal Dimensions】

Unit: mm

Size 	Pedal Rod K	Radius of Gyration S
75	65	82
100	92	112
130	105	135
150	108	140
200	120	148
250	135	160

* The shaft set is included in the bracket.

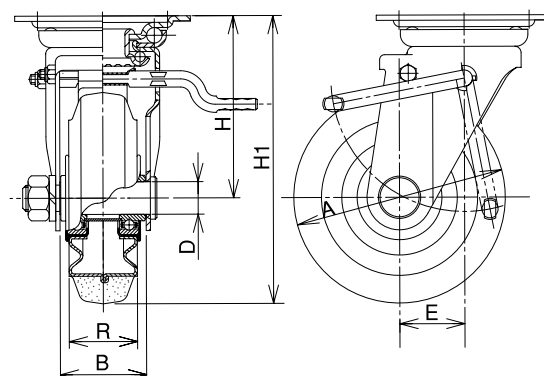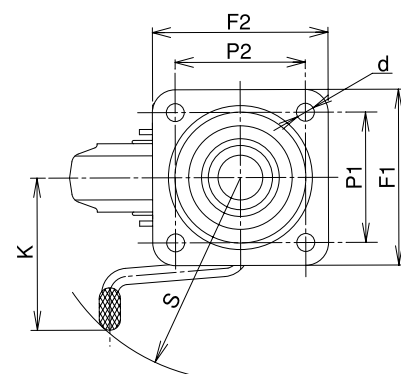

KBZ_{Type}

Size: 75mm

Medium Weight Rigid Bracket with Stopper



Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Weight (g)						
																		
				(daN)	(kgf)													
75	■Steel Rim·Rubber Wheel																	
	SKBZ-75	Rubber	B/B	80	81.6	32	10	101	91/68	63/40	9.5	480						
	SRKBZ-75	Red Rubber	B/B	60	61.2							480						
	CRKBZ-75	Heat-resistance	B/B	80	81.6							500						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIKBZ-75	Urethane	B/B	120	122.4	32	10	101	91/68	63/40	9.5	560						
	SUIEBZ-75	Anti-Static	B/B									560						
	■Nylon Rim·Rubber Wheel																	
	PNKBZ-75	Rubber	B/B	70	71.4	32	10	101	91/68	63/40	9.5	460						
	PNDKBZ-75	Rubber	SUS									460						
	PNAKBZ-75	Rubber										420						
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUKBZ-75	Urethane	B/B	100	102.0	32	10	101	91/68	63/40	9.5	450						
	PNUDKBZ-75	Urethane	SUS									450						
	PNUAKBZ-75	Urethane		70	71.4							400						
	■Nylon																	
	PKBZ-75	Nylon		100	102.0	32	10	101	91/68	63/40	9.5	370						
	PBKBZ-75	Nylon	B/B	120	122.4							430						
	PBDKBZ-75	Nylon	SUS									430						
	■Monomer Cast Nylon																	
	UWBKBZ-75	MC Nylon	B/B	120	122.4	24	10	101	91/68	63/40	9.5	470						
	UWBDBZ-75	MC Nylon	SUS									470						
	UWAKBZ-75	MC Nylon										430						
	UWBSKBZ-75	MC Nylon	B/B			26						450						
	UWBSDKBZ-75	MC Nylon	SUS									450						

● The stopper pedal for left foot is available (KBZ-75 → KBZL-75).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KBZ Type bracket can lock the wheel to stop the caster.

KBZ_{Type}

Size: 100mm

Medium Weight Rigid Bracket with Stopper

SKBZ-100

SUIKBZ-100

SKBZL-100

Medium Weight Caster Series

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity								Weight (g) 						
																		
				(daN)	(kgf)													
100	■Steel Rim·Rubber Wheel																	
	SKBZ-100	Rubber	B/B	130	132.6	35	12	144	115/80	80/45	11	920						
	SRKBZ-100	Red Rubber	B/B	100	102.0							920						
	CRKBZ-100	Heat-resistance	B/B	130	132.6							950						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIKBZ-100	Urethane	B/B	180	183.6	32	12	144	115/80	80/45	11	990						
	SUIEBZ-100	Anti-Static	B/B									990						
	■Nylon Rim·Rubber Wheel																	
	PNKBZ-100	Rubber	B/B	100	102.0	32	12	144	115/80	80/45	11	820						
	PNDKBZ-100	Rubber	SUS									820						
	PNAKBZ-100	Rubber										760						
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUKBZ-100	Urethane	B/B	150	153.0	32	12	144	115/80	80/45	11	800						
	PNUDKBZ-100	Urethane	SUS									800						
	PNUAKBZ-100	Urethane		100	102.0	35	12	144	115/80	80/45	11	740						
	■Nylon																	
	PKBZ-100	Nylon		120	122.4							720						
	PBKBZ-100	Nylon	B/B	180	183.6								780					
	PBDKBZ-100	Nylon	SUS										780					
	■Monomer Cast Nylon																	
	UWBKBZ-100	MC Nylon	B/B	180	183.6	29	12	144	115/80	80/45	11	930						
	UWBDBZ-100	MC Nylon	SUS									930						
	UWAKBZ-100	MC Nylon				30						880						
	UWBSKBZ-100	MC Nylon	B/B									880						
	UWBSDKBZ-100	MC Nylon	SUS									880						

Unit: mm

● The stopper pedal for left foot is available (KBZ-100 → KBZL-100).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KBZ Type bracket can lock the wheel to stop the caster.

KBZ_{Type}

Size: 130mm

Medium Weight Rigid Bracket with Stopper



Unit:mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1		Mounting Hole Spacing P1/P2 (P2')		Weight (g)						
																		
													(daN)	(kgf)				
130	■Steel Rim·Rubber Wheel																	
	SKBZ-130	Rubber	B/B	180	183.6	42	20	177	137/93	※100/56 (50)	11	1,750						
	SRKBZ-130	Red Rubber	B/B	140	142.8							1,750						
	CRKBZ-130	Heat-resistance	B/B	180	183.6							1,780						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIKBZ-130	Urethane	B/B	250	255.0	35	20	177	137/93	※100/56 (50)	11	1,880						
	SUIEBZ-130	Anti-Static	B/B									1,880						
	■Nylon Rim·Rubber Wheel																	
	PNKBZ-130	Rubber	B/B	145	147.9	38	20	177	137/93	※100/56 (50)	11	1,550						
	PNDKBZ-130	Rubber	SUS									1,550						
	PNAKBZ-130	Rubber										120	122.4	1,360				
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUKBZ-130	Urethane	B/B	200	204.0	35	20	177	137/93	※100/56 (50)	11	1,490						
	PNUDKBZ-130	Urethane	SUS									1,490						
	PNUAKBZ-130	Urethane										120	122.4	1,300				
	■Nylon																	
	PKBZ-130	Nylon		150	153.0	42	20	177	137/93	※100/56 (50)	11	1,290						
	PBKBZ-130	Nylon	B/B	250	255.0							1,490						
	PBDKBZ-130	Nylon	SUS									1,490						
	■Monomer Cast Nylon																	
	UWBKBZ-130	MC Nylon	B/B	250	255.0	36	20	177	137/93	※100/56 (50)	11	1,770						
	UWBDBZ-130	MC Nylon	SUS									1,770						
	UWAKBZ-130	MC Nylon										1,620						
	UWBSKBZ-130	MC Nylon	B/B			30						1,510						
	UWBSDKBZ-130	MC Nylon	SUS									1,510						

● The stopper pedal for left foot is available (KBZ-130 → KBZL-130).

※ Oval-shaped screw holes

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KBZ Type bracket can lock the wheel to stop the caster.

KBZ_{Type}

Size: 150mm

Medium Weight Rigid Bracket with Stopper

SKBZ-150

SUIKBZ-150

SKBZL-150

Medium Weight Caster Series

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1		Mounting Hole Spacing P1/P2 (P2')		Weight (g)						
																		
				(daN)	(kgf)													
150	■Steel Rim·Rubber Wheel																	
	SKBZ-150	Rubber	B/B	200	204.0	45	20	198	137/93	※100/56 (50)	11	2,140						
	SRKBZ-150	Red Rubber	B/B	160	163.2							2,140						
	CRKBZ-150	Heat-resistance	B/B	200	204.0							2,180						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIKBZ-150	Urethane	B/B	300	306.0	38	20	198	137/93	※100/56 (50)	11	2,330						
	SUIEBZ-150	Anti-Static	B/B									2,330						
	■Nylon Rim·Rubber Wheel																	
	PNKBZ-150	Rubber	B/B	175	178.5	38	20	198	137/93	※100/56 (50)	11	1,850						
	PNDKBZ-150	Rubber	SUS									1,850						
	PNAKBZ-150	Rubber										140	142.8	1,690				
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUKBZ-150	Urethane	B/B	250	255.0	38	20	198	137/93	※100/56 (50)	11	1,810						
	PNUDKBZ-150	Urethane	SUS									1,810						
	PNUAKBZ-150	Urethane										150	153.0	1,620				
	■Nylon																	
	PKBZ-150	Nylon		180	183.6	45	20	198	137/93	※100/56 (50)	11	1,590						
	PBKBZ-150	Nylon	B/B	300	306.0							1,830						
	PBDKBZ-150	Nylon	SUS									1,830						
	■Monomer Cast Nylon																	
	UWBKBZ-150	MC Nylon	B/B	300	306.0	40	20	198	137/93	※100/56 (50)	11	2,270						
	UWBDBZ-150	MC Nylon	SUS									2,270						
	UWAKBZ-150	MC Nylon				30						2,120						
	UWBSKBZ-150	MC Nylon	B/B									1,870						
	UWBSDKBZ-150	MC Nylon	SUS									1,870						

Unit: mm

● The stopper pedal for left foot is available (KBZ-150 → KBZL-150).

※ Oval-shaped screw holes

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KBZ Type bracket can lock the wheel to stop the caster.

KBZ_{Type}

Size: 200mm

Medium Weight Rigid Bracket with Stopper



Unit: mm																		
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 						
				(daN)	(kgf)													
200	■Steel Rim·Rubber Wheel																	
	SKBZ-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,600						
	SRKBZ-200	Red Rubber	B/B	200	204.0							3,600						
	SHKBZ-200	High-Rebound	B/B	250	255.0							3,600						
	CRKBZ-200	Heat-resistance	B/B									3,680						
	■Steel Rim·Urethane Rubber Wheel																	
	SUIKBZ-200	Urethane	B/B	400	408.0	42	20	250	151/102	112/63	11	3,770						
	SUIEBZ-200	Anti-Static	B/B									3,770						
	■Nylon Rim·Rubber Wheel																	
	PNKBZ-200	Rubber	B/B	220	224.4	42	20	250	151/102	112/63	11	2,950						
	PNDKBZ-200	Rubber	SUS									2,950						
	PNAKBZ-200	Rubber										160	163.2	2,780				
	■Nylon Rim·Urethane Rubber Wheel																	
	PNUKBZ-200	Urethane	B/B	350	357.0	42	20	250	151/102	112/63	11	2,820						
	PNUDKBZ-200	Urethane	SUS									2,820						
	PNUAKBZ-200	Urethane										250	255.0	2,650				
	■Nylon																	
	PKBZ-200	Nylon		250	255.0	45	20	250	151/102	112/63	11	2,670						
	PBKBZ-200	Nylon	B/B	400	408.0							2,880						
	PBDKBZ-200	Nylon	SUS									2,880						
	■Monomer Cast Nylon																	
	UWBKBZ-200	MC Nylon	B/B	420	428.4	42	20	250	151/102	112/63	11	3,830						
	UWBDBZ-200	MC Nylon	SUS									3,830						
	UWAKBZ-200	MC Nylon										3,680						
	UWBSKBZ-200	MC Nylon	B/B			34						3,290						
	UWBSPKBZ-200	MC Nylon	SUS									3,290						

● The stopper pedal for left foot is available (KBZ-200 → KBZL-200).





Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KBZ Type bracket can lock the wheel to stop the caster.

KBZ_{Type}

Medium Weight Rigid Bracket with Stopper

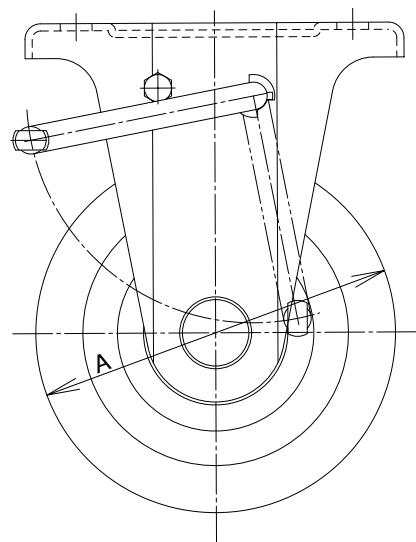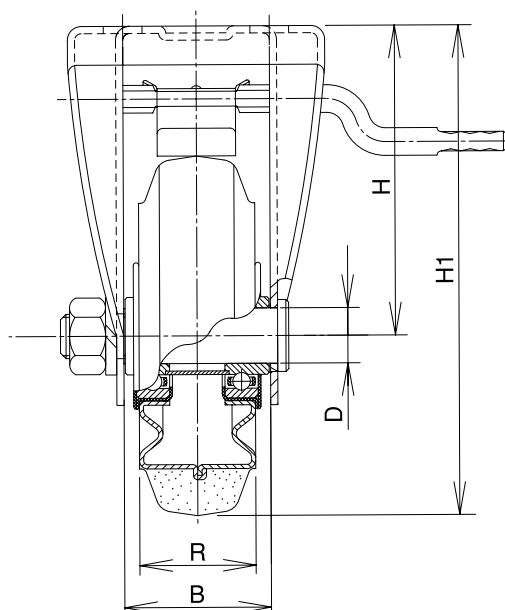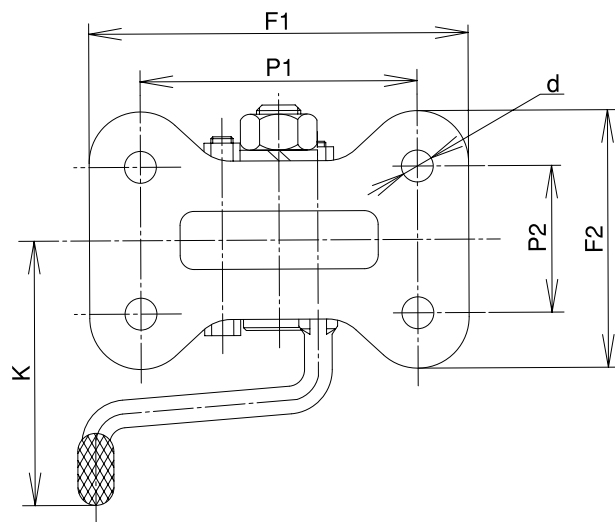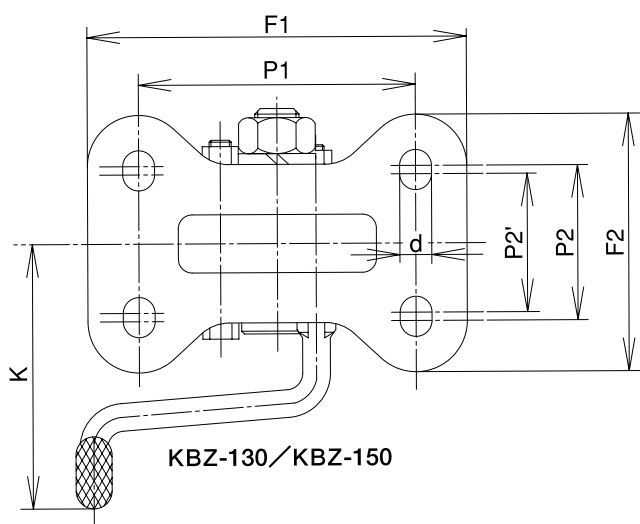

Medium Weight Caster Series

[Bracket Dimensions]

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
75	120	122.4	63	40	280
100	180	183.6	94	43	560
130	250	255.0	112	53	970
150	300	306.0	123	56	1,180
200	420	428.4	150	56	1,930

[Pedal Dimensions]

Unit: mm

Size A	Pedal Rod K
75	72
100	100
130	112
150	112
200	112

* The shaft set is included in the bracket.

JA Type

Size: 75mm

Stainless Steel Swivel Bracket



PJA-75



PNAJA-75

Unit: mm													
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)
				(daN)	(kgf)								
75	■Nylon												
	PJA-75	Nylon		100	102.0	32	10	101	82/82	63/63	9.5	22	420
	PBJA-75	Nylon	B/B	120	122.4								480
	PBDJA-75	Nylon	SUS										480
	■Nylon Rim·Rubber Wheel												
	PNJA-75	Rubber	B/B	70	71.4	32	10	101	82/82	63/63	9.5	22	510
	PNDJA-75	Rubber	SUS										510
	PNAJA-75	Rubber											470
	■Nylon Rim·Urethane Rubber Wheel												
	PNUJA-75	Urethane	B/B	100	102.0	32	10	101	82/82	63/63	9.5	22	500
	PNUDJA-75	Urethane	SUS										500
	PNUAJA-75	Urethane											450
	■Monomer Cast Nylon												
	UWBJA-75	MC Nylon	B/B	150	153.0	24	10	101	82/82	63/63	9.5	22	520
	UWBDA-75	MC Nylon	SUS										520
	UWAJA-75	MC Nylon											480
	UWBSJA-75	MC Nylon	B/B			26							500
	UWBSDJA-75	MC Nylon	SUS										500
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.												
	SJA-75	Rubber	B/B	80	81.6	32	10	101	82/82	63/63	9.5	22	530
	SRJA-75	Red Rubber	B/B	60	61.2								530
	CRJA-75	Heat-resistance	B/B	80	81.6								550
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJA-75	Urethane	B/B	120	122.4	32	10	101	82/82	63/63	9.5	22	610
	SUIEJA-75	Anti-Static	B/B										610

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of JA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

JA_{Type}

Size: 100mm

Stainless Steel Swivel Bracket



PJA-100




PNAJA-100

Unit: mm													
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)
				(daN)	(kgf)								
100	■Nylon												
	PJA-100	Nylon		120	122.4	35	12	144	95/95	71/71	11	35	870
	PBJA-100	Nylon	B/B	180	183.6								930
	PBDJA-100	Nylon	SUS										930
	■Nylon Rim · Rubber Wheel												
	PNJA-100	Rubber	B/B	100	102.0	32	12	144	95/95	71/71	11	35	970
	PNDJA-100	Rubber	SUS										970
	PNAJA-100	Rubber											910
	■Nylon Rim · Urethane Rubber Wheel												
	PNUJA-100	Urethane	B/B	150	153.0	32	12	144	95/95	71/71	11	35	950
	PNUDJA-100	Urethane	SUS										950
	PNUAJA-100	Urethane											890
	■Monomer Cast Nylon												
	UWBJA-100	MC Nylon	B/B	200	204.0	29	12	144	95/95	71/71	11	35	1,080
	UWBDJA-100	MC Nylon	SUS										1,080
	UWAJA-100	MC Nylon											1,030
	UWBSJA-100	MC Nylon	B/B			30							1,030
	UWBSDJA-100	MC Nylon	SUS										1,030
	■Steel Rim · Rubber Wheel Wheel rim is not stainless steel.												
	SJA-100	Rubber	B/B	130	132.6	35	12	144	95/95	71/71	11	35	1,070
	SRJA-100	Red Rubber	B/B	100	102.0								1,070
	CRJA-100	Heat-resistance	B/B	130	132.6								1,100
	■Steel Rim · Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJA-100	Urethane	B/B	180	183.6	32	12	144	95/95	71/71	11	35	1,140
	SUIEJA-100	Anti-Static	B/B										1,140

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

●The materials of JA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

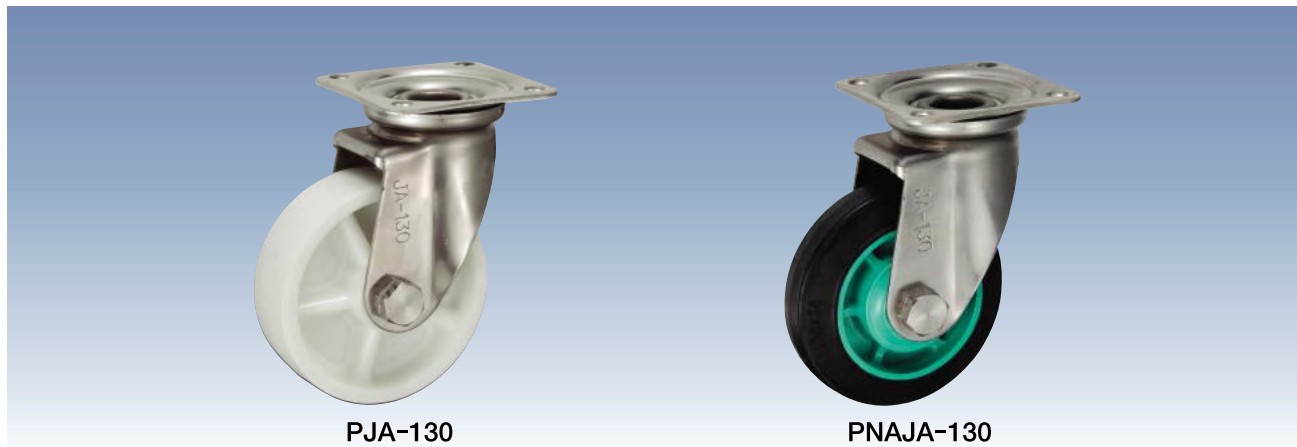

PJA-130

PNAJA-130

Unit: mm																				
Size 	Model Number	Wheel	Bearing	Load Capacity									Weight (g)							
				(daN)	(kgf)															
130	■Nylon																			
	PJA-130	Nylon		150	153.0	42	20	177	108/108	80/80	11	40	1,400							
	PBJA-130	Nylon	B/B	250	255.0								1,600							
	PBDJA-130	Nylon	SUS										1,600							
	■Nylon Rim・Rubber Wheel																			
	PNJA-130	Rubber	B/B	145	147.9	38	20	177	108/108	80/80	11	40	1,660							
	PNDJA-130	Rubber	SUS										1,660							
	PNAJA-130	Rubber											120	122.4	1,470					
	■Nylon Rim・Urethane Rubber Wheel																			
	PNUJA-130	Urethane	B/B	200	204.0	35	20	177	108/108	80/80	11	40	1,600							
	PNUDJA-130	Urethane	SUS										1,600							
	PNUAJA-130	Urethane											120	122.4	1,410					
	■Monomer Cast Nylon																			
	UWBJA-130	MC Nylon	B/B	300	306.0	36	20	177	108/108	80/80	11	40	1,880							
	UWBDJA-130	MC Nylon	SUS										1,880							
	UWAJA-130	MC Nylon											1,730							
	UWBSJA-130	MC Nylon	B/B			30							1,620							
	UWBSDJA-130	MC Nylon	SUS										1,620							
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.																			
	SJA-130	Rubber	B/B	180	183.6	42	20	177	108/108	80/80	11	40	1,860							
	SRJA-130	Red Rubber	B/B	140	142.8								1,860							
	CRJA-130	Heat-resistance	B/B	180	183.6								1,890							
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.																			
	SUIJA-130	Urethane	B/B	250	255.0	35	20	177	108/108	80/80	11	40	1,990							
	SUIEJA-130	Anti-Static	B/B										1,990							

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

●The materials of JA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

JA_{Type}

Size: 150mm

Stainless Steel Swivel Bracket

PJA-150

PNAJA-150

Unit: mm															
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)		
				(daN)	(kgf)										
150	■Nylon														
	PJA-150	Nylon		180	183.6	45	20	198	120/120	90/90	11	45	1,880		
	PBJA-150	Nylon	B/B	300	306.0								2,120		
	PBDJA-150	Nylon	SUS										2,120		
	■Nylon Rim · Rubber Wheel														
	PNJA-150	Rubber	B/B	175	178.5	38	20	198	120/120	90/90	11	45	2,140		
	PNDJA-150	Rubber	SUS												2,140
	PNAJA-150	Rubber											140	142.8	1,980
	■Nylon Rim · Urethane Rubber Wheel														
	PNUJA-150	Urethane	B/B	250	255.0	38	20	198	120/120	90/90	11	45	2,100		
	PNUDJA-150	Urethane	SUS												2,100
	PNUAJA-150	Urethane											150	153.0	1,910
	■Monomer Cast Nylon														
	UWBJA-150	MC Nylon	B/B	350	357.0	40	20	198	120/120	90/90	11	45	2,560		
	UWBDJA-150	MC Nylon	SUS												2,560
	UWAJA-150	MC Nylon													2,410
	UWBSJA-150	MC Nylon	B/B			30								2,160	
	UWBSDJA-150	MC Nylon	SUS												2,160
	■Steel Rim · Rubber Wheel Wheel rim is not stainless steel.														
	SJA-150	Rubber	B/B	200	204.0	45	20	198	120/120	90/90	11	45	2,430		
	SRJA-150	Red Rubber	B/B	160	163.2								2,430		
	CRJA-150	Heat-resistance	B/B	200	204.0								2,470		
	■Steel Rim · Urethane Rubber Wheel Wheel rim is not stainless steel.														
	SUIJA-150	Urethane	B/B	300	306.0	38	20	198	120/120	90/90	11	45	2,620		
	SUIEJA-150	Anti-Static	B/B												2,620

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

●The materials of JA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).



PJA-200

PNAJA-200

Unit: mm													
Size 	Model Number	Wheel	Bearing	Load Capacity  (daN) (kgf)		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
200	■Nylon												
	PJA-200	Nylon		250	255.0	45	20	250	140/140	112/112	11	58	2,910
	PBJA-200	Nylon	B/B	400	408.0								3,120
	PBDJA-200	Nylon	SUS										3,120
	■Nylon Rim・Rubber Wheel												
	PNJA-200	Rubber	B/B	220	224.4	42	20	250	140/140	112/112	11	58	3,190
	PNDJA-200	Rubber	SUS										3,190
	PNAJA-200	Rubber											160
	■Nylon Rim・Urethane Rubber Wheel												
	PNUJA-200	Urethane	B/B	350	357.0	42	20	250	140/140	112/112	11	58	3,060
	PNUDJA-200	Urethane	SUS										3,060
	PNUAJA-200	Urethane											250
	■Monomer Cast Nylon												
	UWBJA-200	MC Nylon	B/B	500	510.0	42	20	250	140/140	112/112	11	58	4,070
	UWBDJA-200	MC Nylon	SUS										4,070
	UWAJA-200	MC Nylon											3,920
	UWBSJA-200	MC Nylon	B/B			34							3,530
	UWBSDJA-200	MC Nylon	SUS										3,530
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.												
	SJA-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	11	58	3,840
	SRJA-200	Red Rubber	B/B	200	204.0								3,840
	SHJA-200	High-Rebound	B/B	250	255.0								3,840
	CRJA-200	Heat-resistance	B/B										3,920
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJA-200	Urethane	B/B	400	408.0	42	20	250	140/140	112/112	11	58	4,010
	SUIEJA-200	Anti-Static	B/B										4,010

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing


Build-to-order manufacturing

●The materials of JA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

JA_{Type}

Stainless Steel Swivel Bracket

Stainless Steel Caster Series

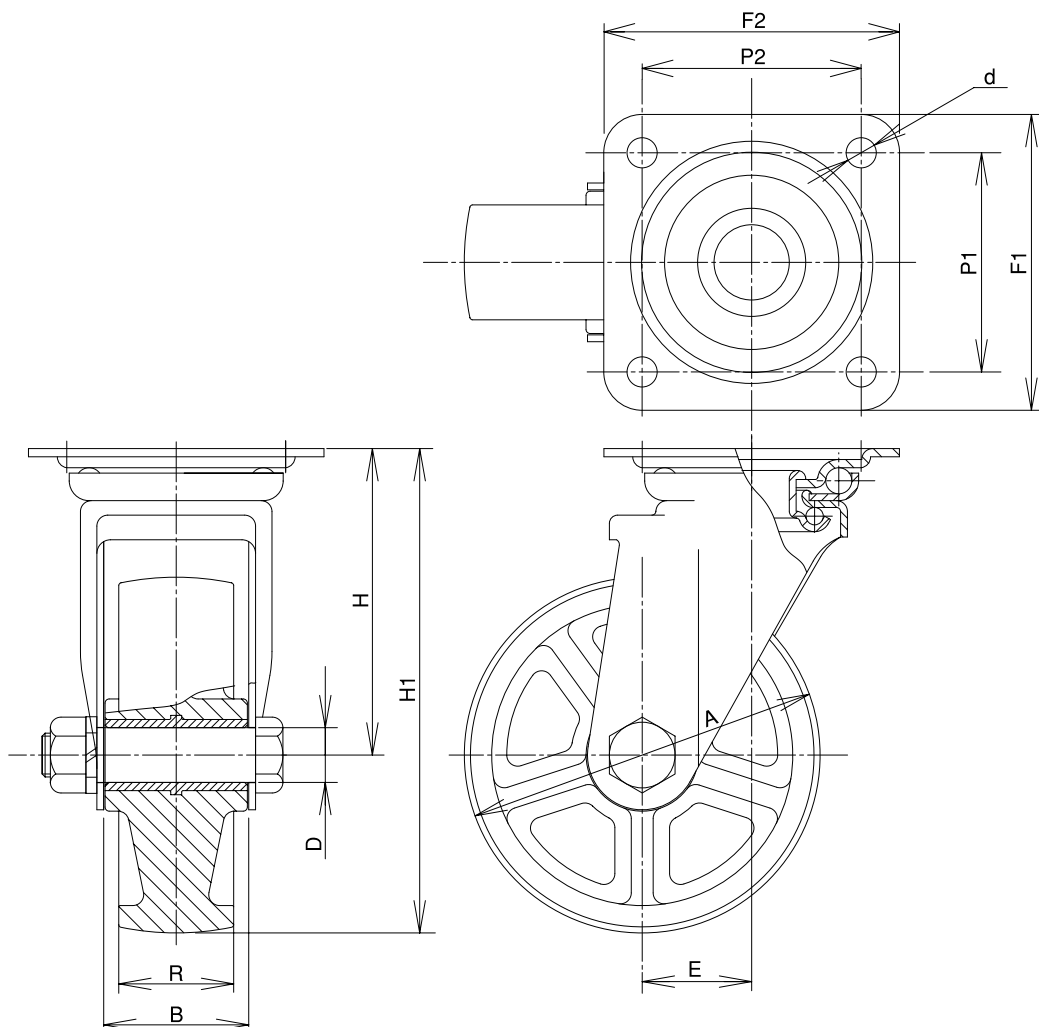

【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height 	Bracket Width 	Weight 
	(daN)	(kgf)			
75	150	153.0	63	40	330
100	200	204.0	94	43	710
130	300	306.0	112	53	1,080
150	350	357.0	123	56	1,470
200	500	510.0	150	56	2,170

* The shaft set is included in the bracket.

Notice

The materials of JA Type bracket are all stainless steel, but the following wheels are not stainless steel. In addition, stainless steel bearings cannot be set.

Please be careful when selecting a caster.

Steel Rim • Rubber Wheel (S, SR, SH, CR Type)

Steel Rim • Urethane Wheel (SUI, SUIE Type)

KA_{Type}

Size: 75mm

Stainless Steel Rigid Bracket



PKA-75



PNAKA-75

Unit:mm

Size 	Model Number	Wheel	Bearing	Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	Weight (g) 
				(daN)	(kgf)							
75	■Nylon											
	PKA-75	Nylon		100	102.0	32	10	101	91/68	63/40	9.5	310
	PBKA-75	Nylon	B/B	120	122.4							370
	PBDKA-75	Nylon	SUS									370
	■Nylon Rim·Rubber Wheel											
	PNKA-75	Rubber	B/B	70	71.4	32	10	101	91/68	63/40	9.5	400
	PNDKA-75	Rubber	SUS									400
	PNAKA-75	Rubber										360
	■Nylon Rim·Urethane Rubber Wheel											
	PNUKA-75	Urethane	B/B	100	102.0	32	10	101	91/68	63/40	9.5	390
	PNUDKA-75	Urethane	SUS									390
	PNUAKA-75	Urethane										340
	■Monomer Cast Nylon											
	UWBKA-75	MC Nylon	B/B	150	153.0	24	10	101	91/68	63/40	9.5	410
	UWBKA-75	MC Nylon	SUS									410
	UWAKA-75	MC Nylon										370
	UWBSKA-75	MC Nylon	B/B			26						390
	UWBSDKA-75	MC Nylon	SUS									390
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.											
	SKA-75	Rubber	B/B	80	81.6	32	10	101	91/68	63/40	9.5	420
	SRKA-75	Red Rubber	B/B	60	61.2							420
	CRKA-75	Heat-resistance	B/B	80	81.6							440
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-75	Urethane	B/B	120	122.4	32	10	101	91/68	63/40	9.5	500
	SUIEKA-75	Anti-Static	B/B									500


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 100mm

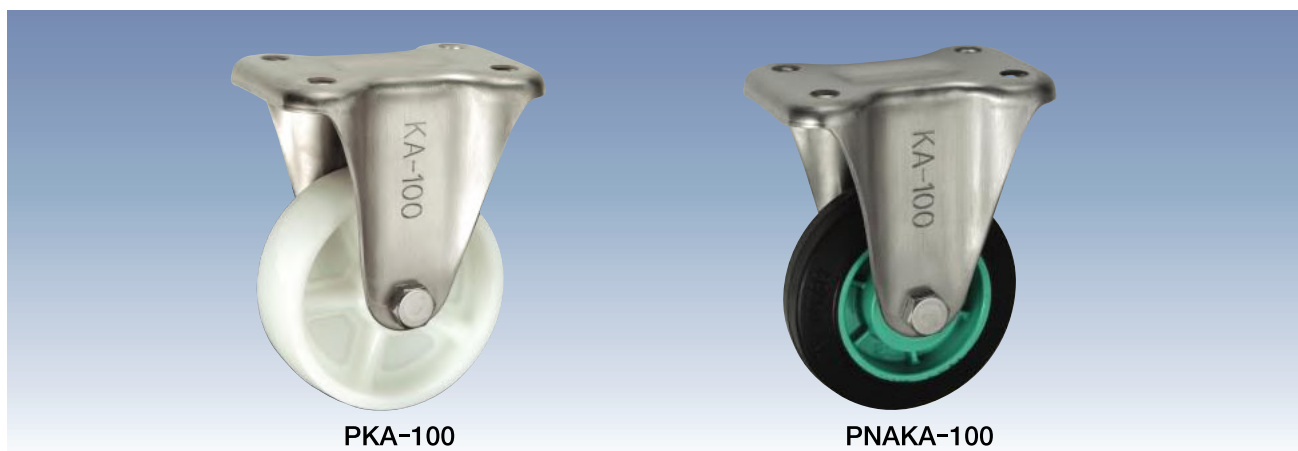Stainless Steel Rigid Bracket

PKA-100
PNAKA-100

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
100	■Nylon											
	PKA-100	Nylon		120	122.4	35	12	144	115/80	80/45	11	580
	PBKA-100	Nylon	B/B	180	183.6							640
	PBDKA-100	Nylon	SUS									640
	■Nylon Rim・Rubber Wheel											
	PNKA-100	Rubber	B/B	100	102.0	32	12	144	115/80	80/45	11	680
	PNDKA-100	Rubber	SUS									680
	PNAKA-100	Rubber										620
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKA-100	Urethane	B/B	150	153.0	32	12	144	115/80	80/45	11	660
	PNUDKA-100	Urethane	SUS									660
	PNUAKA-100	Urethane		100	102.0							600
	■Monomer Cast Nylon											
	UWBKA-100	MC Nylon	B/B	200	204.0	29	12	144	115/80	80/45	11	790
	UWBDKA-100	MC Nylon	SUS									790
	UWAKA-100	MC Nylon										740
	UWBSKA-100	MC Nylon	B/B			30						740
	UWBSDKA-100	MC Nylon	SUS									740
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKA-100	Rubber	B/B	130	132.6	35	12	144	115/80	80/45	11	780
	SRKA-100	Red Rubber	B/B	100	102.0							780
	CRKA-100	Heat-resistance	B/B	130	132.6							810
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-100	Urethane	B/B	180	183.6	32	12	144	115/80	80/45	11	850
	SUIEKA-100	Anti-Static	B/B									850

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 130mm

Stainless Steel Rigid Bracket



PKA-130



PNAKA-130

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	Weight (g) 
				(daN)	(kgf)							
130	■Nylon											
	PKA-130	Nylon		150	153.0	42	20	177	137/93	100/56	11	1,130
	PBKA-130	Nylon	B/B	250	255.0							1,330
	PBDKA-130	Nylon	SUS									1,330
	■Nylon Rim·Rubber Wheel											
	PNKA-130	Rubber	B/B	145	147.9	38	20	177	137/93	100/56	11	1,390
	PNDKA-130	Rubber	SUS									1,390
	PNAKA-130	Rubber										120
	■Nylon Rim·Urethane Rubber Wheel											
	PNUKA-130	Urethane	B/B	200	204.0	35	20	177	137/93	100/56	11	1,330
	PNUDKA-130	Urethane	SUS									1,330
	PNUAKA-130	Urethane										120
	■Monomer Cast Nylon											
	UWBKA-130	MC Nylon	B/B	300	306.0	36	20	177	137/93	100/56	11	1,610
	UWBDKA-130	MC Nylon	SUS									1,610
	UWAKA-130	MC Nylon										1,460
	UWBSKA-130	MC Nylon	B/B			30						1,350
	UWBSDKA-130	MC Nylon	SUS									1,350
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.											
	SKA-130	Rubber	B/B	180	183.6	42	20	177	137/93	100/56	11	1,590
	SRKA-130	Red Rubber	B/B	140	142.8							1,590
	CRKA-130	Heat-resistance	B/B	180	183.6							1,620
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-130	Urethane	B/B	250	255.0	35	20	177	137/93	100/56	11	1,720
	SUIEKA-130	Anti-Static	B/B									1,720

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 150mm

Stainless Steel Rigid Bracket

PKA-150

PNAKA-150

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
150	■Nylon											
	PKA-150	Nylon		180	183.6	45	20	198	137/93	100/56	11	1,370
	PBKA-150	Nylon	B/B	300	306.0							1,610
	PBDKA-150	Nylon	SUS									1,610
	■Nylon Rim · Rubber Wheel											
	PNKA-150	Rubber	B/B	175	178.5	38	20	198	137/93	100/56	11	1,630
	PNDKA-150	Rubber	SUS									1,630
	PNAKA-150	Rubber										140
	■Nylon Rim · Urethane Rubber Wheel											
	PNUKA-150	Urethane	B/B	250	255.0	38	20	198	137/93	100/56	11	1,590
	PNUDKA-150	Urethane	SUS									1,590
	PNUAKA-150	Urethane										150
	■Monomer Cast Nylon											
	UWBKA-150	MC Nylon	B/B	350	357.0	40	20	198	137/93	100/56	11	2,050
	UWBKA-150	MC Nylon	SUS									2,050
	UWAKA-150	MC Nylon										1,900
	UWBSKA-150	MC Nylon	B/B			30						1,650
	UWBSDKA-150	MC Nylon	SUS									1,650
	■Steel Rim · Rubber Wheel Wheel rim is not stainless steel.											
	SKA-150	Rubber	B/B	200	204.0	45	20	198	137/93	100/56	11	1,920
	SRKA-150	Red Rubber	B/B	160	163.2							1,920
	CRKA-150	Heat-resistance	B/B	200	204.0							1,960
	■Steel Rim · Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-150	Urethane	B/B	300	306.0	38	20	198	137/93	100/56	11	2,110
	SUIEKA-150	Anti-Static	B/B									2,110

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

●The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 200mm

Stainless Steel Rigid Bracket



PKA-200



PNAKA-200

Unit: mm																		
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 						
				(daN)	(kgf)													
200	■Nylon																	
	PKA-200	Nylon		250	255.0	45	20	250	151/102	112/63	11	2,310						
	PBKA-200	Nylon	B/B	400	408.0							2,520						
	PBDKA-200	Nylon	SUS									2,520						
	■Nylon Rim · Rubber Wheel																	
	PNKA-200	Rubber	B/B	220	224.4	42	20	250	151/102	112/63	11	2,590						
	PNDKA-200	Rubber	SUS									2,590						
	PNAKA-200	Rubber										160	163.2	2,420				
	■Nylon Rim · Urethane Rubber Wheel																	
	PNUKA-200	Urethane	B/B	350	357.0	42	20	250	151/102	112/63	11	2,460						
	PNUDKA-200	Urethane	SUS									2,460						
	PNUAKA-200	Urethane										250	255.0	2,290				
	■Monomer Cast Nylon																	
	UWBKA-200	MC Nylon	B/B	500	510.0	42	20	250	151/102	112/63	11	3,470						
	UWBKA-200	MC Nylon	SUS									3,470						
	UWAKA-200	MC Nylon										3,320						
	UWBSKA-200	MC Nylon	B/B			34						2,930						
	UWBSDKA-200	MC Nylon	SUS									2,930						
	■Steel Rim · Rubber Wheel Wheel rim is not stainless steel.																	
	SKA-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,240						
	SRKA-200	Red Rubber	B/B	200	204.0							3,240						
	SHKA-200	High-Rebound	B/B	250	255.0							3,240						
	CRKA-200	Heat-resistance	B/B									3,320						
	■Steel Rim · Urethane Rubber Wheel Wheel rim is not stainless steel.																	
	SUIKA-200	Urethane	B/B	400	408.0	42	20	250	151/102	112/63	11	3,410						
	SUIEKA-200	Anti-Static	B/B									3,410						


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Stainless Steel Rigid Bracket

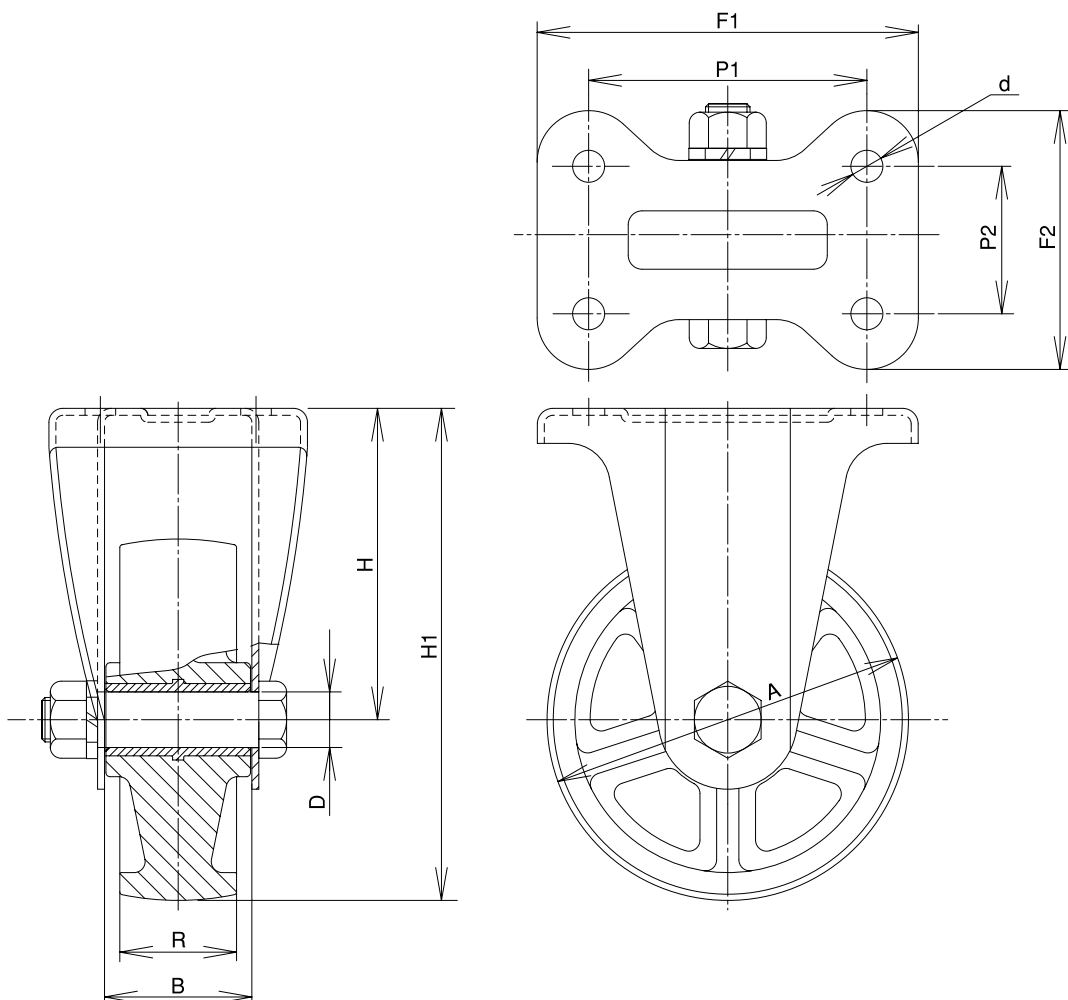

【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height 	Bracket Width 	Weight 
	(daN)	(kgf)			
75	150	153.0	63	40	220
100	200	204.0	94	43	420
130	300	306.0	112	53	810
150	350	357.0	123	56	960
200	500	510.0	150	56	1,570

* The shaft set is included in the bracket.

Notice

The materials of KA Type bracket are all stainless steel, but the following wheels are not stainless steel. In addition, stainless steel bearings cannot be set.

Please be careful when selecting a caster.

Steel Rim • Rubber Wheel (S, SR, SH, CR Type)

Steel Rim • Urethane Wheel (SUI, SUIE Type)

JAB_{Type}

Size: 75mm

Stainless Steel Swivel Bracket with Stopper



PJAB-75



PNAJAB-75

Unit: mm													
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
75	■Nylon												
	PJAB-75	Nylon		100	102.0	32	10	101	82/82	63/63	9.5	22	470
	PBJAB-75	Nylon	B/B	120	122.4								530
	PBDJAB-75	Nylon	SUS										530
	■Nylon Rim・Rubber Wheel												
	PNJAB-75	Rubber	B/B	70	71.4	32	10	101	82/82	63/63	9.5	22	560
	PNDJAB-75	Rubber	SUS										560
	PNAJAB-75	Rubber											520
	■Nylon Rim・Urethane Rubber Wheel												
	PNUJAB-75	Urethane	B/B	100	102.0	32	10	101	82/82	63/63	9.5	22	550
	PNUDJAB-75	Urethane	SUS										550
	PNUAJAB-75	Urethane											70
	■Monomer Cast Nylon												
	UWBJAB-75	MC Nylon	B/B	150	153.0	24	10	101	82/82	63/63	9.5	22	570
	UWBDJAB-75	MC Nylon	SUS										570
	UWAJAB-75	MC Nylon											530
	UWBSJAB-75	MC Nylon	B/B			26							550
	UWBSDJAB-75	MC Nylon	SUS										550
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.												
	SJAB-75	Rubber	B/B	80	81.6	32	10	101	82/82	63/63	9.5	22	580
	SRJAB-75	Red Rubber	B/B	60	61.2								580
	CRJAB-75	Heat-resistance	B/B	80	81.6								600
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJAB-75	Urethane	B/B	120	122.4	32	10	101	82/82	63/63	9.5	22	660
	SUIEJAB-75	Anti-Static	B/B										660

●The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The JAB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

●The materials of JAB Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

JAB_{Type}

Size: 100mm

Stainless Steel Swivel Bracket with Stopper

PJAB-100

PNAJAB-100

Unit: mm																			
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 						
				(daN)	(kgf)														
100	■Nylon																		
	PJAB-100	Nylon		120	122.4	35	12	144	95/95	71/71	11	35	990						
	PBJAB-100	Nylon	B/B	180	183.6								1,050						
	PBDJAB-100	Nylon	SUS										1,050						
	■Nylon Rim·Rubber Wheel																		
	PNJAB-100	Rubber	B/B	100	102.0	32	12	144	95/95	71/71	11	35	1,090						
	PNDJAB-100	Rubber	SUS										1,090						
	PNAJAB-100	Rubber											1,030						
	■Nylon Rim·Urethane Rubber Wheel																		
	PNUJAB-100	Urethane	B/B	150	153.0	32	12	144	95/95	71/71	11	35	1,070						
	PNUDJAB-100	Urethane	SUS										1,070						
	PNUAJAB-100	Urethane		100	102.0								1,010						
	■Monomer Cast Nylon																		
	UWBJAB-100	MC Nylon	B/B	200	204.0	29	12	144	95/95	71/71	11	35	1,200						
	UWBDJAB-100	MC Nylon	SUS										1,200						
	UWAJAB-100	MC Nylon				30							1,150						
	UWBSJAB-100	MC Nylon	B/B										1,150						
	UWBSDJAB-100	MC Nylon	SUS										1,150						
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.																		
	SJAB-100	Rubber	B/B	130	132.6	35	12	144	95/95	71/71	11	35	1,190						
	SRJAB-100	Red Rubber	B/B	100	102.0								1,190						
	CRJAB-100	Heat-resistance	B/B	130	132.6								1,220						
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.																		
	SUIJAB-100	Urethane	B/B	180	183.6	32	12	144	95/95	71/71	11	35	1,260						
	SUIEJAB-100	Anti-Static	B/B										1,260						

●The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The JAB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

●The materials of JAB Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

JAB_{Type}

Size: 130mm

Stainless Steel Swivel Bracket with Stopper



PJAB-130



PNAJAB-130

Unit: mm													
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
130	■Nylon												
	PJAB-130	Nylon		150	153.0	42	20	177	108/108	80/80	11	40	1,580
	PBJAB-130	Nylon	B/B	250	255.0								1,780
	PBDJAB-130	Nylon	SUS										1,780
	■Nylon Rim・Rubber Wheel												
	PNJAB-130	Rubber	B/B	145	147.9	38	20	177	108/108	80/80	11	40	1,840
	PNDJAB-130	Rubber	SUS										1,840
	PNAJAB-130	Rubber		120	122.4								1,650
	■Nylon Rim・Urethane Rubber Wheel												
	PNUJAB-130	Urethane	B/B	200	204.0	35	20	177	108/108	80/80	11	40	1,780
	PNUDJAB-130	Urethane	SUS										1,780
	PNUAJAB-130	Urethane		120	122.4								1,590
	■Monomer Cast Nylon												
	UWBJAB-130	MC Nylon	B/B	300	306.0	36	20	177	108/108	80/80	11	40	2,060
	UWBDJAB-130	MC Nylon	SUS										2,060
	UWAJAB-130	MC Nylon											1,910
	UWBSJAB-130	MC Nylon	B/B			30							1,800
	UWBSDJAB-130	MC Nylon	SUS										1,800
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.												
	SJAB-130	Rubber	B/B	180	183.6	42	20	177	108/108	80/80	11	40	2,040
	SRJAB-130	Red Rubber	B/B	140	142.8								2,040
	CRJAB-130	Heat-resistance	B/B	180	183.6								2,070
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJAB-130	Urethane	B/B	250	255.0	35	20	177	108/108	80/80	11	40	2,170
	SUIEJAB-130	Anti-Static	B/B										2,170

● The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

■ Build-to-order manufacturing

The JAB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

● The materials of JAB Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

JAB_{Type}

Size: 150mm

Stainless Steel Swivel Bracket with Stopper

PJOB-150

PNAJAB-150

Unit: mm															
Size 	Model Number	Wheel	Bearing	 Load Capacity		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Offset E	 Weight (g)		
				(daN)	(kgf)										
150	■Nylon														
	PJAB-150	Nylon		180	183.6	45	20	198	120/120	90/90	11	45	2,080		
	PBJAB-150	Nylon	B/B	300	306.0								2,320		
	PBDJAB-150	Nylon	SUS										2,320		
	■Nylon Rim · Rubber Wheel														
	PNJAB-150	Rubber	B/B	175	178.5	38	20	198	120/120	90/90	11	45	2,340		
	PNDJAB-150	Rubber	SUS												2,340
	PNAJAB-150	Rubber											140	142.8	2,180
	■Nylon Rim · Urethane Rubber Wheel														
	PNUJAB-150	Urethane	B/B	250	255.0	38	20	198	120/120	90/90	11	45	2,300		
	PNUDJAB-150	Urethane	SUS												2,300
	PNUAJAB-150	Urethane											150	153.0	2,110
	■Monomer Cast Nylon														
	UWBJAB-150	MC Nylon	B/B	350	357.0	40	20	198	120/120	90/90	11	45	2,760		
	UWBDJAB-150	MC Nylon	SUS												2,760
	UWAJAB-150	MC Nylon													2,610
	UWBSJAB-150	MC Nylon	B/B			30								2,360	
	UWBSDJAB-150	MC Nylon	SUS											2,360	
	■Steel Rim · Rubber Wheel Wheel rim is not stainless steel.														
	SJAB-150	Rubber	B/B	200	204.0	45	20	198	120/120	90/90	11	45	2,630		
	SRJAB-150	Red Rubber	B/B	160	163.2								2,630		
	CRJAB-150	Heat-resistance	B/B	200	204.0								2,670		
	■Steel Rim · Urethane Rubber Wheel Wheel rim is not stainless steel.														
	SUIJAB-150	Urethane	B/B	300	306.0	38	20	198	120/120	90/90	11	45	2,820		
SUIEJAB-150	Anti-Static	B/B	2,820												

● The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The JAB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.

● The materials of JAB Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

JAB_{Type}

Size: 200mm

Stainless Steel Swivel Bracket with Stopper



PJAB-200



PNAJAB-200

Unit: mm													
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g) 
				(daN)	(kgf)								
200	■Nylon												
	PJAB-200	Nylon		250	255.0	45	20	250	140/140	112/112	11	58	3,120
	PBJAB-200	Nylon	B/B	400	408.0								3,330
	PBDJAB-200	Nylon	SUS										3,330
	■Nylon Rim・Rubber Wheel												
	PNJAB-200	Rubber	B/B	220	224.4	42	20	250	140/140	112/112	11	58	3,400
	PNDJAB-200	Rubber	SUS										3,400
	PNAJAB-200	Rubber											160
	■Nylon Rim・Urethane Rubber Wheel												
	PNUJAB-200	Urethane	B/B	350	357.0	42	20	250	140/140	112/112	11	58	3,270
	PNUDJAB-200	Urethane	SUS										3,270
	PNUAJAB-200	Urethane											250
	■Monomer Cast Nylon												
	UWBJAB-200	MC Nylon	B/B	500	510.0	42	20	250	140/140	112/112	11	58	4,280
	UWBDJAB-200	MC Nylon	SUS										4,280
	UWAJAB-200	MC Nylon											4,130
	UWBSJAB-200	MC Nylon	B/B			34							3,740
	UWBSDJAB-200	MC Nylon	SUS										3,740
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.												
	SJAB-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	11	58	4,050
	SRJAB-200	Red Rubber	B/B	200	204.0								4,050
	SHJAB-200	High-Rebound	B/B	250	255.0								4,050
	CRJAB-200	Heat-resistance	B/B										4,130
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.												
	SUIJAB-200	Urethane	B/B	400	408.0	42	20	250	140/140	112/112	11	58	4,220
	SUIEJAB-200	Anti-Static	B/B										4,220

● The stopper pedal for left foot is not available.

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

The JAB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal.


● The materials of JAB Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

JAB_{Type}

Stainless Steel Swivel Bracket with Stopper

Stainless Steel Caster Series

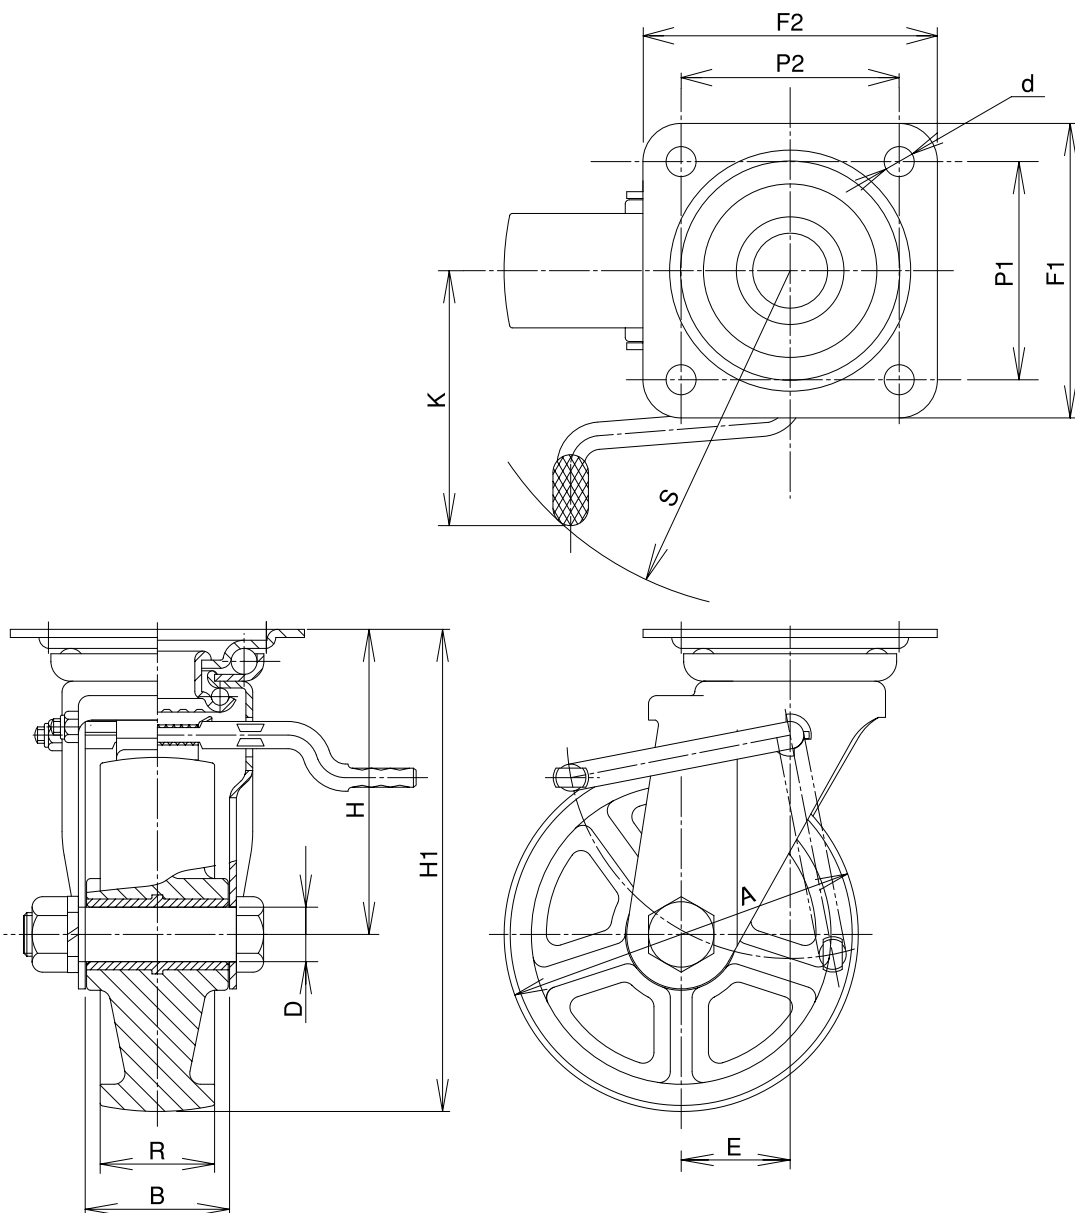

[Bracket Dimensions]

Unit: mm

Size 	Load Capacity 		Bracket Height 	Bracket Width 	Weight (g) 
	(daN)	(kgf)			
75	150	153.0	63	40	380
100	200	204.0	94	43	830
130	300	306.0	112	53	1,260
150	350	357.0	123	56	1,670
200	500	510.0	150	56	2,380

[Pedal Dimensions]

Unit: mm

Size 	Pedal Rod K 	Radius of Gyration S 
75	65	82
100	92	112
130	105	135
150	108	140
200	120	148

Notice

The materials of JAB Type bracket are all stainless steel, but the following wheels are not stainless steel. In addition, stainless steel bearings cannot be set.
Please be careful when selecting a caster.

Steel Rim・Rubber Wheel (S, SR, SH, CR Type)
Steel Rim・Urethane Wheel (SUI, SUIE Type)

* The shaft set is included in the bracket.

KABZ_{Type}

Size: 75mm

Stainless Steel Rigid Bracket with Stopper



PKABZ-75



PNAKABZ-75

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
75	■Nylon											
	PKABZ-75	Nylon		100	102.0	32	10	101	91/68	63/40	9.5	360
	PBKABZ-75	Nylon	B/B	120	122.4							420
	PBDKABZ-75	Nylon	SUS									420
	■Nylon Rim・Rubber Wheel											
	PNKABZ-75	Rubber	B/B	70	71.4	32	10	101	91/68	63/40	9.5	450
	PNDKABZ-75	Rubber	SUS									450
	PNAKABZ-75	Rubber										410
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKABZ-75	Urethane	B/B	100	102.0	32	10	101	91/68	63/40	9.5	440
	PNUDKABZ-75	Urethane	SUS									440
	PNUAKABZ-75	Urethane										390
	■Monomer Cast Nylon											
	UWBKABZ-75	MC Nylon	B/B	150	153.0	24	10	101	91/68	63/40	9.5	460
	UWBDKABZ-75	MC Nylon	SUS									460
	UWAKABZ-75	MC Nylon										420
	UWBSKABZ-75	MC Nylon	B/B			26						440
	UWBSDKABZ-75	MC Nylon	SUS									440
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKABZ-75	Rubber	B/B	80	81.6	32	10	101	91/68	63/40	9.5	470
	SRKABZ-75	Red Rubber	B/B	60	61.2							470
	CRKABZ-75	Heat-resistance	B/B	80	81.6							490
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKABZ-75	Urethane	B/B	120	122.4	32	10	101	91/68	63/40	9.5	550
	SUIEKABZ-75	Anti-Static	B/B									550

● The stopper pedal for left foot is available (KABZ-75 → KABZL-75).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KABZ Type bracket can lock the wheel to stop the caster.

● The materials of KABZ Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

KABZ_{Type}

Size: 100mm

Stainless Steel Rigid Bracket with Stopper

PKABZ-100

PNAKABZ-100

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
100	■Nylon											
	PKABZ-100	Nylon		120	122.4	35	12	144	115/80	80/45	11	690
	PBKABZ-100	Nylon	B/B	180	183.6							750
	PBDKABZ-100	Nylon	SUS									750
	■Nylon Rim・Rubber Wheel											
	PNKABZ-100	Rubber	B/B	100	102.0	32	12	144	115/80	80/45	11	790
	PNDKABZ-100	Rubber	SUS									790
	PNAKABZ-100	Rubber										730
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKABZ-100	Urethane	B/B	150	153.0	32	12	144	115/80	80/45	11	770
	PNUDKABZ-100	Urethane	SUS									770
	PNUAKABZ-100	Urethane		100	102.0							710
	■Monomer Cast Nylon											
	UWBKABZ-100	MC Nylon	B/B	200	204.0	29	12	144	115/80	80/45	11	900
	UWBDKABZ-100	MC Nylon	SUS									900
	UWAKABZ-100	MC Nylon										850
	UWBSKABZ-100	MC Nylon	B/B			30						850
	UWBSDKABZ-100	MC Nylon	SUS									850
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKABZ-100	Rubber	B/B	130	132.6	35	12	144	115/80	80/45	11	890
	SRKABZ-100	Red Rubber	B/B	100	102.0							890
	CRKABZ-100	Heat-resistance	B/B	130	132.6							920
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKABZ-100	Urethane	B/B	180	183.6	32	12	144	115/80	80/45	11	960
	SUIEKABZ-100	Anti-Static	B/B									960

●The stopper pedal for left foot is available (KABZ-100 → KABZL-100).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KABZ Type bracket can lock the wheel to stop the caster.

●The materials of KABZ Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

KABZ_{Type}

Size: 130mm

Stainless Steel Rigid Bracket with Stopper



PKABZ-130



PNAKABZ-130

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
130	■Nylon											
	PKABZ-130	Nylon		150	153.0	42	20	177	137/93	100/56	11	1,310
	PBKABZ-130	Nylon	B/B	250	255.0							1,510
	PBDKABZ-130	Nylon	SUS									1,510
	■Nylon Rim・Rubber Wheel											
	PNKABZ-130	Rubber	B/B	145	147.9	38	20	177	137/93	100/56	11	1,570
	PNDKABZ-130	Rubber	SUS									1,570
	PNAKABZ-130	Rubber										120
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKABZ-130	Urethane	B/B	200	204.0	35	20	177	137/93	100/56	11	1,510
	PNUDKABZ-130	Urethane	SUS									1,510
	PNUAKABZ-130	Urethane										120
	■Monomer Cast Nylon											
	UWBKABZ-130	MC Nylon	B/B	300	306.0	36	20	177	137/93	100/56	11	1,790
	UWBDKABZ-130	MC Nylon	SUS									1,790
	UWAKABZ-130	MC Nylon										1,640
	UWBSKABZ-130	MC Nylon	B/B			30						1,530
	UWBSDKABZ-130	MC Nylon	SUS									1,530
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKABZ-130	Rubber	B/B	180	183.6	42	20	177	137/93	100/56	11	1,770
	SRKABZ-130	Red Rubber	B/B	140	142.8							1,770
	CRKABZ-130	Heat-resistance	B/B	180	183.6							1,800
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKABZ-130	Urethane	B/B	250	255.0	35	20	177	137/93	100/56	11	1,900
	SUIEKABZ-130	Anti-Static	B/B									1,900

● The stopper pedal for left foot is available (KABZ-130 → KABZL-130).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KABZ Type bracket can lock the wheel to stop the caster.

● The materials of KABZ Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

KABZ_{Type}

Size: 150mm

Stainless Steel Rigid Bracket with Stopper

PKABZ-150

PNAKABZ-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity								Weight (g) 
												
				(daN)	(kgf)							
150	■Nylon											
	PKABZ-150	Nylon		180	183.6	45	20	198	137/93	100/56	11	1,560
	PBKABZ-150	Nylon	B/B	300	306.0							1,800
	PBDKABZ-150	Nylon	SUS									1,800
	■Nylon Rim·Rubber Wheel											
	PNKABZ-150	Rubber	B/B	175	178.5	38	20	198	137/93	100/56	11	1,820
	PNDKABZ-150	Rubber	SUS									1,820
	PNAKABZ-150	Rubber										140
	■Nylon Rim·Urethane Rubber Wheel											
	PNUKABZ-150	Urethane	B/B	250	255.0	38	20	198	137/93	100/56	11	1,780
	PNUDKABZ-150	Urethane	SUS									1,780
	PNUAKABZ-150	Urethane										150
	■Monomer Cast Nylon											
	UWBKABZ-150	MC Nylon	B/B	350	357.0	40	20	198	137/93	100/56	11	2,240
	UWBDKABZ-150	MC Nylon	SUS									2,240
	UWAKABZ-150	MC Nylon				30						2,090
	UWBSKABZ-150	MC Nylon	B/B									1,840
	UWBSDKABZ-150	MC Nylon	SUS									1,840
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.											
	SKABZ-150	Rubber	B/B	200	204.0	45	20	198	137/93	100/56	11	2,110
	SRKABZ-150	Red Rubber	B/B	160	163.2							2,110
	CRKABZ-150	Heat-resistance	B/B	200	204.0							2,150
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKABZ-150	Urethane	B/B	300	306.0	38	20	198	137/93	100/56	11	2,300
	SUIEKABZ-150	Anti-Static	B/B									2,300

●The stopper pedal for left foot is available (KABZ-150 → KABZL-150).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

The stopper of the KABZ Type bracket can lock the wheel to stop the caster.

●The materials of KABZ Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

KABZ_{Type}

Size: 200mm

Stainless Steel Rigid Bracket with Stopper



PKABZ-200



PNAKABZ-200

Unit: mm																			
Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 							
				(daN)	(kgf)														
200	■Nylon																		
	PKABZ-200	Nylon		250	255.0	45	20	250	151/102	112/63	11	2,520							
	PBKABZ-200	Nylon	B/B	400	408.0							2,730							
	PBDKABZ-200	Nylon	SUS									2,730							
	■Nylon Rim・Rubber Wheel																		
	PNKABZ-200	Rubber	B/B	220	224.4	42	20	250	151/102	112/63	11	2,800							
	PNDKABZ-200	Rubber	SUS									2,800							
	PNAKABZ-200	Rubber										160	163.2	2,630					
	■Nylon Rim・Urethane Rubber Wheel																		
	PNUKABZ-200	Urethane	B/B	350	357.0	42	20	250	151/102	112/63	11	2,670							
	PNUDKABZ-200	Urethane	SUS									2,670							
	PNUAKABZ-200	Urethane										250	255.0	2,500					
	■Monomer Cast Nylon																		
	UWBKABZ-200	MC Nylon	B/B	500	510.0	42	20	250	151/102	112/63	11	3,680							
	UWBDKABZ-200	MC Nylon	SUS									3,680							
	UWAKABZ-200	MC Nylon										3,530							
	UWBSKABZ-200	MC Nylon	B/B			34													3,140
	UWBSDKABZ-200	MC Nylon	SUS																3,140
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.																		
	SKABZ-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,450							
	SRKABZ-200	Red Rubber	B/B	200	204.0							3,450							
	SHKABZ-200	High-Rebound	B/B	250	255.0							3,450							
	CRKABZ-200	Heat-resistance	B/B									3,530							
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.																		
	SUIKABZ-200	Urethane	B/B	400	408.0	42	20	250	151/102	112/63	11	3,620							
	SUIEKABZ-200	Anti-Static	B/B									3,620							

● The stopper pedal for left foot is available (KABZ-200 → KABZL-200).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

Build-to-order manufacturing

The stopper of the KABZ Type bracket can lock the wheel to stop the caster.


● The materials of KABZ Type bracket are all stainless steel (SUS 304 / 18-8 stainless), except plate springs.

For plate springs, SK5 (carbon tool steel) is used for maintaining spring performance, and the surface is plated with nickel chrome.

KABZ_{Type}

Stainless Steel Rigid Bracket with Stopper

Stainless Steel Caster Series

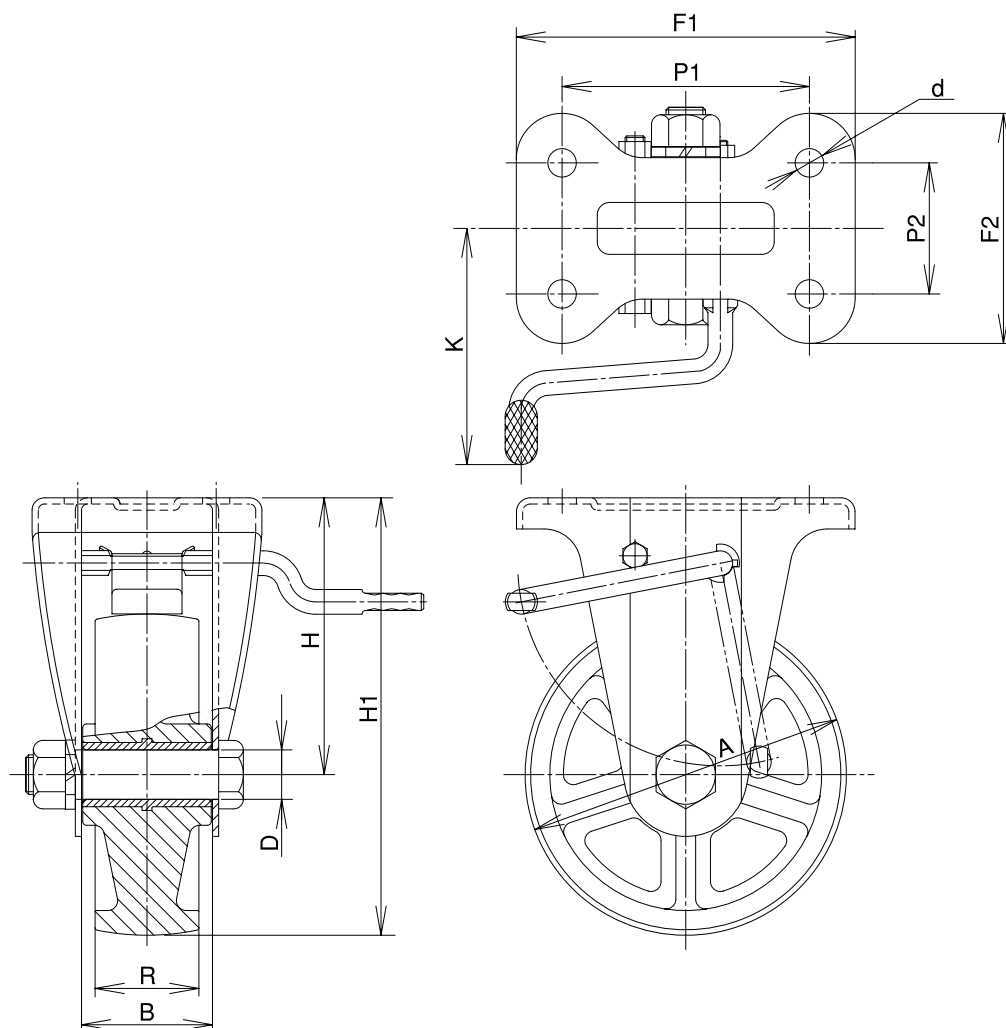


[Bracket Dimensions]

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
75	150	153.0	63	40	270
100	200	204.0	94	43	530
130	300	306.0	112	53	990
150	350	357.0	123	56	1,150
200	500	510.0	150	56	1,780

[Pedal Dimensions]

Unit: mm

Size 	Pedal Rod K 
75	72
100	100
130	112
150	112
200	112

Notice

The materials of KABZ Type bracket are all stainless steel, but the following wheels are not stainless steel. In addition, stainless steel bearings cannot be set. Please be careful when selecting a caster.

Steel Rim • Rubber Wheel (S, SR, SH, CR Type)
Steel Rim • Urethane Wheel (SUI, SUIE Type)

* The shaft set is included in the bracket.

JM_{Type}

Size: 50mm~75mm

Heavy Duty Swivel Bracket (Small Type)



RGNJM-65 CP

RFJM-65 CP

RRJM-65 CP


													Unit: mm
Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
													
				(daN)	(kgf)								
50	RGNJM-50 CP	Reinforced Nylon	B/B	200	204.0	28	10	72	65/65	50/50	6.2	25	420
	RRJM-50 CP	MC Nylon	B/B			27							420
	SUIJM-50 CP	Urethane	B/B	80	81.6	20.5							450
	FJM-50 CP	Steel	B/B	100	102.0	27							630
	FAJM-50 CP	Steel	B/B	60	61.2								700
65 ※	RGNJM-65 CP	Reinforced Nylon	B/B	300	306.0	38	12	92	90/90	71/71	10.5	35	1,070
	RFJM-65 CP	Urethane	B/B	170	173.4	34							1,250
	RRJM-65 CP	MC Nylon	B/B	300	306.0								1,030
75 ※	RGNJM-75 CP	Reinforced Nylon	B/B	400	408.0	38	12	105	90/90	71/71	10.5	35	1,150
	RFJM-75 CP	Urethane	B/B	200	204.0	36							1,160
	RRJM-75 CP	MC Nylon	B/B	400	408.0								1,110

Unit: mm

※ It is possible to attach an AD-12 bracket-mounted adjuster to JM-65 and JM-75 brackets (Page 64).

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing

Bracket: White Plating (Written as "CP")

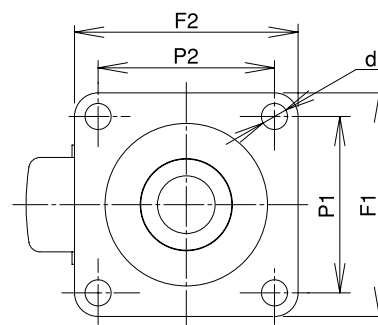


[Bracket Dimensions]

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
50	200	204.0	47	32	310
65	300	306.0	60	40	850
75	400	408.0	68	40	880

Unit: mm

* The shaft set is included in the bracket.

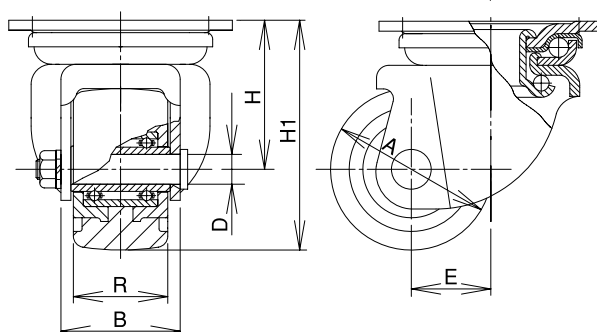

AD-12/AE-12_{Type}

Adjuster with the Bracket



AD-12 CP

Unit: mm

Model Number	Load Capacity		Max. Height Hmax	Min. Height Hmin	Adjustment a	Weight (g)	Compatible Caster
	(daN)	(kgf)					
AD-12 CP	400	408.0	115	83	32	350	JM-65/JM-75



White Plating (Written as "CP")

【Adjuster Dimensions】

Unit: mm

Model Number	Load Capacity		Bolt Diameter P	Bolt Length		Foot Diameter φN	Lock Nut		Weight (g)
	(daN)	(kgf)		L1	L2		s	m	
AE-12 CP	400	408.0	M12×P1.25	52	75	40	17	10	110


White Plating (Written as "CP")

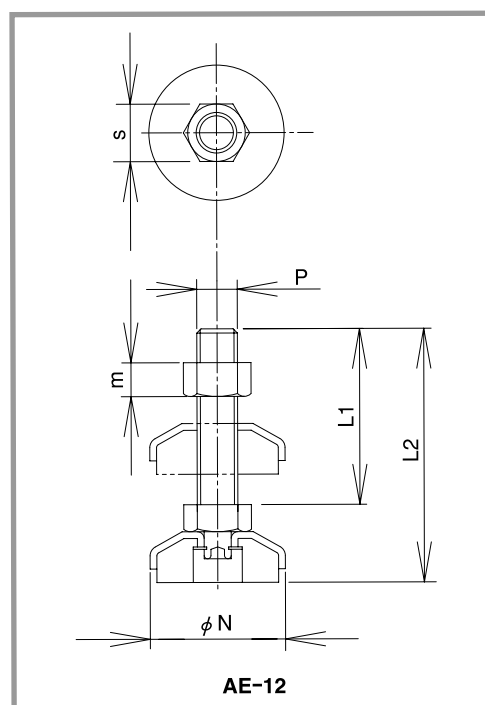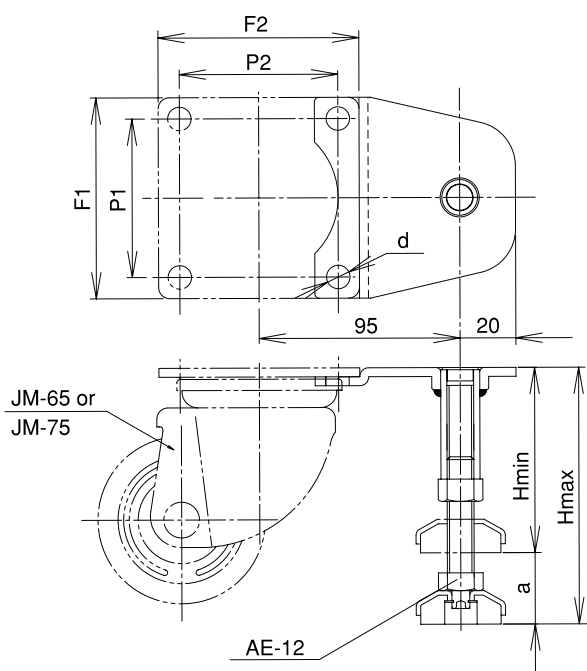

KH Type

Size: 50mm

Heavy Duty Rigid Bracket (Small Type)

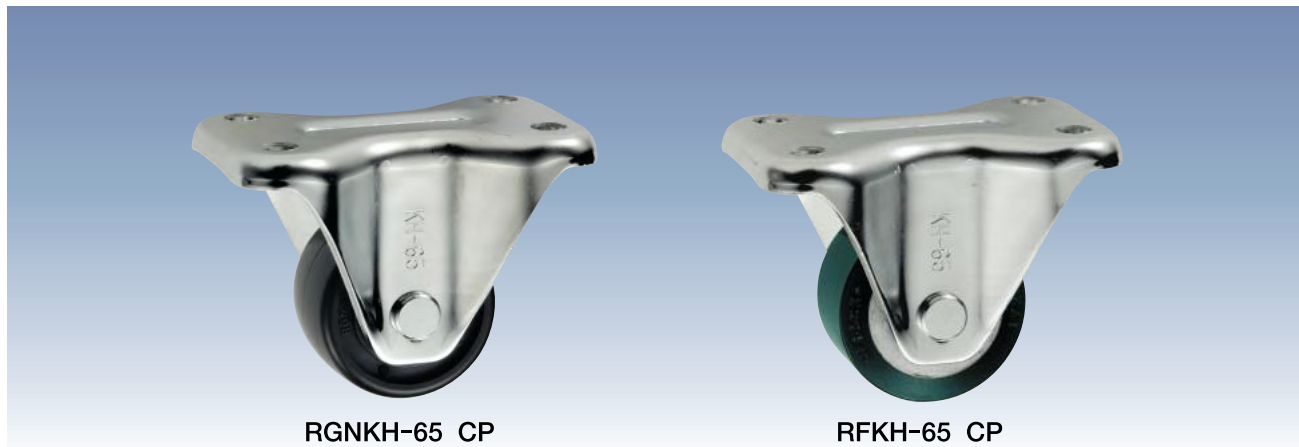

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 					
				(daN)	(kgf)												
50	RGNKH-50 CP	Reinforced Nylon	B/B	200	204.0	28	10	72	82/52	66/36	6.2	290					
	RRKH-50 CP	MC Nylon	B/B			27						290					
	SUIKH-50 CP	Urethane	B/B	80	81.6	20.5						320					
	FKH-50 CP	Steel	B/B	100	102.0	27						500					
	FAKH-50 CP	Steel		60	61.2							570					

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing

Bracket: White Plating (Written as "CP")

[Bracket Dimensions]

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
50	200	204.0	47	32	180
65	300	306.0	60	40	450
75	400	408.0	68	40	540

* The shaft set is included in the bracket.

KH Type

Size: 65mm~75mm

Heavy Duty Rigid Bracket (Small Type)




RRKH-65 CP

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
65	RGNGH-65 CP	Reinforced Nylon	B/B	300	306.0	38	12	92	124/80	91/47	10.5	670
	RFGH-65 CP	Urethane	B/B	170	173.4	34						850
	RRKH-65 CP	MC Nylon	B/B	300	306.0	34						630
75	RGNGH-75 CP	Reinforced Nylon	B/B	400	408.0	38	12	105	136/85	103/52	10.5	810
	RFGH-75 CP	Urethane	B/B	200	204.0	36						820
	RRKH-75 CP	MC Nylon	B/B	400	408.0	36						770

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing

Bracket: White Plating (Written as "CP")

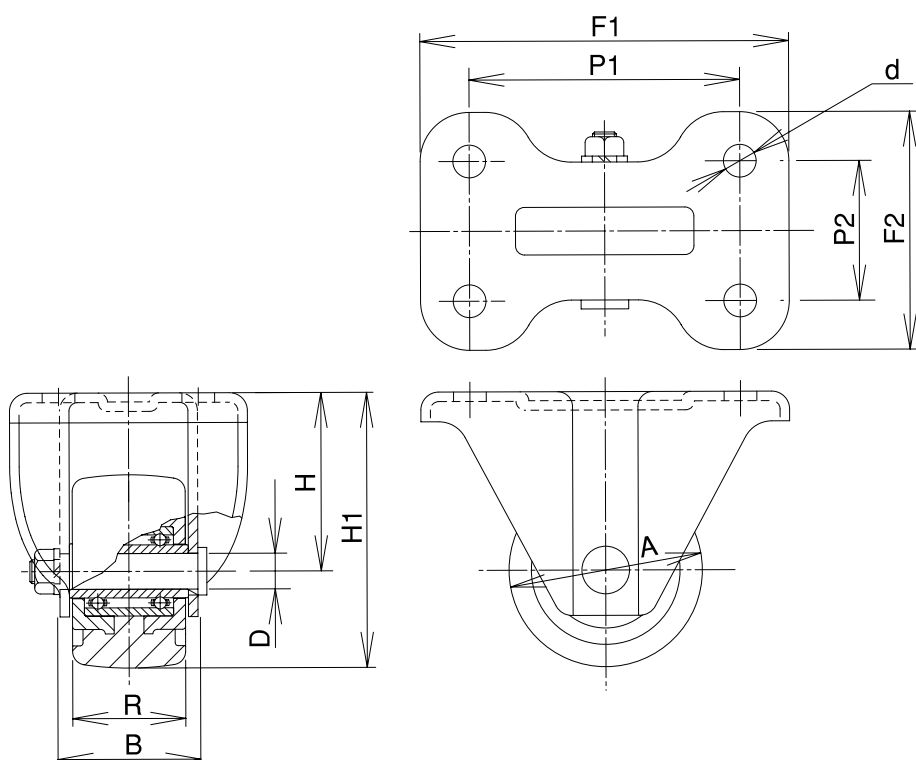

JM_{Type}

Size: 100mm~130mm

Heavy Duty Swivel Bracket



RGJM-150



RJM-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				 (daN)	 (kgf)								
100	RGNJM-100	Reinforced Nylon	B/B	460	469.2	45	12	144	108/108	80/80	11	37	1,940
	RGJM-100	Aluminum Rim・Rubber	B/B	200	204.0	50							1,970
	RJM-100	Aluminum Rim・Urethane	B/B	300	306.0	50							1,970
	RFJM-100	Steel Rim・Urethane	B/B			1,980							
	RRJM-100	MC Nylon	B/B	45	1,880								
	UWBJM-100	MC Nylon	B/B	29	1,820								
130	RGJM-130	Aluminum Rim・Rubber	B/B	240	244.8	50	20	177	108/108	80/80	11	40	2,830
	RJM-130	Aluminum Rim・Urethane	B/B	450	459.0								2,970
	RFJM-130	Steel Rim・Urethane	B/B										3,000
	RRJM-130	Aluminum Rim・MC Nylon	B/B	500	510.0								2,980
	UWBJM-130	MC Nylon	B/B			36							2,730

Bearing: B/B -- Steel bearing

[Bracket Dimensions]

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
100	460	469.2	94	57	1,440
130	500	510.0	112	60	1,920
150	550	561.0	123	60	2,490
200	660	673.2	150	71	3,860

* The shaft set is included in the bracket.

JM Type

Size: 150mm~200mm

Heavy Duty Swivel Bracket


RFJM-150

RRJM-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
													
150	RGJM-150	Aluminum Rim・Rubber	B/B	300	306.0	50	20	198	120/120	90/90	11	45	3,620
	RJM-150	Aluminum Rim・Urethane	B/B	500	510.0								3,730
	RFJM-150	Steel Rim・Urethane	B/B	500	510.0								3,790
	RRJM-150	Aluminum Rim・MC Nylon	B/B	550	561.0	40							3,730
	UWBJM-150	MC Nylon	B/B	550	561.0								3,590
200	RGJM-200	Steel Rim・Rubber	B/B	410	418.2	63	25	250	140/140	112/112	14	58	6,420
	RFJM-200	Steel Rim・Urethane	B/B	600	612.0								6,430
	RRJM-200	Aluminum Rim・MC Nylon	B/B	600	612.0								6,270
	UWBJM-200	MC Nylon	B/B	660	673.2	42							5,800

Bearing: B/B -- Steel bearing

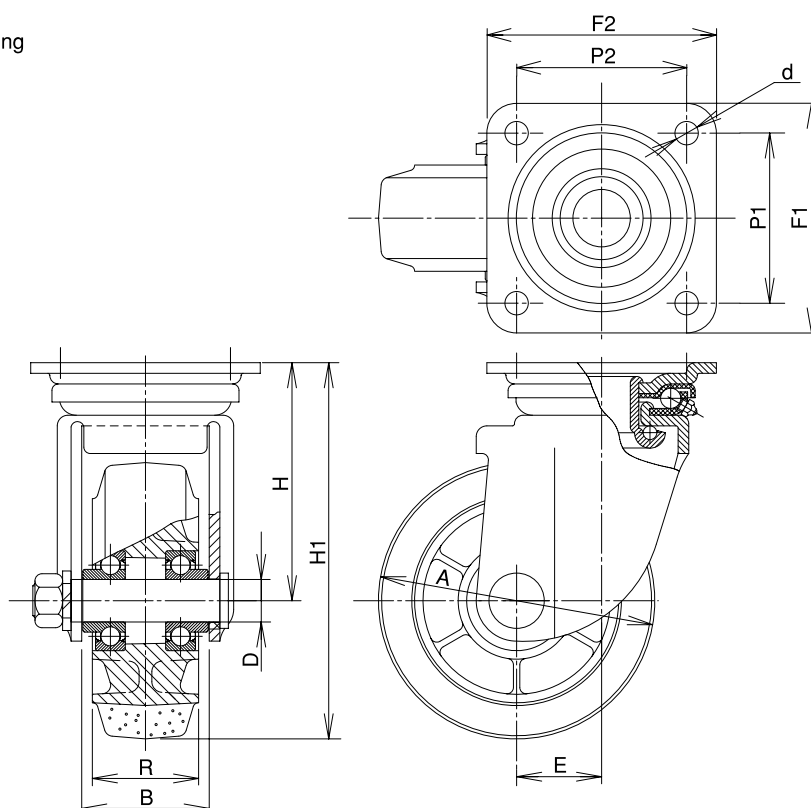

KH Type

Size: 100mm~130mm

Heavy Duty Rigid Bracket



RGKH-150



RKH-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		 Tire Width R	 Shaft Diameter D	 Overall Height H1	 Plate Size F1/F2	 Mounting Hole Spacing P1/P2	 Plate Hole d	 Weight (g)
				(daN)	(kgf)							
100	RGNKH-100	Reinforced Nylon	B/B	460	469.2	45	12	144	139/88	103/52	11	1,450
	RGKH-100	Aluminum Rim·Rubber	B/B	200	204.0	50						1,480
	RKH-100	Aluminum Rim·Urethane	B/B	300	306.0							1,480
	RFKH-100	Steel Rim·Urethane	B/B									1,490
	RRKH-100	MC Nylon	B/B	460	469.2							1,390
	UWBKH-100	MC Nylon	B/B									29
130	RGKH-130	Aluminum Rim·Rubber	B/B	240	244.8	50	20	177	140/96	100/56	11	2,400
	RKH-130	Aluminum Rim·Urethane	B/B	450	459.0							2,540
	RFKH-130	Steel Rim·Urethane	B/B									2,570
	RRKH-130	Aluminum Rim·MC Nylon	B/B	500	510.0							2,550
	UWBKH-130	MC Nylon	B/B			36						2,300

Bearing: B/B -- Steel bearing

[Bracket Dimensions]

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
100	460	469.2	94	57	950
130	500	510.0	112	60	1,490
150	550	561.0	123	60	1,520
200	660	673.2	150	71	2,260

* The shaft set is included in the bracket.

KH Type

Size: 150mm~200mm

Heavy Duty Rigid Bracket


RFKH-150

RRKH-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
150	RGKH-150	Aluminum Rim・Rubber	B/B	300	306.0	50	20	198	140/96	100/56	11	2,650
	RKH-150	Aluminum Rim・Urethane	B/B	500	510.0							2,760
	RFKH-150	Steel Rim・Urethane	B/B									2,820
	RRKH-150	Aluminum Rim・MC Nylon	B/B	550	561.0	2,760						
	UWBKH-150	MC Nylon	B/B			2,620						
200	RGKH-200	Steel Rim・Rubber	B/B	410	418.2	63	25	250	151/102	112/63	14	4,820
	RFKH-200	Steel Rim・Urethane	B/B	600	612.0							4,830
	RRKH-200	Aluminum Rim・MC Nylon	B/B	660	673.2							4,670
	UWBKH-200	MC Nylon	B/B			4,200						


Bearing: B/B -- Steel bearing

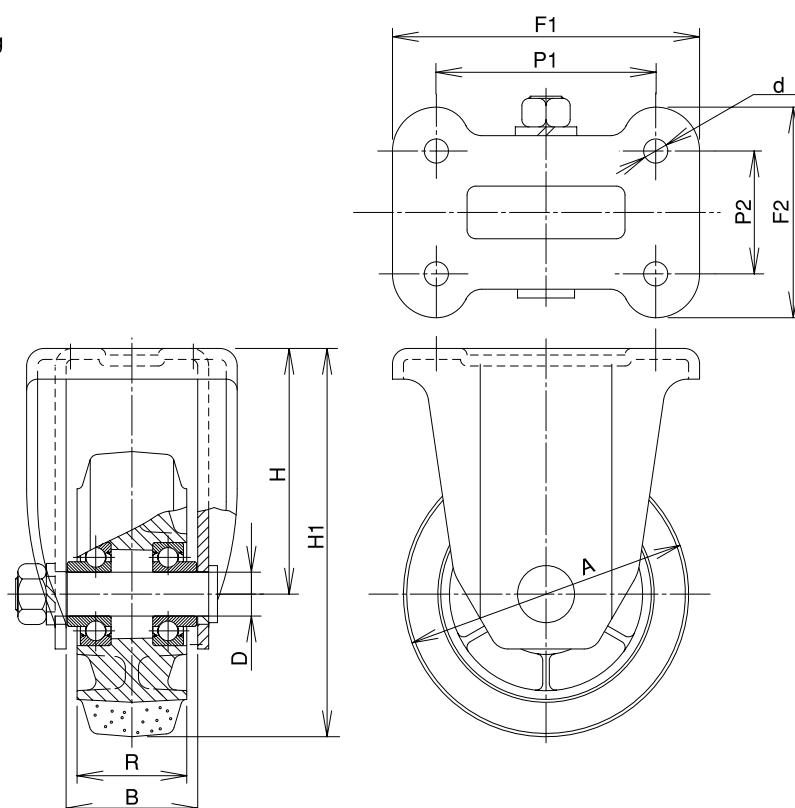

JMB^{Type}

Size: 100mm~130mm

Heavy Duty Swivel Bracket with Stopper

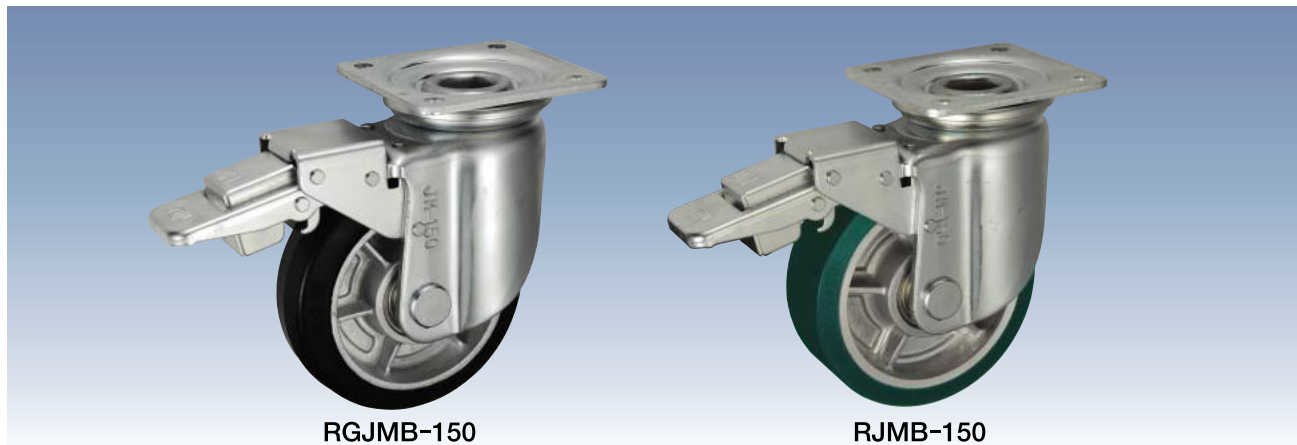

RGJMB-150

RJMB-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
													
				(daN)	(kgf)								
100	RGNJMB-100	Reinforced Nylon	B/B	460	469.2	45	12	144	108/108	80/80	11	37	2,250
	RGJMB-100	Aluminum Rim・Rubber	B/B	200	204.0	50							2,280
	RJMB-100	Aluminum Rim・Urethane	B/B	300	306.0								2,280
	RFJMB-100	Steel Rim・Urethane	B/B										2,290
	RRJMB-100	MC Nylon	B/B	45	2,190								
	UWBJMB-100	MC Nylon	B/B	29	2,130								
130	RGJMB-130	Aluminum Rim・Rubber	B/B	240	244.8	50	20	177	108/108	80/80	11	40	3,310
	RJMB-130	Aluminum Rim・Urethane	B/B	450	459.0								3,450
	RFJMB-130	Steel Rim・Urethane	B/B										3,480
	RRJMB-130	Aluminum Rim・MC Nylon	B/B	500	510.0								3,460
	UWBJMB-130	MC Nylon	B/B			36							3,210

Bearing: B/B -- Steel bearing

The stopper of the JMB Type bracket can lock the wheel to stop the caster.

【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
100	460	469.2	94	57	1,750
130	500	510.0	112	60	2,400
150	550	561.0	123	60	2,980
200	660	673.2	150	71	4,690

* The shaft set is included in the bracket.

【Pedal Dimensions】

Unit: mm

Size 	Pedal Rod K 	Stop Torque (kg-cm) 
100	150	130
130	180	200
150	190	250
200	250	300

JMB_{Type}

Size: 150mm~200mm

Heavy Duty Swivel Bracket with Stopper



RFJMB-150




RRJMB-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
150	RGJMB-150	Aluminum Rim・Rubber	B/B	300	306.0	50	20	198	120/120	90/90	11	45	4,110
	RJMB-150	Aluminum Rim・Urethane	B/B	500	510.0								4,220
	RFJMB-150	Steel Rim・Urethane	B/B	500	510.0								4,280
	RRJMB-150	Aluminum Rim・MC Nylon	B/B	550	561.0	4,220							
	UWBJMB-150	MC Nylon	B/B	550	561.0	4,080							
200	RGJMB-200	Steel Rim・Rubber	B/B	410	418.2	63	25	250	140/140	112/112	14	58	7,250
	RFJMB-200	Steel Rim・Urethane	B/B	600	612.0								7,260
	RRJMB-200	Aluminum Rim・MC Nylon	B/B	660	673.2								7,100
	UWBJMB-200	MC Nylon	B/B	660	673.2	6,630							

Bearing: B/B -- Steel bearing

The stopper of the JMB Type bracket can lock the wheel to stop the caster.

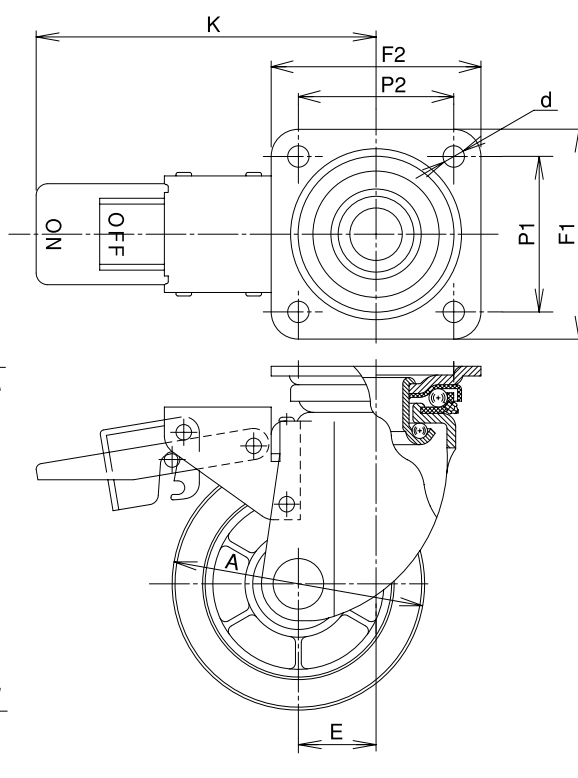

JH_{Type}

Size: 130mm~150mm

Super Heavy Duty Swivel Bracket



RGJH-150



RJH-150

Unit: mm

Size A	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
				(daN)	(kgf)								
130	RGJH-130	Aluminum Rim·Rubber	B/B	240	244.8	50	20	177	108/108	80/80	11	45	3,300
	RJH-130	Aluminum Rim·Urethane	B/B	450	459.0								3,440
	RFJH-130	Steel Rim·Urethane	B/B	500	510.0								3,470
	RRJH-130	Aluminum Rim·MC Nylon	B/B	550	561.0								3,450
	UWBJH-130	MC Nylon	B/B	600	612.0								3,200
150	RGJH-150	Aluminum Rim·Rubber	B/B	300	306.0	50	20	198	120/120	90/90	11	50	4,070
	RJH-150	Aluminum Rim·Urethane	B/B	500	510.0								4,180
	RFJH-150	Steel Rim·Urethane	B/B	550	561.0								4,240
	RRJH-150	Aluminum Rim·MC Nylon	B/B	600	612.0								4,180
	UWBJH-150	MC Nylon	B/B	600	612.0								4,040

Bearing: B/B -- Steel bearing

**Include Thrust ball and
Taper roller bearing!**

[Bracket Dimensions]

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
130	550	561.0	112	60	2,390
150	600	612.0	123	60	2,940
200	JH-200 Shaft Diameter 25				
	800	816.0	150	71	3,460
	JH-200 Shaft Diameter 20				
	800	816.0	150	56	3,270

* The shaft set is included in the bracket.

Distinctive Features

The swivel part includes a thrust ball bearing in the upper part and a taper roller bearing in the lower part. This design was embodied, for stabilizing the smooth swivel function and abrasion resistance under heavy loading for a long period of time.

JH_{Type}

Size: 200mm

Super Heavy Duty Swivel Bracket


RFJH-150





RRJH-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
													
				(daN)	(kgf)								
200	■JH-200 Shaft Diameter 25												
	RGJH-200	Steel Rim·Rubber	B/B	410	418.2	63	25	250	140/140	112/112	14	70	6,020
	RFJH-200	Steel Rim·Urethane	B/B	600	612.0								6,030
	RRJH-200	Aluminum Rim·MC Nylon	B/B	660	673.2								5,870
	UWBJH-200	MC Nylon	B/B	800	816.0	42							5,400
	■JH-200 Shaft Diameter 20												
	SVJH-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	14	70	5,020
	SHVJH-200	High-Rebound	B/B	250	255.0								5,020


Bearing: B/B -- Steel bearing

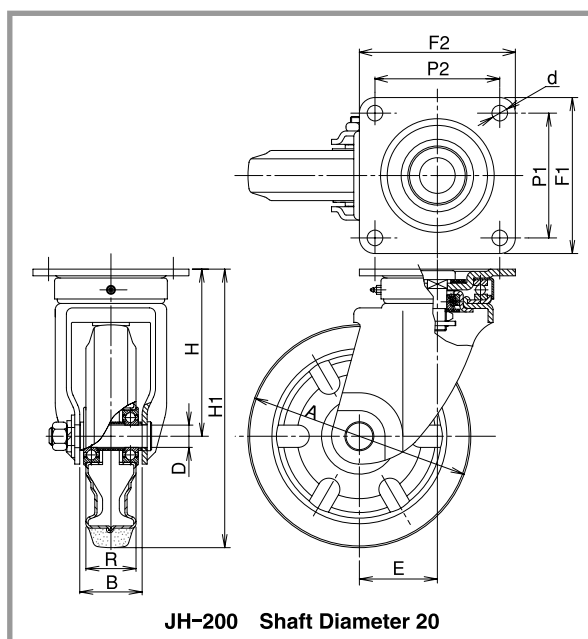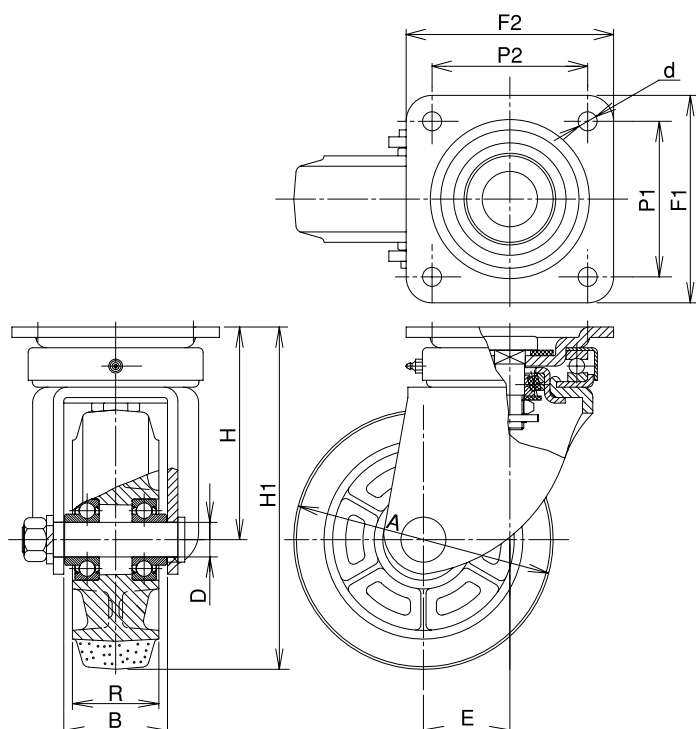

JHB_{Type}

Size: 150mm

Super Heavy Duty Swivel Bracket with Stopper

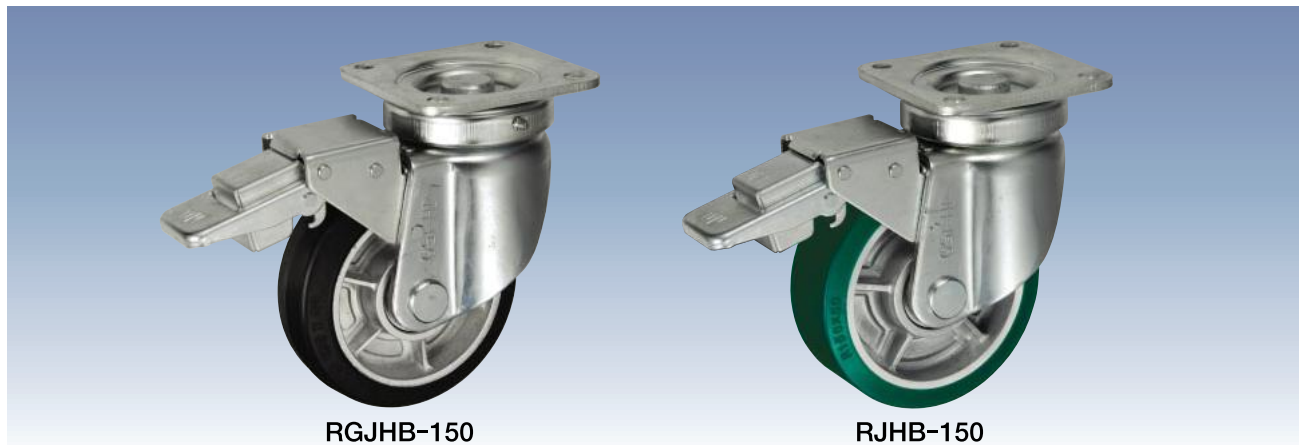

RGJHB-150

RJHB-150

Unit: mm

Size A	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
				(daN)	(kgf)								
150	RGJHB-150	Aluminum Rim · Rubber	B/B	300	306.0	50	20	198	120/120	90/90	11	50	4,610
	RJHB-150	Aluminum Rim · Urethane	B/B	500	510.0								4,720
	RFJHB-150	Steel Rim · Urethane	B/B	550	561.0								4,780
	RRJHB-150	Aluminum Rim · MC Nylon	B/B	550	561.0								4,720
	UWBJHB-150	MC Nylon	B/B	600	612.0	40							4,580



Bearing: B/B -- Steel bearing

**Include Thrust ball and
Taper roller bearing!**

Distinctive Features

The swivel part includes a thrust ball bearing in the upper part and a taper roller bearing in the lower part. This design was embodied, for stabilizing the smooth swivel function and abrasion resistance under heavy loading for a long period of time.

The stopper of the JHB Type bracket can lock the wheel to stop the caster.

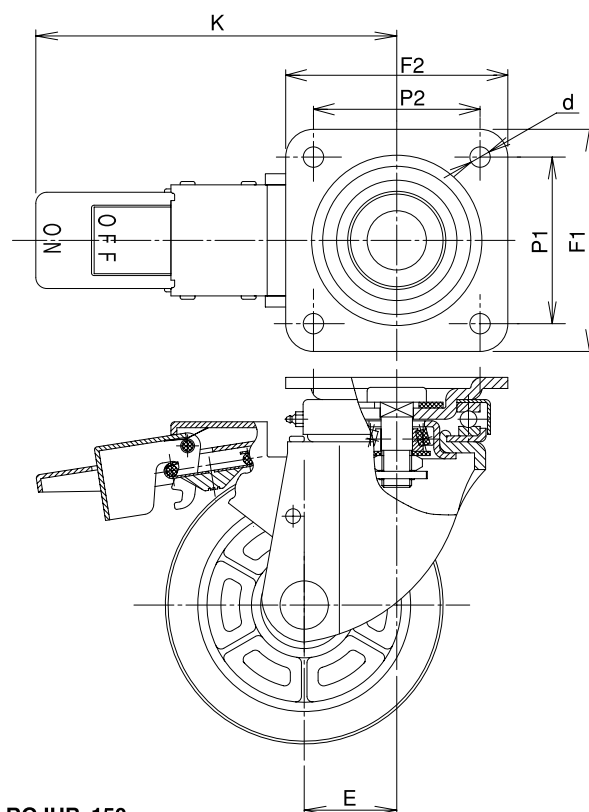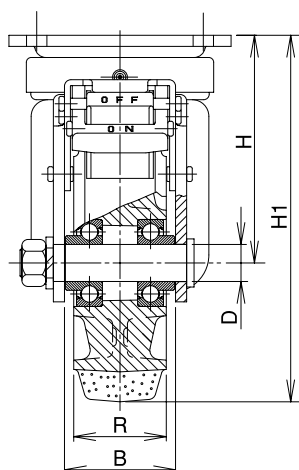

RGJHB-150

JHB_{Type}

Size: 150mm

Super Heavy Duty Swivel Bracket with Stopper



RFJHB-150



RRJHB-150

【Bracket Dimensions】

Unit: mm



Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
150	600	612.0	123	60	3,480

* The shaft set is included in the bracket.

【Pedal Dimensions】

Unit: mm

Size 	Pedal Rod K 	Stop Torque (kg-cm)
150	195	250

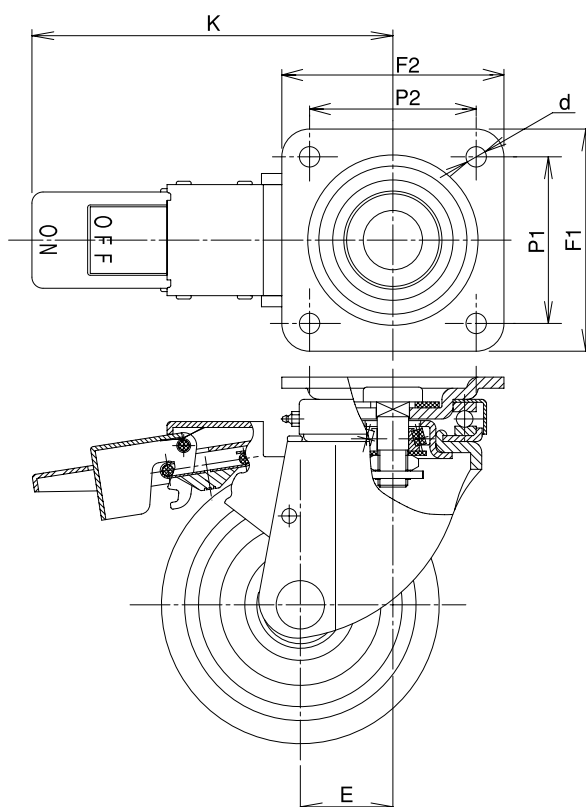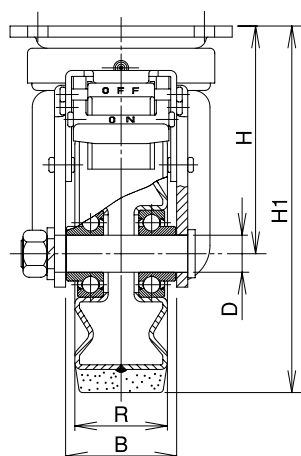

RFJHB-150

JHW Type

Size: 150mm~200mm

Towing Swivel Bracket



RGJHW-200


SHVJHW-200

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity			Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
													
150	RGJHW-150	Aluminum Rim・Rubber	B/B	300	306.0		20	198	120/120	90/90	11	50	4,070
	RJHW-150	Aluminum Rim・Urethane	B/B	500	510.0								4,180
	RFJHW-150	Steel Rim・Urethane	B/B										4,240
200	■JHW-200 Shaft Diameter 25												
	RGJHW-200	Steel Rim・Rubber	B/B	410	418.2	63	25	250	140/140	112/112	14	70	6,010
	RFJHW-200	Steel Rim・Urethane	B/B	600	612.0								6,020
	■JHW-200 Shaft Diameter 20												
	SVJHW-200	Rubber	B/B	250	255.0	45	20	250	140/140	112/112	14	70	5,020
	SHVJHW-200	High-Rebound	B/B										5,020

Bearing: B/B -- Steel bearing

The shaft includes a split pin for preventing loosening.

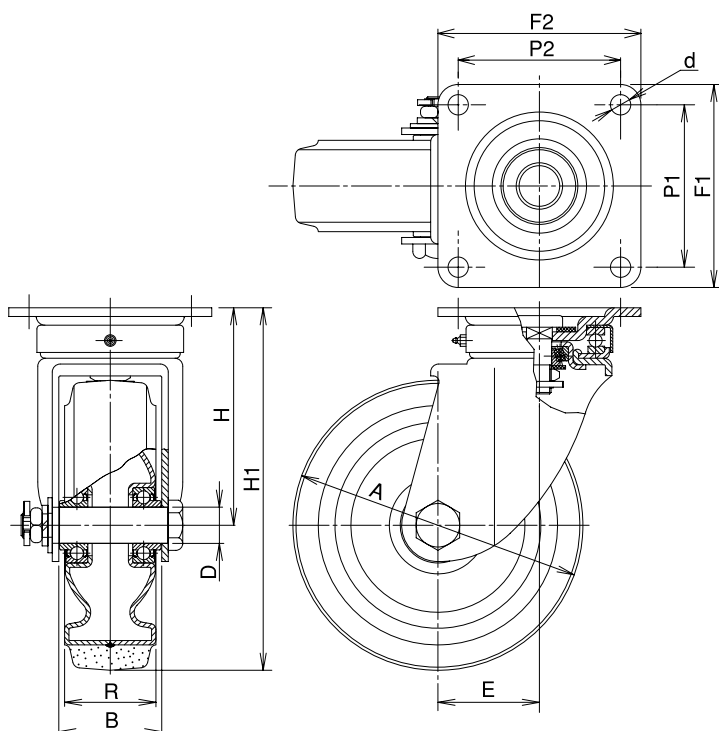


Bracket Dimensions

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
150	600	612.0	123	60	2,940
200	■JHW-200 Shaft Diameter 25				
	800	816.0	150	71	3,450
	■JHW-200 Shaft Diameter 20				
	800	816.0	150	56	3,270

* The shaft set is included in the bracket.

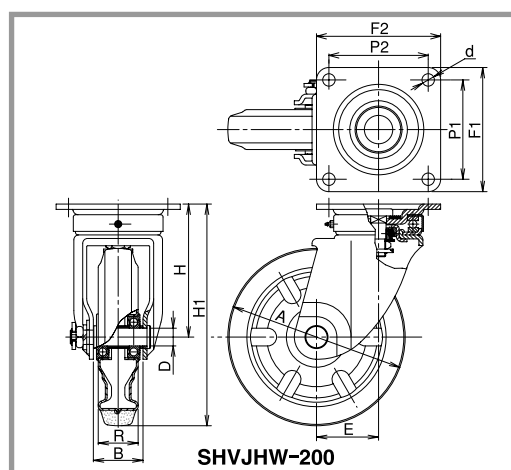

KHW/KW Type

Size: 150mm~200mm

Towing Rigid Bracket

RGKHW-200




SHVKW-200

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
150	RGKHW-150	Aluminum Rim・Rubber	B/B	300	306.0	50	20	198	140/96	100/56	11	2,650
	RKHW-150	Aluminum Rim・Urethane	B/B	500	510.0							2,760
	RFKHW-150	Steel Rim・Urethane	B/B		2,820							
200	■KHW-200 Shaft Diameter 25											
	RGKHW-200	Steel Rim・Rubber	B/B	410	418.2	63	25	250	151/102	112/63	14	4,810
	RFKHW-200	Steel Rim・Urethane	B/B	600	612.0							4,820
	■KW-200 Shaft Diameter 20											
	SVKW-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,500
	SHVKW-200	High-Rebound	B/B									3,500

Bearing: B/B -- Steel bearing

The shaft includes a split pin for preventing loosening.

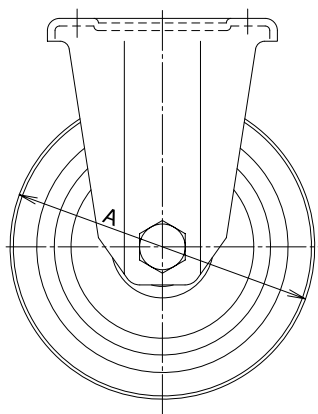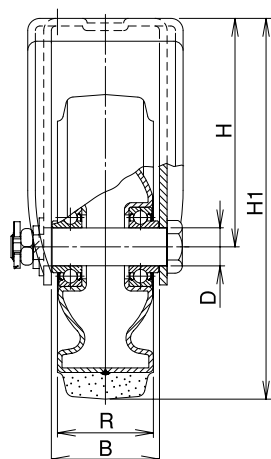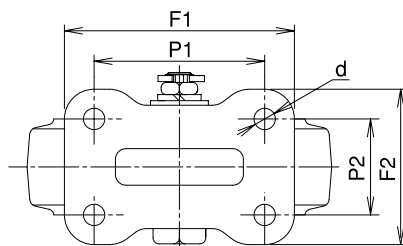


【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
150	550	561.0	123	60	1,520
200	■KHW-200 Shaft Diameter 25				
	660	673.2	150	71	2,250
	■KW-200 Shaft Diameter 20				
	420	428.4	150	56	1,750


* The shaft set is included in the bracket.

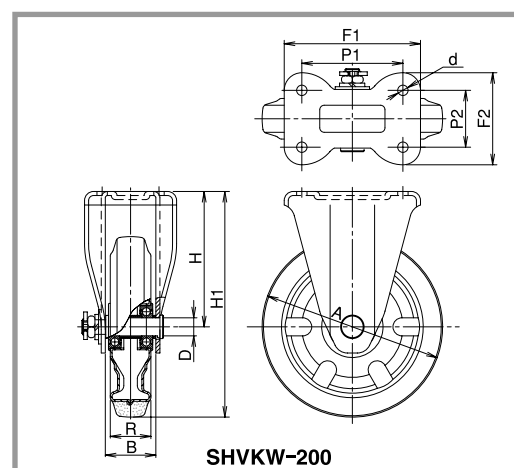

T Type

Size: 50mm

Low Height Swivel Bracket

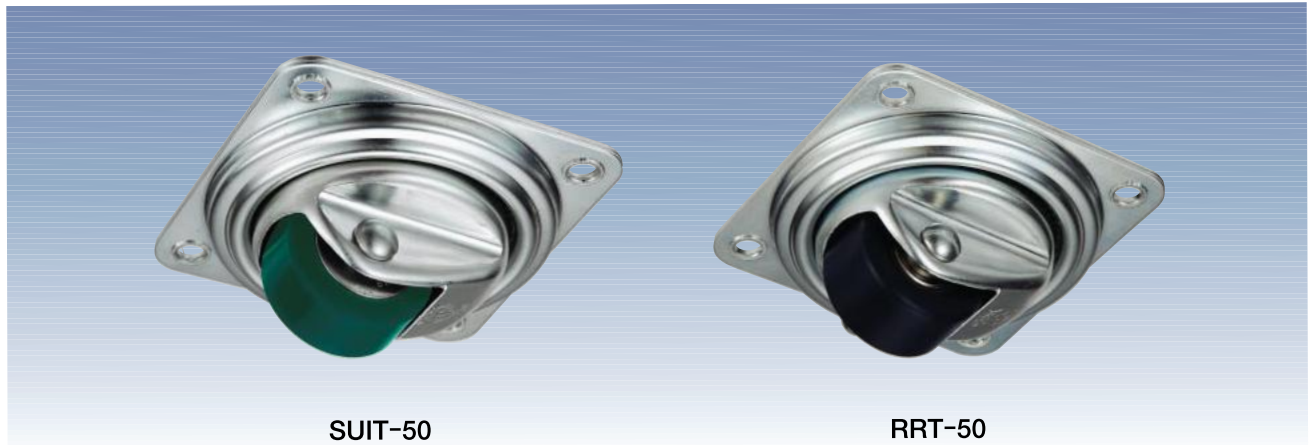

SUIT-50

RRT-50

Unit: mm

Size A	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)
				(daN)	(kgf)								
50	SUIT-50	Urethane	B/B	80	81.6	24	10	57	118/118	94/94	8.5	12	800
	RRT-50	MC Nylon	B/B	100	102.0	27							780
	FT-50	Steel	B/B										990
	FAT-50	Steel		60	61.2								1,060


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing

[Bracket Dimensions]

Unit: mm

Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
50	100	102.0	32	32	670

* The shaft set is included in the bracket.

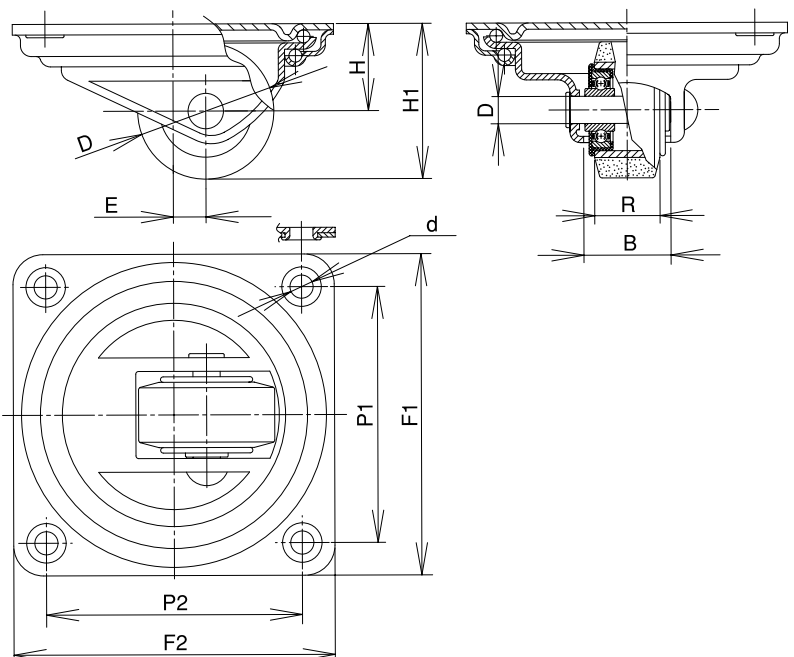

TN_{Type}

Size: 50mm

Dust-Proof Low Height Swivel Bracket



SUITN-50

RRTN-50

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
50 	SUITN-50	Urethane	B/B	80	81.6	24	10	63	118/118	94/94	8.5	13	850
	RRTN-50	MC Nylon	B/B	100	102.0	27							830
	FTN-50	Steel	B/B										1,040
	FATN-50	Steel		60	61.2								1,110


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing

[Bracket Dimensions]

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
50 	100	102.0	38	32	720


* The shaft set is included in the bracket.

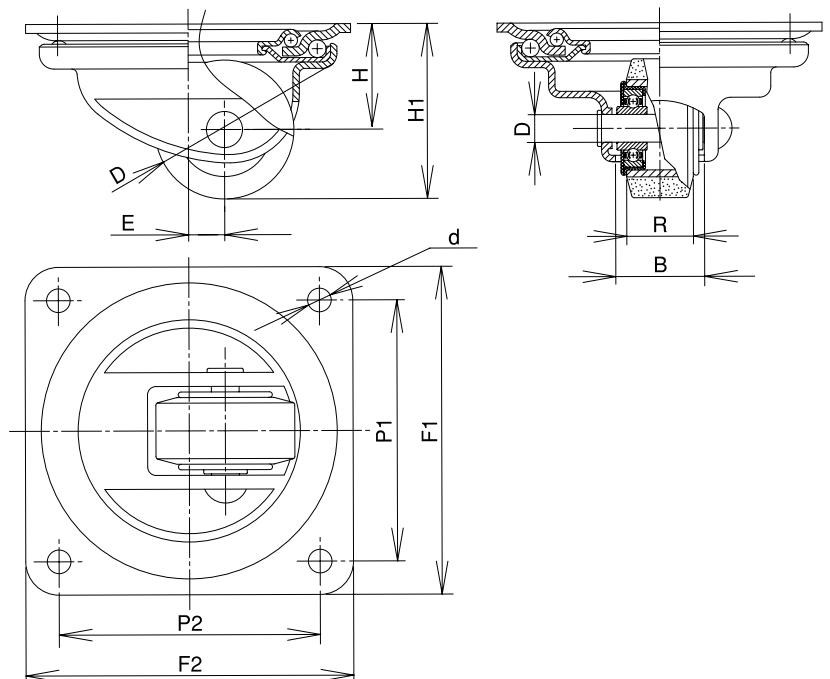

TH_{Type}

Size: 50mm~65mm

Heavy Duty Low Height Swivel Bracket

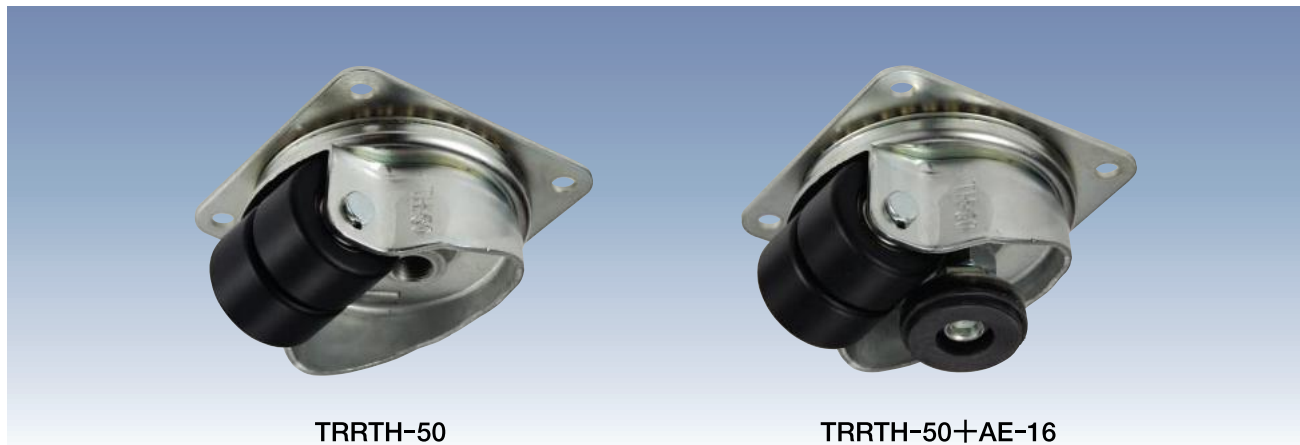

TRRTH-50

TRRTH-50+AE-16

Unit: mm

Size A	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Adjuster ※	Weight (g)
				(daN)	(kgf)									
50	TSUITH-50	Urethane	B/B	150	153.0	20.5	10	70	118/118	94/94	8.5	40	AE-16	1,330
	TRRTH-50	MC Nylon	B/B	350	357.0	27								1,270
	TFTH-50	Steel	B/B											1,690
65	TSUITH-65	Urethane	B/B	250	255.0	25	12	87	118/118	94/94	8.5	45	AE-20	1,760
	TRRTH-65	MC Nylon	B/B	450	459.0									1,440
	TFTH-65	Steel	B/B											2,240

Bearing: B/B -- Steel bearing

The wheel is used in two wheels.

※The adjuster is optional (Page 82).

【Bracket Dimensions】

Unit: mm


Size A	Load Capacity		Bracket Height H	Bracket Width B	Weight (g)
	(daN)	(kgf)			
50	400	408.0	45	60	1,050
65	500	510.0	54	60	1,140

* The shaft set is included in the bracket.

【Adjuster Dimensions】

Unit: mm

Compatible Adjuster	Max. Height Hmax	Min. Height Hmin	Adjustment a
AE-16	80	65	15
AE-20	94	79	15

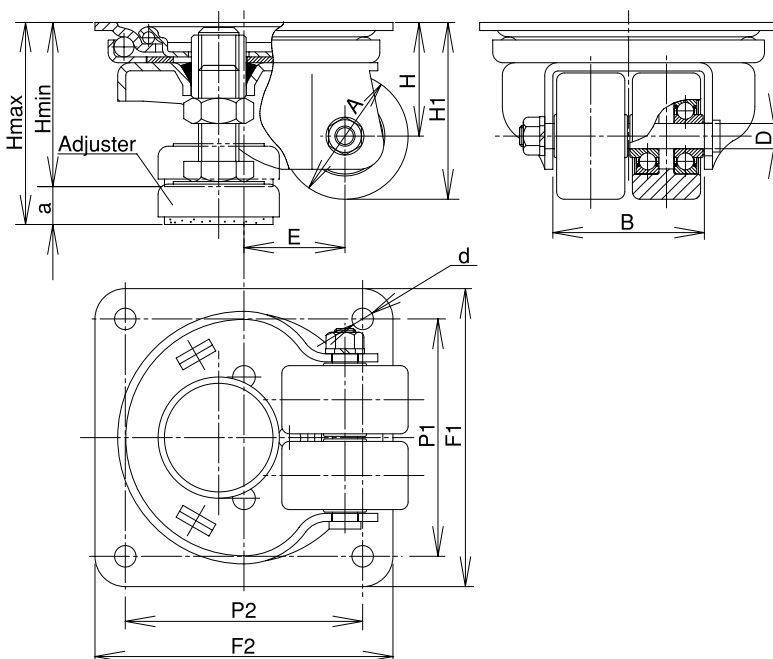


AE_{Type}

Adjuster



Unit: mm


Model Number	Load Capacity		Bolt Diameter P	Bolt Length		Foot Diameter ϕN	Lock Nut		Weight (g)	Compatible Caster
	(daN)	(kgf)		L1	L2		s	m		
AE-16	500	510.0	M16×P2	38	63	48	24	10	190	TH-50
AE-20	600	612.0	M20×P2.5	45	72	48	30	12	270	TH-65

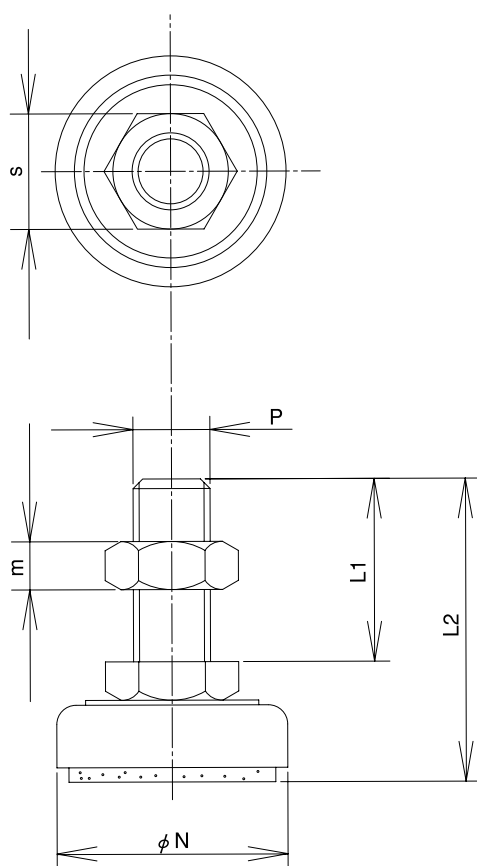

S/SR_{Type}

Wheel

S Type Steel Rim · Polybutadiene Rubber Wheel

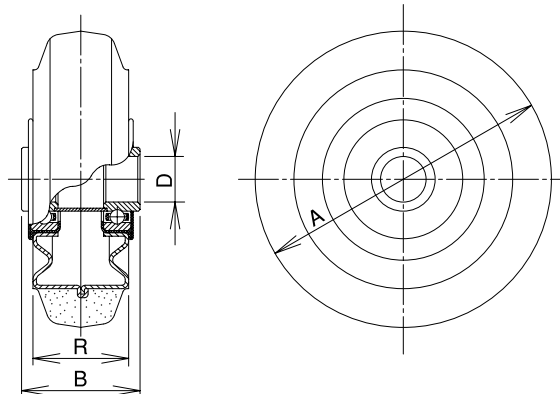


Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	S-75	80	81.6	39	32	10	200B	200	J, JA K, KA JB, JAB KBZ, KABZ
100	S-100	130	132.6	42	35	12	201B	360	
130	S-130	180	183.6	52	42	20	204B	780	
150	S-150	200	204.0	55	45	20	204B	960	
200	S-200	250	255.0	55	45	20	204B	1,670	
250	S-250	330	336.6	64	50	25	205B	2,520	J, K, JB
300	S-300	350	357.0	71	50	25	205B	4,770	J, K

Wheel Rim: Steel

SR Type Steel Rim · Polybutadiene Red Rubber Wheel

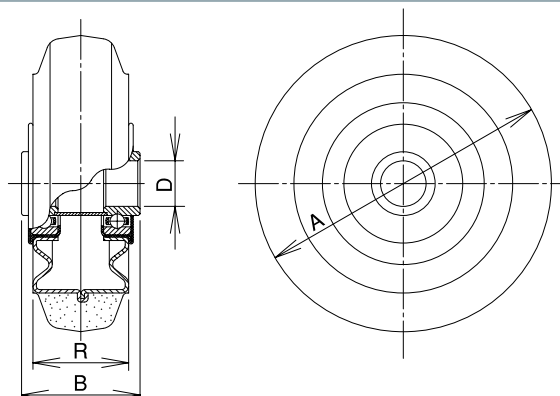

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	SR-75	60	61.2	39	32	10	200B	200	J, JA K, KA JB, JAB KBZ, KABZ
100	SR-100	100	102.0	42	35	12	201B	360	
130	SR-130	140	142.8	52	42	20	204B	780	
150	SR-150	160	163.2	55	45	20	204B	960	
200	SR-200	200	204.0	55	45	20	204B	1,670	
250	SR-250	260	265.2	64	50	25	205B	2,250	J, K, JB


Wheel Rim: Steel

SH/CR_{Type}

Wheel

SH Type

Steel Rim · Polybutadiene High-Rebound Rubber Wheel

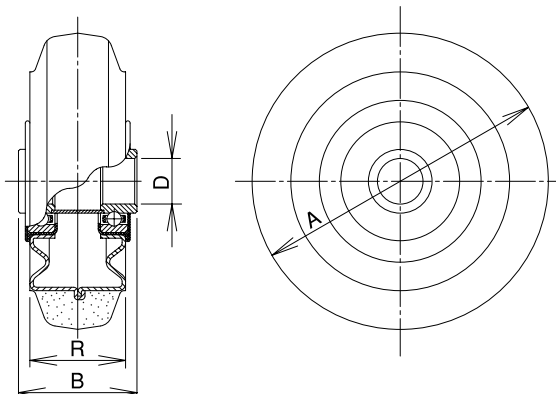


Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
200	SH-200	250	255.0	55	45	20	204B	1,670	J, JA K, KA JB, JAB KBZ, KABZ

Wheel Rim: Steel

CR Type

Steel Rim · Chloroprene Heat-resistance Rubber Wheel

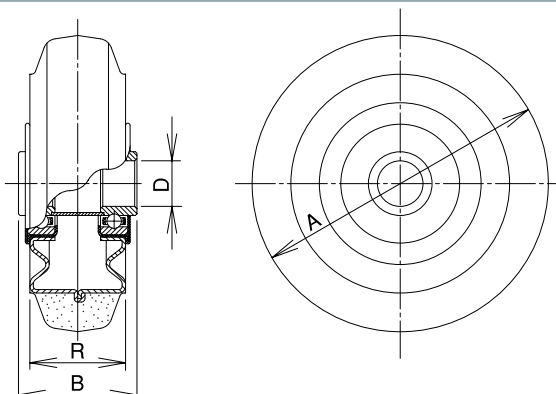

Unit: mm



Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	CR-75	80	81.6	39	32	10	200B	220	J, JA K, KA JB, JAB KBZ, KABZ
100	CR-100	130	132.6	42	35	12	201B	390	
130	CR-130	180	183.6	52	42	20	204B	810	
150	CR-150	200	204.0	55	45	20	204B	1,000	
200	CR-200	250	255.0	55	45	20	204B	1,750	
250	CR-250	330	336.6	64	50	25	205B	2,740	J, K, JB

Wheel Rim: Steel

SUI/SUIE Type

Wheel

SUI Type Steel Rim · Urethane Rubber Wheel

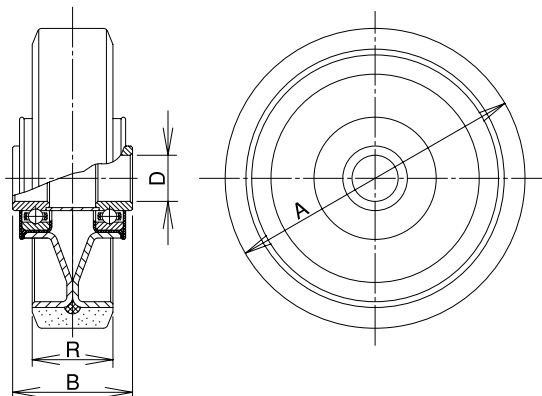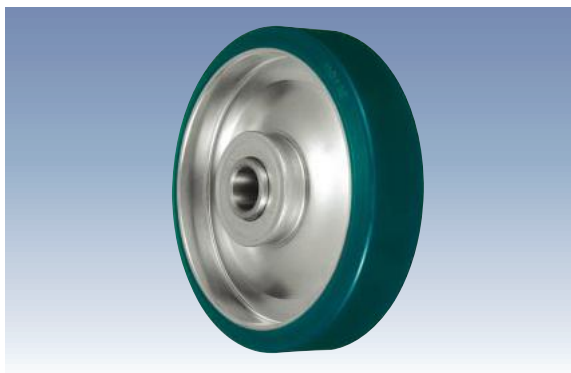


Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
50	SUI-50	80	81.6	28	20.5	10	200B	140	TH, JM, KH
65	TSUI-65	100	102.0	30	25	12	6201ZZY	310	TH
75	SUI-75	120	122.4	39	32	10	200B	280	J, JA K, KA JB, JAB KBZ, KABZ
100	SUI-100	180	183.6	42	32	12	201B	430	
130	SUI-130	250	255.0	52	35	20	204B	910	
150	SUI-150	300	306.0	55	38	20	204B	1,150	
200	SUI-200	400	408.0	55	42	20	204B	1,840	
250	SUI-250	500	510.0	64	45	25	205B	3,080	J, K, JB
300	SUI-300	600	612.0	71	50	25	205B	4,440	J, K


Wheel Rim: Steel

SUIE Type Steel Rim · Anti-Static Urethane Rubber Wheel

Build-to-order
manufacturing

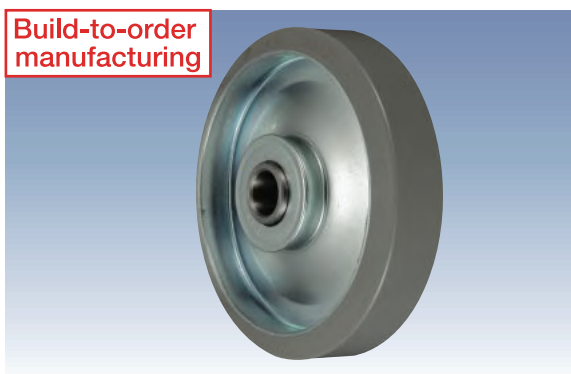

By adding semi-conducting property to urethane rubber, it became possible to prevent the accumulation of static electricity and remove static electricity gently without generating a shock.

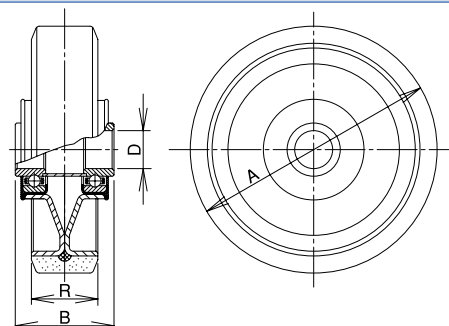

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	SUIE-75	120	122.4	39	32	10	200B	280	J, JA K, KA JB, JAB KBZ, KABZ
100	SUIE-100	180	183.6	42	32	12	201B	430	
130	SUIE-130	250	255.0	52	35	20	204B	910	
150	SUIE-150	300	306.0	55	38	20	204B	1,150	
200	SUIE-200	400	408.0	55	42	20	204B	1,840	

Wheel Rim: Steel

Volume Resistivity Value: $6 \times 10^8 \Omega \cdot \text{cm}$ (Measured by insulation resistance tester)


Build-to-order manufacturing

PN/PND_{Type}

Wheel

PN Type

Nylon Rim • Polybutadiene Rubber Wheel

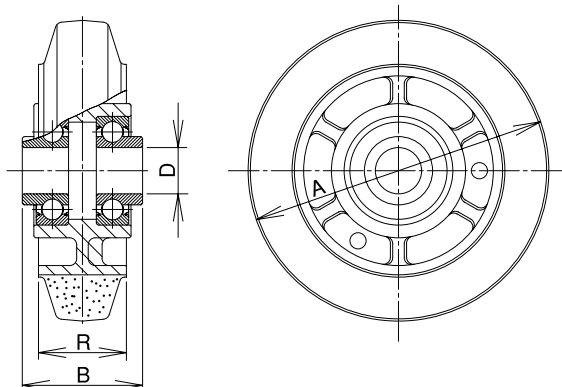


Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PN-75	70	71.4	39	32	10	6200ZZY	180	J, JA K, KA JB, JAB KBZ, KABZ
100	PN-100	100	102.0	42	32	12	6201ZZY	260	
130	PN-130	145	147.9	52	38	20	6204ZZY	580	
150	PN-150	175	178.5	55	38	20	6204ZZY	670	
200	PN-200	220	224.4	55	42	20	6204ZZY	1,020	

Wheel Rim: Nylon6

PND Type

Nylon Rim • Polybutadiene Rubber Wheel (Including Stainless Steel Bearings)

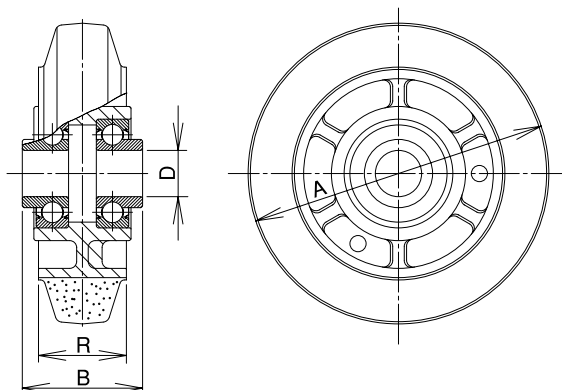

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Stainless Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PND-75	70	71.4	39	32	10	SUS 6200ZZ	180	J, JA K, KA JB, JAB KBZ, KABZ
100	PND-100	100	102.0	42	32	12	SUS 6201ZZY	260	
130	PND-130	145	147.9	52	38	20	SUS 6204ZZY	580	
150	PND-150	175	178.5	55	38	20	SUS 6204ZZY	670	
200	PND-200	220	224.4	55	42	20	SUS 6204ZZY	1,020	



Wheel Rim: Nylon6

PNU/PNUD_{Type}

Wheel

PNU Type

Nylon Rim · Urethane Rubber Wheel

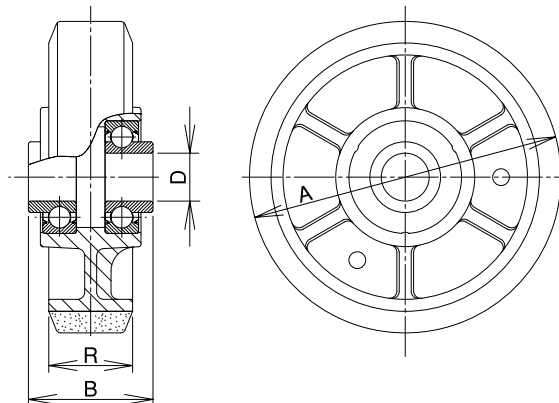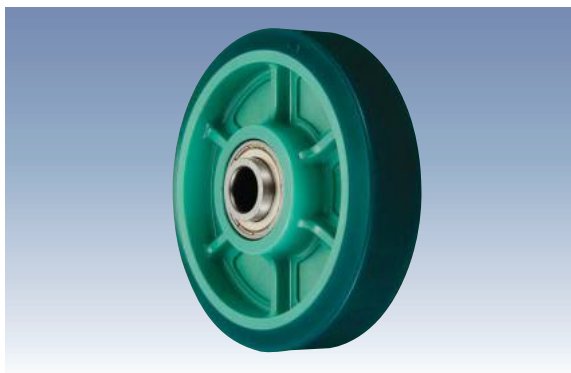



Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PNU-75	100	102.0	39	32	10	6200ZZY	170	J, JA K, KA JB, JAB KBZ, KABZ
100	PNU-100	150	153.0	42	32	12	6201ZZY	240	
130	PNU-130	200	204.0	52	35	20	6204ZZY	520	
150	PNU-150	250	255.0	55	38	20	6204ZZY	630	
200	PNU-200	350	357.0	55	42	20	6204ZZY	890	

Wheel Rim: Nylon6

PNUD Type

Nylon Rim · Urethane Rubber Wheel (Including Stainless Steel Bearings)

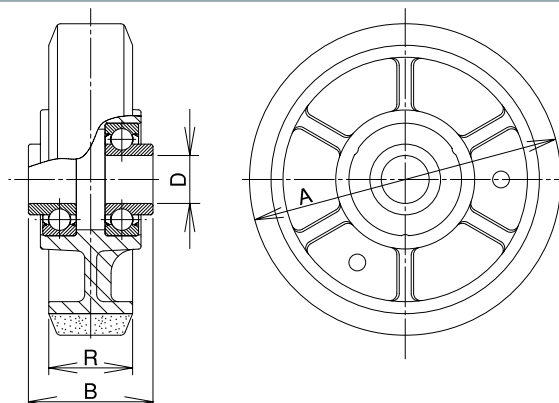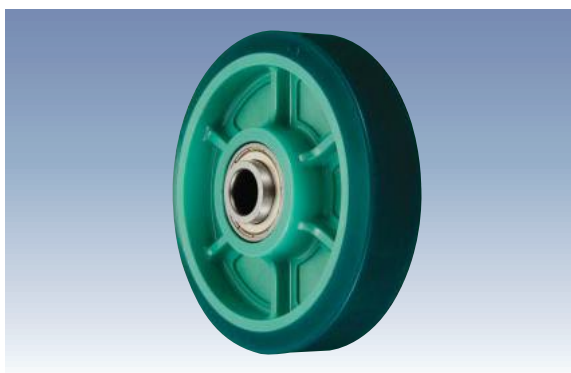

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Stainless Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PNUD-75	100	102.0	39	32	10	SUS 6200ZZ	170	J, JA K, KA JB, JAB KBZ, KABZ
100	PNUD-100	150	153.0	42	32	12	SUS 6201ZZY	240	
130	PNUD-130	200	204.0	52	35	20	SUS 6204ZZY	520	
150	PNUD-150	250	255.0	55	38	20	SUS 6204ZZY	630	
200	PNUD-200	350	357.0	55	42	20	SUS 6204ZZY	890	


Wheel Rim: Nylon6

PNA/PNUA_{Type}

Wheel

PNA Type

Nylon Rim · Rubber Wheel (Spindle Sleeve)

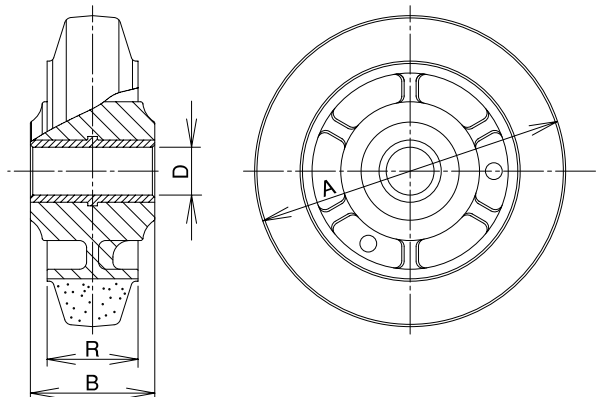

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PNA-75	70	71.4	39	32	10	Spindle Sleeve	140	J, JA K, KA JB, JAB KBZ, KABZ
100	PNA-100	100	102.0	42	32	12		200	
130	PNA-130	120	122.4	52	38	20		390	
150	PNA-150	140	142.8	55	38	20		510	
200	PNA-200	160	163.2	55	42	20		850	


Wheel Rim: Nylon6

Spindle Sleeve: Nylon66 (Molybdenum combination)

* The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel including bearings (PN / PND Type, Page 86).

PNUA Type

Nylon Rim · Urethane Rubber Wheel (Spindle Sleeve)

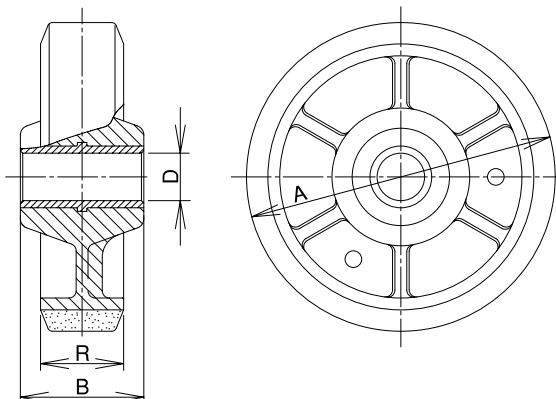

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PNUA-75	70	71.4	39	32	10	Spindle Sleeve	120	J, JA K, KA JB, JAB KBZ, KABZ
100	PNUA-100	100	102.0	42	32	12		180	
130	PNUA-130	120	122.4	52	35	20		330	
150	PNUA-150	150	153.0	55	38	20		440	
200	PNUA-200	250	255.0	55	42	20		720	

Wheel Rim: Nylon6



Spindle Sleeve: Nylon66 (Molybdenum combination)

*The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel including bearings (PNU / PNUD type, Page 87).

PB/PBD_{Type}

Wheel

PB Type Nylon Wheel

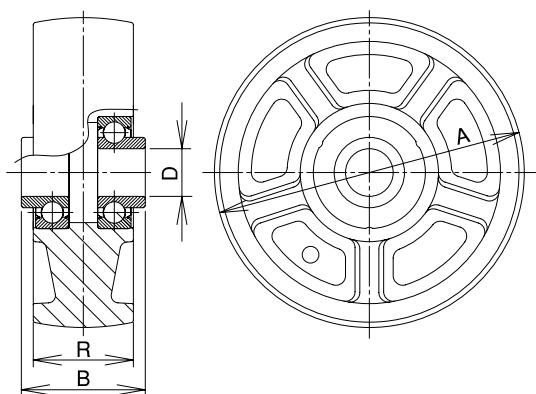
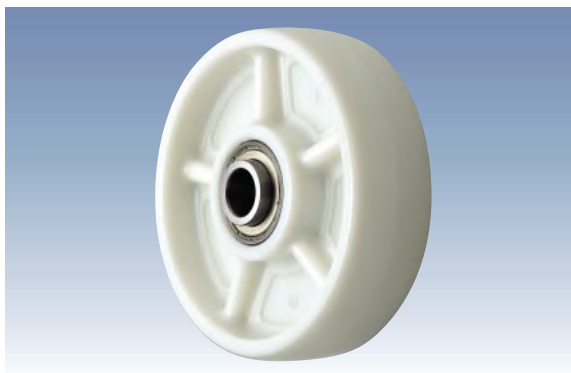


Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PB-75	120	122.4	39	32	10	6200ZZY	150	J, JA K, KA JB, JAB KBZ, KABZ
100	PB-100	180	183.6	42	35	12	6201ZZY	220	
130	PB-130	250	255.0	52	42	20	6204ZZY	520	
150	PB-150	300	306.0	55	45	20	6204ZZY	650	
200	PB-200	400	408.0	55	45	20	6204ZZY	950	

Wheel: Nylon6

PBD Type Nylon Wheel (Including Stainless Steel Bearings)

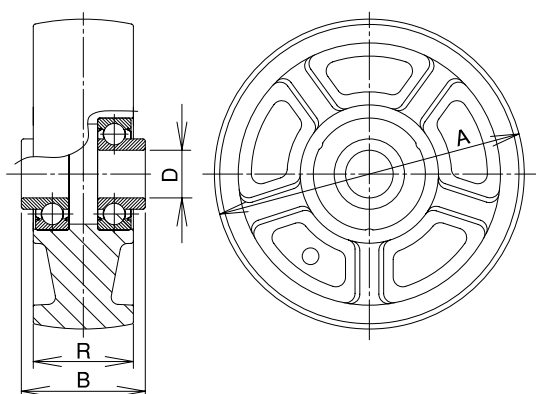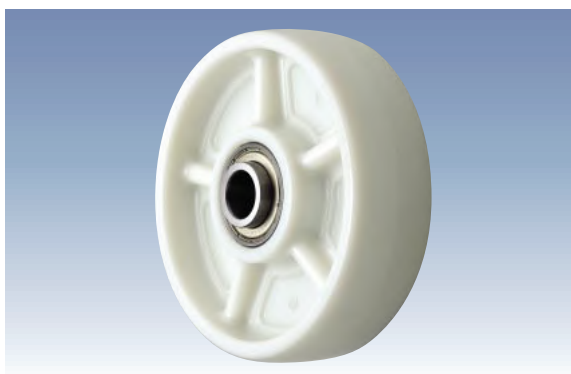

Unit: mm


Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Stainless Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	PBD-75	120	122.4	39	32	10	SUS 6200ZZ	150	J, JA K, KA JB, JAB KBZ, KABZ
100	PBD-100	180	183.6	42	35	12	SUS 6201ZZY	220	
130	PBD-130	250	255.0	52	42	20	SUS 6204ZZY	520	
150	PBD-150	300	306.0	55	45	20	SUS 6204ZZY	650	
200	PBD-200	400	408.0	55	45	20	SUS 6204ZZY	950	

Wheel: Nylon6

P/SV/SHV Type

Wheel

P Type Nylon Wheel (Spindle Sleeve)

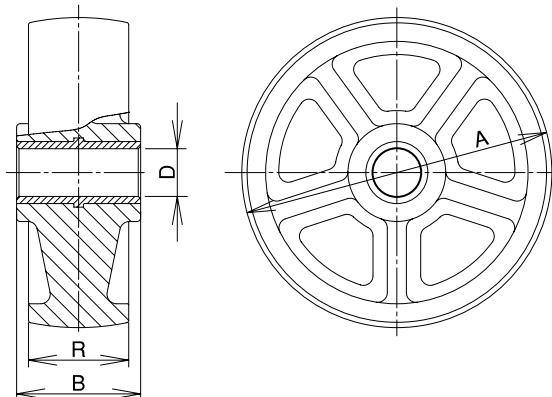

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	P-75	100	102.0	39	32	10	Spindle Sleeve	90	J, JA K, KA JB, JAB KBZ, KABZ
100	P-100	120	122.4	42	35	12		160	
130	P-130	150	153.0	52	42	20		320	
150	P-150	180	183.6	55	45	20		410	
200	P-200	250	255.0	55	45	20		740	


Wheel: Nylon6

Spindle Sleeve: Nylon66 (Molybdenum combination)

* The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel including bearings (PB / PBD type, Page 89).

SV Type Steel Rim · Polybutadiene Rubber Wheel (Including Radial Bearings)

SHV Type Steel Rim · Polybutadiene High-Rebound Rubber Wheel (Including Radial Bearings)

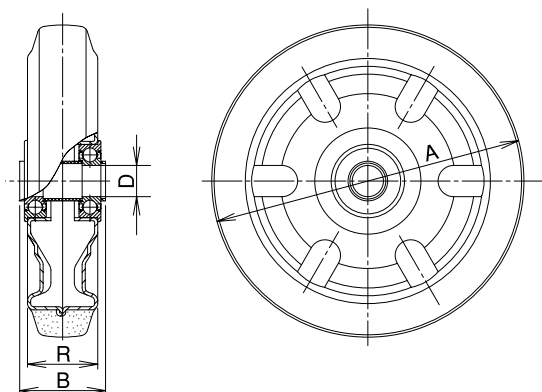

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
200	SV-200	250	255.0	55	45	20	6204ZZF	1,750	JH, JHW, KW
200	SHV-200	250	255.0	55	45	20	6204ZZF	1,750	JH, JHW, KW


Wheel Rim: Steel

RGN/RG_{Type}

Wheel

RGN Type

Heavy Duty Reinforced Nylon Wheel

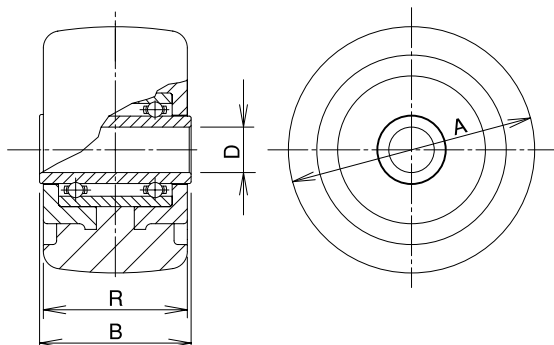

RGN-100


Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
50	RGN-50	200	204.0	31	28	10	1022SBW	110	JM, KH
65	RGN-65	300	306.0	40	38	12	1230SBW	220	
75	RGN-75	400	408.0	40	38	12	1230SBW	270	
100	RGN-100	500	510.0	56	45	12	1241SBW	500	JM, KH, JMB

Wheel: Nylon 6 and fiberglass-mixed materials

RG Type

Heavy Duty Polybutadiene Rubber Wheel



RG-200

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
100	RG-100	200	204.0	56	50	12	6201ZZY	530	JM, KH, JMB
130	RG-130	240	244.8	59	50	20	6204ZZY	910	JM, JH, KH, JMB
150	RG-150	300	306.0	59	50	20	6204ZZY	1,130	JM, JH, JHW, KH, KHW, JMB, JHB
200	RG-200	410	418.2	70	63	25	6205ZZY	2,560	JM, JH, JHW, KH, KHW, JMB

Wheel Rim: RG-100/130/150
RG-200



Aluminum alloy for die casting (ADC-12)
Steel

R/RF Type

Wheel

R Type

Heavy Duty Aluminum Rim · Urethane Rubber Wheel

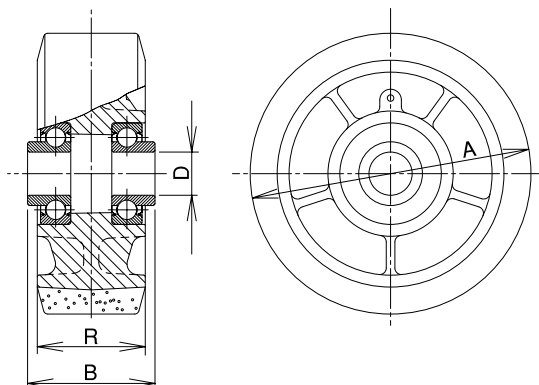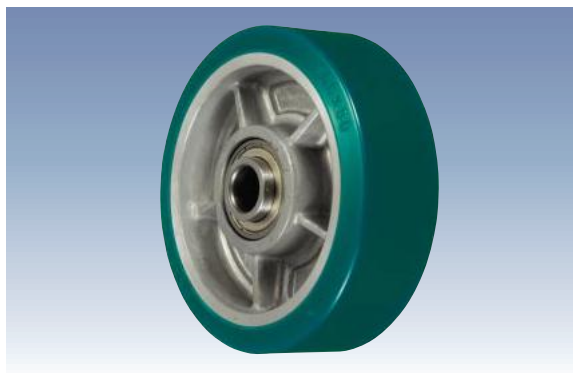



Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
100	R-100	300	306.0	56	50	12	6201ZZY	530	JM, KH, JMB
130	R-130	450	459.0	59	50	20	6204ZZY	1,050	JM, JH, KH, JMB
150	R-150	500	510.0	59	50	20	6204ZZY	1,240	JM, JH, JHW, KH, KHW, JMB, JHB

Wheel Rim: Aluminum alloy for die casting (ADC-12)

RF Type

Heavy Duty Steel Rim · Urethane Rubber Wheel

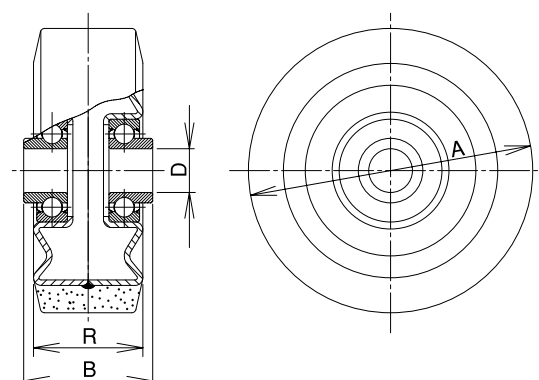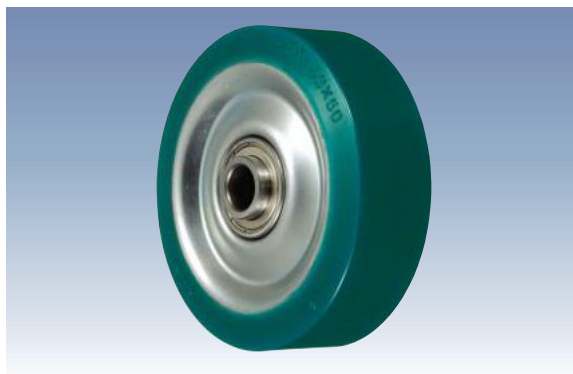

Unit: mm


Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
65	RF-65	170	173.4	39	34	12	6201ZZY	400	JM, KH
75	RF-75	200	204.0	39	38	12	6201ZZY	280	
100	RF-100	300	306.0	56	50	12	6201ZZY	540	JM, KH, JMB
130	RF-130	450	459.0	59	50	20	6204ZZY	1,080	JM, JH, KH, JMB
150	RF-150	500	510.0	59	50	20	6204ZZY	1,300	JM, JH, JHW, KH, KHW, JMB, JHB
200	RF-200	600	612.0	70	63	25	6205ZZY	2,570	JM, JH, JHW, KH, KHW, JMB

Wheel Rim: RF-65 Iron Rim
RF-75~200 Steel

RR_{Type}

Wheel

RR Type Heavy Duty MC Nylon Wheel

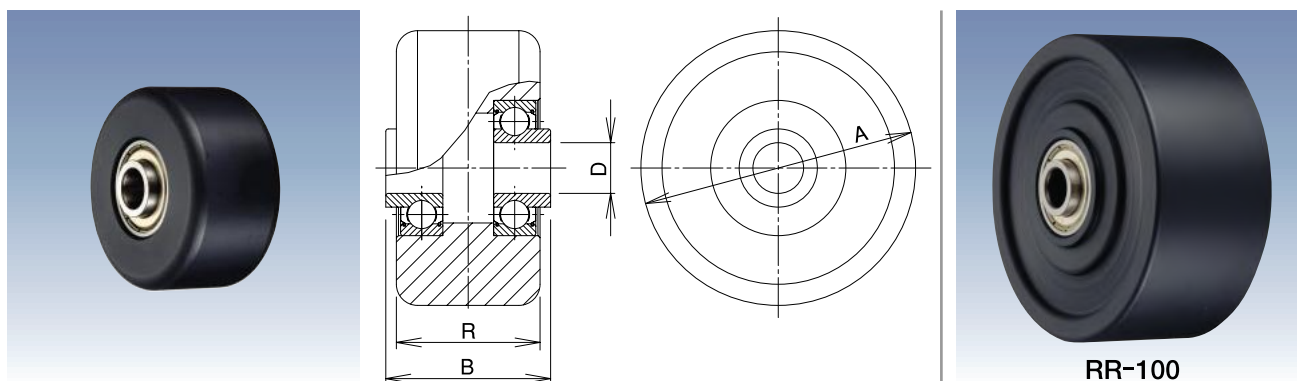


RR-100

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
50	RR-50	220	224.4	29	27	10	6200ZZY	110	T, TN, TH, JM, KH
65	RR-65	330	336.6	39	34	12	6201ZZY	180	JM, KH
	TRR-65	330	336.6	29	25	12	6201ZZY	150	TH
75	RR-75	440	448.8	39	36	12	6201ZZY	230	JM, KH
100	RR-100	550	561.0	56	45	12	6201ZZY	440	JM, KH, JMB

RR-50/65/75/100 Monomer Cast Nylon Wheel

RR Type Heavy Duty Aluminum Rim • MC Nylon Wheel

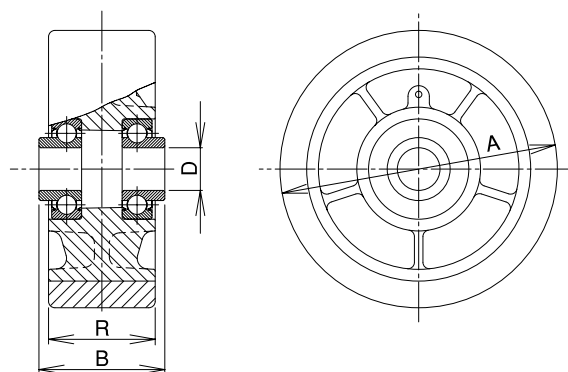

Unit: mm



Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
130	RR-130	500	510.0	59	50	20	6204ZZY	1,060	JM, JH, KH, JMB
150	RR-150	550	561.0	59	50	20	6204ZZY	1,240	JM, JH, KH, JMB, JHB
200	RR-200	660	673.2	70	63	25	6205ZZY	2,410	JM, JH, KH, JMB

Wheel Rim: RR-130/150/200 Aluminum alloy for die casting (ADC-12)

UWB_{Type}

Wheel

UWB Type MC Nylon Wheel

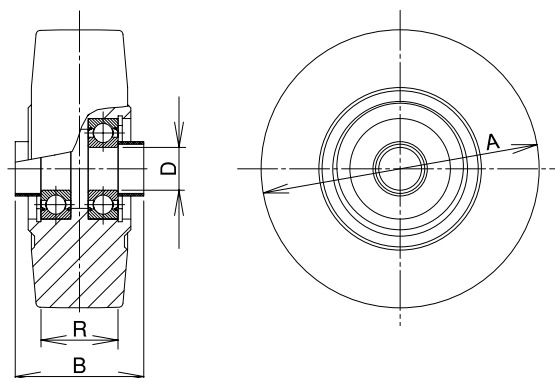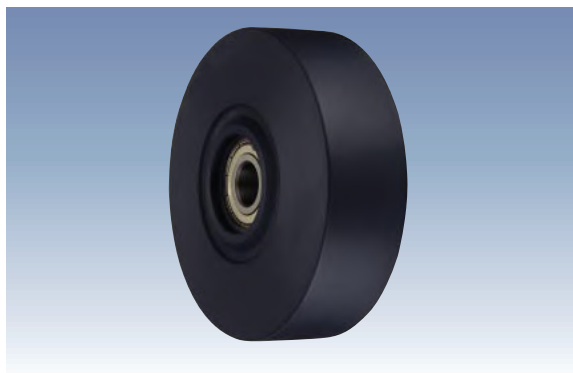

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing 	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	UWB-75	360	367.2	39	24	10	6200ZZ	190	J, K, JB, KBZ, JA, KA, JAB, KABZ
100	UWB-100	520	530.4	42	29	12	6201ZZ	370	J, K, JB, KBZ, JA, KA, JAB, KABZ
				57				380	JM, KH, JMB
130	UWB-130	890	907.8	52	36	20	6204ZZ	800	J, K, JB, KBZ, JA, KA, JAB, KABZ
				60				810	JM, JH, KH, JMB
150	UWB-150	1,040	1,060.8	55	40	20	6204ZZ	1,090	J, K, JB, KBZ, JA, KA, JAB, KABZ
				60				1,100	JM, JH, KH, JMB, JHB
200	UWB-200 $\phi 20$	1,400	1,428.0	55	42	20	6204ZZ	1,900	J, K, JB, KBZ, JA, KA, JAB, KABZ
	UWB-200 $\phi 25$			71		25	6205ZZ	1,940	JM, JH, KH, JMB

Monomer Cast Nylon Wheel (with Steel Collar)



When placing an order for UWB-100, 130, or 150, please specify boss width.

Please be careful about the load capacity of the mounting bracket.

UWBD_{Type}

Wheel

UWBD Type MC Nylon Wheel (Including Stainless Steel Bearings)

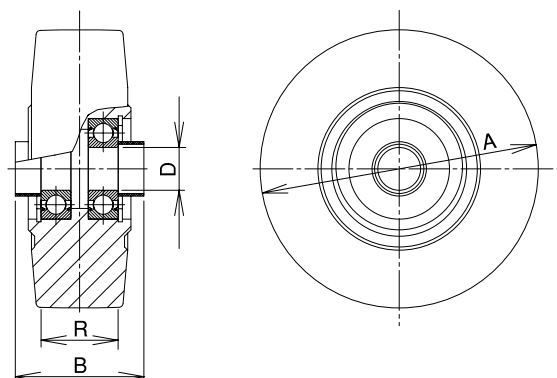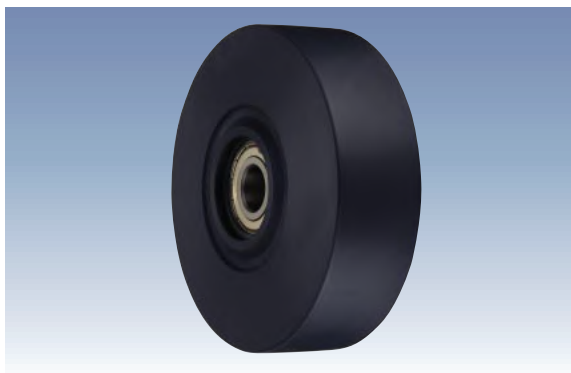

Unit: mm

Size 	Model Number	Load Capacity		Boss Width B 	Tire Width R 	Shaft Diameter D 	Stainless Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	UWBD-75	360	367.2	39	24	10	SUS 6200ZZ	190	J, K, JB, KBZ JA, KA, JAB, KABZ
100	UWBD-100	520	530.4	42	29	12	SUS 6201ZZ	370	
130	UWBD-130	890	907.8	52	36	20	SUS 6204ZZ	800	
150	UWBD-150	1,040	1,060.8	55	40	20	SUS 6204ZZ	1,090	
200	UWBD-200	1,400	1,428.0	55	42	20	SUS 6204ZZ	1,900	



Monomer Cast Nylon Wheel (with Stainless Steel Collar)

Please be careful about the load capacity of the mounting bracket.

UWA_{Type}

Wheel

UWA Type MC Nylon Wheel (Spindle Sleeve)

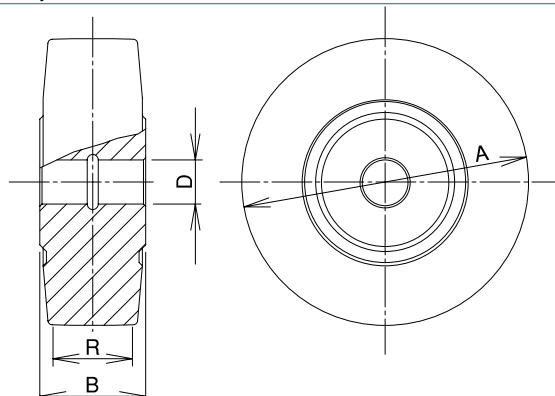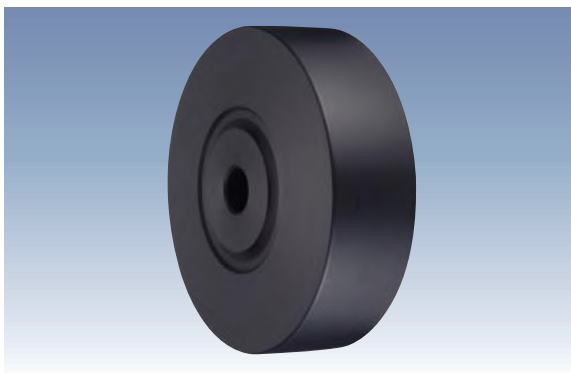

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	UWA-75	360	367.2	34	24	10	Spindle Sleeve	150	J, K, JB, KBZ JA, KA, JAB, KABZ
100	UWA-100	520	530.4	40	29	12		320	
130	UWA-130	890	907.8	48	36	20		650	
150	UWA-150	1,040	1,060.8	52	40	20		940	
200	UWA-200	1,400	1,428.0	54	42	20		1,750	

Monomer Cast Nylon Wheel



Please be careful about the load capacity of the mounting bracket.

* The wheel with a spindle sleeve may cause trudge, noise, etc. when heavily loaded.
When heavily loaded, we recommend you to use a wheel bearings (UWB type, Page 94 / UWBD type, Page 95).

UWBS/UWBSD_{Type}

Wheel

UWBS Type MC Nylon Wheel [Slim Type]

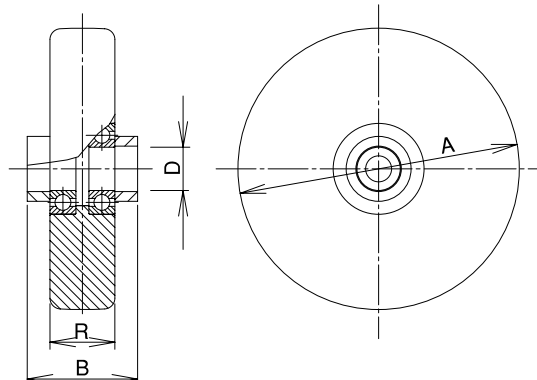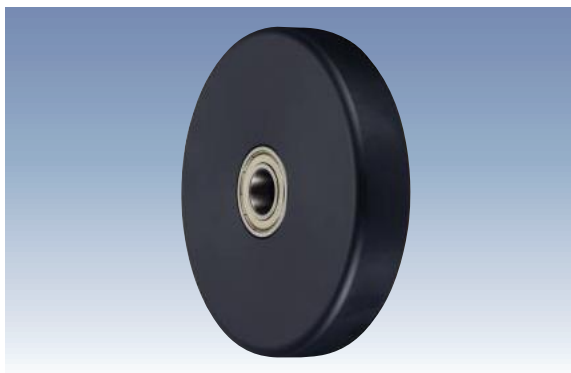

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	UWBS-75	250	255.0	39	26	10	6200ZZ	170	J, K, JB, KBZ JA, KA, JAB, KABZ
100	UWBS-100	350	357.0	42	30	12	6201ZZ	320	
130	UWBS-130	500	510.0	52	30	20	6004ZZ	540	
150	UWBS-150	600	612.0	55	30	20	6004ZZ	690	
200	UWBS-200 $\phi 20$	900	918.0	55	34	20	6204ZZ	1,360	J, K, JB, KBZ JA, KA, JAB, KABZ
	UWBS-200 $\phi 25$			71	36	25	6205ZZ	1,490	—
250	UWBS-250	1,000	1,020.0	88	36	25	6205ZZ	2,240	J, K, JB



Monomer Cast Nylon Wheel (with MC Nylon Collar)

* Only for UWBS-200 $\phi 25$, steel collar is used.

 Build-to-order manufacturing

Please be careful about the load capacity of the mounting bracket.

UWBSD Type MC Nylon Wheel [Slim Type] (Including Stainless Steel Bearings)

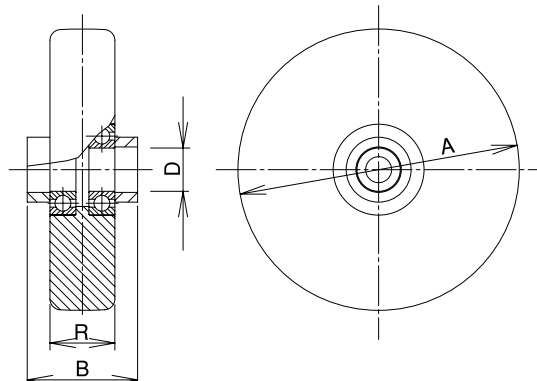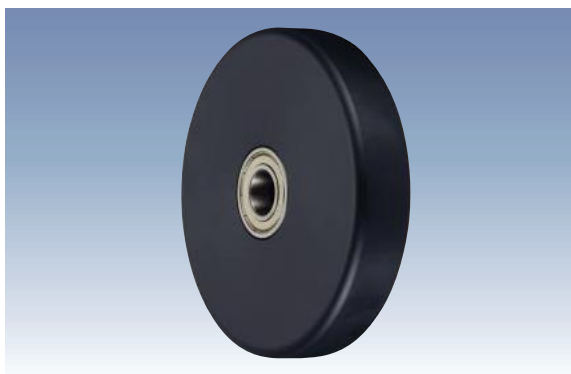

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Stainless Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
75	UWBSD-75	250	255.0	39	26	10	SUS 6200ZZ	170	J, K, JB, KBZ JA, KA, JAB, KABZ
100	UWBSD-100	350	357.0	42	30	12	SUS 6201ZZ	320	
130	UWBSD-130	500	510.0	52	30	20	SUS 6004ZZ	540	
150	UWBSD-150	600	612.0	55	30	20	SUS 6004ZZ	690	
200	UWBSD-200	900	918.0	55	34	20	SUS 6204ZZ	1,360	



Monomer Cast Nylon Wheel (with MC Nylon Collar)

Please be careful about the load capacity of the mounting bracket.

F/FA_{Type}

Wheel



F Type

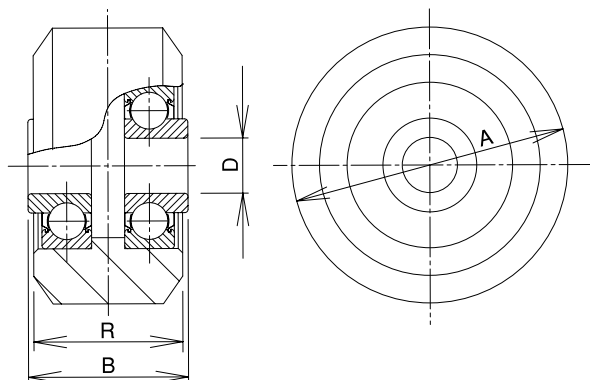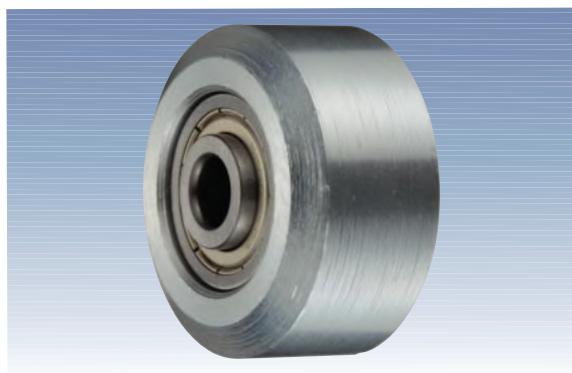Steel Wheel


Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
50	F-50	100	102.0	29	27	10	6200ZZY	320	T, TN, TH, JM, KH
65	TF-65	100	102.0	29	25	12	6201ZZY	550	TH

FA Type

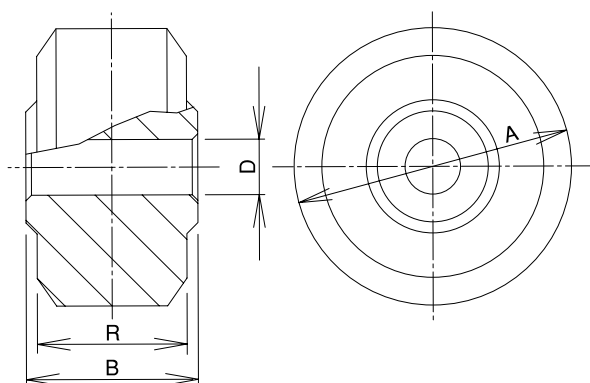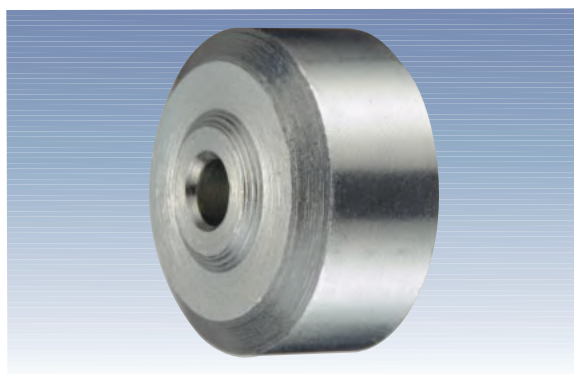Steel Wheel (Spindle Sleeve)


Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
50	FA-50	60	61.2	31	27	10	Spindle Sleeve	390	T, TN, JM, KH

HJ_{Type}

Size: 130mm~150mm

Medium Weight Swivel Caster



HJ-130



HJ-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P1'/P2') 	Plate Hole d 	Offset E 	Weight (g) 
				(daN)	(kgf)								
130	HJ-130	Rubber	B/B	150	153.0	42	12	177	108/108	80/80	11	40	1,540
150	HJ-150	Rubber	B/B	180	183.6	38	12	187	100/100	※80/80 (75/75)	11	40	1,710

Bearing: B/B -- Steel bearing


※Oval-shaped screw holes

[Bracket Dimensions]


Unit: mm

Size 	Bracket Height H 	Bracket Width B 
130	112	53
150	112	53



* The shaft set is included in the bracket.



HJ-150



HJ-130

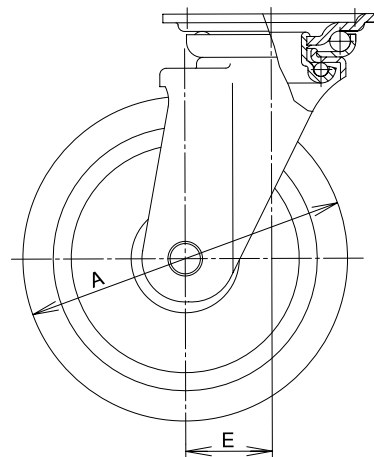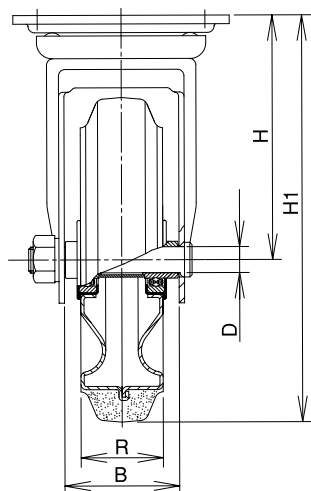

HK_{Type}

Size: 130mm~150mm

Medium Weight Rigid Caster



HK-130



HK-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2(P2') 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
130	HK-130	Rubber	B/B	150	153.0	42	12	177	137/93	※100/56 (50)	11	1,270
150	HK-150	Rubber	B/B	180	183.6	38	12	187	137/93	※100/56 (50)	11	1,410


Bearing: B/B -- Steel bearing

※Oval-shaped screw holes

【Bracket Dimensions】

Unit: mm

Size 	Bracket Height H 	Bracket Width B 
130	112	53
150	112	53

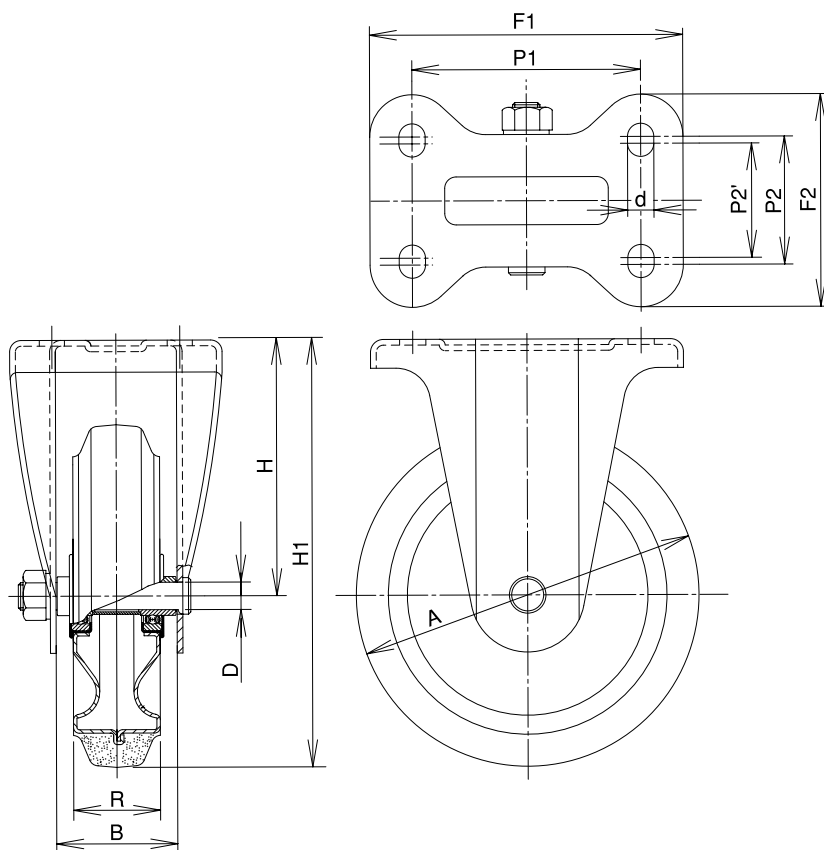

HJS_{Type} Size: 130mm~150mm

Medium Weight Swivel Caster with Stopper



HJS-130

HJS-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P1'/P2') 	Plate Hole d 	Offset E 	Weight (g)
				(daN)	(kgf)								
130	HJS-130	Rubber	B/B	150	153.0	42	12	177	108/108	80/80	11	40	1,770
150	HJS-150	Rubber	B/B	180	183.6	38	12	187	100/100	※80/80 (75/75)	11	40	1,920

Bearing: B/B -- Steel bearing

※Oval-shaped screw holes


The stopper of the HJS Type caster can lock the wheel to stop the caster.

[Bracket Dimensions]

Unit: mm

Size 	Bracket Height H 	Bracket Width B
130	112	53
150	112	53

* The shaft set is included in the bracket.

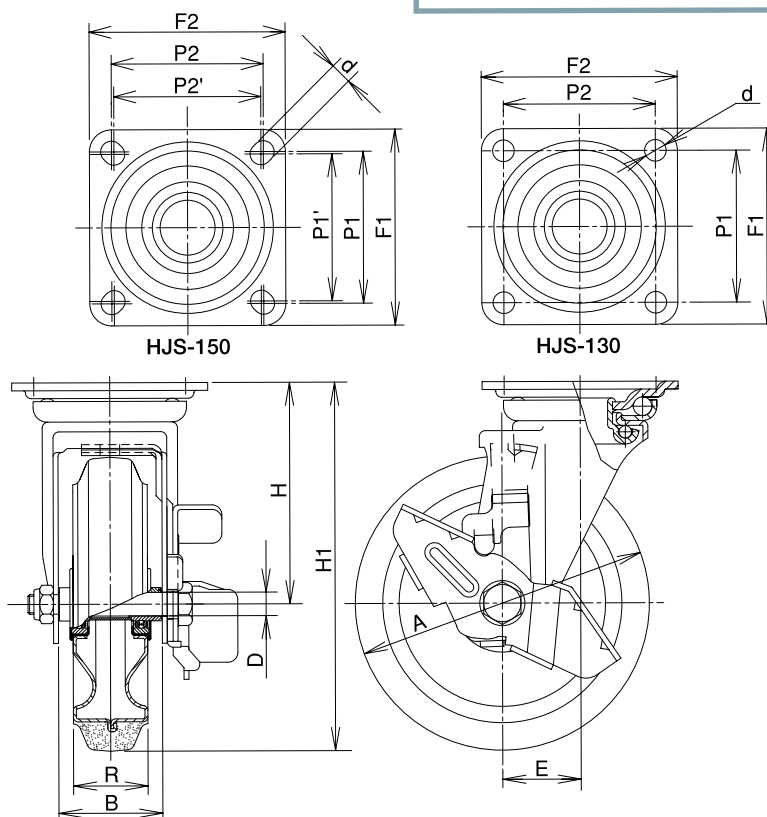


H Type

Size: 130mm~150mm

Wheel

H Type Steel Rim · Polybutadiene Rubber Wheel

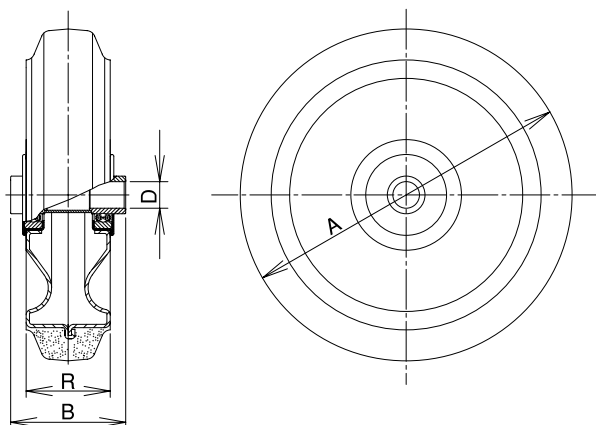

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Ball Bearing	Weight (g) 	Compatible Caster Bracket
		(daN)	(kgf)						
130	H-130	150	153.0	52	42	12	201BL	620	HJ, HK, HJS
150	H-150	180	183.6	52	38	12	201BLL	730	


Wheel Rim: Steel

Silent Running Caster Series

Reduces the Noise of Brackets and Wheels while Running!

Distinctive Features

The UKAI silent running caster replaces the original ball bearings in the swivel part of J type bracket with the radial bearings and bearing holder, and also replaces the original pressed bearings in the wheel with radial bearings. This improvement successfully reduced the noise of brackets and wheels while running.

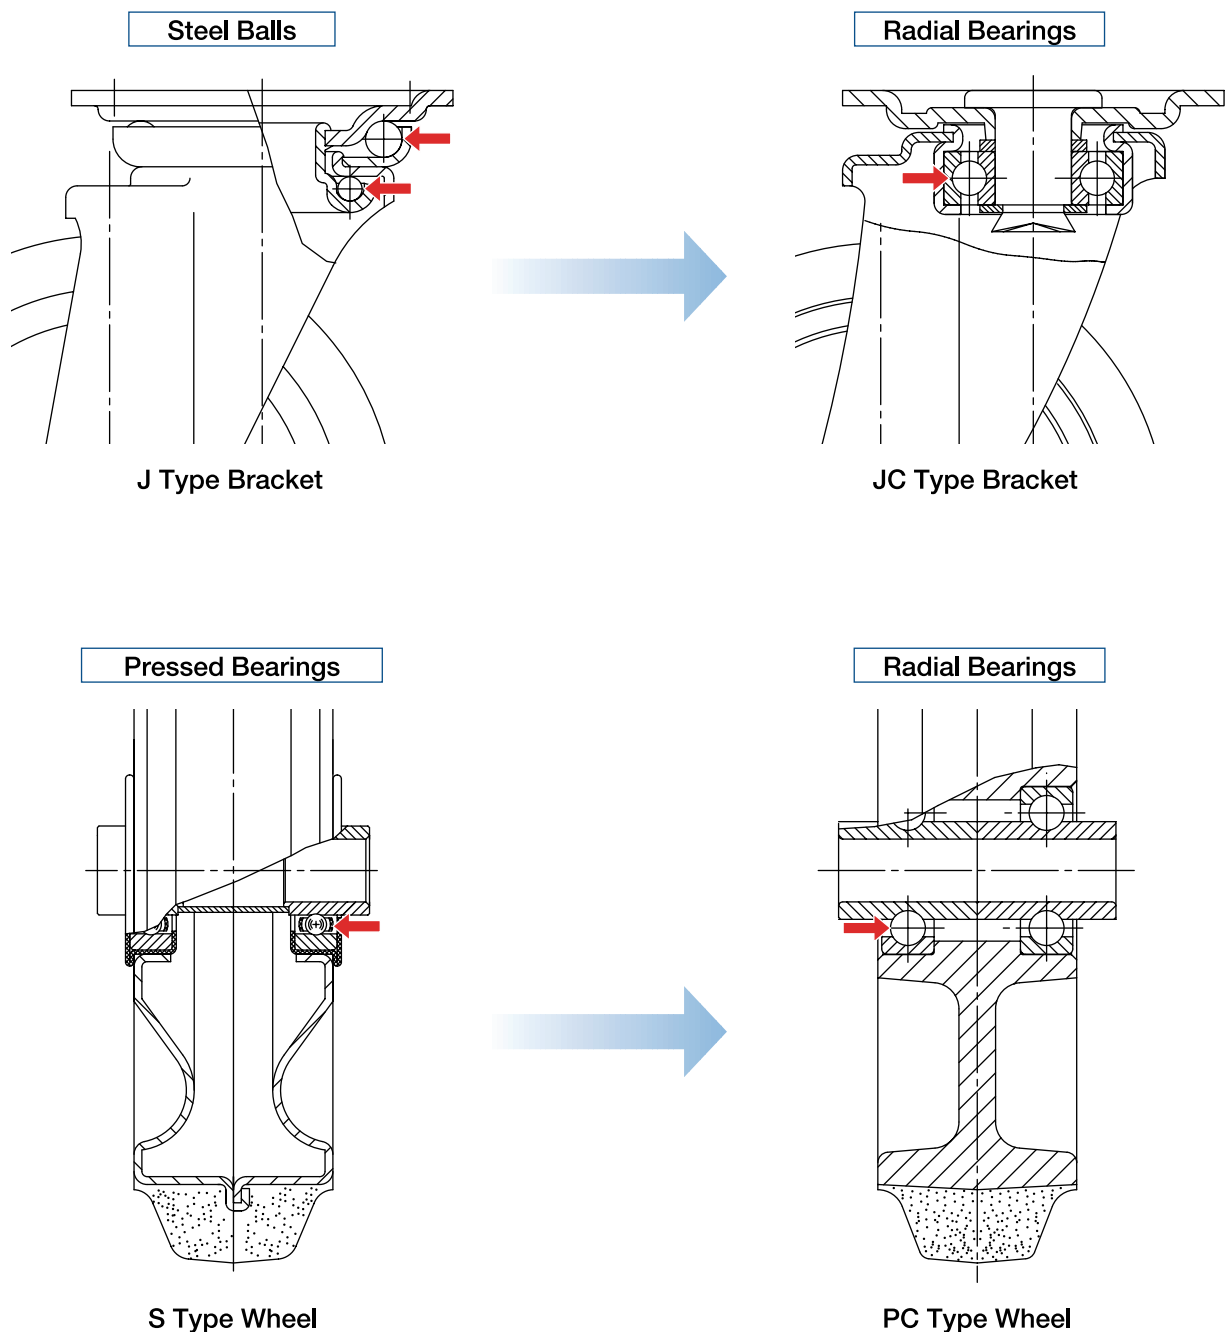

PCJC_{Type}

Size: 100mm~150mm

Silent Running Swivel Caster


PCJC-100

PCJC-125

PCJC-151

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P1'/P2') 	Plate Hole d 	Offset E 	Weight (g)
				(daN)	(kgf)								
100	PCJC-100	Rubber	B/B	120	122.4	32	10	132	90/90	※71/71 (68/68)	11	34	900
125	PCJC-125	Rubber	B/B	150	153.0	38	12	168	100/100	※80/80 (75/75)	11	38	1,420
150	PCJC-151	Rubber	B/B	180	183.6	38	12	190	100/100	※80/80 (75/75)	11	40	1,520


Bearing: B/B -- Steel radial bearing

※Oval-shaped screw holes

[Bracket Dimensions]

Unit: mm

Size 	Bracket Height H 	Bracket Width B
100	82	42
125	105	53
150	115	53

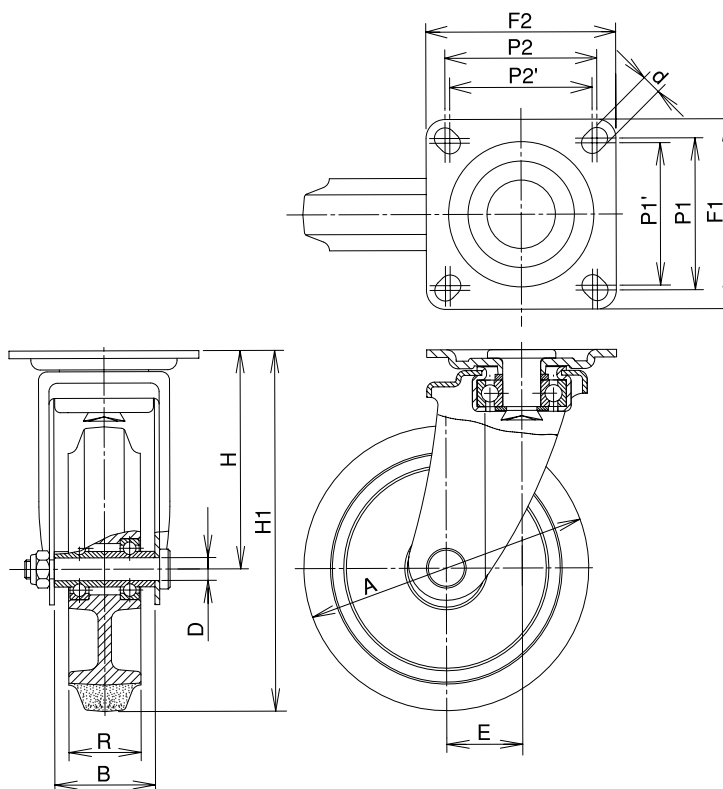

PCKE_{Type}

Size: 100mm~150mm

Silent Running Rigid Caster



PCKE-100

PCKE-125

PCKE-151

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P1'/P2') 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
100	PCKE-100	Rubber	B/B	120	122.4	32	10	132	110/78	※80/45 (90/50)	11	650
125	PCKE-125	Rubber	B/B	150	153.0	38	12	168	140/94	※100/56 (112/53)	11	1,120
150	PCKE-151	Rubber	B/B	180	183.6	38	12	190	140/94	※100/56 (112/53)	11	1,260


Bearing: B/B -- Steel radial bearing

※Oval-shaped screw holes

[Bracket Dimensions]

Unit: mm

Size 	Bracket Height H 	Bracket Width B 
100	82	42
125	105	53
150	115	53

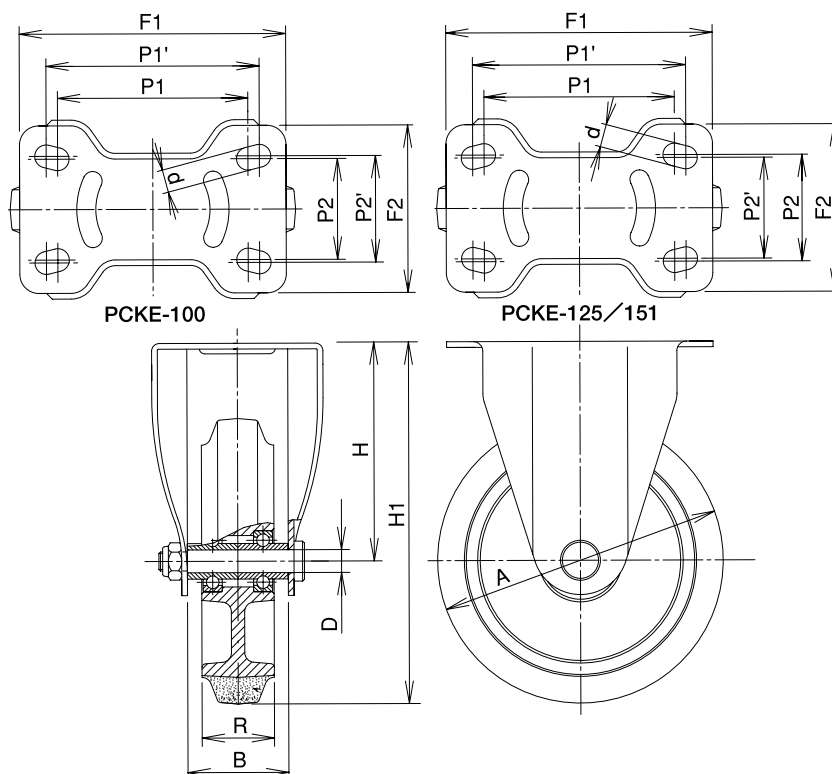

PCKC_{Type}

Size: 100mm~150mm

Silent Running Rigid Caster


PCKC-100

PCKC-125

PCKC-151

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 (P1'/P2') 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
100	PCKC-100	Rubber	B/B	120	122.4	32	10	132	95/90	※71/71 (68/68)	11	650
125	PCKC-125	Rubber	B/B	150	153.0	38	12	168	105/105	※80/80 (75/75)	11	940
150	PCKC-151	Rubber	B/B	180	183.6	38	12	190	105/105	※80/80 (75/75)	11	1,070


Bearing: B/B -- Steel radial bearing

※Oval-shaped screw holes

【Bracket Dimensions】

Unit: mm

Size 	Bracket Height H 	Bracket Width B 
100	82	42
125	105	53
150	115	53

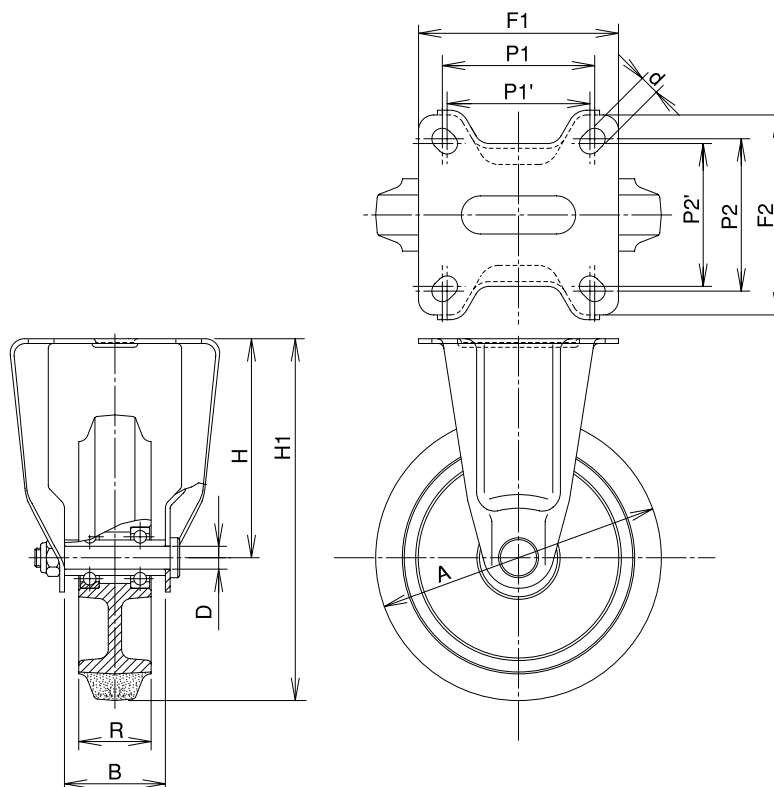

PCJCS_{Type}

Size: 100mm~150mm

Silent Running Swivel Caster with Stopper



PCJCS-100

PCJCS-125

PCJCS-151

Unit: mm

Size A	Model Number	Wheel	Bearing	Load Capacity		Tire Width R	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2 (P1'/P2')	Plate Hole d	Offset E	Weight (g)
				(daN)	(kgf)								
100	PCJCS-100	Rubber	B/B	120	122.4	32	10	132	90/90	※71/71 (68/68)	11	34	970
125	PCJCS-125	Rubber	B/B	150	153.0	38	12	168	100/100	※80/80 (75/75)	11	38	1,590
150	PCJCS-151	Rubber	B/B	180	183.6	38	12	190	100/100	※80/80 (75/75)	11	40	1,730

Bearing: B/B -- Steel radial bearing


※Oval-shaped screw holes

The stopper of the PCJCS Type caster can lock the wheel to stop the caster.

[Bracket Dimensions]

Unit: mm

Size A	Bracket Height H	Bracket Width B
100	82	42
125	105	53
150	115	53

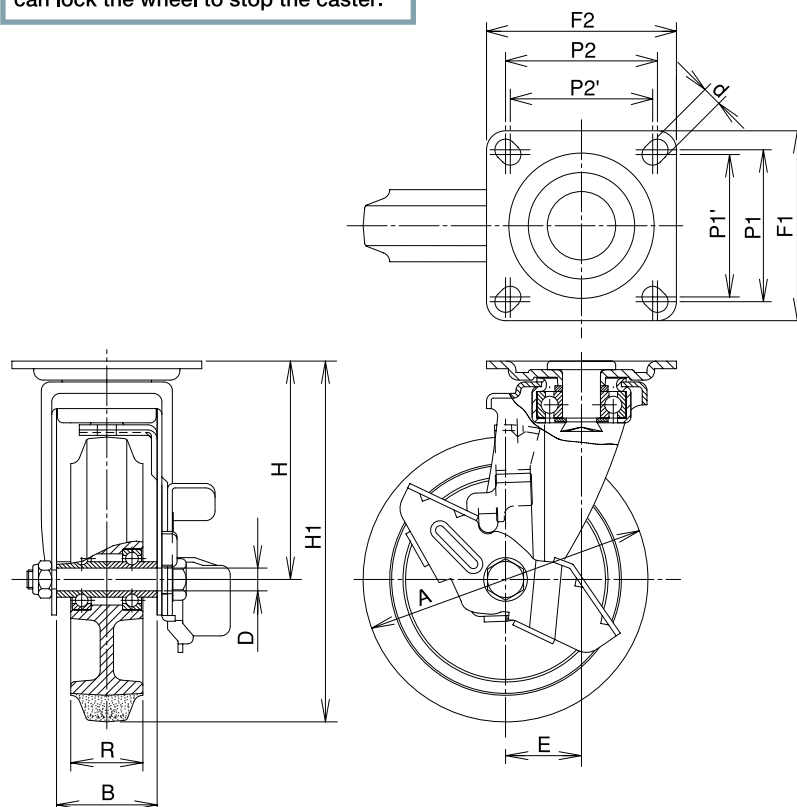

PC_{Type}

Size: 100mm~150mm

Wheel

PC Type **Silent Running** Nylon Rim · Polybutadiene Rubber Wheel



PC-100


PC-125

PC-151

Unit: mm

Size 	Model Number	Load Capacity 		Boss Width B 	Tire Width R 	Shaft Diameter D 	Steel Radial Bearing	Weight (g) 	Compatible Caster
		(daN)	(kgf)						
100	PC-100	120	122.4	42	32	10	6200ZZL	270	PCJC PCKC, PCKE PCJCS
125	PC-125	150	153.0	53	38	12	6201ZZL	410	
150	PC-151	180	183.6	53	38	12	6201ZZL	500	

Wheel Rim: Nylon6

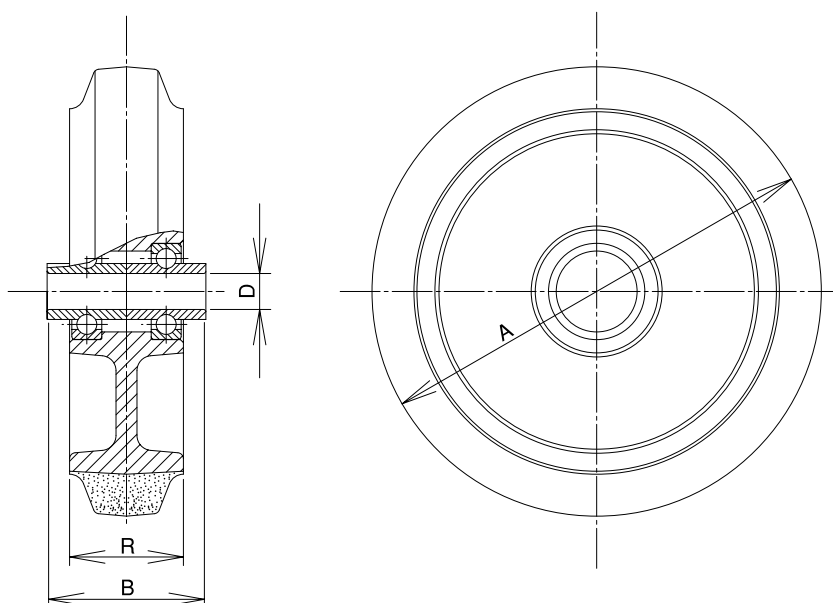



UKAI CASTERS

Pneumatic Rubber / Airless Wheel Casters

HLJ/HFJF Type

Swivel Bracket for Pneumatic Rubber / Airless Wheel



HLJ6 $\frac{1}{2}$ × 2-3

HLJ2.00-4

Unit: mm

Model Number	Wheel	Bearing	Load Capacity		Tire		Standard Air Pressure (kgf/cm ²)	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2 (P1'/P2')	Plate Hole d	Offset E	Weight (g)							
					Diameter A	Width R															
																					
			(daN)	(kgf)																	
HLJ6 $\frac{1}{2}$ ×2-3	BLACK	B/B	60	61.2	175	51	2.5	12	210	120/120	※90/90 (80/80)	11	45	1,500							
	GRAY	B/B							213					1,500							
	PU	B/B			181									1,650							
HLJY6 $\frac{1}{2}$ ×2-3	BLACK	B/B	60	61.2	175	51	2.5	12	210	128/98	100/56	11	45	1,490							
	GRAY	B/B							213					1,490							
	PU	B/B			181									1,640							
HLJ2.00-4	BLACK	B/B	80	81.6	210	50	2.5	20	260	140/140	112/112	11	58	3,490							
	GRAY	B/B												3,490							
HLJ6 $\frac{1}{2}$ ×2-4	BLACK	B/B	80	81.6	175	40	2.5	20	237	140/140	112/112	11	58	3,440							
	GRAY	B/B												3,440							
HFJF6 $\frac{1}{2}$ ×2-4	BLACK	B/B	80	81.6	169	50	2.5	20	234	140/140	112/112	14	58	4,090							
	GRAY	B/B												4,090							
HLJ2.50-4	BS	B/B	85	86.7	225	65	3.5	20	292	160/160	125/125	14	71	4,920							
	FO	B/B			218	62			289					4,830							
	AL	B/B			100	102.0			220					60	—	290	6,050				
HLETJ2.50-4	BS	B/B	85	86.7	225	65	3.5	20	292	140/140	112/112	14	58	4,520							
	FO	B/B			218	62			289					4,430							
	AL	B/B			100	102.0			220					60	—	290	5,650				

Bearing: B/B -- Steel bearing

※Oval-shaped screw holes

Wheel: BLACK -- Tire Color : BLACK

GRAY -- Tire Color : GRAY

PU -- PU Type Airless Tire (Foaming Urethane)

BS -- Tire Made by Bridgestone

FO -- Tire Made by an Overseas Maker

AL -- Airless / Solid Tire

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

HLJ/HFJF Type

Swivel Bracket for Pneumatic Rubber / Airless Wheel



HLJ2.50-4



HLJ3.50-5

Unit: mm

Model Number	Wheel	Bearing	Load Capacity		Tire		Standard Air Pressure (kgf/cm ²)	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2 (P1'/P2')	Plate Hole d	Offset E	Weight (g)
					Diameter A	Width R								
			(daN)	(kgf)										
HLJ3.00-4	BS	B/B	110	112.2	253	82	3.5	20	306	160/160	125/125	14	71	5,190
	FO	B/B			250	76			305					5,080
	AL	B/B	130	132.6	248	73	—		304					7,210
HLETJ3.00-4	BS	B/B	110	112.2	253	82	3.5	20	306	140/140	112/112	14	58	4,780
	FO	B/B			250	76			305					4,680
	AL	B/B	130	132.6	248	73	—		304					6,810
HLJ8×3.00-4	FO	B/B	85	86.7	218	67	3.5	20	289	160/160	125/125	14	71	4,760
	AL	B/B	100	102.0	210	65	—		285					5,960
HLJ3.50-5	BS	B/B	160	163.2	295	90	3.5	25	371	175/175	140/140	14	71	7,110
	FO	B/B			286	90			367					7,110
	AL	B/B	200	204.0	286	90	—		367					10,440

Bearing: B/B -- Steel bearing

Wheel: BS -- Tire Made by Bridgestone
FO -- Tire Made by an Overseas Maker
AL -- Airless / Solid Tire


The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

[Bracket Dimensions]

Unit: mm

Model Number	Bracket Height H	Bracket Width B	Weight (g)
J6 $\frac{1}{2}$ ×2-3	123	63	820
JY6 $\frac{1}{2}$ ×2-3	123	63	810
J2.00-4	155	56	2,380
J6 $\frac{1}{2}$ ×2-4	150	56	2,380
JF6 $\frac{1}{2}$ ×2-4	150	90	2,820
J2.50-4	180	90	3,370
J2.50-4ET	180	90	2,970
J3.00-4	180	90	3,370
J3.00-4ET	180	90	2,970
J8×3.00-4	180	90	3,370
J3.50-5	224	110	4,500

* The shaft set is included in the bracket.

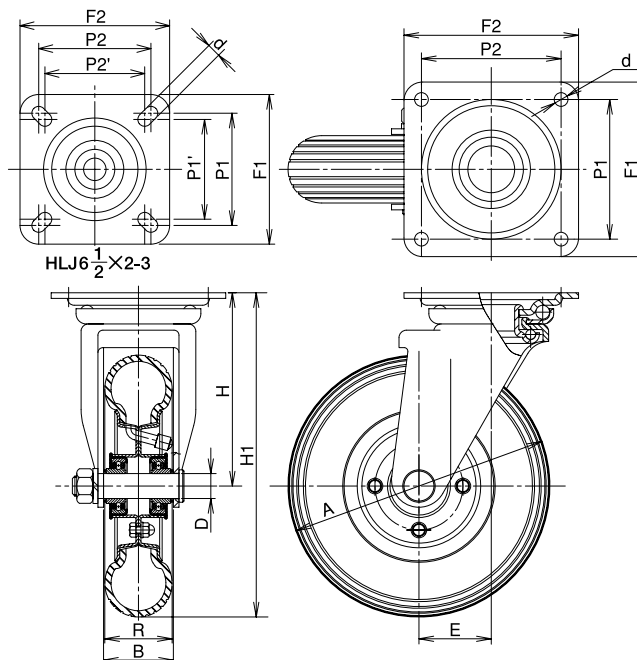

HLK/HFKF Type

Rigid Bracket for Pneumatic Rubber / Airless Wheel



HLK6 $\frac{1}{2}$ × 2-3

HLK2.00-4

Unit: mm

Model Number	Wheel	Bearing	Load Capacity		Tire		Standard Air Pressure (kgf/cm²)	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Weight (g)	
			(daN)	(kgf)										
HLK6 $\frac{1}{2}$ ×2-3	BLACK	B/B	60	61.2	175	51	2.5	12	210	127/87	100/56	11	1,260	
	GRAY	B/B			181	51			—				213	1,260
	PU	B/B												1,410
HLK2.00-4	BLACK	B/B	80	81.6	210	50	2.5	20	260	151/102	112/63	11	2,860	
	GRAY	B/B											2,860	
HLK6 $\frac{1}{2}$ ×2-4	BLACK	B/B	80	81.6	175	40	2.5	20	237	151/102	112/63	11	2,810	
	GRAY	B/B			169	50							2.5	20
HFKF6 $\frac{1}{2}$ ×2-4	BLACK	B/B	80	81.6			169	50	2.5	20	234	158/120		
	GRAY	B/B			2,910									
HLK2.50-4	BS	B/B	85	86.7	225	65	3.5	20	292	200/140	140/80	14	4,350	
	FO	B/B			218	62			289				4,260	
	AL	B/B	100	102.0	220	60	—		290				5,480	
HLETK2.50-4	BS	B/B	85	86.7	225	65	3.5	20	292	158/120	112/63	14	3,300	
	FO	B/B			218	62			289				3,210	
	AL	B/B	100	102.0	220	60	—		290				4,430	

Bearing: B/B -- Steel bearing

Wheel: BLACK -- Tire Color : BLACK

GRAY -- Tire Color : GRAY

PU -- PU Type Airless Tire (Foaming Urethane)

BS -- Tire Made by Bridgestone

FO -- Tire Made by an Overseas Maker

AL -- Airless / Solid Tire

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

HLK/HFKF Type

Rigid Bracket for Pneumatic Rubber / Airless Wheel



HLK2.50-4



HLK3.50-5

Unit: mm

Model Number	Wheel	Bearing	Load Capacity		Tire		Standard Air Pressure (kgf/cm ²)	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Weight (g)					
					Diameter A	Width R												
																		
			(daN)	(kgf)														
HLK3.00-4	BS	B/B	110	112.2	253	82	3.5	20	306	200/140	140/80	14	4,620					
	FO	B/B			250	76			305				4,510					
	AL	B/B	130	132.6	248	73	—		304				6,640					
HLETK3.00-4	BS	B/B	110	112.2	253	82	3.5	20	306	158/120	112/63	14	3,570					
	FO	B/B			250	76			305				3,460					
	AL	B/B	130	132.6	248	73	—		304				5,590					
HLK8×3.00-4	FO	B/B	85	86.7	218	67	3.5	20	289	200/140	140/80	14	4,190					
	AL	B/B	100	102.0	210	65	—		285				5,390					
HLK3.50-5	BS	B/B	160	163.2	295	90	3.5	25	371	220/150	160/90	14	6,650					
	FO	B/B			286	90			367				6,650					
	AL	B/B	200	204.0	286	90	—		367				9,980					

Bearing: B/B -- Steel bearing

Wheel: BS -- Tire Made by Bridgestone
FO -- Tire Made by an Overseas Maker
AL -- Airless / Solid Tire


The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

[Bracket Dimensions]

Unit: mm

Model Number	Bracket Height H	Bracket Width B	Weight (g)
K6 $\frac{1}{2}$ ×2-3	123	63	580
K2.00-4	155	56	1,750
K6 $\frac{1}{2}$ ×2-4	150	56	1,750
KF6 $\frac{1}{2}$ ×2-4	150	90	1,640
K2.50-4	180	90	2,800
K2.50-4ET	180	90	1,750
K3.00-4	180	90	2,800
K3.00-4ET	180	90	1,750
K8×3.00-4	180	90	2,800
K3.50-5	224	110	4,040

* The shaft set is included in the bracket.

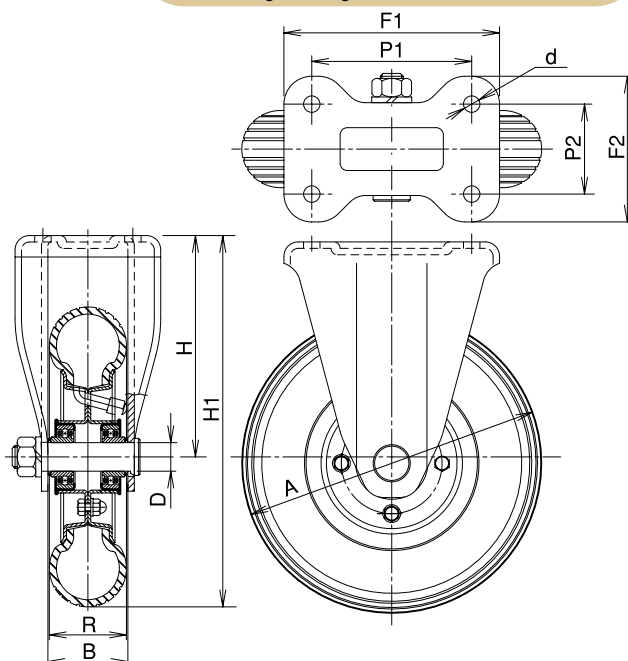

HLJB/HFJBF Type

Swivel Bracket with Stopper for Pneumatic Rubber / Airless Wheel



HLJB2.00-4

HLETJB2.50-4

HLJB3.00-4

Unit: mm

Model Number	Wheel	Bearing	Load Capacity		Tire		Standard Air Pressure (kgf/cm ²)	Shaft Diameter D	Overall Height H1	Plate Size F1/F2	Mounting Hole Spacing P1/P2	Plate Hole d	Offset E	Weight (g)		
					Diameter A	Width R										
																
			(daN)	(kgf)												
HLJB2.00-4	BLACK	B/B	80	81.6	210	50	2.5	20	260	140/140	112/112	11	58	3,690		
	GRAY	B/B												3,690		
HFJBF6 $\frac{1}{2}$ ×2-4	BLACK	B/B	80	81.6	169	50	2.5	20	234	140/140	112/112	14	58	4,340		
	GRAY	B/B												4,340		
HLETJB2.50-4	BS	B/B	85	86.7	225	65	3.5	20	292	140/140	112/112	14	58	4,780		
	FO	B/B			218	62			289					4,690		
	AL	B/B	100	102.0	220	60	—		290					5,910		
HLJB3.00-4	BS	B/B	110	112.2	253	82	3.5	20	306	160/160	125/125	14	71	5,480		
	FO	B/B			250	76			305					5,370		
	AL	B/B	130	132.6	248	73	—		304					7,500		

Bearing: B/B -- Steel bearing

Wheel: BLACK -- Tire Color : BLACK

GRAY -- Tire Color : GRAY

PU -- PU Type Airless Tire (Foaming Urethane)

BS -- Tire Made by Bridgestone

FO -- Tire Made by an Overseas Maker

AL -- Airless / Solid Tire

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

[Bracket Dimensions]

Unit: mm

Model Number	Bracket Height H	Bracket Width B	Weight (g)
JB2.00-4	155	56	2,580
JB6 $\frac{1}{2}$ ×2-4	150	90	3,070
JB2.50-4ET	180	90	3,230
JB3.00-4	180	90	3,660

* The shaft set is included in the bracket.

[Pedal Dimensions]

Unit: mm



Model Number	Pedal Rod K	Radius of Gyration S
JB2.00-4	120	148
JB6 $\frac{1}{2}$ ×2-4	130	156
JB2.50-4ET	130	156
JB3.00-4	135	160

The JB Type bracket can lock or unlock the wheel and frame at the same time just by stepping the pedal. This was designed under the assumption that it is combined with the pneumatic rubber / airless wheel produced by our company. If this is combined with a tire whose outer diameter is not within the range below, the tire may slip or the tire may interfere with the stopper mechanism. Use the tire with the specified air pressure.

Unit: mm

Compatible Tire Diameter (Rough Standard)

210~206
169~166
225~216
253~248

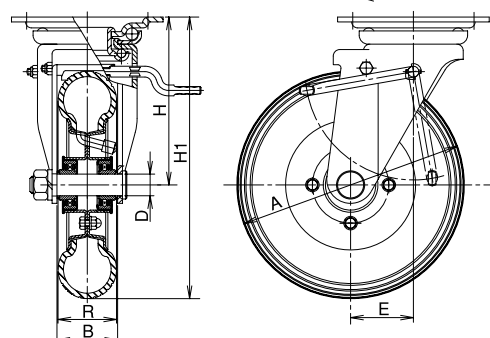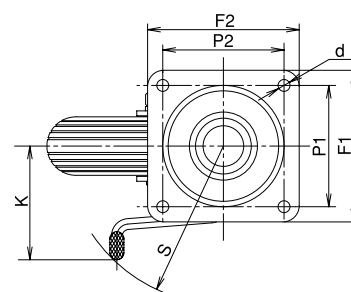


UKAI Pneumatic Wheels

Pneumatic Rubber Wheel / Airless Wheel

6 $\frac{1}{2}$ ×2-3HL Pneumatic Rubber Wheel


6 $\frac{1}{2}$ ×2-3HL BLACK

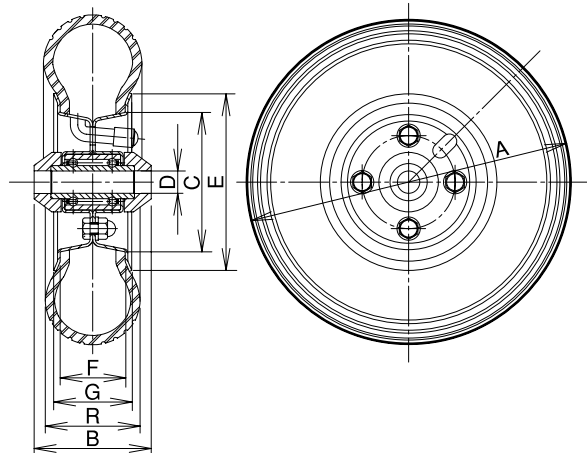6 $\frac{1}{2}$ ×2-3HL GRAY


Unit: mm															
Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
						Diameter E	Bead Diameter C	Outside Width G	Inside Width F						
		(daN)	(kgf)												
6 $\frac{1}{2}$ ×2-3HL	BLACK	60	61.2	175	51	95	75	42	35	63	12	2.5	1230W	DIN7777	680
	GRAY														680


Unit: mm

Wheel: BLACK -- Tire Color : BLACK
GRAY -- Tire Color : GRAY

Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

6 $\frac{1}{2}$ ×2-3HL PU PU Type Airless Tire (Foaming Urethane)

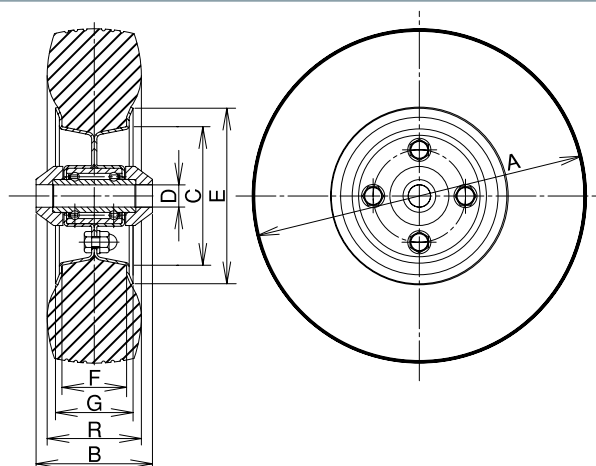
6 $\frac{1}{2}$ ×2-3HL PU


Unit: mm															
Model Number	Wheel	Load Capacity		Tire		Rim				Boss	Shaft	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
				Diameter A	Width R	Diameter E	Bead Diameter C	Outside Width G	Inside Width F	B B	D D				
		(daN)	(kgf)												
6½×2-3HL	PU	60	61.2	181	51	95	75	42	35	63	12	—	1230W	—	830


Unit: mm

The outer diameter and width of a tire were measured under the unloaded condition. They may vary according to usage conditions.

UKAI Pneumatic Wheels

Pneumatic Rubber Wheel / Airless Wheel

6 $\frac{1}{2}$ ×2-4HL (Boss Width : 52) Pneumatic Rubber Wheel

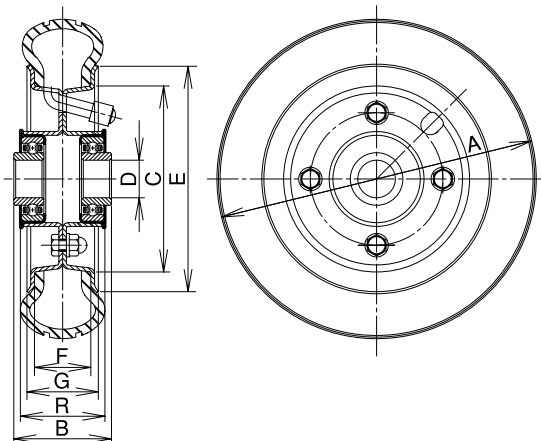


Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width	Shaft Diameter	Standard Air Pressure	Steel Ball Bearing	Valve	Weight
		(daN)	(kgf)	Diameter A	Width R	Diameter E	Bead Diameter C	Outside Width G	Inside Width F	B	D	(kgf/cm ²)			(g)
6 $\frac{1}{2}$ ×2-4HL	BLACK	80	81.6	175	40	120	99	38	30	52	20	2.5	204B	DIN7777	1,060
	GRAY														1,060

Wheel: BLACK -- Tire Color : BLACK
GRAY -- Tire Color : GRAY

Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

6 $\frac{1}{2}$ ×2-4HF (Boss Width : 82) Pneumatic Rubber Wheel

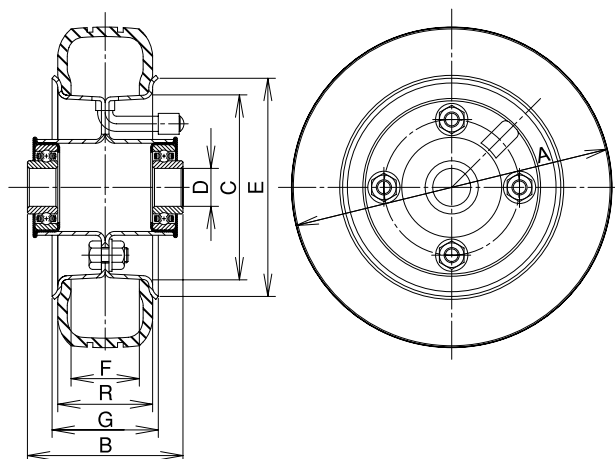

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width	Shaft Diameter	Standard Air Pressure	Steel Ball Bearing	Valve	Weight
		(daN)	(kgf)	Diameter A	Width R	Diameter E	Bead Diameter C	Outside Width G	Inside Width F	B	D	(kgf/cm ²)			(g)
6 $\frac{1}{2}$ ×2-4HF	BLACK	80	81.6	169	50	115	97.5	56	46	82	20	2.5	204B	DIN7777	1,270
	GRAY														1,270

Wheel: BLACK -- Tire Color : BLACK
GRAY -- Tire Color : GRAY

Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

UKAI Pneumatic Wheels

Pneumatic Rubber Wheel / Airless Wheel


2.00-4HL Pneumatic Rubber Wheel



2.00-4HL BLACK

2.00-4HL GRAY

2.00-4HL Rim

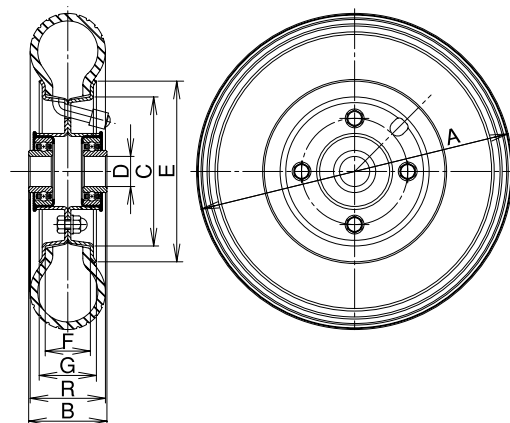

Unit: mm


Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
		 (daN)	 (kgf)	 A	 R	 E	 C	 G	 F	 B	 D				 (g)
2.00-4HL	BLACK	80	81.6	210	50	120	99	38	30	52	20	2.5	204B	JS87	1,110
	GRAY														1,110

Wheel: BLACK -- Tire Color : BLACK
GRAY -- Tire Color : GRAY

Tire: 4PR


The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

2.50-4HL Pneumatic Rubber Wheel / Airless Tire

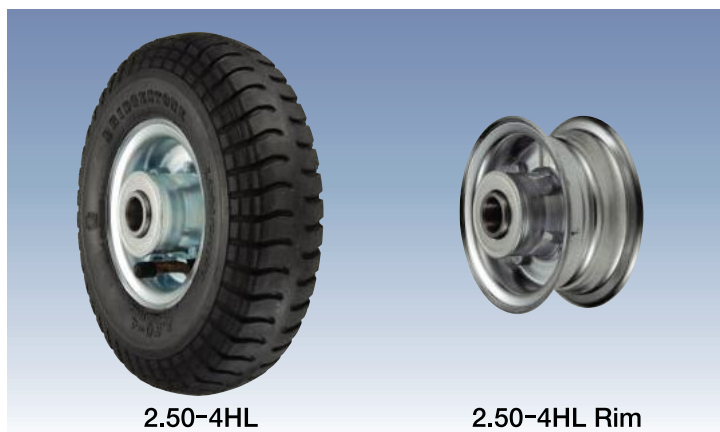

2.50-4HL

2.50-4HL Rim

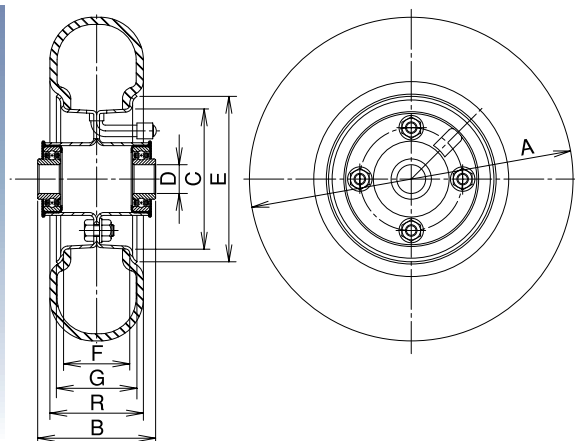

Unit: mm

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
		 (daN)	 (kgf)	 A	 R	 E	 C	 G	 F	 B	 D				 (g)
2.50-4HL	BS	85	86.7	225	65	115	97.5	56	46	82	20	3.5	204B	TR87	1,550
	FO			218	62										1,460
	AL	100	102.0	220	60							—			2,680

Wheel: BS -- Tire Made by Bridgestone
FO -- Tire Made by an Overseas Maker
AL -- Airless / Solid Tire

Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.


UKAI Pneumatic Wheels

Pneumatic Rubber Wheel / Airless Wheel

3.00-4HL Pneumatic Rubber Wheel / Airless Tire



3.00-4HL

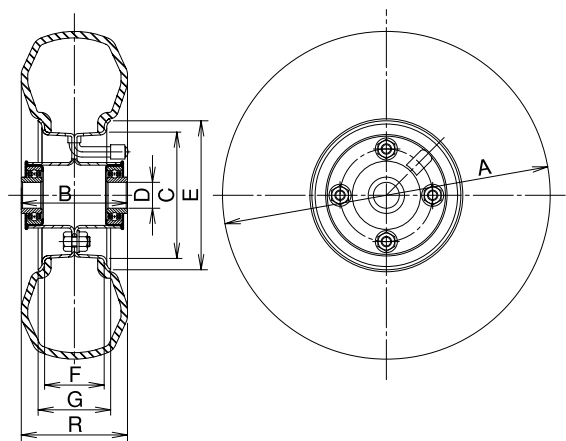

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
						Diameter E	Bead Diameter C	Outside Width G	Inside Width F						
				A	R					B	D				
3.00-4HL	BS			253	82	115	97.5	56	46	82	20	3.5	204B	TR87	1,820
	FO	110	112.2	250	76										1,710
	AL	130	132.6	248	73							—		—	3,840

Unit: mm

Wheel: BS -- Tire Made by Bridgestone
FO -- Tire Made by an Overseas Maker
AL -- Airless / Solid Tire


Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

8×3.00-4HL Pneumatic Rubber Wheel / Airless Tire



8×3.00-4HL

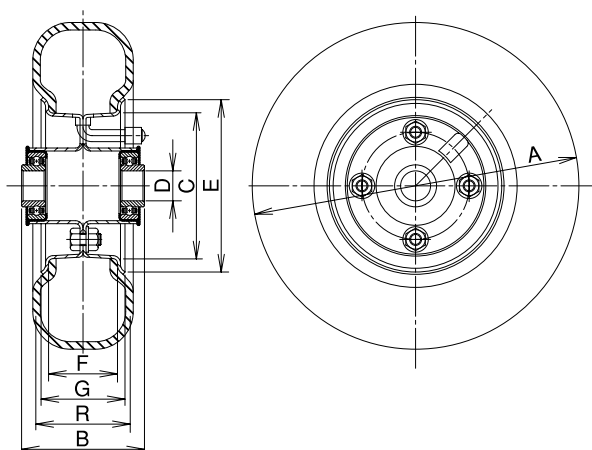

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
						Diameter E	Bead Diameter C	Outside Width G	Inside Width F						
				A	R					B	D				
8×3.00-4HL	FO	85	86.7	218	67	115	97.5	56	46	82	20	3.5	204B	TR87	1,390
	AL	100	102.0	210	65							—		—	2,590

Unit: mm

Wheel: FO -- Tire Made by an Overseas Maker
AL -- Airless / Solid Tire


Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

UKAI Pneumatic Wheels

Pneumatic Rubber Wheel / Airless Wheel

3.50-5HL Pneumatic Rubber Wheel / Airless Tire

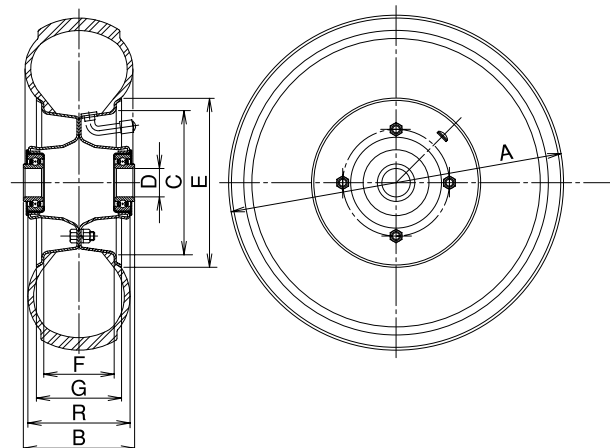


Unit: mm

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
															
3.50-5HL	BS	160	163.2	295	90	149	127	75	62	98	25	3.5	205B	JS87	2,610
	FO			286	90									TR87	2,610

Wheel: BS -- Tire Made by Bridgestone
FO -- Tire Made by an Overseas Maker

Tire: 4PR

The outer diameter and width of a tire were measured at the standard air pressure under the unloaded condition. They may vary according to usage conditions.

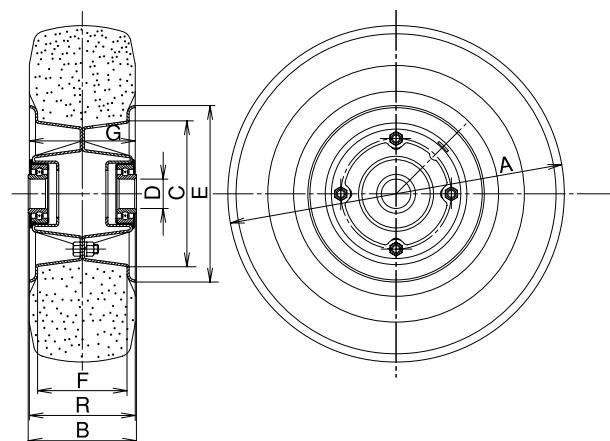


Unit: mm

Model Number	Wheel	Load Capacity		Tire		Rim				Boss Width B	Shaft Diameter D	Standard Air Pressure (kgf/cm ²)	Steel Ball Bearing	Valve	Weight (g)
															
3.50-5HL	AL	200	204.0	286	90	150	124	90	76	92	25	—	CBB-2547R	—	5,940


Wheel: AL -- Airless / Solid Tire

The outer diameter and width of a tire were measured under the unloaded condition. They may vary according to usage conditions.

Pneumatic Wheel Parts

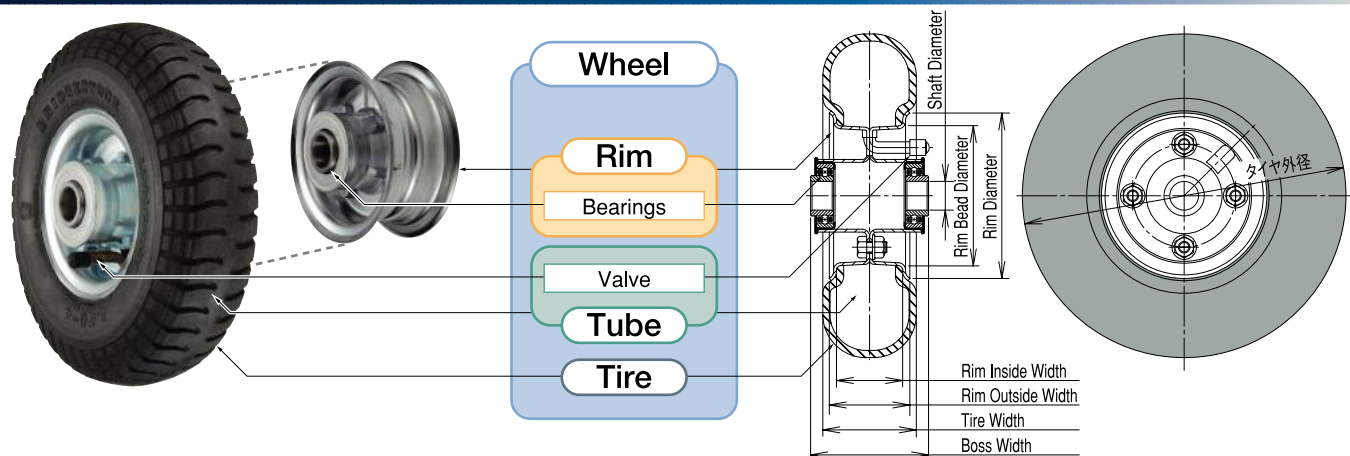

The Model Number of UKAI Pneumatic Wheels

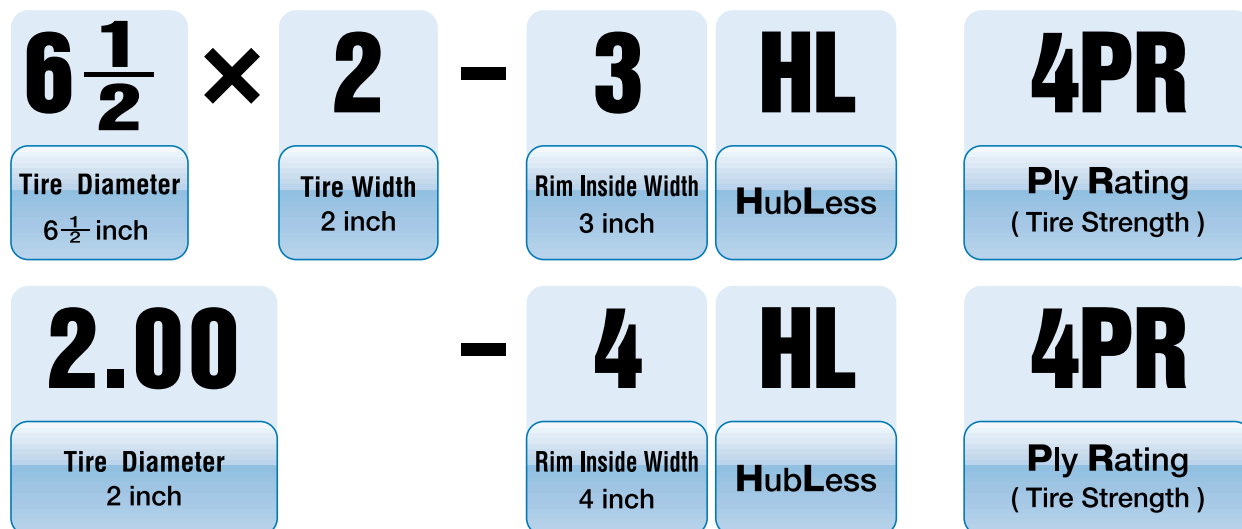

* 1 inch = 25.4 cm For actual size, refer to the table of specs on each page.

The Usage Notice of Pneumatic / Airless Wheels

- Check the abrasion or deterioration of the tire part of the pneumatic rubber / airless wheel, the corrosion of the bearing part, etc. If you discover deterioration, replace the parts.
- The pneumatic rubber wheel may deflate spontaneously. Check air pressure, and if it is low, replenish air.
- Regarding air replenishment
The Schrader Valve (American Valve) is used for the pneumatic rubber wheel. When replenishing air, use an inflator for the Schrader Valve (American Valve). It is impossible to replenish air with other inflators for such as Dunlop Valve (English Valve).
- If air leaks after air replenishment
In the case of air leakage after air replenishment, possible factors include the damage to the tube and the loosening of the valve core. Check each part, to confirm whether there is the leakage of air. If the valve core loosens, tighten it again.




Schrader Valve
(American Valve)

If there are any questions, please ask us before use.

The Performance Test of Casters


Static Load Test

Apply a load of three times the maximum load written in the catalog on the caster for 3 minutes, to check abnormalities. It will provide reference data for load bearing capacity.

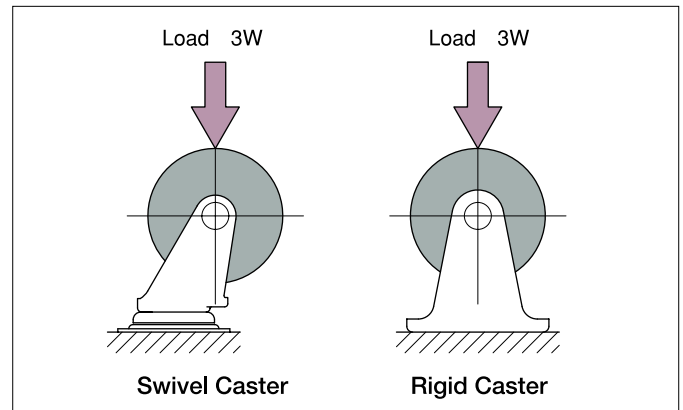

Running Test


Apply the maximum load on the caster and roll it on a rugged steel drum for a certain distance, to check wheel performance. It will provide reference data for the rolling performance of a wheel.

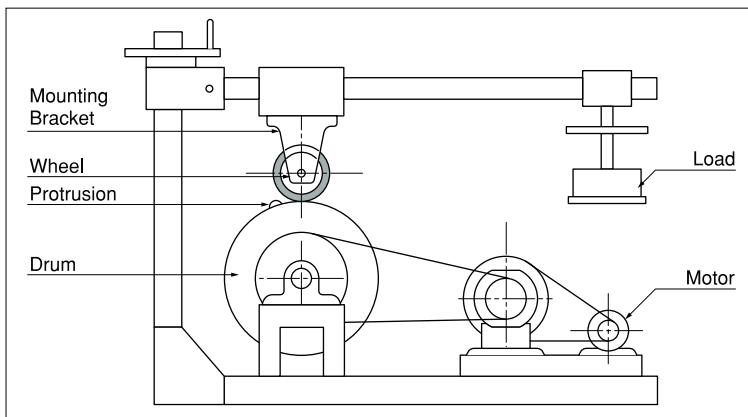


Starting Performance Test

Attach casters to a cart, and place a load onto the cart. Then, measure starting resistance. You can check starting performance and swivel starting performance.

Starting Performance

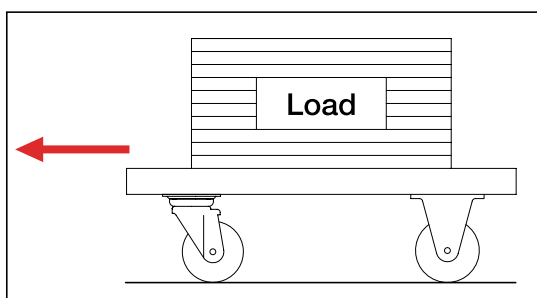

Swivel Starting Performance

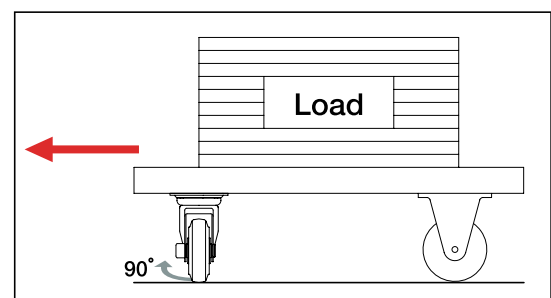



岐阜産研工業株式会社
Gifu Sanken Kogyo Co., Ltd.

Homepage URL <http://www.gifusanken.com/>

Gifu sanken	Search
-------------	--------

Ukai Caster Catalog URL <http://www.gifusanken.com/cataj0701/>

You can download the catalog and CAD data
from our homepage.

■Ogaki Factory Caster Division

696 Hirui-Cho, Ogaki-City, Gifu-Pref. 503-2216, Japan
TEL: +81-584-93-2975 FAX:+81- 584-93-2976

■Head Office Moulding Division

1403 Kugo, Ono-Cho, Ibi-Gun, Gifu-Pref. 501-0555, Japan
TEL: +81-585-35-2529 FAX:+81- 585-35-2526

■Gift Division 755-3 Honjo, Ono-Cho, Ibi-Gun, Gifu-Pref. 501-0533, Japan
TEL: +81-585-35-2511 FAX:+81- 585-35-2327

Dealer / Agency

- The specs of the products in this catalog may be modified without notice, with the purpose of improving quality or the like.
We would appreciate your understanding.
- The colors of actual products may differ from those in this catalog somewhat.
We would appreciate your understanding.
- You cannot reprint this document without our consent.