



DR A BEST **35** YEARS

MANUFACTURER OF LADDERS AND LADDER HOISTS

CATALOGUE 2026



MANUFACTURER OF LADDERS AND LADDER HOISTS

DRABEST SP. Z O.O.

ul. Pogodna 64, 32-084 Mników, Poland

DRABEST.COM

Contact us

Export@drabest.pl



Find us on





PRODUCT COMPARISON

SINGLE-SIDED ACCESS LADDERS
DOUBLE-SIDED ACCESS LADDERS
THREE-ELEMENT LADDERS
TELESCOPIC LADDERS
UNIVERSAL LADDERS
LADDER SCAFFOLDING
LADDER SCAFFOLDING HECTOR/IKAR

2 - 7

2
2
3
4
5
6
7

LADDER HOIST 250 LADDER HOIST 125

8-11
12-15

SINGLE-SIDED ACCESS LADDERS

ALD 125 KG - HOME
ALD 125 KG + SHELF - HOME
ALD 150 KG - PRO
ALD 150 KG + SHELF - PRO
ALD 150 KG +SHELF+HANDRAILS - PRO
ALD MAX 150 KG - MAX
FIBREGLASS 150 KG - MAX
STD 125 KG - HOME
SLIM WITH HANDRAIL 150 KG - HOME
SLIM 150 KG - HOME
MINIFERO 150 KG - PRO
KS 150 KG - HOME
ST TW 150 KG - HOME
PLATFORM HOP UP 150 KG - PRO

16-31

18
19
20
21
22
23
24
25
26
27
28
29
30
31

DOUBLE-SIDED ACCESS LADDERS

DD 125KG - HOME
DD 150 KG - PRO
DREW 150 KG - PRO

32-37

34
35
36

TELESCOPIC LADDERS

TELESCOPIC 125 KG - HOME
TELESCOPIC 150 KG - MAX

38-41

40
41

LEANING LADDERS

DP 150 KG - PRO

42-45

44

TWO-ELEMENT LADDERS

DW 2 150 KG - PRO

46-49

48

THREE-ELEMENT LADDERS

DW 3 150 KG - HOME
DW 3 150 KG - PRO
DW 3 150 KG - MAX

50-55

52
53
54

UNIVERSAL LADDERS

DU 4X3-4X4 125 KG - HOME
DU 4X3 125 KG + PLATFORM - HOME
DU 4X3-4x4 125 KG AL-ST - HOME
DU 4X3 125 KG + PLATFORM AL-ST - HOME
DU 4X3 150 KG + PLATFORM AL-ST - PRO
DU 4X3 150 KG - HOME
DU 4X3 150 KG + PLATFORM - PRO

56-65

58
59
60
61
62
63
64

LADDER SCAFFOLDING

ARD 150 KG - HOME
ARD 150 KG - PRO
IKAR 150 KG - PRO
HECTOR 150 KG - PRO
HECTOR BASIC 150 KG - PRO

66-73

68
69
70
71
72

ACCESSORIES

74-81

FIRE ESCAPE LADDERS

82-87

ABOUT OUR COMPANY

88

CHOOSE THE BEST LADDER!

CATEGORIES	SINGLE-SIDED ACCESS LADDERS		
ALD	HOME	PRO	MAX
			
LOAD CAPACITY	125 KG	150 KG	150 KG
PROFILE THICKNESS	model 3-4 0,8 mm model 5-7 0,9 mm model 8 1,2 mm	model 3-6 1,2 mm model 7-8 1,4 mm	1,4 mm
USAGE			
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG		

CATEGORIES	DOUBLE-SIDED ACCESS LADDERS	
DD	HOME	PRO
		
LOAD CAPACITY	125 KG	150 KG
PROFILE THICKNESS	0,8 mm	1,2 mm
USAGE		
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG	

THREE-ELEMENT LADDER - WHICH ONE TO CHOOSE?

CATEGORIES	THREE-ELEMENT LADDERS																										
DW3	HOME	PRO	MAX																								
																											
MODELS	6-11	6-16	7, 9, 11, 13																								
RUNG PROFILE	25x25 mm	28x28 mm	28x28 mm																								
USAGE																											
DISTANCE BETWEEN RUNGS	265 mm	265 mm	290 mm																								
FUNCTION ON STAIRS																											
FEET	STANDARD BLACK 	TWO COMPONENT 	MOVABLE DOUBLE-SIDED 																								
STABILIZER LENGTH	<table><tr><th colspan="3">[mm]</th></tr><tr><td>675 models 6, 7</td><td>860 models 8, 9, 10</td><td>980 model 11</td></tr></table>	[mm]			675 models 6, 7	860 models 8, 9, 10	980 model 11	<table><tr><th colspan="3">[mm]</th></tr><tr><td>700 model 6</td><td>825 models 7, 8</td><td>900 model 9</td></tr><tr><th colspan="3">[mm]</th></tr><tr><td>974 model 10</td><td>1100 models 11, 12</td><td>1200 models 13-16</td></tr></table>	[mm]			700 model 6	825 models 7, 8	900 model 9	[mm]			974 model 10	1100 models 11, 12	1200 models 13-16	<table><tr><th colspan="3">[mm]</th></tr><tr><td>900 model 7</td><td>1100 model 9</td><td>1200 models 11, 13</td></tr></table>	[mm]			900 model 7	1100 model 9	1200 models 11, 13
[mm]																											
675 models 6, 7	860 models 8, 9, 10	980 model 11																									
[mm]																											
700 model 6	825 models 7, 8	900 model 9																									
[mm]																											
974 model 10	1100 models 11, 12	1200 models 13-16																									
[mm]																											
900 model 7	1100 model 9	1200 models 11, 13																									
QUALITY / CERTIFICATE	NORM EN 131 NON PROFESSIONAL USE 	NORM EN 131 PROFESSIONAL USE 	NORM EN 131 PROFESSIONAL USE 																								
ADDITIONAL PARTS	STABILIZER	STABILIZER	• STABILIZER (FOR MODELS: 3x11 and 3x13) • STEEL BRACKET																								

CHOOSE THE BEST TELESCOPIC LADDER!

CATEGORIES		TELESCOPIC LADDERS	
	HOME	MAX	
TELESCOPIC			
LOAD CAPACITY	125 KG	150 KG	
STABILIZER		for models 11, 13 	
USAGE	 	 	
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG	 	
FOLDING SYSTEM	BUMPERS	SOFT CLOSE	

UNIVERSAL LADDER WHICH ONE TO CHOOSE?

CATEGORIES	UNIVERSAL LADDERS		
------------	-------------------	--	--

DU 4x3

HOME

PRO


PRO



DU 4x3

LOAD CAPACITY	125 KG	150 KG	150 KG
MATERIAL	ALUMINUM	ALUMINUM- STEEL	ALUMINUM
PLATFORM	✓	✓	✓
USAGE			
QUALITY / CERTIFICATE	DECLARATION OF CONFORMITY 125 KG	NORM EN 131-4 PROFESSIONAL USE	NORM EN 131-4 PROFESSIONAL USE 

LADDER SCAFFOLDING - MODELS

CATEGORIES	LADDER SCAFFOLDING	
ARD	HOME	PRO
		
PLATFORM DIMENSIONS	1,14 x 0,34 m	1,50 x 0,46 m
LADDER WIDTH	0,46 m	0,58 m
RUNG PROFILE	25 x 25 mm	28 x 28 mm
USAGE		
QUALITY / CERTIFICATE	NORM EN 131 NON PROFESSIONAL USE	NORM EN 131 PROFESSIONAL USE

WHICH SCAFFOLDING TO CHOOSE?

CATEGORIES	LADDER SCAFFOLDING		
HECTOR / IKAR	PRO	PRO	PRO
			
PLATFORM DIMENSIONS	1,34 x 0,60 m	1,34 x 0,60 m + side panels	1,30 x 0,60 m
LOAD CAPACITY	150 KG	150 KG	150 KG
STABILIZER LENGTH	1,30 m	1,30 m	1,10 m
MAXIMUM WORKING HEIGHT	4,00 m	4,73 m	4,00 m
QUALITY / CERTIFICATE	NORM EN 131 PROFESSIONAL USE	NORM EN 1004 PROFESSIONAL USE	NORM EN 131 PROFESSIONAL USE



NEW


LADDER HOIST 250



WATCH THE VIDEO

LADDER HOIST 250


NEW

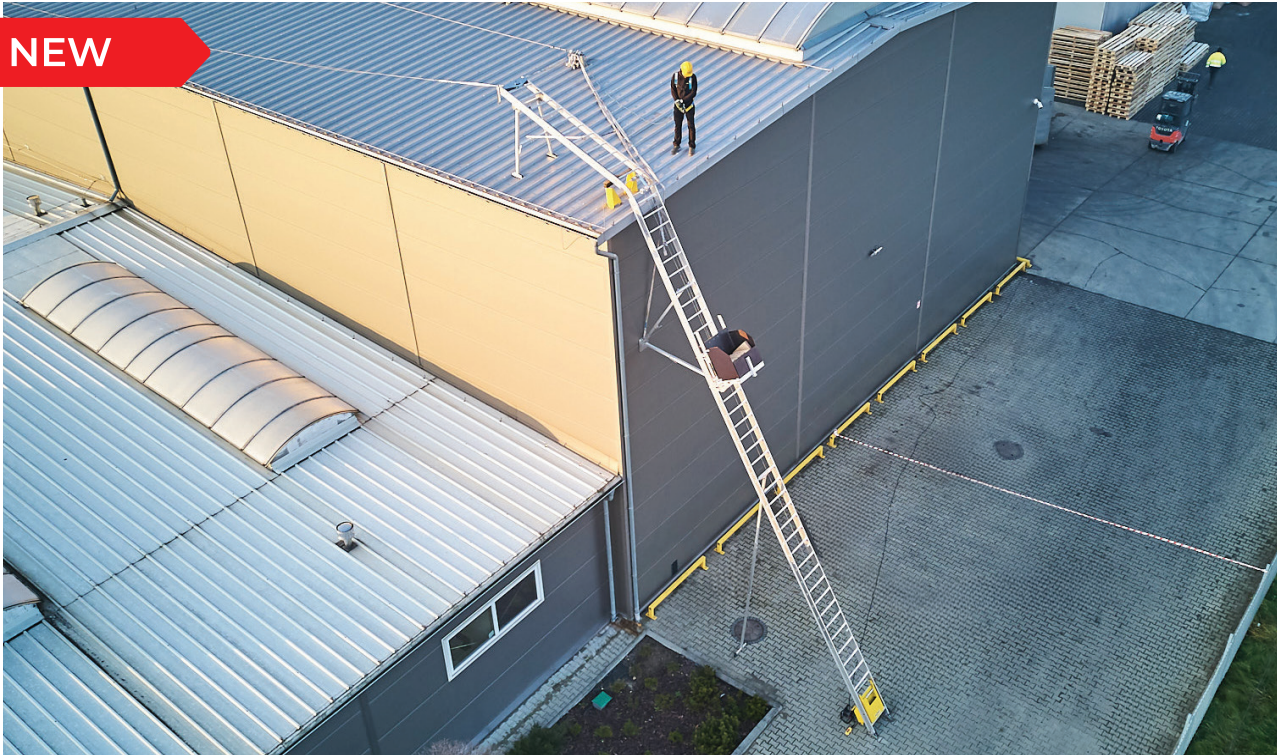


10

LADDER HOIST 250

- **Load capacity:** 250 kg (depending on the inclination angle and height to the roof edge).
- **Soft-start system**
- **Lifting speed:** 12 m/min.
- Bottom-mounted drive unit with wheels, transport handle, and accessory storage.
- Wired and wireless remote control.
- Upper and lower limit switches that disconnect the drive at the trolley's extreme positions.
- Anti-derailment roller system.
- **Safety braking system** that prevents the trolley from falling in the event of rope breakage.
- **Support system:** lower support (to the ground), wall brace (to the gable wall), and roof support to improve load capacity and structural stability.

LADDER HOIST 250		
 MEASUREMENTS & WEIGHTS MAY VARY ±5%	A [m] MAX. ROOF HEIGHT	12
	B [m] TOTAL LADDER LENGTH	20
	C [m] LADDER WIDTH	0,63
	E [m] LOWER SUPPORT LENGTH	5,5
	E1 [m] WALL BRACE LENGTH	2,50–2,80 m (x2)
	E2 [m] ROOF SUPPORT LENGTH	1,0–1,5
	MAX. LOAD CAPACITY	250 kg
	MOTOR POWER	1,5 kW
	ANGLE TO THE GROUND	50°–75°
	ANGLE TO THE ROOF	30°–60°

7 TROLLEY CONFIGURATIONS

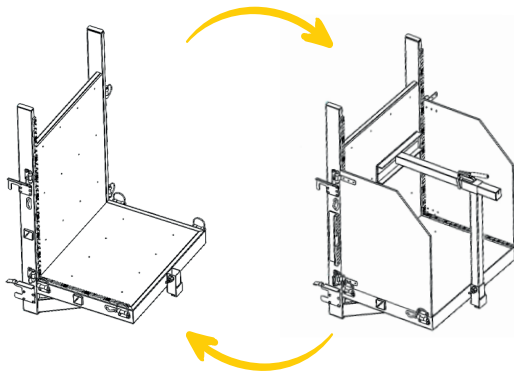



- Stable and safe aluminum construction.
- The universal MAX trolley with opening sides allows for the transport of materials of various dimensions.
- Durable and powerful drive saves time and labor costs!



LADDER HOIST 125



LADDER HOIST 125

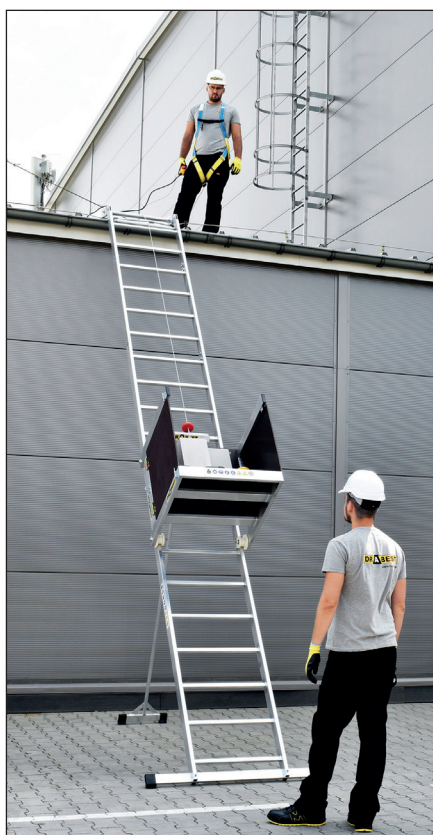


14

LADDER HOIST 125



- Lightweight aluminum construction that will be perfect for daily support in construction and renovation work
- **Easy to assemble and disassemble**, and when folded, the compact form will allow for convenient transportation and storage
- All components have a total weight of 90 kg
- Lifting speed as high as **8 meters per minute**
- Lifting capacity up to **125 kilograms**
- Large transport STANDARD trolley or PV MODULES trolley, which are additionally covered with waterproof non-slip plywood
- Possibility of disassembling side covers in the standard trolley enables transportation of materials of various dimensions
- Drabest ladder hoist has **CE declaration**, all necessary approvals, and meets health and safety standards
- It will provide you and your employees with many years of safe and comfortable work

LADDER HOIST 125		
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] HEIGHT TO THE ROOF	6,50
	B [m] LADDER LENGTH	12,5
	C [m] LADDER WIDTH	0,63
	E [m] STABILIZER LENGTH	1,12
	G [m] BRACKET LENGTH	1,90 ÷ 3,30
	WEIGHT [kg]	90
	PACKAGING DIMENSIONS [m]	2,00 x 0,80 x 1,50

■ STANDARD trolley
WT-AL-M-12

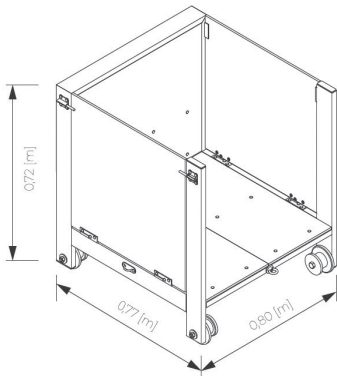

■ PV MODULES trolley
WT-AL-M-12-BW

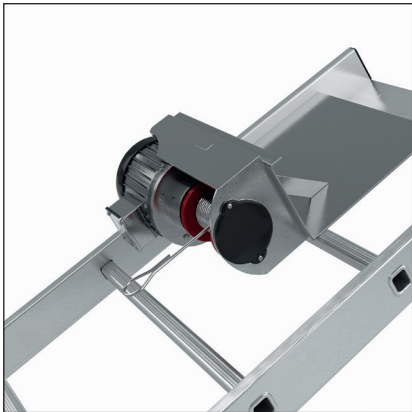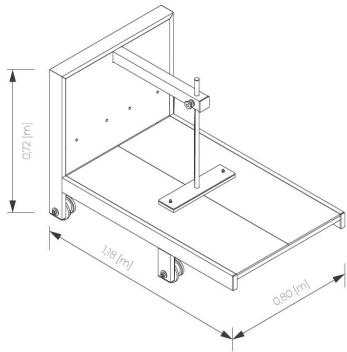

LADDER HOIST 125		
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	MINIMUM ENGINE POWER	1050 W
	SUPPLY VOLTAGE	230 V
	MAX CAPACITY	125 [kg]
	LINE LENGTH	12 [m]
	LIFTING SPEED	8 [m/min.]
	ELECTRIC MOTORINGRESS PROTECTION RATING	IP 54



SINGLE-SIDED ACCESS LADDERS



SINGLE-SIDED ACCESS LADDERS

FOR HOME USE



18


ALD 125 KG - HOME

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for **work in households**
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALD 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity **max. 125 kg**

ALD 125 KG	NUMBER OF STEPS	3	4	5	6	7	8
 MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	2,50	2,90	3,60	4,20	4,70	5,60
	DXCXG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

FOR HOME USE



■ INCLUDED



■ ALDP 4 125 KG



19

ALD 125 KG + TOOL SHELF - HOME

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER WITH TOOL SHELF

- Dedicated for **work in households**
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband **with tool shelf**
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALDP 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity **max. 125 kg**

ALD 125 KG + TOOL SHELF	NUMBER OF STEPS	3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	E [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	2,50	2,90	3,60	4,20	4,70	5,60
	DXCXG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



NORM
EN 131
PROFESSIONAL USE



■ ALD 150 KG

ALD 150 KG - PRO

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for everyday work in **households, office and warehouse** spaces as well as occasional renovations
- Safe 0,60 [m] headband
- Steel powder coated working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees work safety
- Special **non-slip feet, screwed to the profile**
- Notched steps riveted and secured with yellow plastic covers
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

ALD 150 KG	NUMBER OF STEPS	3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,20	3,70	4,30	5,10	5,80	6,60
	DxCxG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12
	MEASUREMENTS & WEIGHTS MAY VARY +/-5%						

FOR PROFESSIONALS



■ INCLUDED



■ ALDP 4 150 KG



NORM
EN 131
PROFESSIONAL USE

ALD 150 KG + TOOL SHELF - PRO


ALUMINUM HOUSEHOLD LADDER WITH TOOL SHELF SINGLE-SIDED ACCESS

- Dedicated for work in **households, office and warehouse** spaces
- Light structure, convenient for storage
- Safe 0,60 [m] headband **with tool shelf**
- Steel powder coated platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Notched steps, riveted and secured with yellow plastic covers
- Special **non-slip feet screwed to the profile** to ensure the highest safety standard, protect the floor against scratches!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ALD 150 KG + TOOL SHELF		NUMBER OF STEPS					
		3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,20	3,70	4,30	5,10	5,80	6,60
	DxCxG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



■ INCLUDED



NORM
EN 131
PROFESSIONAL USE



■ ALDP+P 4 150 KG

22


ALD 150 KG+TOOL SHELF+HANDRAILS - PRO

ALUMINUM HOUSEHOLD SINGLE-SIDED ACCESS LADDER WITH TOOL SHELF + HANDRAILS

- Dedicated for everyday work in **households, office and warehouse** spaces as well as occasional renovations
- Ergonomic handrails help when using the ladder
- Steel powder coated platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Safe 0,60 [m] headband with tool shelf
- Notched steps riveted and secured with yellow plastic covers
- Special non-slip feet screwed to the profile to ensure the highest safety standard
- Load capacity **max. 150 kg**
- Quality **EN 131**

ALD 150 KG TOOL SHELF + HANDRAILS	NUMBER OF STEPS	4	5	6	7	8
	A [m] WORKING HEIGHT	2,75	2,97	3,19	3,40	3,62
	B [m] PLATFORM HEIGHT	0,75	0,97	1,19	1,40	1,62
	C [m] LADDER WIDTH	0,43	0,45	0,48	0,50	0,52
	D [m] LADDER LENGTH	1,47	1,70	1,93	2,17	2,39
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	4,45	5,05	5,85	6,65	7,45
	DxCxG [m] PACKAGE	1,47x0,43x0,12	1,70x0,45x0,12	1,93x0,45x0,12	2,17x0,50x0,12	2,39x0,52x0,12

FOR PROFESSIONALS



**50 %
WIDER
STEPS
120 [MM]**



**NEW
TWO-COMPONENT
FEET „CLICK”**

**NORM
EN 131
PROFESSIONAL USE**



■ ALD MAX 5 150 KG

23

ALD MAX 150 KG - MAX


ALUMINUM SINGLE-SIDED ACCESS LADDER WITH TOOL SHELF

- Dedicated for professionals
- Made of high-quality aluminum
- Comfortable steps with a width of 120 [mm]
- First step at a height of 190 [mm]
- Tool shelf integrated into the profiles
- New two-component feet „Click” , non-slip, easy to replace
- Plastic hinge, clamped in the support and riveted to the shackle
- Load capacity max. 150 kg
- Quality EN 131

ALD MAX 150 KG	NUMBER OF STEPS	3	4	5	6	7
	A [m] WORKING HEIGHT	2,61	2,82	3,04	3,26	3,47
	B [m] PLATFORM HEIGHT	0,61	0,82	1,04	1,26	1,47
	C [m] LADDER WIDTH	0,43	0,44	0,47	0,49	0,52
	D [m] LADDER LENGTH	1,31	1,54	1,77	2,00	2,24
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	3,68	4,38	5,08	5,92	7,00
	DxCxG [m] PACKAGE	1,31x0,43x0,12	1,54x0,44x0,12	1,77x0,47x0,12	2,00x0,49x0,12	2,24x0,52x0,12

SINGLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



■ FIBREGLASS 8 150 KG



NORM
EN 131
PROFESSIONAL USE

24

FIBREGLASS- MAX

- Our fibreglass ladders are constructed from durable, **non-conductive materials**, to provide maximum safety when working at height.
- Highly resistant and can be stored indoors and outdoors up to your convenience
- Wide steps
- Stable and strong fibreglass stringers
- Special non-slip feet
- High safety for **electrical work**
- Load capacity max. **150 kg**
- Quality **EN 131**

FIBREGLASS 150 KG	NUMBER OF STEPS	4	5	6	8	10
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	2,01	2,27	2,53	3,05	3,57
	B [m] MAXIMUM ENTRANCE HEIGHT	0,26	0,52	0,78	1,30	1,82
	C [m] LADDER WIDTH	0,45	0,48	0,51	0,58	0,65
	D [m] LADDER LENGTH	1,14	1,42	1,69	2,24	2,82
	G [m] LADDER THICKNESS	0,15	0,15	0,15	0,15	0,15
	WEIGHT [kg]	5,40	6,50	7,30	10,30	12,70
	DxCxG [m] PACKAGE	1,14x0,45x0,15	1,42x0,48x0,15	1,69x0,514x0,15	2,24x0,583x0,15	2,82x0,65x0,15

FOR HOME USE



■ STD 125 KG



GREY
MODEL 3-8

BLACK
MODEL 4-6

■ AVAILABLE

25

STD 125 - HOME

STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for **work in households**
- Sturdy ladder construction made of powder-coated steel
- Models STD 3-8 powder coated - grey colour
- Models STD 4-6 powder coated - black colour
- Safe 0,60 [m] headband
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Notched and welded steps!
- Special plastic feet ensure work stability
- Load capacity **max. 125 kg**



STD 125 KG	NUMBER OF STEPS	3	4	5	6	7	8
	A [m] WORKING HEIGHT	2,58	2,75	3,00	3,20	3,46	3,68
	B [m] PLATFORM HEIGHT	0,58	0,75	1,00	1,20	1,46	1,68
	C [m] LADDER WIDTH	0,40	0,43	0,46	0,49	0,52	0,55
	D [m] LADDER LENGTH	1,25	1,49	1,73	1,97	2,19	2,43
	G [m] LADDER THICKNESS	0,08	0,08	0,08	0,08	0,08	0,08
	WEIGHT [kg]	4,10	4,90	6,10	7,50	8,80	10,8
	DxCxG [m] PACKAGE	1,25x0,4x0,08	1,49x0,43x0,08	1,73x0,46x0,08	1,97x0,49x0,08	2,19x0,52x0,08	2,43x0,55x0,08

SINGLE-SIDED ACCESS LADDERS

FOR HOME USE

NEW

ONLY 50 MM
THICK WHEN
FOLDED

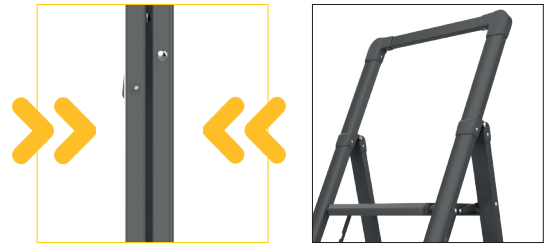

NORM
EN 14183
PROFESSIONAL USE

CREAM
MODEL 2-4

BLACK
MODEL 2-4

■ AVAILABLE

26

■ SLIM 3 WITH HANDRAIL 150 KG

STEP STOOL SLIM WITH HANDRAIL


150 KG - HOME

STEEL SINGLE-SIDED ACCESS LADDER

- Sturdy ladder construction made of powder-coated steel
- Ideal for home and office use
- Large steel platform with embossed anti-slip surface, measuring 320 × 210 mm
- Wide, notched steps
- Two-component anti-slip feet
- Safe headband
- Folded ladder thickness: 50 mm
- Load capacity **max. 150 kg**
- Quality **EN 14183**

SLIM WITH HANDRAIL 150 KG		NUMBER OF STEPS		2	3	4
	A [m] WORKING HEIGHT			2,44	2,66	2,88
	B [m] PLATFORM HEIGHT			0,44	0,66	0,88
	C [m] LADDER WIDTH			0,44	0,44	0,44
	D [m] LADDER LENGTH			0,95	1,19	1,43
	G [m] LADDER THICKNESS			0,05	0,05	0,05
	WEIGHT [kg]			4,86	6,38	7,27
	DxCxG [m] PACKAGE			0,95x0,44x0,05	1,19x0,44x0,05	1,43x0,44x0,05

FOR HOME USE



ONLY 50 MM
THICK WHEN
FOLDED

NEW



CREAM
MODEL 2-3

BLACK
MODEL 2-3

NORM
EN 14183
PROFESSIONAL USE

■ AVAILABLE



■ SLIM 3 150 KG

27

STEP STOOL SLIM 150 KG - HOME

STEEL SINGLE-SIDED ACCESS LADDER

- Sturdy ladder construction made of powder-coated steel
- Ideal for home and office use
- Large steel platform with embossed anti-slip surface, measuring 320 × 210 mm
- Wide, notched steps
- Two-component anti-slip feet
- Folded ladder thickness: 50 mm
- Load capacity max. 150 kg
- Quality EN 14183

SLIM 150 KG	NUMBER OF STEPS	2	3
	A [m] WORKING HEIGHT	2,44	2,66
	B [m] PLATFORM HEIGHT	0,44	0,66
	C [m] LADDER WIDTH	0,44	0,44
	D [m] LADDER LENGTH	0,69	0,93
	G [m] LADDER THICKNESS	0,05	0,05
	WEIGHT [kg]	4,18	4,66
	DxCxG [m] PACKAGE	0,69x0,44x0,05	0,93x0,44x0,05

SINGLE-SIDED ACCESS LADDERS

FOR HOME USE



■ MINIFERO 2 150 KG



■ MINIFERO 3 150 KG

NORM
EN 14183
PROFESSIONAL USE



www.tuv.com
ID: 1111293938

28

MINIFERO 150KG - PRO

STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Sturdy ladder construction made of powder-coated steel
- Steel working platform with a specially embossed surface guarantees safe work
- Wide, notched steps
- Special plastic feet ensure work stability
- Safe headband
- Load capacity **max. 150 kg**
- Quality **EN 14183**
- Certified by TÜV Rheinland GS

MINIFERO 150 KG	NUMBER OF STEPS	2	3
	A [m] WORKING HEIGHT	2,47	2,70
	B [m] PLATFORM HEIGHT	0,47	0,70
	C [m] LADDER WIDTH	0,47	0,47
	D [m] LADDER LENGTH	0,90	1,16
	G [m] LADDER THICKNESS	0,05	0,05
	WEIGHT [kg]	4,00	5,60
	DXCXG [m] PACKAGE	0,90x0,47x0,05	1,16x0,47x0,05

FOR HOME USE



NORM
EN 14183
PROFESSIONAL USE



■ KS 3 150KG



■ KS 2 150 KG

29

KS 150 KG - HOME

STEEL HOUSEHOLD SINGLE-SIDED ACCESS LADDER

- Dedicated for **work in households**
- Sturdy ladder construction made of powder-coated steel
- Wide steps 0,31 x 0,205 [m] with anti-slip coating
- Special plastic feet ensure work stability
- Comfortable headband
- Load capacity **max. 150 kg**
- Quality **EN 14183**

KS 125 KG	NUMBER OF STEPS	2	3
	A [m] WORKING HEIGHT	2,46	2,69
	B [m] PLATFORM HEIGHT	0,46	0,69
	C [m] LADDER WIDTH	0,47	0,47
	D [m] LADDER LENGTH	1,16	1,40
	G [m] LADDER THICKNESS	0,15	0,15
	WEIGHT [kg]	5,00	7,00
	DxCxG [m] PACKAGE	1,16x0,47x0,15	1,40x0,47x0,15

SINGLE-SIDED ACCESS LADDERS

FOR HOME USE



ST TW 1 150 KG



ST TW 2 150 KG




NORM
EN 14183
PROFESSIONAL USE

ST TW 150 KG - HOME

STEEL HOUSEHOLD SINGLE-SIDED ACCESS STEP STOOL


- Dedicated for everyday **work in households**
- Sturdy ladder construction made of powder-coated steel
- Steel steps with a special surface abtbi-slip guarantees safe work
- Special plastic feet ensure work stability
- Load capacity **max. 150 kg**
- Quality **EN 14183**

ST TW 150 KG	NUMBER OF STEPS	1	2
 MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	-	-
	B [m] PLATFORM HEIGHT	0,25	0,46
	C [m] LADDER WIDTH	0,37	0,37
	D [m] LADDER LENGTH	0,27	0,46
	G [m] LADDER THICKNESS	0,29	0,50
	WEIGHT [kg]	1,65	3,10
	DxCxG [m] PACKAGE	0,27x0,37x0,29	0,46x0,37x0,50

FOR PROFESSIONALS



■ HOP UP 60x60

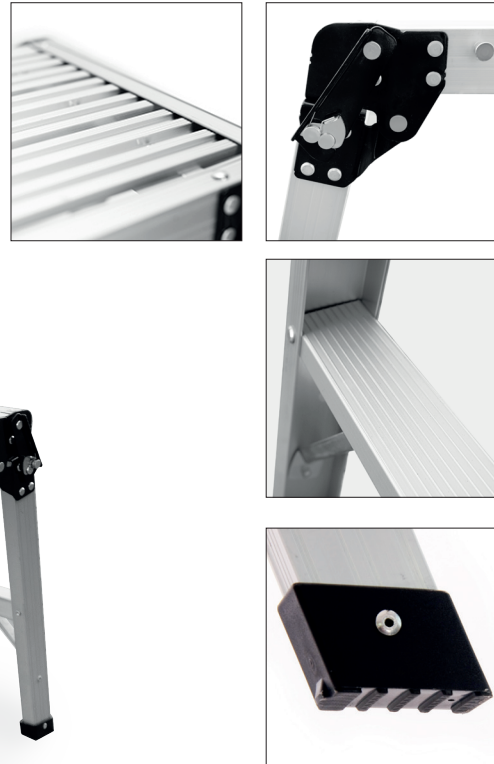

31

PLATFORM HOP UP - PRO ALUMINUM AND STEEL

- Sturdy construction made of aluminum and steel
- Comfortable work platform available in 3 sizes
- Ideal for low-level work
- A large, ribbed platform and a wide step provide stable access from both sides.
- Special, **non-slip feet**
- Safety hooks to provide security
- Load capacity **max. 150 kg**

HOP UP 150 KG		30x60	30x100	60x60
	A [m] WORKING HEIGHT	2,51	2,51	2,51
	B [m] MAXIMUM ENTRANCE HEIGHT	0,51	0,51	0,51
	C [m] LADDER WIDTH	0,42	0,42	0,63
	D [m] LADDER LENGTH	0,67	1,05	0,71
	G [m] LADDER THICKNESS	0,14	0,14	0,17
	WEIGHT [kg]	3,60	4,00	6,00
	DxCxG [m] PACKAGE	0,67x0,41x0,14	1,05x0,41x0,14	0,71x0,63x0,16



DOUBLE-SIDED ACCESS LADDERS



DOUBLE-SIDED ACCESS LADDERS

FOR HOME USE



DD 6 125 KG

34

DD 125 KG - HOME

ALUMINUM HOUSEHOLD DOUBLE-SIDED ACCESS LADDER

- Dedicated for everyday **work in households**
- Sturdy ladder construction made of durable aluminum
- Light, compact and easy to store
- Convenient work platform 0,16 x 0,34 [m]
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Additional securing belts to prevent sliding
- Load capacity **max. 125 kg**

DD 125 KG	NUMBER OF STEPS	2x2	2x3	2x4	2x5	2x6	2x7	2x8
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	2,38	2,20	2,41	2,62	2,83	3,04	3,26
	B [m] PLATFORM HEIGHT	0,38	0,60	0,81	1,02	1,23	1,44	1,66
	C [m] LADDER WIDTH	0,39	0,41	0,44	0,46	0,48	0,51	0,53
	D [m] LADDER LENGTH	0,41	0,63	0,87	1,10	1,33	1,56	1,79
	G [m] LADDER THICKNESS	0,20	0,16	0,16	0,16	0,16	0,16	0,16
	WEIGHT [kg]	1,50	1,80	2,40	3,10	3,90	4,50	6,10
	DxCxG [m] PACKAGE	0,41x0,39x0,16	0,63x0,41x0,16	1,10x0,46x0,16	1,10x0,46x0,16	1,33x0,48x0,16	1,56x0,51x0,16	1,79x0,53x0,16

FOR PROFESSIONALS

DD 2x3 - 2x8



DD 2x2



DD 2x7 150 KG

*Working platform
Models : 2x2 - 2x4



Working platform
Models : 2x5 - 2x8



35

DD 150 KG - PRO

ALUMINUM HOUSEHOLD DOUBLE-SIDED ACCESS LADDER

- Dedicated for work in **households, office and warehouse** spaces as well as occasional renovations
- Solid ladder construction made of durable aluminum
- Light, compact, easy to store
- Convenient work platform* 0,20 x 0,345 [m]/ 0,16 x 0,34 [m]
- Additional securing belts to prevent sliding
- Notched steps riveted and secured with yellow plastic covers
- Non-slip feet, screwed to the profile
- Load capacity **max. 150 kg**
- Quality **EN 131/EN 14183**
- Certified by **TÜV SÜD GS**

DD 150 KG	NUMBER OF STEPS	2x2	2x3	2x4	2x5	2x6	2x7	2x8
	A [m] WORKING HEIGHT	2,38	2,20	2,41	2,62	2,83	3,04	3,26
	B [m] PLATFORM HEIGHT	0,38	0,60	0,81	1,02	1,23	1,44	1,66
	C [m] LADDER WIDTH	0,39	0,41	0,44	0,46	0,48	0,51	0,53
	D [m] LADDER LENGTH	0,41	0,63	0,87	1,10	1,33	1,56	1,79
	E [m] LADDER THICKNESS	0,20	0,20	0,20	0,16	0,16	0,16	0,16
	WEIGHT [kg]	1,70	2,40	3,20	4,20	4,90	5,80	6,80
	DxCxG [m] PACKAGE	0,41x0,39x0,16	0,63x0,41x0,16	1,10x0,46x0,16	1,10x0,46x0,16	1,33x0,48x0,16	1,56x0,51x0,16	1,79x0,53x0,16

DOUBLE-SIDED ACCESS LADDERS

FOR PROFESSIONALS



36

NORM
EN 131
PROFESSIONAL USE




■ DREW 2x7 150 KG

DREW 150 KG - PRO

WOODEN DOUBLE-SIDED ACCESS LADDER

- Wooden ladder can be used for painting or a variety of other works carried out around the house and in the garden
- Additional elements of the ladder are made of galvanized steel, including a hook mounted at the top of the ladder and reinforcing bars
- Made of impregnated **pine wood**
- Load capacity **max. 150 kg**
- Quality **EN 131**

DREW 150 KG		NUMBER OF RUNGS					
		2x3	2x4	2x5	2x6	2x7	
 MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A [m] WORKING HEIGHT	2,40	2,70	3,00	3,30	3,60	
	B [m] MAXIMUM ENTRANCE HEIGHT	0,30	0,59	0,88	1,17	1,46	
	C [m] LADDER WIDTH	0,45	0,49	0,53	0,57	0,61	
	D [m] LADDER LENGTH	0,95	1,24	1,53	1,82	2,11	
	G [m] LADDER THICKNESS	0,13	0,13	0,13	0,13	0,13	
	WEIGHT [kg]	5,00	6,00	7,00	8,50	10,00	
	DxCxG [m] PACKAGE	0,95x0,45x0,13	1,24x0,49x0,13	1,53x0,53x0,13	1,82x0,57x0,13	2,11x0,61x0,13	





TELESCOPIC LADDERS



TELESCOPIC LADDERS

FOR HOME USE



40



■ TELESCOPIC 11 HOME 125 KG



TELESCOPIC LADDER 125 KG - HOME

TELESCOPIC LADDER

- Dedicated for everyday work in household
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- Indicators show the locking of individual rungs at the required height
- Dedicated for everyday work in household
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- Indicators show the locking of individual rungs at the required height

TELESCOPIC 125 KG		NUMBER OF RUNGS			
			9	11	13
		A [m] WORKING HEIGHT	3,70	4,30	4,90
		B1 [m] OPENED LADDER LENGTH	2,60	3,20	3,80
		B2 [m] CLOSED LADDER LENGTH	0,88	0,97	1,07
		C [m] LADDER WIDTH	0,47	0,47	0,48
		G [m] LADDER THICKNESS	0,07	0,08	0,09
		WEIGHT[kg]	6,50	8,30	10,5
		B2xCxG [m] PACKAGE	0,88x0,47x0,07	0,97x0,47x0,08	1,07x0,48x0,09

FOR PROFESSIONALS



„SOFT CLOSE”



NORM
EN 131
PROFESSIONAL USE



Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 1111289997



■ TELESCOPIC 11 MAX 150 KG



41

TELESCOPIC LADDER 150 KG - MAX

TELESCOPIC LADDER

- Telescopic ladder is a perfect work tool for specialists looking for the **highest standards of safety and durability**
- Adjustable ladder height allows customization to individual needs
- **Compact, lightweight**, and convenient for transport and storage
- **Indicators show the locking** of individual rungs at the required height
- The highest rung that can be used on the ladder is marked with a yellow color
- **Automatic locking system**
- **Wide and anti-slip feet**
- Additional stabilizer for models 11 and 13
- Made of high-quality aluminum
- Includes a handle underneath steps for easier transportation
- Equipped with a safety belt
- **Quality EN 131**
- Load capacity **max. 150 kg**

TELESCOPIC 150 KG	NUMBER OF RUNGS	9	11	13
	A [m] WORKING HEIGHT	3,37	3,99	4,55
	B1 [m] OPENED LADDER LENGTH	2,63	3,27	3,81
	B2 [m] CLOSED LADDER LENGTH	0,72	0,80	0,91
	C [m] LADDER WIDTH	0,49	0,80	0,88
	G [m] LADDER THICKNESS	0,10	0,10	0,11
	WEIGHT[kg]	8,50	11,30	14,50
	B2xCxG [m] PACKAGE	0,76x0,52x0,10	0,84x0,55x0,10	0,91x0,55x0,11



INDUSTRIAL LEANING LADDERS



FOR PROFESSIONALS

44



DP PRO 12 150 KG



NORM
EN 131
PROFESSIONAL USE



Zatwierdzony
typ
Bezpieczeństwo
Produkcja
kontrolowana

www.tuv.com
ID: 0000087808

DP 150 KG - PRO

- Professional leaning ladder PRO, used by thousands of specialists servicing appliances, doing maintenance and finishing interiors
- Models from 12 to 18 steps have an **additional stabilizer**
- Completed with **non-slip feet** that protect against ladder sliding
- Load capacity **max. 150 kg**
- The rungs are grooved to ensure safety, attached to the profile with a strong pressing system, models 5-14 rungs of the 25x25 [mm] profile, models 15-18 rungs of the 28x28 [mm] profile
- Quality **EN 131**
- Certified by **TÜV Rheinland**

[illegible]





TWO-ELEMENT LADDERS



TWO-ELEMENT LADDERS

FOR PROFESSIONALS

48



■ DW 2X13 PRO 150 KG



NORM
EN 131
PROFESSIONAL USE



DW 2 150 KG - PRO

INDUSTRIAL ALUMINUM LADDER

- Professional **two-element ladder** PRO is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer mounted only with screws! Profile 60x20 [mm]
- Rungs with a **28x28 [mm]** profile have **grooves**, attached to the profile with a strong **pressing system**
- Clamp-on **anti-slip feet** and bumpers make it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DW 2 150 KG	NUMBER OF RUNGS	2x7	2x9	2x11
	A1 [m] WORKING HEIGHT	3,22	3,72	4,23
	A2 [m] WORKING HEIGHT	4,25	5,02	5,78
	B1 [m] LADDER LENGTH	1,94	2,46	2,98
	B2 [m] LADDER LENGTH	3,00	3,79	4,58
	C [m] LADDER WIDTH	0,46	0,46	0,46
	G [m] LADDER THICKNESS	0,11	0,12	0,14
	WEIGHT [kg]	7,20	9,00	11,20





THREE-ELEMENT LADDERS



THREE-ELEMENT LADDERS

FOR HOME USE



52

NORM
EN 131
NON PROFESSIONAL USE



■ DW HOME 3x9 150 KG

DW 3 150 KG - HOME

ALUMINUM LADDER FOR HOME

- **Three-element ladder HOME** is an excellent tool for home DIY enthusiasts
- **Stabilizer** mounted only with screws!
- Rungs with a **25x25 [mm]** profile have grooves, attached to the profile with a strong pressing system
- Solid hooks and automatic lock
- Black clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV SÜD GS**


DW3 150 KG	NUMBER OF RUNGS	3x6	3x7	3x8	3x9	3x10	3x11
	A1 [m] WORKING HEIGHT	3,17	3,42	3,94	4,49	4,44	5,26
	A2 [m] WORKING HEIGHT	3,98	4,23	4,97	5,47	5,72	6,55
	B1 [m] LADDER LENGTH	1,65	1,90	2,20	2,46	2,70	2,99
	B2 [m] LADDER LENGTH	2,97	3,25	4,02	4,54	4,80	5,64
	C [m] LADDER WIDTH	0,46	0,46	0,45	0,46	0,45	0,46
	G [m] LADDER THICKNESS	0,13	0,13	0,16	0,16	0,16	0,18
	WEIGHT [kg]	8,00	9,10	11,00	12,50	13,50	15,10

MEASUREMENTS & WEIGHTS MAY VARY +/-5%

FOR PROFESSIONALS



■ DW 3x9 PRO 150 KG



NORM
EN 131
PROFESSIONAL USE



53

DW 3 150 KG - PRO

INDUSTRIAL ALUMINUM LADDER


- Professional **three-element ladder** PRO is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer** mounted only with screws!
- Rungs with a **28x28 [mm]** profile have **grooves**, attached to the profile with a strong pressing system
- Possibility of using the ladder on stairs!* (See page 77)
- Clamp-on anti-slip feet
- The guides makes it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity **max. 150 kg**
- Quality **EN 131**
- Certified by **TÜV Rheinland**

DW 3 150 KG	NUMBER OF RUNGS	3x6	3x7	3x8	3x9	3x10	3x11	3x12	3x13	3x14	3x15	3x16
	A1 [m] WORKING HEIGHT	3,40	3,75	4,00	4,51	5,01	5,01	6,04	6,56	7,06	7,58	8,08
	A2 [m] LADDER LENGTH	4,43	5,05	5,05	5,83	6,31	6,31	8,09	8,61	9,62	10,39	10,83
	B1 [m] LADDER LENGTH	1,68	1,95	2,20	2,46	2,72	2,98	3,25	3,52	3,78	4,05	4,31
	B2 [m] LADDER LENGTH	3,45	4,09	4,09	4,90	5,39	5,39	7,24	7,77	8,82	9,62	10,07
	C [m] LADDER WIDTH	0,45	0,45	0,45	0,45	0,45	0,45	0,48	0,48	0,48	0,48	0,48
	G [m] LADDER THICKNESS	0,155	0,155	0,155	0,155	0,175	0,175	0,19	0,19	0,22	0,22	0,22
	WEIGHT [kg]	9,10	10,20	11,50	13,00	15,10	16,40	23,00	24,60	30,00	32,00	34,00

THREE-ELEMENT LADDERS

FOR PROFESSIONALS

54



NORM
EN 131
PROFESSIONAL USE

■ DW 3 MAX 3x11 150 KG

DW3 150 KG - MAX

INDUSTRIAL ALUMINUM LADDER

- Professional **three-element ladder** MAX is a multifunctional tool for **professional and domestic use**
- Movable foot** with a large rubber non-slip surface will adapt the ladder to any type of ground - function to the ground!
- Rubber swivel casters** make it easy to unfold the ladder and protect the wall from damage
- Additional steel **bracket stiffens** the structure in the
- free-standing position increasing comfort and safety of work
- Sturdy catches, guiding profile elements, automatic locks
- Steel elements are double-protected against corrosion
- Additional stabilizer** in 3x11 and 3x13 models for the third ladder segment provides exceptional stability
- Rungs with 28x28 [mm] profile have grooves
- Load capacity **max. 150 kg**
- Manufactured in accordance with **EN 131**

DW 3 150 KG	NUMBER OF RUNGS	3x7	3x9	3x11	3x13
	A1 [m] WORKING HEIGHT	4,00	4,70	6,10	6,90
	A2 [m] WORKING HEIGHT	5,30	6,13	8,34	10,07
	B1 [m] LADDER LENGTH	2,12	2,71	3,29	3,87
	B2 [m] LADDER LENGTH	4,41	5,30	7,61	9,37
	C [m] LADDER WIDTH	0,45	0,45	0,48	0,48
	G [m] LADDER THICKNESS	0,16	0,18	0,22	0,22
	WEIGHT [kg]	13,00	16,00	25,70	33,00






UNIVERSAL LADDERS



UNIVERSAL LADDERS

FOR HOME USE



58

PLATFORM
NOT INCLUDED



■ DU 4x3 HOME 125 KG

DU 4x3 - 4x4 125 KG - HOME

ALUMINUM LADDER FOR HOME


- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **3 different configurations**
- Includes two stabilizers with profile dimensions of 62x17 [mm], completed with non-slip feet that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- The rungs are **grooved** to ensure safety, attached to the profile with strong pressing system
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Compact and easy to transport
- Load capacity **max. 125kg**

DU 4x3 HOME 125 KG		NUMBER OF RUNGS	4x3	4x4
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A1/A2/A3 [m] WORKING HEIGHT		2,97/3,53/4,39	3,50/4,05/5,20
	B1/B2/B3/B4 [m] LADDER LENGTH		1,72/2,54/3,38/0,91	2,30/3,35/4,46/1,18
	C [m] LADDER WIDTH		0,33	0,33
	G [m] LADDER THICKNESS		0,25	0,25
	WEIGHT [kg]		9,80	11,70
	B4xCxG [m] PACKAGE		0,91x0,33x0,25	1,20x0,33x0,25

FOR HOME USE



■ INCLUDED



■ DU 4x3 HOME 125 KG + PLATFORM

59

DU 4x3 125 KG + PLATFORM - HOME

ALUMINUM LADDER WITH PLATFORM FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **4 different configurations**
- Includes **two stabilizers** with profile dimensions of 62x17 [mm], completed with non-slip feet that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- **Compact** and easy to transport
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- The platform attached to the ladder consists of two steel elements, so the ladder can be used in a platform configuration*
- Load capacity **max.125kg**

DU 4X3 HOME 125 KG + PLATFORM	NUMBER OF RUNGS	4x3
	A1/A2/A3/A4 [m] WORKING HEIGHT	2,90/2,97/3,53/4,39
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,90/1,72/2,54/3,38/0,91
	C [m] LADDER WIDTH	0,33
	G [m] LADDER THICKNESS	0,25
	WEIGHT [kg]	13,20
	B5xCXG [m] PACKAGE	0,91x0,33x0,25



UNIVERSAL LADDERS

FOR HOME USE

60



■ DU 4x3 HOME 125 KG



PLATFORM
NOT INCLUDED

DU 4x3 - 4x4 125 KG - HOME


ALUMINUM AND STEEL LADDER FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **3 different configurations**
- Includes **two stabilizers** completed with **non-slip feet** that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- Made of steel and aluminum
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Compact and easy to transport
- Neat, black finish
- Load capacity **max. 125kg**

DU 4X3 -4x4 125 KG - ALUMINUM + STEEL	NUMBER OF RUNGS	4x3	4x4
	A1/A2/A3 [m] WORKING HEIGHT	2,97/3,53/4,19	3,50/4,30/5,34
	B1/B2/B3/B4 [m] LADDER LENGTH	1,72/2,54/3,37/0,90	2,26/3,37/4,45/1,16
	C [m] LADDER WIDTH	0,33	0,33
	G [m] LADDER THICKNESS	0,24	0,24
	WEIGHT [kg]	10,60	16,00
	B4xCxG [m] PACKAGE	0,90x0,33x0,25	1,16x0,33x0,24

FOR HOME USE

INCLUDED



DU 4x3 HOME 125 KG + PLATFORM

61

DU 4x3 125 KG + PLATFORM - HOME

ALUMINUM AND STEEL LADDER WITH PLATFORM FOR HOME

- The universal ladder HOME is dedicated for everyday **work in households**
- Adapted to use in **4 different configurations**
- Includes two stabilizers completed with **non-slip feet** that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- Compact and easy to transport
- Made of aluminum and steel
- The platform attached to the ladder consists of two steel elements, so the ladder can be used in a platform configuration*
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Neat, black finish
- Load capacity **max.125kg**

DU 4X3 125 KG + PODEST - ALUMINUM+ STEEL		NUMBER OF RUNGS	4x3
		A1/A2/A3 [m] WORKING HEIGHT	2,89/2,97/3,53/4,19
		B1/B2/B3/B4 [m] LADDER LENGTH	0,89/1,72/2,54/3,37/0,90
		C [m] LADDER WIDTH	0,33
		G [m] LADDER THICKNESS	0,24
		WEIGHT [kg]	13,90
		B4xCxG [m] PACKAGE	0,90x0,33x0,25


UNIVERSAL LADDERS FOR PROFESSIONALS

NEW

62



■ DU 4x3 150 KG + PODEST



NORM

EN 131-4

PROFESSIONAL USE

DU 4x3 150 KG + PLATFORM - PRO

ALUMINUM AND STEEL LADDER FOR HOME

- Adapted to use in **4 different configurations**
- Includes two stabilizers completed with **non-slip feet** that protect against ladder sliding. Feet are pressed to the stabilizer profile, and the stabilizer is attached to the ladder using self-locking screws with nuts
- Compact and easy to transport
- Made of aluminum and steel
- The rungs are grooved to ensure safety, attached to the profile with **strong pressing system**
- The locking mechanism of the joints in the selected position is reliable, featuring a system of **self-locking hinges**, which make the ladder easy to operate
- Load capacity **max. 150 kg**
- Quality **EN 131-4**

DU 4x3 150 KG + PLATFORM- AL+ ST		NUMBER OF RUNGS	4x3
	A1/A2/A3/A4 [m] WORKING HEIGHT	2,89/2,99/3,52/4,19	
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,86/1,73/2,55/3,37/0,90	
	C [m] LADDER WIDTH	0,33	
	G [m] LADDER THICKNESS	0,24	
	WEIGHT [kg]	17,30	
	B5xCXG [m] PACKAGE	0,90x0,33x0,25	

FOR HOME USE



■ DU 4x3 150 KG HOME




PLATFORM
NOT INCLUDED

DU 4X3 150 KG - HOME


ALUMINUM MULTI-PURPOSE LADDER 4X3

- An aluminum multi-purpose ladder HOME is an excellent tool for home **DIY enthusiasts**
- Adapted to use in **3 different configurations**
- **Two stabilizers**
- The rungs of the 28x28 [mm] profile are grooved to ensure safety, attached to the profile with a strong **pressing system**
- Black non-slip feet in the stabilizer protect against ladder shifts
- Platform - not included (additional option)
- Load capacity **max. 150 kg**

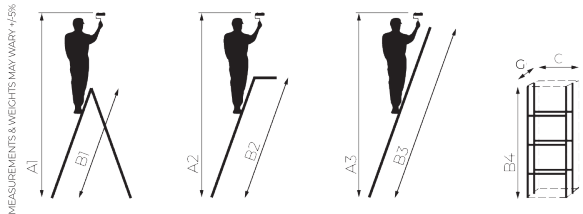DU 4X3 150 KG	NUMBER OF RUNGS	4x3
 MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A1/A2/A3 [m] WORKING HEIGHT	3,06/3,54/4,34
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	1,80/2,60/3,45/0,95
	C [m] LADDER WIDTH	0,33
	G [m] LADDER THICKNESS	0,25
	S [M] STABILIZER	0,70 - 2 pcs.
	WEIGHT [kg]	11,90
	B5xCxG [m] PACKAGE	0,95x0,33x0,25

UNIVERSAL LADDERS

FOR PROFESSIONALS



64

■ DU 4x3 PRO 150 KG

NORM
EN 131-4
PROFESSIONAL USE



DU 4X3 150 KG +PLATFORM - PRO

ALUMINUM MULTI-PURPOSE LADDER 4X3 WITH PLATFORM

- An aluminum multi-purpose ladder PRO is an excellent tool for DIY enthusiasts and professionals
- Two stabilizers
- The rungs of the 28x28 [mm] profile are grooved to ensure safety, attached to the profile with a strong pressing system
- Black non-slip feet in the stabilizer protect against ladder shifts
- Steel platform
- Load capacity **max. 150 kg**
- Quality **EN 131 - 4**
- Certified by **TÜV SÜD GS**

DU 4X3 150 KG	NUMBER OF RUNGS	4x3
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A1/A2/A3/A4 [m] WORKING HEIGHT	2,90/3,06/3,54/4,34
	B1/B2/B3/B4/B5 [m] LADDER LENGTH	0,90/1,80/2,60/3,45/0,95
	C [m] LADDER WIDTH	0,33
	G [m] LADDER THICKNESS	0,25
	S [M] STABILIZER	0,70 - 2 pcs.
	WEIGHT [kg]	15,30
	B5xCxG [m] PACKAGE	0,95x0,33x0,25





LADDER SCAFFOLDING





LADDER SCAFFOLDING

FOR HOME USE

68



■ ARD 2x8 HOME 150 KG



■ 3w1!

NORM
EN 131
NON PROFESSIONAL USE

ARD 150KG - HOME

ALUMINUM SCAFFOLDING



- Dedicated for **work in households**
- Solid scaffolding structure made of aluminum
- Wide **working platform 1,14 x 0,34 [m]**, a special surface of the platform ensures stability and safety during work
- **25x25 [mm] grooved** rungs pressed to the profile
- **Stabilizer** with a lenght 0,90 [m]
- **Special non-slip feet** ensure the highest safety standard
- **3in1:** scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ARD 150 KG	NUMBER OF RUNGS	ARD HOME 2x6	ARD HOME 2x7	ARD HOME 2x8
	A1/A2/A3 [m] WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m] LADDER LENGTH	1,61	1,87	2,14
	B2 [m] LADDER LENGTH	2,67	3,20	3,73
	C [m] LADDER WIDTH	0,46	0,46	0,46
	E [m] WIDTH	0,89	1,14	1,14
	S [m] STABILIZER	0,90	0,90	0,90
	WEIGHT [kg]	11,00	12,00	13,00

FOR PROFESSIONALS



■ ARD 2x8 PRO 150 KG



■ 3w1!



69

ARD 150KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING



- Solid scaffolding structure made of aluminum
- Wide **working platform 1,50 x 0,46 [m]**, special surface of the platform ensures stability and safety during work
- **28x28 [mm] grooved** rungs pressed to the profile
- **Stabilizer** with a dimension 1,10 [m]
- Special **non-slip feet** ensure the highest safety standard
- **3in1**: scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

ARD 150 KG	NUMBER OF RUNGS	ARD PRO 2x6	ARD PRO 2x7	ARD PRO 2x8
	A1/A2/A3 [m] WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m] LADDER LENGTH	1,61	1,87	2,14
	B2 [m] LADDER LENGTH	2,67	3,20	3,73
	C [m] LADDER WIDTH	0,58	0,58	0,58
	E [m] WIDTH	1,50	1,50	1,50
	S [m] STABILIZER	1,10	1,10	1,10
	WEIGHT [kg]	16,00	17,00	18,00

LADDER SCAFFOLDING

FOR PROFESSIONALS

70



■ INCLUDED



NORM
EN 131
PROFESSIONAL USE

IKAR 150 KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- IKAR aluminum ladder scaffolding is a **mobile structure** for the construction industry
- Wide **working platform 1,30 x 0,60 [m]**
- 28x28 [mm] grooved** rungs pressed to the profile
- Special joints facilitate the assembly of the structure
- Stabilizer with a dimension 1,10 [m]
- Strong plastic wheels
- 3in1:** scaffolding, leaning ladder, free-standing ladder!
- Load capacity **max. 150 kg**
- Quality **EN 131**

IKAR 150 KG	NUMBER OF RUNGS	IKAR V1	IKAR V2	
MEASUREMENTS & WEIGHTS MAY VARY ±5%	A1 [m] WORKING HEIGHT	4,00	A2 3,14	
	B1[m] LADDER LENGTH	3,00	B2 3,00	
	C [m] LADDER WIDTH	0,50		
	E [m] WIDTH	1,50		
	S [m] STABILIZER	1,10		
	WEIGHT [KG]	27,0		
	PACKAGE [m]	0,50x0,32x1,65		


FOR PROFESSIONALS



NORM
EN 1004
PROFESSIONAL USE



■ HECTOR



■ W ZESTAWIE

71

HECTOR 150 KG - PRO


PROFESSIONAL ALUMINUM SCAFFOLDING

- HECTOR aluminum ladder scaffolding is a multi-purpose mobile structure for the construction industry
- Wide **working platform 1,34 x 0,60 [m]**
- **28x28 [mm] grooved** rungs pressed to the profile
- Wall mounting kit included!
- Side protection panels included
- Special joints facilitate the assembly of the structure
- **Stabilizer** with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall.
- Load capacity **max. 150 kg**
- Quality **EN 1004**

HECTOR 150 KG	NUMBER OF RUNGS	HECTOR	
	A1 [m] WORKING HEIGHT	4,73	
	B1[m] LADDER LENGTH	3,91	
	C [m] LADDER WIDTH	0,57	
	E [m] WIDTH	1,51	
	S [m] STABILIZER	1,31	
	WEIGHT [KG]	43,6	
	PACKAGE [m]	0,57x0,325x2,00	

LADDER SCAFFOLDING

FOR PROFESSIONALS



72

■ INCLUDED

NORM
EN 131
PROFESSIONAL USE



■ HECTOR BASIC

HECTOR BASIC 150 KG - PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- HECTOR BASIC aluminum ladder scaffolding is a **multi-purpose mobile structure for the construction industry**
- Wide working platform 1,34 x 0,60 [m]
- **28x28 [mm] grooved rungs** pressed to the profile
- Wall mounting kit **NOT** included
- Load capacity **max. 150 kg**
- Stabilizer with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall
- Special joints facilitate the assembly of the structure
- Quality **EN 131**

HECTOR BASIC 150 KG	NUMBER OF RUNGS	HECTOR BASIC V1	HECTOR BASIC V2	
MEASUREMENTS & WEIGHTS MAY VARY +/-5%	A1 [m] WORKING HEIGHT	4,00	A2 2,80	
	B1[m] LADDER LENGTH	3,91	A2 2,00	
	C [m] LADDER WIDTH	0,57		
	E [m] WIDTH	1,51		
	S [m] STABILIZER	1,31		
	WEIGHT [KG]	40,6		
	PACKAGE [m]	0,57x0,325x2,00		






ACCESSORIES





UNIVERSAL ROOF HOOK KIT

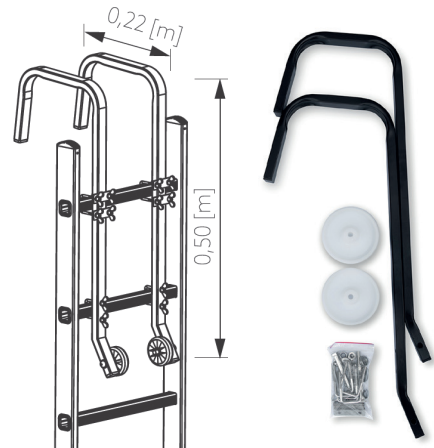

76

ROOF HOOK KIT

ROOF HOOK KIT - UNIVERSAL - FITS ALL
INDUSTRIALLADDERS

- Special hooks for working on the roof
- Powder coated, teal handle for industrial ladders
- Strong plastic wheels allow the ladder to be moved on the roof!
- Dimensions: 0,50 x 0,22 [m]
- Weight: 2,45 kg




WHEELS FOR INDUSTRIAL LADDERS

FOR ALL DRABEST LADDERS

- Plastic wheels for industrial ladders
- Wheels make it easier to set up the ladder
- Protect surfaces from scratches

BUMPER - SPACER HOLDER


- Teel handle for industrial ladders, powder coated
- Dedicated to work on the renovation of walls and cleaning gutters

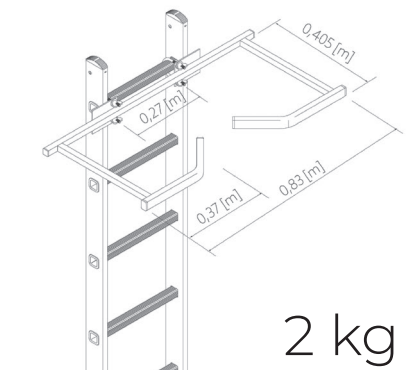

FUNCTION FOR STAIRS

FOR INDUSTRIAL LADDER

- Steel ladder locking system allowing to open a 3-piece ladder on the stairs

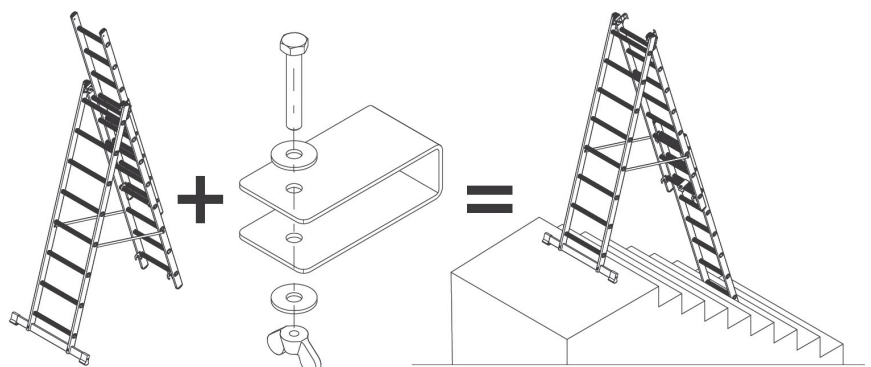

CAR ROOF RACK LADDER CLAMPS



- Roof rack for transporting a ladder on the car
- Easy to assemble!



78

UNIVERSAL WALL-WELDED HANDLE FOR STORING

- Aluminum bracket for storing the ladder on the wall
- Length 0,32 [m]! The longest handle on the market!
- For all types of ladders!

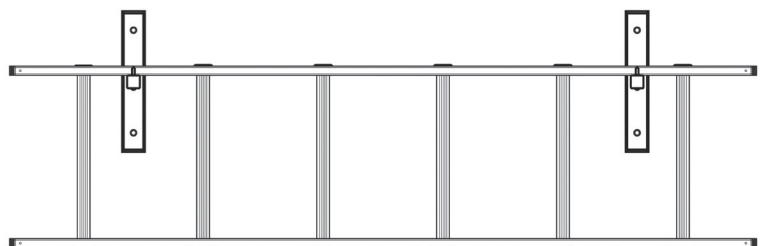




STEEL HOOK FOR THE INDUSTRIAL LADDER

- Powder coated, steel hook
- Dimensions: 0,31 x 0,05 x 0,47[m]; 0,4 kg



STEEL PLATFORM FOR THE INDUSTRIAL LADDER

- For all industrial ladders
- Powder coated steel
- Dimensions: 0,265 x 0,250 [m]; 1,5kg
- Maximum load: 150 kg

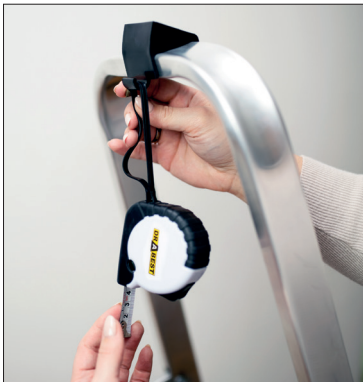

HOOK FOR THE HOUSEHOLD LADDER


- Plastic, dyed in mass
- Dimensions: 0,05 x 0,045 x 0,03 [m]
- Maximum load: 10 kg
- For ALD ladders



TOOL SHELF FOR THE HOUSEHOLD LADDER

- Plastic, dyed in mass
- Dimensions: 0,30 x 0,14 x 0,145 [m]; 0,25 kg
- Maximum load: 10 kg
- Equipped with a hook on which you can hang a container with paint






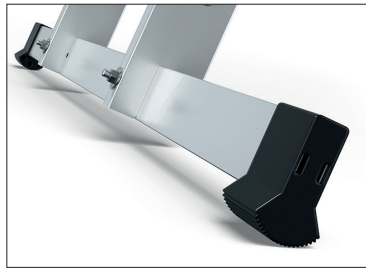

ALUMINUM STABILIZER FOR MULTI-FUNCTIONAL LADDERS

- Strong aluminum profile
- Non-slip plastic feet
- Stabilizes the ladder

Stabilizer assembly instruction
Stabilizer 980, 1100, 1200 [mm]

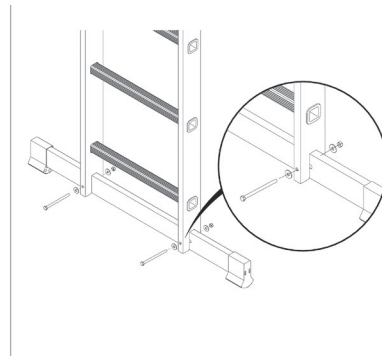


ASSEMBLY INSTRUCTION

80

STABILIZER 900 [mm]



- Profile 60x20 [mm]
- For DW3 PRO*: 3x12, 3x13, 3x14, 3x15, 3x16 *In accordance to the EN 131 standard, a leaning ladder over 3m must have a stabilizer. Stabilizer 900mm is dedicated to the third segment of the ladder used separately as a leaning ladder (not included in set)




900 [mm]

STABILIZER 980 [mm]



- Profile 40x20 [mm]
- For DW3 BASIC: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11




980 [mm]

STABILIZER 1100 [mm]



- Profile 60x20 [mm]
- For DP PRO: 1x12, 1x13, 1x14, 1x15, 1x16, 1x17, 1x18;
DW2 PRO: 2x6, 2x7, 2x8, 2x9, 2x10, 2x11;
DW3 PRO: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11




1100 [mm]

STABILIZER 1200 [mm]



- Profile 60x20 [mm]
- For DW2 PRO: 2x12, 2x13, 2x14
DW3 PRO: 3x12, 3x13, 3x14, 3x15, 3x16



1200 [mm]

NON-SLIP FEET FOR HOUSEHOLD LADDERS

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. Profile 33 x 20 [mm] - for ALD household ladders
 02. Profile 40x20 [mm] - for ALD and DD household ladders




TWO-COMPONENT FEET FOR MULTIFUNCTIONAL LADDERS

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. Profile 50 x 20 [mm]
 02. Profile 60 x 20 [mm]
 03. Profile 70 x 20 [mm]
 04. Profile 82 x 25 [mm]
 05. Profile 95 x 25 [mm]



NON-SLIP FEET FOR STABILIZER

- Solid non-slip feet ensure the stability of the ladders
- Models:
 01. For the stabilizer with a profile of 40 x 20 [mm]
 02. For the stabilizer with a profile of 60 x 20 [mm]

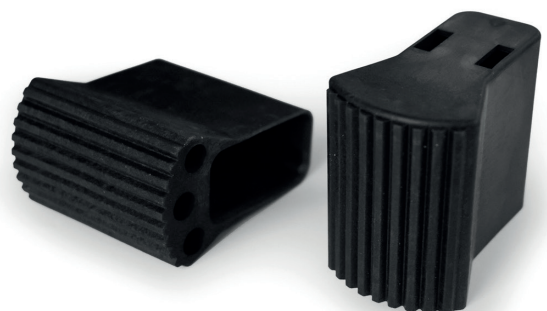



FIRE ESCAPE LADDERS



FIRE ESCAPE LADDERS


FIRE ESCAPE LADDERS

The fire escape ladders are an original system developed by the designers at Drabest, who aimed to support the construction industry in the rapidly rising structures. Ready ladder sets are dedicated to overcoming heights ranging from 3 to 10 meters, available in steel or aluminum versions to best match the ladder to the facility. Steel ladders perform well in adverse weather conditions - they are perfect for outdoor use, in large multi-family and industrial buildings. The advantage of aluminum evacuation ladders is their low weight and modern appearance, making this type of structure ideal for smaller residential buildings, both indoors and outdoors


MODULAR EVACUATION LADDERS advantages:

- High quality
- Easy installation
- Self-assembly modules
- Different sets are easily adapted to the height of the object
- Modular evacuation steel ladders made of hot-dip galvanized steel
- Modular evacuation aluminium ladders made of aluminium


84

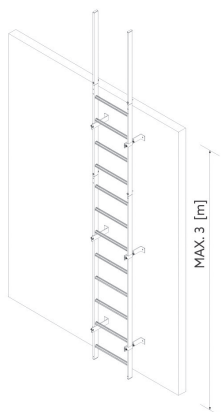


SET 1
DO 3[m]

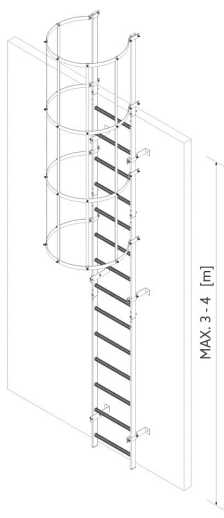


SET 2
3-4[m]

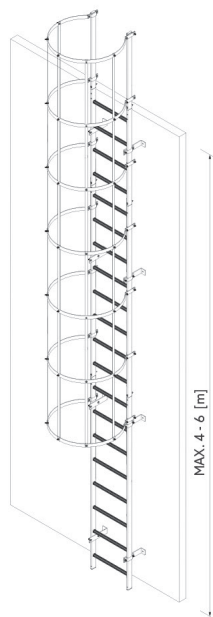

SET 3
4-6[m]

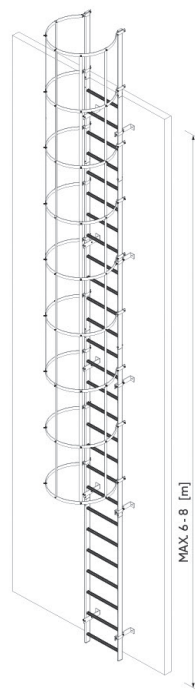

SET 4
6-8[m]

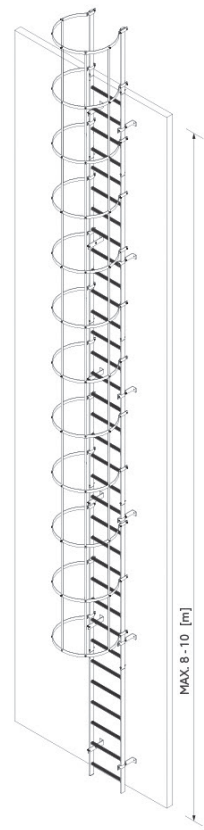


SET 5
8-10[m]

CUSTOM-MADE LADDERS

We design and manufacture individualized steel evacuation ladders tailored to the client's requirements and facility. Drabest brand evacuation ladders meet all necessary standards, possess safety and health certificates, ensuring safety and comfort during work. The vertical evacuation ladder is permanently mounted on buildings or machinery, and its primary function is to provide a fully secure means of accessing the structures to which it is attached

- 35 years of experience in the special construction industry!
- Customized construction tailored to your facility.
- On-time execution.
- Free quote - send inquiries to uslugi@drabest.pl.
- We also undertake individual steel constructions on request, such as bicycle racks or warehouse stairs.








PROFESSIONAL LADDERS MADE FOR 35 YEARS!

PROFESSIONAL LADDERS MADE FOR 35 YEARS!

Drabest was established on 15 December 1990 in Krakow by Piotr Paluch. Since then, it has been pursuing its mission to „provide people with products of the top quality for a reasonable price while ensuring safety at heights.” The company has been developing dynamically on the domestic market and conquering new foreign markets for 35 years. The successive expansion of the assortment offered to our customers and many years of experience allow us to meet the needs of every user. We currently manufacture various types of aluminium and steel structures for industrial and domestic use. Currently, the available products are: HOME - made for home use, PRO - for professional use, and the MAX line intended for professionals.

TOP QUALITY!

By choosing Drabest products you receive top-quality equipment for the work at heights, including scaffolding and ladders. Here you have the offer of one of the leading Polish companies in this industry. The extensive portfolio of the Drabest products is a perfect solution for a wide range of construction and renovation works, as well as for domestic use.

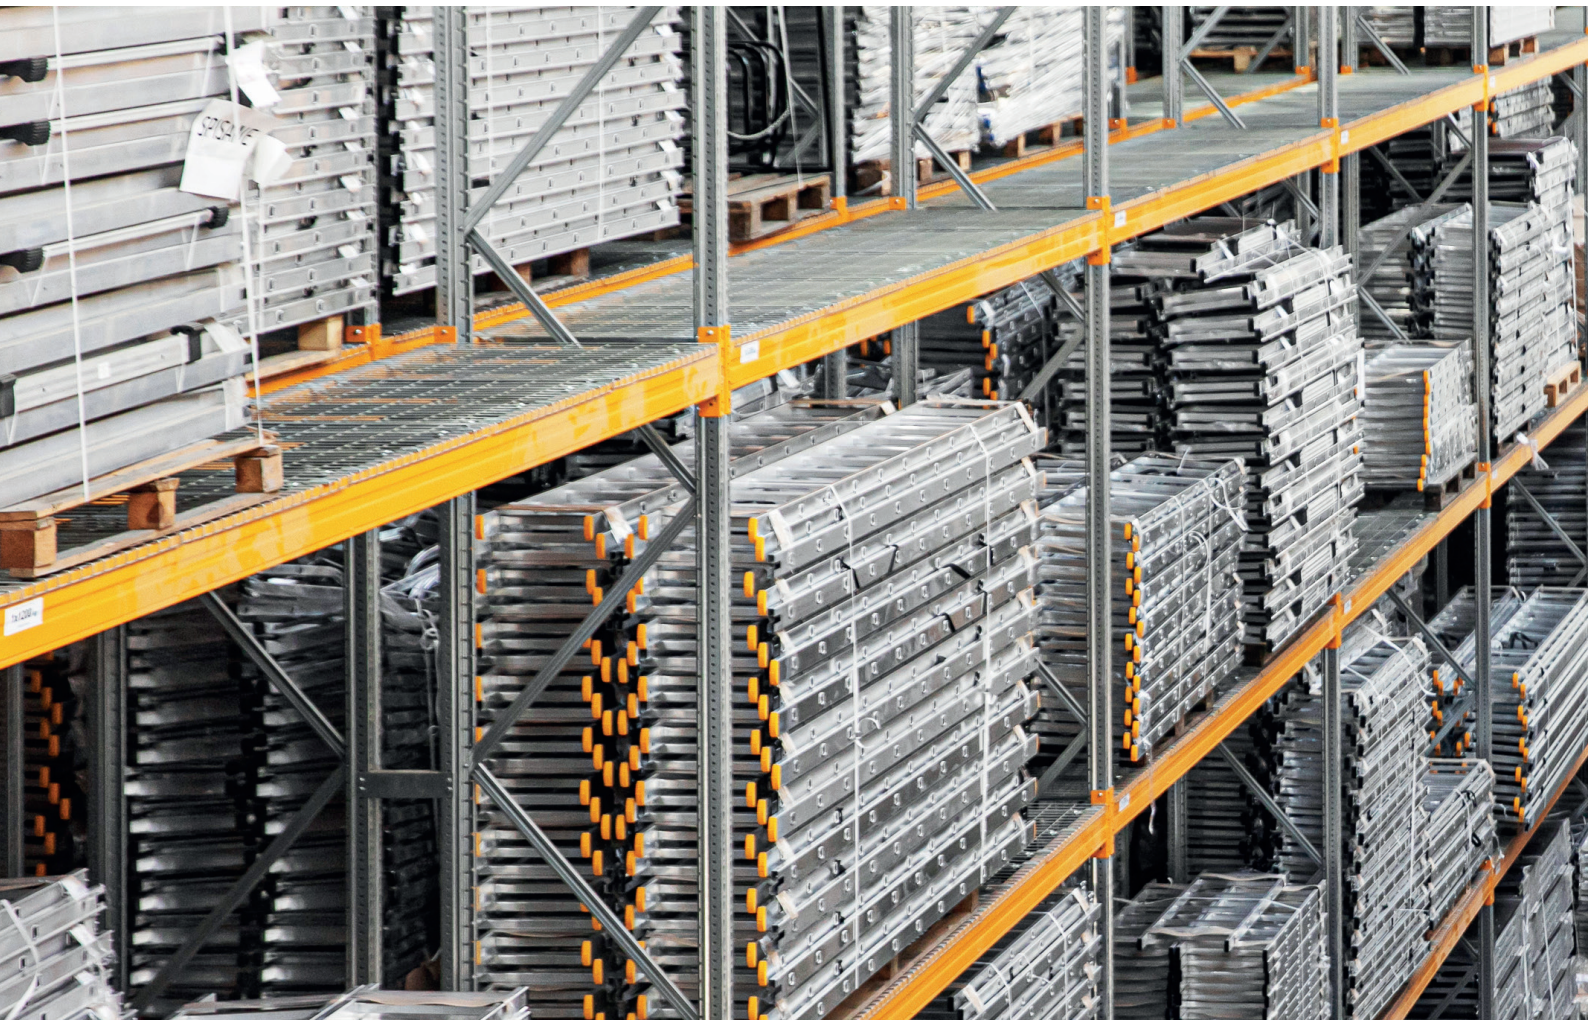



DRABEST 35 YEARS

MANUFACTURER OF LADDERS AND LADDER HOISTS

DRABEST SP. Z O.O.
ul. Pogodna 64, 32-084 Mników, Poland
DRABEST.COM

Contact us
Export@drabest.pl

