

DeFelsko®

The Measure of Quality

Coating Thickness and Inspection Instruments



Coating Thickness ♦ Environmental Conditions ♦ Surface Profile
Dust/Salt Contamination ♦ Hardness ♦ Gloss ♦ Ultrasonic Wall Thickness
Adhesion ♦ Pinhole/Holiday ♦ Oven Profile ♦ Concrete Moisture

www.defelsko.com

COATING THICKNESS

Coatings on Metals

PosiTector 6000

Coating Thickness Gages measure on all metal substrates. Select from a variety of measurement ranges and probe styles including cabled probes, microprobes, and the *Xtreme Series* for measuring on hot or rough surfaces.

All Gages Feature:

- Fast measurement speed—60+ readings per minute. Enhanced FAST mode—90+ readings per minute for quick inspection.
- Large 2.8" impact resistant color touchscreen with redesigned keypad for quick menu navigation
- Weatherproof, dustproof, and water-resistant—IP65-rated enclosure
- Ready to measure—no adjustment required for most applications
- Certificate of Calibration showing traceability to NIST or PTB included
- Continually displays/updates average, standard deviation, min/max, and number of readings while measuring
- Conforms to national and international standards including ISO and ASTM
- Includes PosiSoft suite of software for viewing and reporting data



Variety of Measurement Ranges and Probe Styles:

- Interchangeable probes can be detached and replaced with any one of our wide variety of probes
- Ferrous, Non-Ferrous, and Combination probes available as integral and/or cabled versions with a wide variety of measurement ranges and styles
- Extended cables available (up to 75 m/250 ft) for underwater or remote measuring



FNDS



Duplex Probe measures individual layer thicknesses of zinc and paint in a duplex coating system



FXS

FHXS

Xtreme Probes with Alumina wear faces and braided cables for hot/rough surfaces



FKS

Thick Probe series for thick protective coatings: epoxy, rubber, fireproofing, and more



FMS

Microprobe series for small parts and hard-to-reach areas

Select Standard or Advanced Gage Body:

Standard Models Feature:

- Storage of 1,000 readings per probe—stored readings can be viewed or downloaded

Advanced Models Feature:

- Storage of 250,000 readings from multiple probes in up to 1,000 batches and sub-batches
- 3 Scan Modes—increase measurement speed to 180+ readings per minute
- Touchscreen keyboard for quickly renaming batches, adding notes, and more
- SSPC-PA 2, ISO 19840, and IMO PSPC 90/10 modes determine if film thickness conforms to min/max specs
- Bluetooth and WiFi data transfer options
- Connect a Bluetooth barcode scanner or keyboard to instantly annotate readings and batches



Integral Probe Style



PosiTest DFT

Measures coatings on metal substrates. It is the economical choice that retains the uncompromising quality of DeFelsko coating thickness and inspection instruments.

- 2 models available:
 - PosiTest DFT Ferrous**—measures non-magnetic coatings on steel
 - PosiTest DFT Combo**—measures both non-magnetic coatings on steel AND non-conductive coatings on aluminum, brass, etc. Automatically recognizes the substrate and takes a measurement.



PosiTest PG

Paint Inspection Gage measures the thickness of one or multiple layers of coating on any rigid substrate using a proven destructive technique.

- Ideal for coatings up to 1,250 μm (50 mils) depending on cutting tip
- Powerful 50x microscope with precision optics and rotating scale in Imperial and Metric Units
- Durable anodized aluminum housing with rotating cutting tip holder

PosiTest PG

Large field of view provides a comfortable eye distance with or without glasses



COATING THICKNESS

Coatings on Steel

PosiTest®

Magnetic Pull-off Gages for the non-destructive measurement of non-magnetic coatings on steel. No batteries or electronics.



PosiPen®

Magnetic Pull-off Gage has a very small, unique magnet which can be placed with pinpoint accuracy. Ideal for measuring on small, hot, or hard to reach surfaces.



Wet Film Thickness on All Substrates

Wet Film Gages measure the thickness of paint, enamels, and other wet films quickly and accurately



Coatings on Non-Metals

PosiTector® 200

Ultrasonic Coating Thickness Gages measure up to 7,600 µm (300 mils) of protective coatings over wood, concrete, plastics, and more.

- 3 models available:
 - PosiTector 200 B**—for measuring coatings on wood, plastic, etc.
 - PosiTector 200 C**—for measuring coatings on concrete, fiberglass, etc.
 - PosiTector 200 D**—for measuring thick, soft coatings such as polyurea
- Proven non-destructive ultrasonic technique conforms to ASTM D6132 and ISO 2808
- Advanced models measure up to 3 individual layer thicknesses in a multi-layer system
- Provides a graphic readout for detailed analysis of the coating system



POWDER THICKNESS

Uncured Powder Thickness

PosiTest® PC

Powder Checker Thickness Gages affordably measure uncured powder coatings using non-contact ultrasonic technology to automatically calculate and display a predicted cured thickness. Help control powder consumption to ensure adequate coverage and reduce waste.

- Improved sensor technology allows easier measurement on small tubes, odd shapes and moving parts
- Dedicated stand-alone unit is ready to measure right out of the box
- Up to 4x faster measurement speed*—ideal for moving lines and swinging parts
- Storage of 999 readings with onscreen averaging. Stored readings can be downloaded to PosiSoft Desktop Software
- Scan Mode continuously takes measurements—ideal for analyzing large areas



Powder Inspection Kits offer complete solutions for measuring powder coating before and after cure. Each kit contains the PosiTest PC, two DeFelsko Powder Combs, and your choice of dry film thickness gage.

* Versus the previous generation PosiTector PC Powder Checker

WALL THICKNESS

PosiTector® UTG

Ultrasonic Thickness Gages measure the wall thickness of materials such as steel, plastic and more. Choose from corrosion, multiple-echo, low frequency, and precision probes.



Corrosion—PosiTector *UTG C*, PosiTector *UTG CA*, PosiTector *UTG CX*—Ideal for measuring the effects of corrosion or erosion on tanks, pipes, or any structure where access is limited to one side.

Multiple-Echo—PosiTector *UTG M*—Features Thru-Paint capability to quickly and accurately measure the metal thickness of a painted structure without having to remove the coating.

Low Frequency—PosiTector *UTG CLF*—Designed for measuring attenuative materials such as cast iron.

Precision—PosiTector *UTG P*—Designed for high resolution measurements and materials as thin as 0.125 mm (0.005").



SURFACE PROFILE

Testex®

Testex Replica Tape and Digital Micrometer measure surface profile by creating a replica of the surface which can be measured using a micrometer.

Testex Press-O-Film® Replica Tape

- Select from a wide variety of conventional and optical grade tapes

Testex Digital Micrometer

- Custom-designed to be the optimal tool for measuring replica tape
- Built-in memory for up to 250 readings with on-screen statistics
- New Averaging and Conversion modes simplify data analysis
- Fully compatible with powerful PosiSoft Software for archiving and reporting measurement data
- Traceable Certificate of Calibration is included with each digital micrometer
- Available separately or as a kit with three cartons of replica tape (Coarse, X-Coarse, X-Coarse Plus), and a High Accuracy Burnishing Tool



Testex Digital Micrometer Kit
includes everything required to measure surface profile using replica tape



High Accuracy Burnishing Tool

- Includes a spring-loaded burnishing ball exerting the perfect amount of pressure to burnish (create) a replica.

PosiTector® RTR^H

Digital Spring Micrometers measure and record surface profile parameters using Testex Press-O-Film® replica tape.

- Simply select the appropriate replica tape grade to automatically apply the appropriate conversion factor and subtract the 50 µm (2 mils) backing thickness
- Rugged indoor/outdoor instrument—ideal for field and shop use




PosiTector RTR H

PosiTector® RTR^{3D}

3D Digital Spring Micrometers use imaging sensors to measure peak height (H_L) and fourteen common 2D/3D profile parameters such as R_a, R_z, S_a, S_{pd}, and more.

- Advanced models generate high resolution Surface Data Files and 2D/3D thumbnails for detailed analysis of surface profiles



Air Needle Scaler

Shot Blast



PosiTector RTR 3D




PosiTector® SPG

Surface Profile Gages measure and record peak-to-valley surface profile height on blasted metal, concrete, and textured coatings with a depth micrometer fitted with a fine pointed probe. Includes an alumina wear face and tungsten carbide tip for long life and continuous accuracy.

- Probes available for measuring blasted steel, textured coatings, and concrete profile
- **PosiTector SPG OS** probe features a v-groove and proprietary OD mode for measuring on convex surfaces

PosiTector SPG - Integral Probe

PosiTector SPG S - Cabled Probe

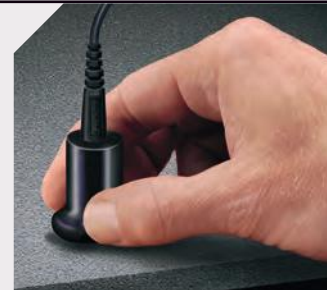


GLOSS

PosiTector® GLS

Gloss Meters measure Gloss, Reflectance, and Haze. Select up to 3 measurement angles to suit any application. Save readings into memory and transfer them to PosiSoft Software to quickly archive data and generate professional reports.

- 3 models available:
GLS 60°—suitable for most gloss applications, preferred angle for semi-gloss
GLS 20°/60°—suitable for high- to semi-gloss applications. Calculates Haze (Haze Index)
GLS 20°/60°/85°—suitable for high-, semi-, and matte-gloss applications and also calculates Haze (Haze Index)



- Automatic Diagnosis and Auto Calibration upon power-on using the protective base plate with integrated calibration standard (tile)
- 2 Powerful Scan modes for quantifying large surfaces (Advanced models only)
- Compatible with PosiSoft Software Solutions for managing measurement data and creating professional custom reports
- Store multiple calibration standards (tiles) for quick calibration adjustment



CONTAMINATION

PosiTector SST

Soluble Salt Testers measure the concentration of soluble salts (salt contamination) on metal surfaces in accordance with ISO 8502-6 and 8502-9. Features include:

- An intuitive step-by-step interface that guides users through the Bresle method with automatic computation of the surface density of salt
- Displays test duration, sample temperature, conductivity ($\mu\text{S}/\text{cm}$), and surface density (mg/m^2 or $\mu\text{g}/\text{cm}^2$)



Available with Standard or Flexible magnetic rings



Innovative PosiPatch™

A non-adhesive, flexible, and reusable patch that adheres to steel surfaces using a magnetic ring.

- No adhesive residue
- No sharps, no needles!

HARDNESS

PosiTector SHD

Shore Hardness Durometers measure the hardness of plastics, rubbers, thick coatings, and other non-metallic materials. Two models—Shore A and Shore D. Features include:

- User adjustable measurement time with on-screen countdown to conform to international standards
- Auto Ignore mode disregards hardness readings below 20 and above 90



PosiTector BHI

Barcol Hardness Impressors measure the hardness of soft metals such as aluminum, aluminum alloys, copper, brass, and other materials such as harder plastics and fiber-reinforced plastic. Comparable to 934-1 Barcol Hardness Testers, this electronic impressor offers a number of advantages over conventional analog instruments.



ENVIRONMENTAL CONDITIONS

PosiTector DPM

Dew Point Meters measure and record climatic conditions including relative humidity, air temperature, surface temperature, dew point temperature, and the difference between surface and dew point temperatures—ideal for surface preparation as required by ISO 8502-4.

- Fast response precision sensors provide accurate, repeatable readings
- Automatically records environmental parameters at user selected time intervals
- SmartTrend™ Indicators** identify rising, falling, or stable readings
- Select from integral, cabled, infrared, 1/2" NPT threads, and anemometer probes
- USB, WiFi, and Bluetooth connectivity to PosiSoft PC, Mac, and Smartphone software



PosiTector DPM
Integral Probe with Direct Contact Surface Temperature Sensor

PosiTector DPM IR
Integral Probe with Infrared Surface Temperature Sensor



PosiTector DPM A
Integral Probe with Wind Speed Sensor



PosiTector DPM D
Cabled Probe with 1/2" NPT Threads



PosiTector DPM S
Integral Probe with Cabled Surface Temperature Sensor



PosiTector DPM L Series

Dew Point Meter Loggers measure and record environmental parameters independently for up to 200 days (DPM L) or 600 days (DPM L+).

- Automatically record datasets at user-selected time intervals
- Internal memory storage of 10,000 datasets (60,000 readings)
- Connect to the PosiTector App using Bluetooth Technology to download all logged readings for review, analysis, and reporting
- Environmentally sealed enclosure—IP65 rated
- Kensington Security Slot for anti-theft protection



50 mm (2")
PosiTector DPM L



73 mm (2.87")
PosiTector DPM L+

Additional PosiTector DPM L+ Features

- Automatically upload readings to PosiSoft.net at user-specified intervals to remotely monitor environmental conditions (WiFi connection required)
- Receive email alarms when any environmental parameter exceeds user-defined limits (WiFi connection required)
- USB port to supply continuous power

PosiTector IRT

Infrared Thermometers measure surface temperature from a distance using non-contact infrared technology—ideal for applications where conventional sensors will not work, including hard to reach areas, moving parts, and objects too hot for direct contact sensors.

- Selectable emissivity levels
- Button-activated laser pointer for accurate targeting



ADHESION TESTING

PosiTest[®] AT

Pull-off Adhesion Testers measure the adhesion of coatings to metal, wood, concrete, and other rigid substrates. Featuring a revolutionary self-alignment feature and pull rate indicator. Available in Automatic (**PosiTest AT-A**) or Manual (**PosiTest AT-M**) models.

- **Automatic models** feature an impact resistant color touch screen, and the ability to record the results as Pass/Fail and the nature of fracture: cohesion, adhesion, and glue failure
- **Manual models** feature a high-contrast, easy-to-read color display, and field replaceable AAA alkaline batteries



Select from four kits:

- **20 mm kit** for higher bond strength coatings on metals
- **50 mm kit** for lower bond strength coatings on concrete, wood, and plastics
- **50 x 50 mm tile kit** for measuring the tensile strength of ceramic tile cementitious adhesives
- **50 mm C1583 kit** for measuring the tensile strength of concrete repairs and cementitious overlays

PosiTest[®] CH

Cross Hatch Testers determine a coating's ability to resist separation from a substrate when a lattice pattern is cut into the coating. Features include:

- All tools and accessories required for cross hatch testing
- Wide range of 4-in-1 cutting blades available for different Standards, coating thicknesses, and substrates. Each blade features 4 cutting edges for longer testing.
- Conforms to ISO 2409 and ASTM D3359



PINHOLE/HOLIDAY DETECTION

PosiTest[®] HHD

Optional hand-held wand accessory

High voltage Holiday Detector uses pulse DC technology to detect holidays, pinholes, and other discontinuities on metal and concrete substrates. Features include:

- User-adjustable voltage range from 0.5 to 35 kV
- Built-in certified volt meter
- Voltage calculator for conforming to 11 international standards
- Conforms to national and international standards including ISO, ASTM, and NACE

Select from a wide range of quality electrodes including rolling springs and flat wire brushes—custom sizes are available upon request.



PosiTest[®] HHD^C

High voltage Holiday Detectors use continuous DC technology in a convenient wand format to detect holidays, pinholes, and other discontinuities on metal and concrete substrates. Features include:

- User-adjustable voltage range from 0.5 to 30 kV
- Powerful Li-ion batteries fit neatly within the compact wand handle eliminating the need for a separate battery box—reducing weight and operator fatigue
- 43 cm (17") extension rod available for detection on floors and hard-to-reach areas




PosiTest[®] LPD

Low voltage Pinhole Detectors use a wet sponge to detect holidays, pinholes, and other discontinuities on metal and concrete substrates.

- 4 regulated voltage output options for coatings up to 500 µm (20 mils)
- Choose from Basic or Complete kits: Complete kits feature adaptable sponge hardware including rectangle (flat), roller, ID, and custom sponges

PosiTest HHD Verifier standalone voltmeter (crest meter, jeep meter) for verifying the accuracy and operation of pulse type and DC holiday detectors

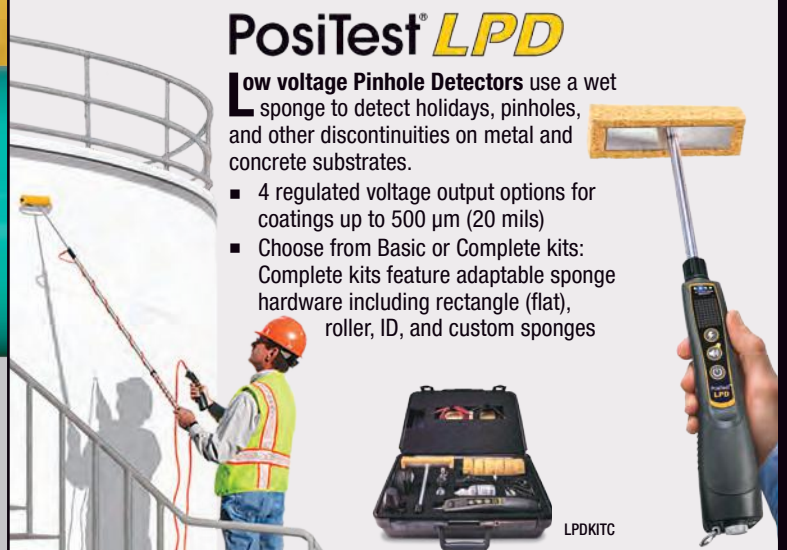

LPDKITC

CONCRETE MOISTURE

PosiTest[®] CMM

Concrete Moisture Meters non-destructively measure the moisture conditions in concrete slabs in accordance with ASTM F2659.

- Easy-to-read digital display takes the guesswork out of analog scales
- Storage of 200 readings—stored readings can be viewed or downloaded
- Innovative Hold Max and Save mode waits for the reading to stabilize, then automatically saves it into memory
- Threaded mounting point for the optional Telescopic Extender to measure without bending or kneeling



PosiTector[®] CMM IS

Concrete Moisture Meters In-Situ measure relative humidity and temperature in concrete floor slabs in conformance with ASTM F2170, *Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes*.

- Wirelessly connect to the PosiTector App (iOS/Android) and **PosiTector DPM Advanced** models via Bluetooth




OVEN PROFILE

PosiTest[®] OTL

Oven Temperature Loggers simultaneously measure up to 6 different temperatures with a variety of air and surface temperature probes (sold separately). Featuring a thermally insulated stainless steel barrier box, the **PosiTest OTL** is ideal for measuring and recording oven temperature profiles during curing.

- 6 K-type thermocouple ports (channels)
- Cure Index compares supplier's cure specifications to actual oven and part temperatures to ensure a proper cure
- High temperature stainless steel barrier box for long run times
- Download, view, and analyze data using PosiSoft Desktop Software or export to .CSV
- Wide variety of spring clamp and magnetic temperature probes available



MECHANICAL TESTS

PosiTest[®] DT

Dust Tape Tests assess the quantity and size of dust particles on blast cleaned surfaces in accordance with ISO 8502-3.

- Includes all report forms and accessories required for dust tape testing in accordance with ISO 8502-3
- Can be used as a pass/fail test or to provide a permanent record of dust present on a surface
- Dust Test Comparator includes pictorial references to determine dust size and dust quantity rating



SMARTLINK

PosiTector[®] SmartLink™

Wirelessly connects PosiTector probes to your Apple iOS or Android smart devices using the free mobile app. Turn your cell phone or tablet into a virtual **PosiTector** gage.

- Accepts **PosiTector 6000, SPG, RTR-H,** and **DPM** probes
- Take full advantage of the simplicity and utility of your **Android** or **Apple** smart device including touch screen, keyboard, camera, email, WiFi, Bluetooth, cellular, dictation tools, and more.
- Every reading is instantly transmitted to your smart device
- Real time graphing and statistical analysis with the swipe of a finger
- Share professional PDF reports and CSV data instantly via email, Dropbox, AirPrint™ or other applications on your device



PosiTest[®] PT

Pencil Hardness Tests, also known as Wolff-Wilborn Tests, determine the scratch resistance and relative hardness of coatings.

- Includes 14 quality graphite pencils—6B to 6H
- Custom aluminum pencil sharpener includes 5 and 6 mm reference marks for precision graphite length
- Comes complete with everything needed for testing
 - Optional Pencil Cart exerts a constant force of 7.35 N at the specified 45° angle (included with Complete Kit)
- Conforms to ISO 15184 and ASTM D3363



PosiTector SmartLink accepts PosiTector 6000, SPG, RTR-H, and DPM probes easily converting to a coating thickness gage, surface profile gage, replica tape reader, or dew point meter.



Inspection Kits

PosiTector Inspection Kits contain a PosiTector gage body (Standard or Advanced) with 1 or more probes and accessories in a convenient hard shell carrying case.

- Select from **12 Pre-Configured Kits** or build your own **Custom Kit** from our wide variety of gage bodies and probes
- **Award Winning Probe Interchangeability**
Gage body (Standard or Advanced) accepts ALL PosiTector probes including coating thickness, (6000/200), surface profile (SPG/RTR), environmental (DPM/IRT), salt contamination (SST), hardness (BHI/SHD), gloss (GLS), and ultrasonic wall thickness probes (UTG)
- Each pre-configured kit contains a PosiTector gage body (Standard or Advanced), choice of PosiTector 6000 coating thickness probe, PosiTector DPM environmental probe, and PosiTector SPG surface profile probe
- Certificate of Calibration showing traceability to NIST or PTB included (Long Form)



Verification Standards are used to verify the accuracy and operation of inspection instruments and are an important component in fulfilling both ISO/QS-9000 and in-house quality control requirements. Choose from a variety of standards:

Coating Thickness

- Certified Coated Metal Plates
- Certified Polystyrene Blocks
- Certified Plastic Shims
- Non-Certified Plastic Shims
- Zero Plates

Ultrasonic Wall Thickness

- Certified Step Block—Metric, Inch, Precision

Surface Profile

- PosiTector SPG Certified Standards
- PosiTector SPG Certified Shim Set
- Testex Certified Shim Set

Pinhole/Porosity

- PosiTest HHD Verifier
- PosiTest HHD C Verifier

Pull-Off Adhesion

- PosiTest AT Verifier



Certified Coated Metal Plates



PosiTector UTG Step Blocks



PosiTest HHD Verifier Series

POSISOFT SOLUTIONS

PosiSoft—Powerful ways to view and report your data

PosiSoft Desktop—PC/Mac

Powerful desktop software for downloading, viewing, printing, and archiving measurement data with no internet connection required. Import measurement data via USB, and categorize batches into Jobs for creation of multi-batch reports. Import PDF forms and overlay Custom Fields for automatic population of measurement data.



PosiTector App—Mobile

An easy-to-use mobile app (iOS/Android) that connects to your **PosiTector Advanced**, **PosiTector SmartLink**, **PosiTest AT-A**, **PosiTector DPM L**, and **PosiTector CMM IS**. Capture, view, and report measurement data all from one device.

PosiSoft USB Drive—Gage Based

A simple gage interface to retrieve data in a manner similar to USB flash drives or cameras. No software to install or internet connection required.

PosiSoft.net—Web Based

Compatible with PosiSoft Desktop and the PosiTector App, PosiSoft.net is a secure way to store and share data using the cloud. Synchronize data from your gage without the need for a computer when connected via WiFi (*Advanced models only*).

PosiTector Developer Resources

Integrate PosiTector and PosiTest AT-A instruments with third-party software, drones, ROVs, PLCs, and robotic devices using several industry-standard communication protocols including: Bluetooth 4.0, WiFi, and USB serial.

PosiSoft Custom PDF Report Generator

Easily create reports from your measurement data in seconds. Featured on:

PosiSoft Desktop ■ PosiTector App

- Include inspection information such as on-site pictures, screen captures, notes, and more to communicate important details
- Create and save multiple custom layouts as templates—insert cover pages, add logos/images, and select font and point size
- Save readings as comma separated value (.CSV) files which can easily be imported into Excel and other applications



Prompted Batch Mode

Create pre-defined batches in PosiSoft Desktop with on-screen text and image prompts for each reading, then upload to **PosiTector 6000, 200, and UTG** gages (*Advanced models only*).

