

WALLING & CEILING FINISHES



Customer Service: 0917-300-9943
Follow Us on : Worldwide Home Depot



DISTRIBUTED BY:



CRAFTSWOOD

HIGH PRESSURE LAMINATES

HIGH PRESSURE LAMINATES

AVAILABLE SIZE: 1220X2440X0.7MM



WOOD AGED
WALNUT



WOOD ARTISAN
BEAM WOOD




WOOD BAMBOO
WHITE



WOOD CAST
FORM WOOD



WOOD NATURAL
WASHED MAPLE



WOOD CINNAMON
ASH



WOOD AGED ASH



WOOD CLASSIC
WALNUT



WOOD RIFTWOOD




WOOD CHERRY
WOOD



WOOD GRACIOUS
SAKURA
(HORIZONTAL)



WOOD MOCCA
FIRWOOD



WOOD NATURAL
ASH



WOOD SOUTH
AFRICA TEAK



WOOD POWDERED
OAK



WOOD WHITE
SYCAMORE



WOOD OILED
LEGNO



WOOD OLIVE
AFROMOSIA



MAT WOOD
AGED GREY



GLOSSY WHITE

CRAFTS WOOD

HIGH PRESSURE LAMINATES



WOOD NATURAL
TEAK



WOOD SANDY
SAKURA
(HORIZONTAL)



WOOD GREY
CHERRY



WOOD WHITE
SAKURA
(HORIZONTAL)



WOOD EARTHEN
TWILL



MAT SARUM
GREY



PLAIN WHITE
MATTE



WOOD NEUTRAL
TWILL



WOOD ELEGANT



WOOD COLORFUL
INTEGR BROWN



WOOD SMOKE
STRAND



WOOD SEASON
PLANK ELM



WOOD FANCY
PINE



WOOD SARUM
STRAND



WOOD SILENT
WALNUT



WOOD SILVER
PINE



WOOD WHEAT
STRAND



WOOD STRAIGHT

FEATURES AND BENEFITS

- RESISTANT TO FIRE
- RESISTANT TO HEAT
- RESISTANT TO WATER
- RESISTANT TO SCRATCHES
- DURABLE, NOT EASY TO DEFORM OR FADE
- ENVIRONMENTAL PROTECTION, NO TOXIC OR RADIATE SUBSTANCE
- EASY & CONVENIENT TO DESIGN & PROCESS
- VARIETIES OF COLOR & SURFACE FINISHING CAN BE CHOSEN, SATISFY YOUR OWN FAVORITES
- EASY TO CLEAN, STAINS CAN BE CLEAN BY SOFT CLOTH

RECOMMENDED APPLICATION

- INTERIOR WALL CLADDING
- WORKSHOPS AND COUNTERTOPS
- DOORS AND KITCHEN CABINETS
- WARDROBES
- OFFICE FURNITURES
- PARTITIONS
- ELEVATOR WALL
- COLUMNS
- INTERIOR FACADE



ELEMENTS DECO PANEL



ENERGY STONE II
IVORY
60CM X 60CM



ENERGY STONE II
BEIGE
60CM X 60CM



ENERGY STONE II
BROWN
60CM X 60CM



MOON WAVES II
IVORY
25CM X 50CM X 7CM



MOON WAVES II
LT BROWN
25CM X 50CM X 7CM



MOON WAVES II
RUSTIC
25CM X 50CM X 7CM



CHANEL
GLITTERED IVORY
60CM X 60CM



CHANEL
GLITTERED BEIGE
60CM X 60CM



CHANEL
GLITTERED MOCHA
60CM X 60CM



DNA
GLITTERED IVORY
60CM X 60CM



DNA
GLITTERED BEIGE
60CM X 60CM



DNA
GLITTERED MOCHA
60CM X 60CM



LV III
GLITTERED IVORY
60CM X 60CM



LV III
GLITTERED MOCHA
60CM X 60CM



LV III
GLITTERED GREY
60CM X 60CM



AVATAR
IVORY
60CM X 60CM



AVATAR
BEIGE
60CM X 60CM



AVATAR
MOCHA
60CM X 60CM




PUZZLE
GLITTERED IVORY
40CM X 80CM



PUZZLE
GLITTERED BEIGE
40CM X 80CM



PUZZLE
GLITTERED MOCHA
40CM X 80CM

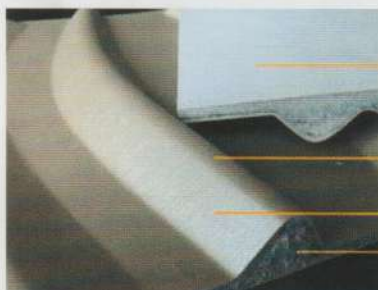

Back side is covered by Polyurethane leather too.
It's to prevent the moisture from the wall to seep in

Surface as covered by polyurethane leather

Water proof coating

Soft memory foam (fire retardant) inside



ROME
IVORY
40CM X 80CM



ROME
LT BROWN
40CM X 80CM



ROME
GREY
40CM X 80CM



ROME
DK BROWN
40CM X 80CM



6TH ELEMENTS
BEIGE
11.6CM X 23.2CM X 20CM



6TH ELEMENTS
BROWN
11.6CM X 23.2CM X 20CM



MOON WAVE
IVORY
25CM X 50CM X 7CM




MOON WAVE
GREY
25CM X 50CM X 7CM



MOON WAVE
LT BROWN
25CM X 50CM X 7CM



MOON WAVE
DK BROWN
25CM X 50CM X 7CM



6TH ELEMENTS
GREY
11.6CM X 23.2CM X 20CM

FEATURES AND BENEFITS

- EASY FABRICATION
- MORE DURABLE AND RESILIENT
- SUITABLE FOR LIGHT DUTY HORIZONTAL APPLICATIONS
- MAINTENANCE FREE
- AFFORDABLE ELEGANCE
- STYLISH DESIGN
- PERFECT COLOR SCHEME MATCHES
- VERSATILE
- SUSTAINABLE, RENEWABLE MATERIALS
- LEATHER SUBSTITUTE

RECOMMENDED APPLICATION

- HEAD BOARDS
- WALL COVERING/ ACCENT
- CEILING COVERING

INSTALLATION GUIDE



Make sure the surface of the wall is clean. For lime wall, please paint with a coat of latex. Square off the wall according to the size of panels.



Apply the first panel on the lined bottom middle position, then, go ahead with the neighbour panels the same way. When applying on the wall, press a little bit for around 1 second to make sure there are no gaps in between knife, as needed



When there is an outlet, measure the position on the panel and cut. Then put the inner box in the hole, cover the outlet.



MELAMINE BOARD

AVAILABLE SIZE: 18MM X 4FT X 8FT



WHITE

WHITE WASH

CREME

PINE

NATURAL

LT GREY

WENGUE



BLACK

MELAMINE EDGING



WHITE
1MMX21MM

WHITE WASH
1MMX21MM

CREME
1MMX21MM

PINE
1MMX21MM

NATURAL
1MMX21MM

LT GREY
1MMX21MM

WENGUE
1MMX21MM

BLACK
1MMX21MM

FEATURES AND BENEFITS

- DURABLE - scratch & shatter resistant, waterproof
- INEXPENSIVE - covers inexpensive substrates like MDF or plywood
- CHOICE - can be produced in a wide variety of colors & finishes
- CORE - Particle Boards

RECOMMENDED APPLICATION

- FOR OFFICE TABLE
- COUNTER TABLE
- DINNERWARE
- CABINETS
- WALLING

INSTALLATION GUIDE



CUT WITHOUT CHIPPING

Making a scoring cut before the final one will result in a chip-free edge. First, use a straightedge as a saw guide. Without the straightedge, the saw might wobble slightly as you cut, and this twisting will contribute to chipping. Clamp your straightedge guide in position and set the saw to cut 1/8 in. deep. Run your saw along the straightedge and cut a groove in the melamine panel. This shallow cut shouldn't produce any chipping.



DRILL AND COUNTERSINK FOR SCREWS

Particleboard, whether it has a melamine finish or not, doesn't hold screws as well as solid lumber or plywood. Plus, it tends to split if you drive screws without drilling first. The key to fastening it with screws is to drill pilot holes for the screws and countersinks for the screw heads.



FINISH RAW EDGES WITH EDGE BANDING


When the edge of a melamine panel is visible but you don't want to add solid wood nosing, apply edge banding tape. You can buy iron-on edge banding at most home centers. But an even easier solution is to apply self-adhesive or peel-and-stick edge banding. FastCap is one company that supplies peel-and-stick edge banding in a wide variety of colors, widths and lengths. Called Fastedge, it's available online and at woodworking stores.

Move a hot iron quickly over iron-on edge banding tape to melt the glue. If you're using self-adhesive edge banding, you can skip this step and simply peel off the paper backing and stick the edge banding to the particleboard edge.



METAL FRAMINGS

CEILING ASSEMBLY



DOUBLE FURRING
19MM X 50MM X 5MM
THICKNESS: 0.40MM & 0.35MM



CARRYING CHANNEL
12MM X 38MM X 5MM
THICKNESS: 0.80MM



SINGLE FURRING
19MM X 25MM X 5MM
THICKNESS: 0.40MM & 0.38MM



WALL ANGLE
25MM X 25MM X 3MM
THICKNESS: 0.40MM



SINGLE METAL FURRING
CLIP



DOUBLE METAL FURRING
CLIP



GRAVEL SCREW
3/4



PAN HEAD SCREW
6 - 1/2



GYPSUM SCREW

DRYWALL PARTITION



METAL STUDS
AVAILABLE IN MANY SIZES



METAL TRACKS
AVAILABLE IN MANY SIZES

SMART BOARD

SQUARE EDGE



3.5MM X 1220 X 2440

4.5MM X 1220 X 2440

6MM X 1220 X 2440

12MM X 1220 X 2440

16MM X 1220 X 2440

18MM X 1220 X 2440

INTERNAL & EXTERNAL CEILING



VENTILATED
60 x 120 x 0.4CM







WOOD GRAIN
60 x 120 x 0.4CM

VENT WOOD GRAIN
60 x 120 x 0.4CM

LINING
60 x 120 x 0.4CM

VENT 3" LINING
60 x 120 x 0.4CM

FEATURES & BENEFITS

-  • Environment friendly and non-hazardous
-  • Adaptable to wall and ceiling needs without beam structure
-  • Light weight to reduce structural base of construction
-  • Ability to install quickly and withstand weather conditions
-  • Permits flexibility to develop varied ceiling shapes
-  • Resistant to fire for better functionality

RECOMMENDED APPLICATION

- Commercial office buildings
- Showrooms
- Schools and universities
- Restaurants
- Cafés
- Food halls
- Retail
- Complexes
- Shopping centres
- Auditoriums and Concert halls
- Foyers of Public Buildings

INSTALLATION GUIDE

- 1 This system is known as the "scoop", a cement plaster replacement system that cost efficient, easy to install, and minimizes the chances of cracks.
- 2 This system uses metal framing applied as a wall lining, making it especially suitable for reinforced concrete walls or block walls with severe irregularities. It also improves acoustic performance while allowing services to be placed in its cavity.
- 3 This system achieves the severe duty class in terms of performance against impact. It provides greater solidity and durability with the EasyTrowel tool, a patent-pending tool that applies the bonding compound in the right thickness to ensure a smooth, rock-solid wall.
- 4 This system offers an innovative solution that places EasyBond compounds in areas subject to higher chances of impact and indentations using the EasyScoop tool, a typical mortar-and-sand mix plaster eliminator that doubles your productivity rate.

SMARTWOOD

WOOD PLANK



WHITE PEARL
0.8CM X 20CM X 300CM







SILVER GREY
0.8CM X 20CM X 300CM

DARK ANTHRACITE
0.8CM X 20CM X 300CM

SPECIAL PROPERTY

SCG Smartwood is an innovative wood substitute product made from superior SCG Portland Cement, Silica Sand, and Special Cellulose Fiber using high standardized processes (Autoclave Process). SCG Smartwood creates a natural, attractiveness and confident look.

FEATURES & BENEFITS

-  High Impact Strength
-  Water - Resistance
-  Termite Resistant
-  Flexibility for various designs
-  Light Weight,
Fast and Easy to Install
-  Better Heat Resistance

