




The **BOOK**

APPROACHING LIGHTING
IN A DIFFERENT WAY

BULBRITE[®]
turn life on

Turn life on



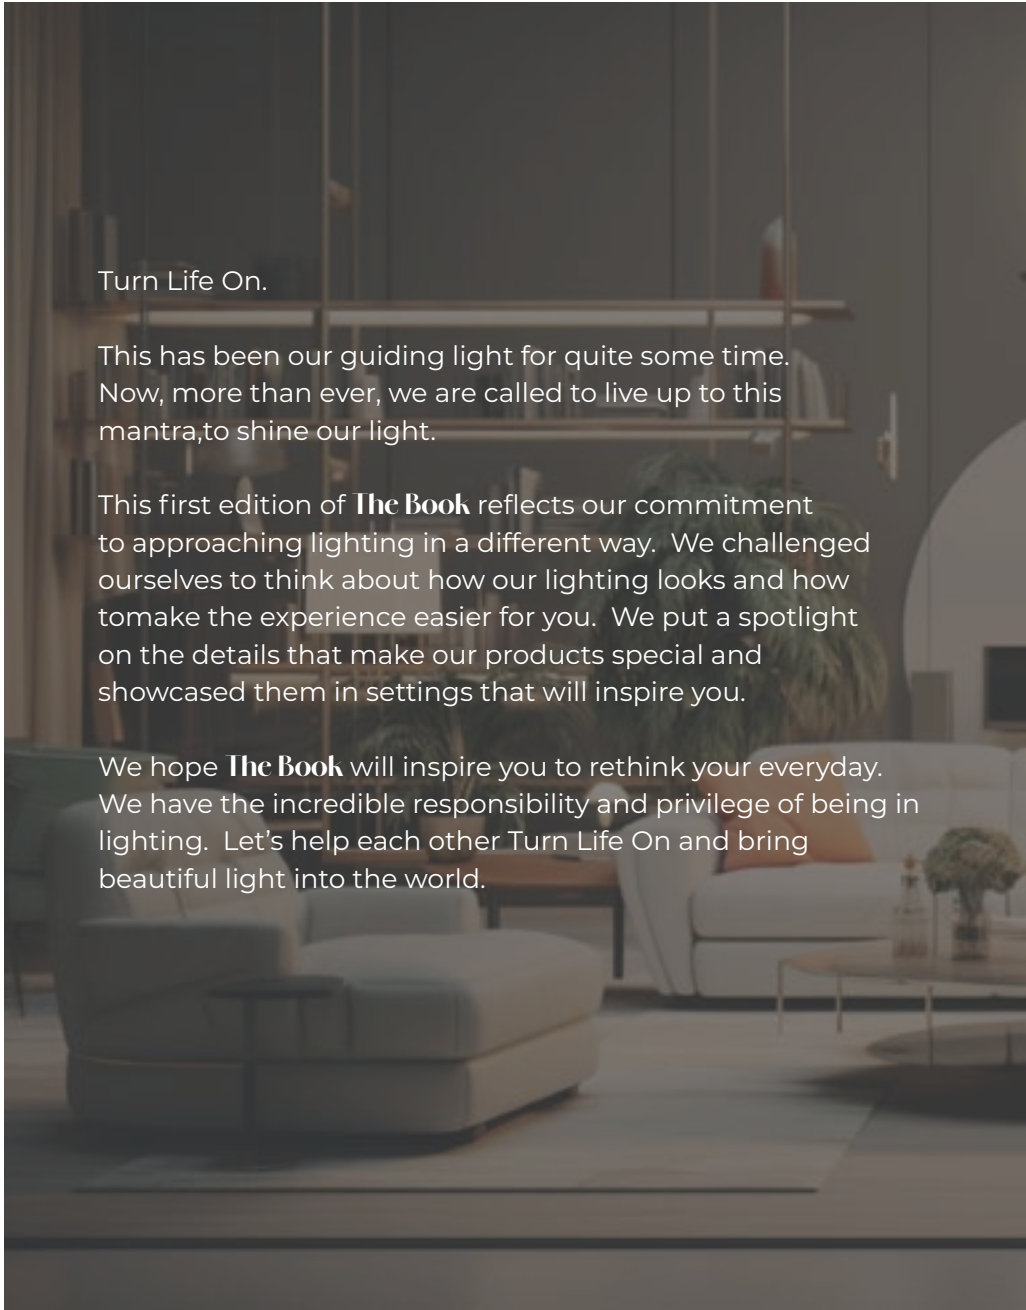



Turn Life On.

This has been our guiding light for quite some time. Now, more than ever, we are called to live up to this mantra, to shine our light.

This first edition of **The Book** reflects our commitment to approaching lighting in a different way. We challenged ourselves to think about how our lighting looks and how to make the experience easier for you. We put a spotlight on the details that make our products special and showcased them in settings that will inspire you.

We hope **The Book** will inspire you to rethink your everyday. We have the incredible responsibility and privilege of being in lighting. Let's help each other Turn Life On and bring beautiful light into the world.

Table of Contents

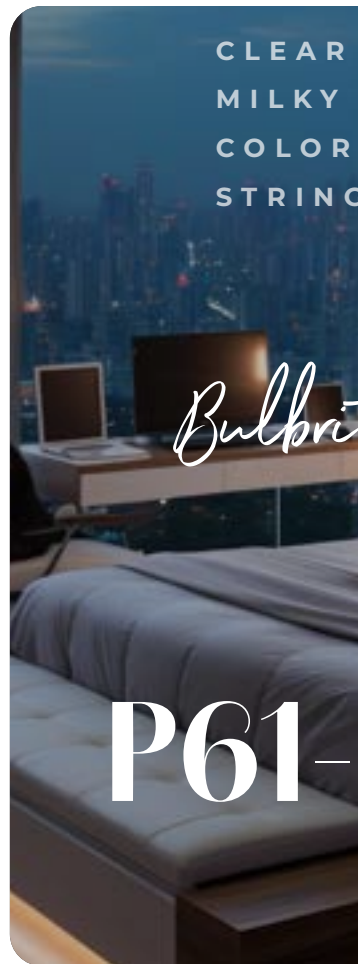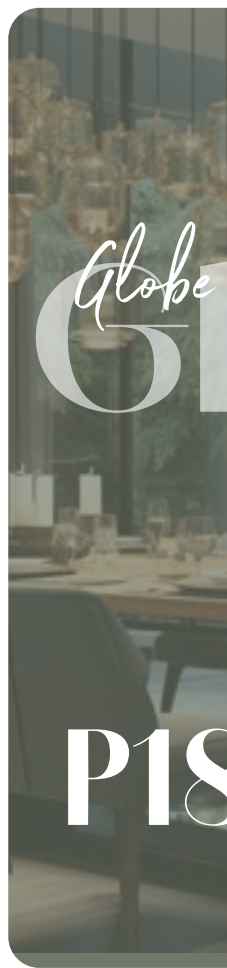





Petite Classics

A15 & ST15

CLEAR & MILKY A15 & ST15



NEW

Item #
[776825](#) (2700K)
[776826](#) (3000K)

4W
A15
25W Equiv.



NEW

Item #
[776821](#) (2700K)
[776822](#) (3000K)

4W
ST15
40W Equiv.



NEW

Item #
[776827](#) (2700K)
[776828](#) (3000K)

4W
A15
25W Equiv.



NEW

Item #
[776823](#) (2700K)
[776824](#) (3000K)

4W
ST15
40W Equiv.





Hubbardton Forge Mika Pendant with Bulbrite LED Classic Petite

NEW DECORATIVE STYLE

LED Filaments

IN *smaller* FORM FACTOR

CLEAR & MILKY A15



NEW
Item #
[776831](#) (2700K)
[776832](#) (3000K)

7W
A15
60W Equiv.



NEW
Item #
[776829](#) (2700K)
[776830](#) (3000K)

7W
A15
60W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

CLEAR A19



Item #
[776871](#) (2700K)

2.5W
A19
25W Equiv.



Item #
[776872](#) (2700K)¹

5W
A19
40W Equiv.



Item #
[776925](#) (4000K)^{1,2}

7W
A19
60W Equiv.



Item #
[776913](#) (2700K)¹
[776914](#) (3000K)¹
[776926](#) (4000K)¹ **NEW**

9W
A19
75W Equiv.




Item #
[776774](#) (2700K)^{1,2}
[776768](#) (3000K)^{1,2} **NEW**
[776925](#) (4000K)^{1,2} **NEW**
[776958](#) (5000K)¹ **NEW**

8.5W
A19
60W Equiv.



Item #
[776915](#) (2700K)¹
[776916](#) (3000K)¹
[776927](#) (4000K)¹ **NEW**
[776960](#) (5000K)¹ **NEW**

14W
A19
100W Equiv.

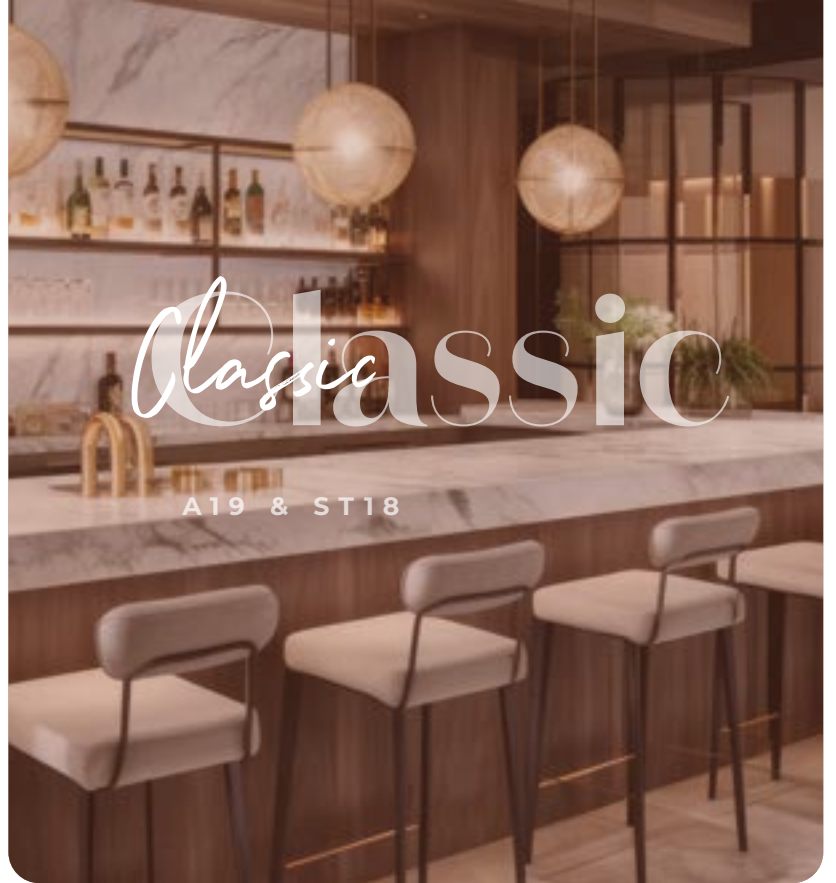

MILKY A19



Item #
[776953](#) (2700K)¹ **NEW**

2.5W
A19
25W Equiv.



Item #
[776954](#) (2700K)¹ **NEW**

5W
A19
40W Equiv.



776922 Replaces 776898

Item #
[776917](#) (2700K)¹
[776922](#) (3000K)¹

9W
A19
75W Equiv.

Milky Bulbs

INSIDE COATING CREATES A
Uniform
Glow

NO HOTSPOTS OR SHADOWS

CA10 B11 CLASSIC TUBULAR GLOBE



776937 Replaces 776866

Item #
[776937](#) 8.5W (2700K)
[776869](#) 8.5W (3000K)¹ **NEW**
[776928](#) 8.5W (4000K)¹ **NEW**
[776959](#) 7W (5000K)

7W & 8.5W
A19
60W Equiv.



Item #
[776918](#) (2700K)¹ **NEW**
[776919](#) (3000K)¹ **NEW**
[776929](#) (4000K)¹ **NEW**
[776961](#) (5000K)¹ **NEW**

14W
A19
100W Equiv.





AMBER & CURVED A19



Item #
[776902](#) (2100K)¹

4.5W
A19
40W Equiv.



Item #
[776514](#) (2100K)² **NEW**

4.5W
A19
25W Equiv.



AMBER & CURVED ST18




Item #
[776801](#) (2200K)^{1,2,4}

5W
ST18
40W Equiv.



Item #
[776909](#) (2100K)^{1,2}

7W
ST18
60W Equiv.

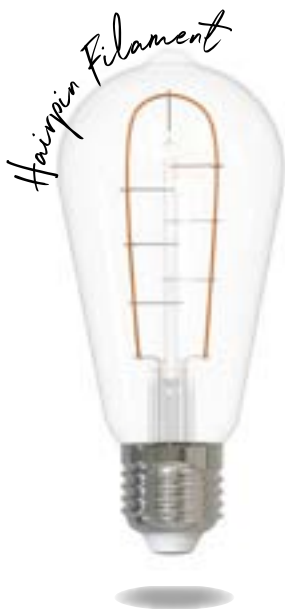

Item #
[776515](#) (2100K)^{1,2} **NEW**

3W
ST18
25W Equiv.




776513 will transition to 776515

Item #
[776513](#) (2200K)³ **NEW**

4W
ST18
40W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

CLEAR ST18



Ideal for rustic chandeliers



Item #
[776857](#) (2700K)

4.5W
ST18
40W Equiv.



Item #
[776767](#) (2700K)¹
[776769](#) (3000K)¹
[776935](#) (4000K) **NEW**
[776985](#) (5000K) **NEW**

8.5W
ST18
60W Equiv.



Item #
[776745](#) (2700K)¹
[776746](#) (3000K)¹
[776936](#) (4000K)¹ **NEW**
[776987](#) (5000K) **NEW**

13W
ST18
100W Equiv.





Lighting the
way forward

CLEAR E12 & E26 B11



Item #
[776938](#) (2700K)^{2,3}

2.5W
B11
25W Equiv.
E12 Base



Item #
[776756](#) (2700K)^{2,3,4}
[776763](#) (3000K)^{2,3,4}
[776930](#) (4000K)^{2,3,4}
[776962](#) (5000K)^{2,3}

4W
B11
40W Equiv.
E12 Base



Item #
[776626](#) (2700K)^{2,3}
[776627](#) (3000K)^{2,3}
[776931](#) (4000K)^{2,3} **NEW**
[776964](#) (5000K)^{2,3}

5W
B11
60W Equiv.
E12 Base



Item #
[776737](#) (2700K)^{2,3}
[776738](#) (3000K)^{2,3} **NEW**
[776932](#) (4000K)^{2,3} **NEW**
[776966](#) (5000K)^{2,3} **NEW**

6.5W
B11
75W Equiv.
E12 Base



Item #
[776862](#) (2700K)^{1,3}

4.5W
B11
40W Equiv.
E26 Base



Item #
[776733](#) (2700K)^{1,3} **NEW**
[776734](#) (3000K)^{1,3} **NEW**

5.5W
B11
60W Equiv.
E26 Base



MILKY E12 & E26 B11



Item #
[776772](#) (2700K)²
[776773](#) (3000K)^{2, 3 (4.5W)}
[776933](#) (4000K)^{2, 3} **NEW**
[776963](#) (5000K)² **NEW**

4W
 B11
 40W Equiv.
 E12 Base



776940 Replaces 776887
776941 Replaces 776888





Item #
[776940](#) (2700K)^{2, 3} **NEW**
[776941](#) (3000K)^{2, 3} **NEW**
[776934](#) (4000K)^{2, 3} **NEW**
[776965](#) (5000K)² **NEW**

5W
 B11
 60W Equiv.
 E12 Base



Item #
[776986](#) (2700K)^{2, 3} **NEW**
[776988](#) (3000K)^{2, 3} **NEW**
[776968](#) (4000K)^{2, 3} **NEW**
[776967](#) (5000K)^{2, 3} **NEW**

6.5W
 B11
 75W Equiv.
 E12 Base

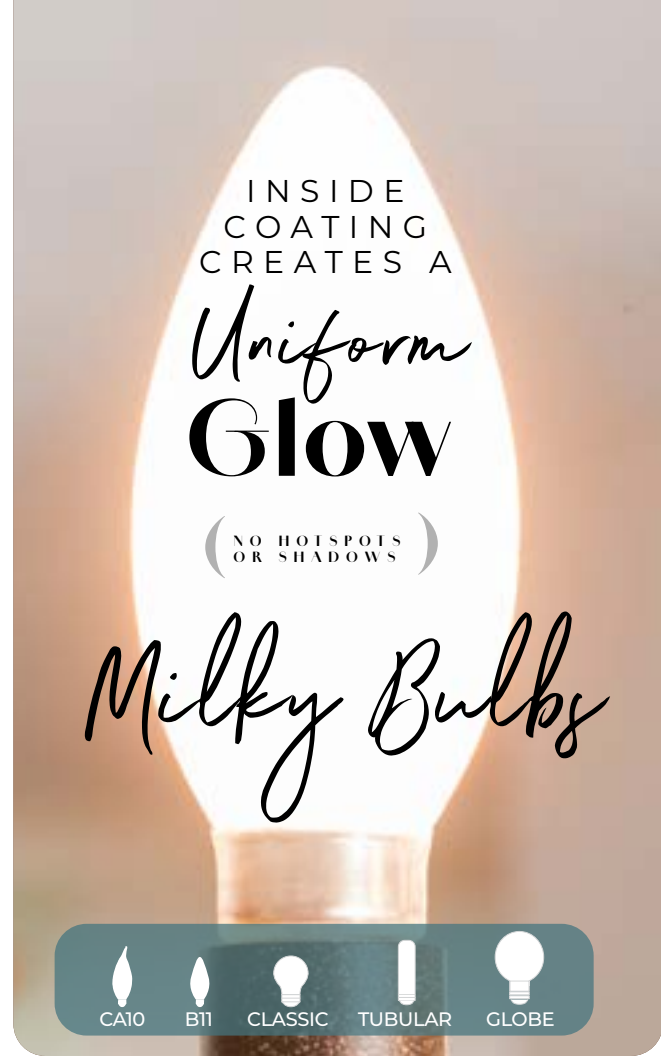

Item #
[776735](#) (2700K)^{1, 3} **NEW**
[776736](#) (3000K)^{1, 3} **NEW**

5.5W
 B11
 60W Equiv.
 E26 Base



SEE INDEX FOR FULL PRODUCT SPECS

CLEAR E12 & E26 CA10



Item #
[776858](#) (2700K)²

2.5W
CA10
25W Equiv.
E12 Base



Item #
[776859](#) (2700K)^{2,3}
[776864](#) (3000K)^{2,3}

4.5W
CA10
40W Equiv.
E12 Base



Item #
[776875](#) (2700K)^{1,3}

4.5W
CA10
40W Equiv.
E26 Base



Item #
[776969](#) (2700K)^{1,3} **NEW**
[776971](#) (3000K)^{1,3} **NEW**

5W
CA10
60W Equiv.
E26 Base




Item #
[776741](#) (2700K)^{2,3,4} **NEW**
[776742](#) (3000K)^{2,3,4} **NEW**

5W
CA10
60W Equiv.
E12 Base



Item #
[776739](#) (2700K)^{2,3} **NEW**
[776740](#) (3000K)^{2,3} **NEW**

6.5W
CA10
75W Equiv.
E12 Base





MILKY & AMBER CA10

776942 Replaces 776860

Item #

[776942](#) (2700K)

[776861](#) (3000K)¹

NEW

NEW



4W
CA10
40W Equiv.

Item #

[776787](#) (2700K)¹

[776788](#) (3000K)¹



5W
CA10
60W Equiv.

Item #

[776970](#) (2700K)^{1,3}

[776972](#) (3000K)^{1,3}

NEW

NEW



5W
CA10
40W Equiv.
E26 Base

Item #

[776903](#) (2100K)



2.5W
CA10
25W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



Globe

G 16
G 25
G 40

CLEAR, MILKY, AMBER G16



Item #
[776706](#) (2700K)¹

2.5W
G16
25W Equiv.



Item #
[776743](#) (2700K)^{1,2}
[776744](#) (3000K)^{1,2} **NEW**

4W
G16
40W Equiv.

[776943](#) Replaces [776612](#)



Item #
[776943](#) (2700K)
[776712](#) (3000K)¹

4W
G16
40W Equiv.



Item #
[776906](#) (2100K)

2.5W
G16
25W Equiv.



Ideal for Pendants

CLEAR & MILKY G25



Item #
[776973](#) (2700K)¹ **NEW**
[776975](#) (3000K)¹ **NEW**

5W
 G25
 60W Equiv.



Item #
[776749](#) (2700K)^{1,2} **NEW**
[776750](#) (3000K)^{1,2} **NEW**
[776977](#) (4000K)^{1,2} **NEW**
[776979](#) (5000K)¹ **NEW**

8.5W
 G25
 100W Equiv.



Item #
[776974](#) (2700K)¹ **NEW**
[776976](#) (3000K)¹ **NEW**

5W
 G25
 60W Equiv.



776944 Replaces 776611



Item #
[776747](#) (2700K)^{1,2} **NEW**
[776748](#) (3000K)^{1,2} **NEW**

13W
 G25
 150W Equiv.



Item #
[776944](#) (2700K)¹ **NEW**
[776810](#) (3000K)¹
[776978](#) (4000K)¹ **NEW**
[776980](#) (5000K)¹ **NEW**

8.5W
 G25
 100W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



Infuse
your
space
with the
warmth of

Amber

AMBER & CURVED G25



Item #
[776800](#) (2200K)^{1, 2, 4}

5W
G25
40W Equiv.



776516 Replaces 776512

Item #
[776516](#) (2100K)^{1, 2} **NEW**

4.5W
G25
40W Equiv.



CLEAR & MILKY G40



Item #
[776878](#) (2700K)
[776879](#) (3000K)
[776981](#) (4000K)
[776983](#) (5000K)

8.5W
 G40
 100W Equiv.



Item #
[776897](#) (2700K)
[776899](#) (3000K)
[776982](#) (4000K)
[776984](#) (5000K)

8.5W
 G40
 100W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



T 6
T 8
T 9
T 14



5"



776947 Replaces 776853

Item #
[776947](#) (2700K) **NEW**
[776854](#) (3000K)¹


3W
T9 5"
25W Equiv.



5"

Item #
[776731](#) (2700K)^{1,2}
[776732](#) (3000K)^{1,2}
[776989](#) (4000K)^{1,2} **NEW**
[776991](#) (5000K)¹ **NEW**

5W
T9 5"
40W Equiv.



7.5"



776948 Replaces 776714
776949 Replaces 776715

Item #
[776948](#) (2700K)¹
[776949](#) (3000K)¹

3W
T9 7.5"
25W Equiv.




11"



776765 Replaces 776865

Item #
[776765](#) (2700K)
[776865](#) (2700K)¹
[776946](#) (3000K)¹

5W
T9 11"
40W Equiv.

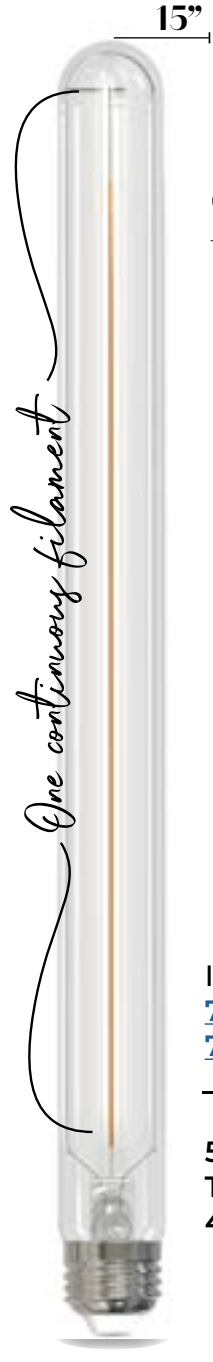

15"

One continuous filament


CLEAR
T9

Item #
[776720](#) (2700K)¹
[776721](#) (3000K)¹

5W
T9 15"
40W Equiv.



Glare free, soft diffused light

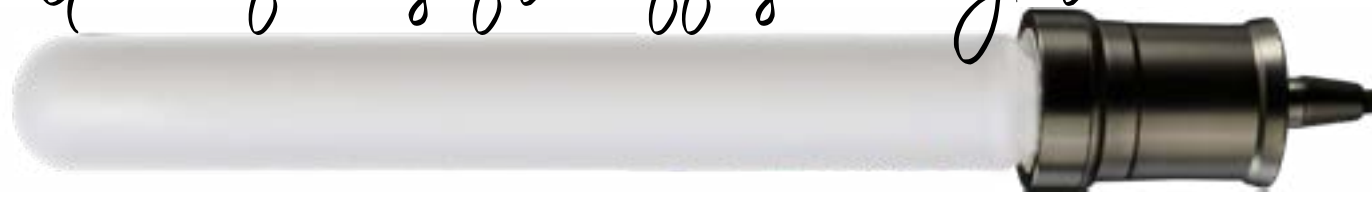


FROST T9



5"

Item #
[776781](#) (2700K)¹
[776792](#) (3000K)¹
[776990](#) (4000K)¹
[776992](#) (5000K)¹

5W
T9 5"
40W Equiv.



7.5"

Item #
[776725](#) (2700K)
[776726](#) (3000K)

5W
T9 7.5"
40W Equiv.



11"

Item #
[776727](#) (2700K)
[776728](#) (3000K)

5W
T9 11"
40W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



One continuous filament
NO BREAKS IN LIGHT

AMBER T9



Item # [776908](#) (2100K)

3W
T9 5"
25W Equiv.




Item # [776713](#) (2100K)¹

5W
T9 7.5"
25W Equiv.



Item # [776707](#) (2100K)

5W
T9 11"
25W Equiv.

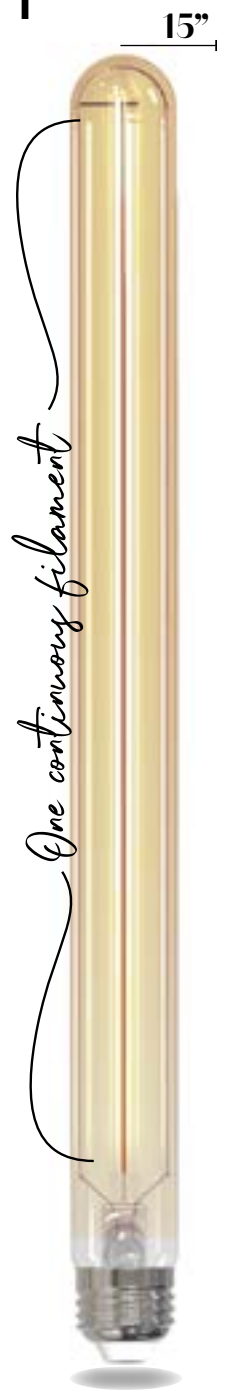

Item # [776719](#) (2100K)

5W
T9 15"
40W Equiv.



CLEAR, CURVED, AMBER T14



Item #
[776819](#) (2700K)^{1,3}
[776820](#) (3000K)^{1,3}

5W
T14
40W Equiv.

Spiral Filament



Item #
[776518](#) (2100K)² **NEW**

4.5W
T14
40W Equiv.



Item #
[776905](#) (2100K)¹

4W
T14
40W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



CLEAR, MILKY, AMBER T6, T8



776951 Replaces 776880



Item #
[776951](#) (2700K) **NEW**
[776952](#) (3000K)¹

2.5W
 T6
 25W Equiv.



Item #
[776780](#) (2700K)¹
[776791](#) (3000K)¹
[776993](#) (4000K)¹ **NEW**
[776995](#) (5000K)¹ **NEW**

4.5W
 T6
 40W Equiv.



Item #
[776723](#) (2700K)¹
[776724](#) (3000K)¹

4.5W
 T8
 40W Equiv.



Item #
[776729](#) (2700K)¹ **NEW**
[776730](#) (3000K)¹ **NEW**
[776994](#) (4000K)¹ **NEW**
[776996](#) (5000K)¹ **NEW**

4.5W
 T6
 40W Equiv.



Item #
[776904](#) (2100K)

2.5W
 T6
 25W Equiv.



Item #
[776722](#) (2100K)

4.5W
 T8
 40W Equiv.





Illuminating
Emotions
through
Design

Introducing
Designer *Bulbs*

WARM DIM B11, CA10, G16



Item #
[776401](#) (3000K - 1800K) **NEW**

5W
B11
60W Equiv.




Item #
[776402](#) (3000K - 1800K) **NEW**

5W
CA10
60W Equiv.



Item #
[776403](#) (3000K - 1800K) **NEW**

5W
G16
60W Equiv.



watch our LED Warm Dim collection in action!



INTROD LED WARM DIM

You have to
dim it to
believe it





ED
DIM
CTION

WARM DIM A19, ST18, G25


DU C I N G DIM Collection



50%
Brightness



10%
Brightness



Bulb shifts
in color from
soft white to
candlelight
as you dim



Item #
[776400](#) (3000K - 1800K) **NEW**

9W
A19
60W Equiv.



Item #
[776405](#) (3000K - 1800K) **NEW**

9W
ST18
60W Equiv.



Item #
[776404](#) (3000K - 1800K) **NEW**

9W
G25
60W Equiv.

Hubbardton Forge Vine Pendant with
Bulbrite LED Classic Half Black (A19)



Half Black

MATTE FINISH



Item #
[776833](#) (2700K)¹

5W
A19
40W Equiv.



Item #
[776834](#) (2700K)²

2.5W
G16
25W Equiv.



Item #
[776835](#) (2700K)¹

5W
G25
40W Equiv.



Item #
[776836](#) (2700K)¹

6W
G40
60W Equiv.

A19, G16, G25, G40 Half Black



Elk Connexions Pendant with
Bulbrite LED Globe Half White (G16)



Item #
[776837](#) (2700K)¹

5W
A19
40W Equiv.



Item #
[776838](#) (2700K)²

2.5W
G16
25W Equiv.




Item #
[776839](#) (2700K)¹

5W
G25
40W Equiv.



Item #
[776840](#) (2700K)¹

6W
G40
60W Equiv.

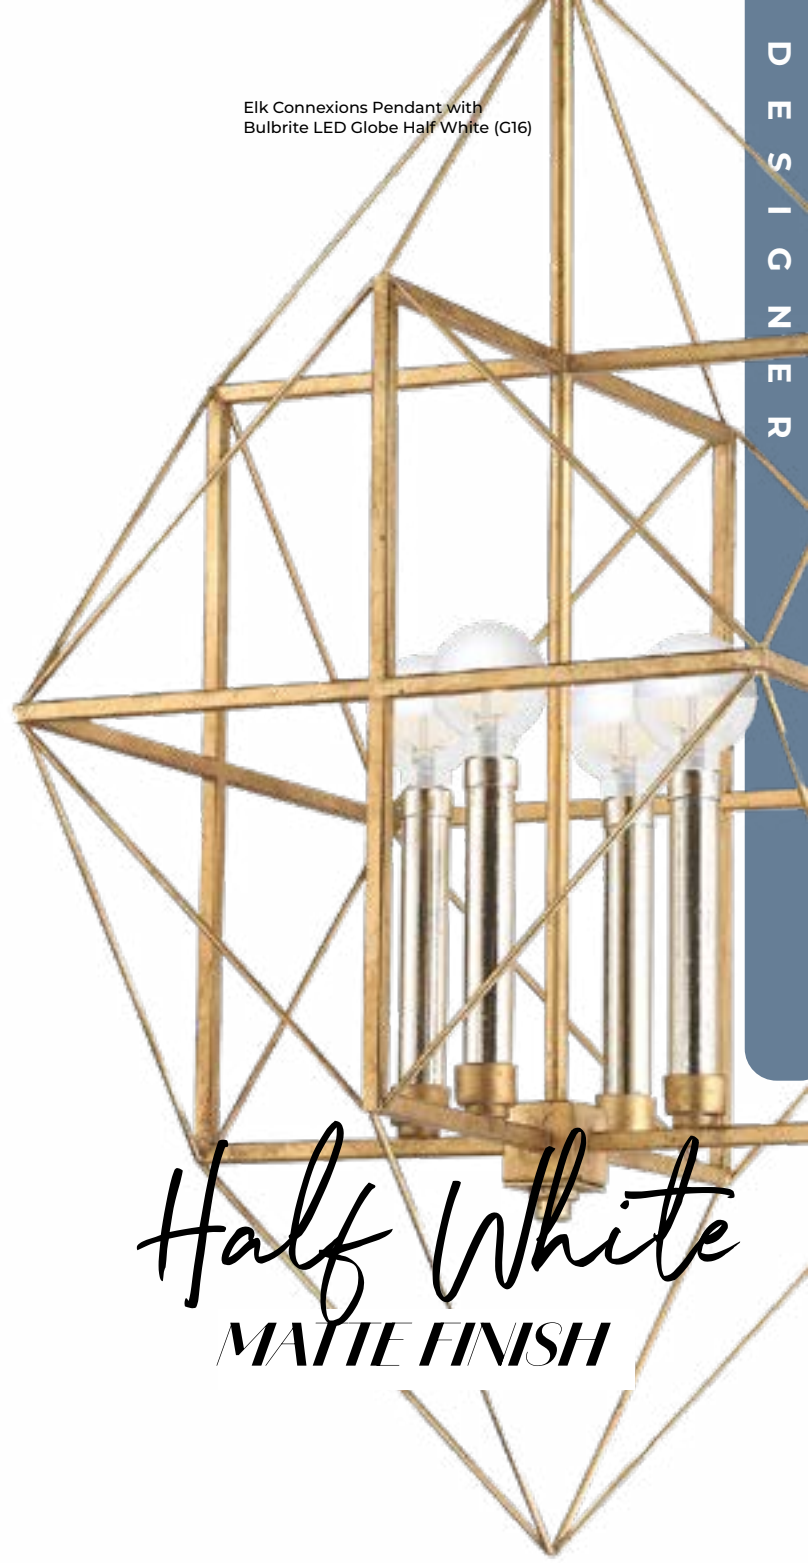

Half White
MATTE FINISH

A19, G16, G25, G40
Half White





Half Gold
TO REDUCE GLARE



Item #
[776679](#) (2700K)¹

5W
A19
40W Equiv.



Item #
[776921](#) (2700K)²

2.5W
G16
25W Equiv.



Item #
[776923](#) (2700K)¹

4.5W
G25
40W Equiv.



Item #
[776924](#) (2700K)¹

6W
G40
60W Equiv.

A19, G16, G25, G40 Half Gold





Item #
[776671](#) (2700K)¹

4.5W
A19
40W Equiv.



Item #
[776771](#) (2700K)²

2.5W
G16
25W Equiv.



Item #
[776870](#) (2700K)^{1,3}

5W
G25
40W Equiv.



Item #
[776920](#) (2700K)²⁻³

6W
G40
60W Equiv.



Half Mirror bulbs

shine best when paired with metallic
gunmetal finish pendants or fixtures.

A19, G16, G25, G40
Half Mirror





*New shapes
breaking the norm!*

**CLEAR & AMBER
Prism, Slanted, Fiesta**



Item #
[776596](#) (3000K)¹ **NEW**

4W
Prism
40W Equiv.
E12 Base



Item #
[776594](#) (2700K)¹ **NEW**
[776595](#) (3000K)¹ **NEW**

4.5W
Slanted
40W Equiv.
E12 Base



Item #
[776580](#) (2700K)

4W
F15
40W Equiv.
E26 Base



Item #
[776581](#) (2100K)

4W
F15
40W Equiv.
E26 Base

SATIN & AMBER Spunlite®



Item #
[776590](#) (2700K)

4W
C11
40W Equiv.
E12 Base



Item #
[776592](#) (2700K)

4W
C15
40W Equiv.
E26 Base



Item #
[776591](#) (2100K)

4W
C11
40W Equiv.
E12 Base



Item #
[776593](#) (2100K)

4W
C15
40W Equiv.
E26 Base



*look & feel of a
gas lantern
flame*



SEE INDEX FOR FULL PRODUCT SPECS

GRAND DIENT LED COLLECTION

C53, G40 Clear and Smoke

10.25 inches



NEW

Item # [776321](#) (3000K)

4.5W
C53
60W Equiv.



NEW

Item # [776997](#) (3000K)

4.5W
G40
60W Equiv.



Uniq
Finish
create a **foo**
of the

You
CENTE



ue
& Shapes
cal Point
ir OWN

ur new
ERPIECE

C53, G40 Clear and Blue



NEW

Item #
[776322](#) (3000K)

4.5W
C53
60W Equiv.



NEW

Item #
[776998](#) (3000K)

4.5W
G40
60W Equiv.



TRADITIONAL LED Grands



The bulb is the fixture



15.16
inches

Item #
[776301](#) (2200K)

4W
ET25
60W Equiv.



Item #
[776302](#) (2200K)

4W
G63
60W Equiv.



Item #
[776300](#) (2200K)

4W
PS52
60W Equiv.




Item #
[776314](#) (2200K)

4W
BT56
60W Equiv.



WHIMSICAL LED Grands

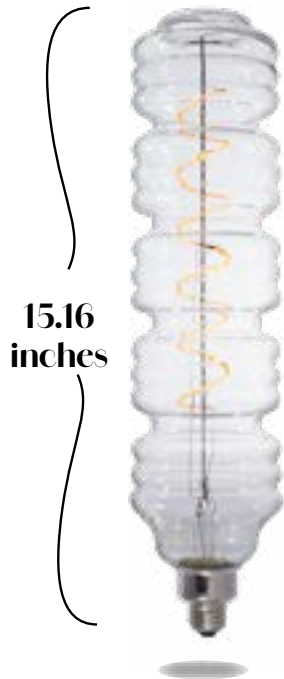

15.16
inches

Item #
[776303](#) (2200K)

4W
WATER BOTTLE
60W Equiv.



Item #
[776304](#) (2200K)

4W
BEEHIVE
60W Equiv.



Item #
[776305](#) (2200K)

4W
DIAMOND
60W Equiv.



Item #
[776306](#) (2200K)

4W
OLIVE
60W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

NATURAL LED Grands



Item #
[776317](#) (2000K)

4W
DROPLET
60W Equiv.



Item #
[776316](#) (2000K)

4W
ICEBERG
60W Equiv.



Item #
[776319](#) (2000K)

4W
ORB
60W Equiv.

11.5
inches



Item #
[776318](#) (2000K)

4W
JEWEL
60W Equiv.



Item #
[776320](#) (2000K)

4W
GLACIER
60W Equiv.



Turn life on



120V G9



Item #
[770589](#) (2700K)²
[770577](#) (3000K)²

3.5W
T5
25W Equiv.



Item #
[770590](#) (2700K)^{1, 2}
[770579](#) (3000K)^{1, 2}

4.5W
T6
40W Equiv.



Item #
[770647](#) (2700K)^{1, 2}
[770648](#) (3000K)^{1, 2}

5W
T6
60W Equiv.



Item #
[770591](#) (2700K)^{1, 2}
[770580](#) (3000K)^{1, 2}

4.5W
T6
40W Equiv.



Item #
[770644](#) (2700K)¹
[770645](#) (3000K)¹

6.5W
T6
70W Equiv.



120V G9 - Full Glass



perfect for clear glass fixtures



Item #
[770597](#) (2700K) **NEW**
[770598](#) (3000K) **NEW**

3.5W
 T4
 20W Equiv.



Item #
[770599](#) (2700K) **NEW**
[770600](#) (3000K) **NEW**

4.5W
 T5
 40W Equiv.

Clear glass *creates the look of* halogens



Item #
[770659](#) (2700K) **NEW**
[770660](#) (3000K) **NEW**

3.5W
 T5
 25W Equiv.



Item #
[770657](#) (2700K) **NEW**
[770658](#) (3000K) **NEW**

4.5W
 T5
 40W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

CLEAR, FROST E11



Item #
[770592](#) (2700K)¹
[770581](#) (3000K)¹

4.5W
T6
40W Equiv.



Item #
[770593](#) (2700K)¹
[770582](#) (3000K)¹

4.5W
T6
40W Equiv.



Item #
[770629](#) (2700K)¹
[770630](#) (3000K)¹

5W
T6
60W Equiv.



Item #
[770640](#) (2700K)¹
[770641](#) (3000K)¹

6.5W
T6
70W Equiv.





CLEAR, FROST E12

Item #
[770595](#) (2700K)¹
[770584](#) (3000K)¹



4.5W
T6
40W Equiv.

Item #
[770596](#) (2700K)¹
[770585](#) (3000K)¹



4.5W
T6
40W Equiv.

Item #
[770631](#) (2700K)¹
[770632](#) (3000K)¹



5W
T6
60W Equiv.

Item #
[770642](#) (2700K)
[770643](#) (3000K)



6.5W
T6
70W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

120V GY6.35, GY8



Item #
[770616](#) (2700K)
[770615](#) (3000K)

4.5W
T6
GY6.35 Base
40W Equiv.



Item #
[770588](#) (2700K)
[770576](#) (3000K)

4.5W
T5
GY8 Base
40W Equiv.



MINIS

Small but mighty



12V G4, GY6.35



Item #
[770649](#) (2700K)¹ **NEW**
[770650](#) (3000K)¹ **NEW**

1.8W
 T5
 G4 Base
 15W Equiv.



Item #
[770651](#) (2700K)¹ **NEW**
[770652](#) (3000K)¹ **NEW**

1.8W
 T5
 G4 Base
 15W Equiv.



Item #
[770653](#) (2700K)¹ **NEW**
[770654](#) (3000K)¹ **NEW**

1.8W
 T5
 GY6.35 Base
 15W Equiv.



Item #
[770655](#) (2700K)¹ **NEW**
[770656](#) (3000K)¹ **NEW**

1.8W
 T5
 GY6.35 Base
 15W Equiv.




Item #
[770586](#) (2700K)²
[770571](#) (3000K)²

2W
 T4
 G4 Base
 15W Equiv.



Item #
[770587](#) (2700K)²
[770572](#) (3000K)²

3W
 T4
 G4 Base
 25W Equiv.



Item #
[770622](#) (2700K)¹
[770621](#) (3000K)¹

2.8W
 Wafer
 G4 Base
 25W Equiv.



Item #
[770623](#) (2700K)^{1,2}
[770624](#) (3000K)^{1,2}

4.5W
 T4
 G4 Base
 40W Equiv.



Item #
[770625](#) (2700K)^{1,2}
[770626](#) (3000K)^{1,2}

5W
 T7
 GY6.35 Base
 60W Equiv.



12V, 24V, 120V R7S, BA15S, BA15D, Festoon, Wedge



120 VOLTS

Item #
[770637](#) (3000K)¹

6W
J-TYPE
50W Equiv.
R7S Base



120 VOLTS

Item #
[770638](#) (3000K)¹

10W
J-TYPE
75W Equiv.
R7S Base



12 VOLTS

Item #
[770618](#) (2700K)¹
[770617](#) (3000K)¹

4.5W
T4
40W Equiv.
BA15S Base



120 VOLTS

Item #
[770620](#) (2700K)¹
[770619](#) (3000K)¹

4.5W
T5
40W Equiv.
BA15D Base



12 VOLTS

Item #
[770612](#) (2700K)¹
[770611](#) (3000K)¹

0.8W
T3
20W Equiv.
Festoon Base

24 VOLTS

Item #
[770614](#) (2700K)¹
[770613](#) (3000K)¹

12 VOLTS

Item #
[770594](#) (2700K)
[770583](#) (3000K)



2.5W
T5
20W Equiv.
Wedge Base



A modern, minimalist living room. In the center, a large white cabinet with a dark wood frame and open shelves holds various decorative items, including a bronze sculpture of a rider on a horse and a white vase. To the left, a dining area with a white marble countertop and grey chairs is visible. In the foreground, a brown leather armchair with a metal frame sits on a grey and white striped rug. To the right, a round coffee table with a white top and dark base holds a small bronze sculpture. A modern pendant light with three spherical bulbs hangs from the ceiling. The overall aesthetic is clean and sophisticated.

Anything
but Ordinary

E26, GU24 A19



Preferred

- Item #
[774234](#) (2700K)
[774235](#) (3000K)
[774236](#) (4000K)
[774237](#) (5000K)

Premium

- Item #
[774238](#) (2700K)¹
[774239](#) (3000K)¹
[774240](#) (4000K)¹

9W
 A19
 60W Equiv.
 E26 Base



- Item #
[774260](#) (2700K)
[774261](#) (3000K)

11W
 A19
 75W Equiv.
 E26 Base



- Item #
[774276](#) (2700K)¹
[774277](#) (3000K)¹

15W
 A19
 100W Equiv.
 E26 Base



- Item #
[774241](#) (2700K)¹
[774242](#) (3000K)¹

9W
 A19
 60W Equiv.
 GU24 Base



- Item #
[774278](#) (2700K)¹
[774279](#) (3000K)¹

15W
 A19
 100W Equiv.
 GU24 Base



General Service

- A19
 R20, BR30, BR40
 PAR16, PAR20
 PAR30, PAR38
 MR16

3-WAY, DUSK TO DAWN A19

Ideal for table lamps and portables

Offers three levels of light so users can adjust the brightness to their preference



Item #
[774285](#) (2700K)
[774286](#) (3000K)

5/9/14W
 A19
 40/60/100W Equiv.



Hidden
Dusk-to-Dawn
 sensor

Item #
[774070](#) (3000K)

9W
 A19
 60W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

REFLECTORS R20, BR30, BR40



Item #
[772864](#) (2700K)
[772865](#) (3000K)

7.5W
R20
50W Equiv.



Item #
[772870](#) (2700K)
[772871](#) (3000K)

8W
BR30
65W Equiv.



Item #
[772873](#) (2700K)
[772874](#) (3000K)

11W
BR30
75W Equiv.



Item #
[772876](#) (2700K)
[772877](#) (3000K)

15W
BR40
75W Equiv.



PREFERRED & PREMIUM PAR16 & PAR20



Item #
[771117](#) (3000K)²

6.5W
PAR16
60W Equiv.

Preferred

N.Flood

Item #
[772751](#) (2700K)¹
[772752](#) (2700K)¹

Flood

Item #
[772755](#) (3000K)¹
[772756](#) (3000K)¹

7W
PAR20
50W Equiv.



Premium

N.Flood

Item #
[772261](#) (2700K)^{1, 3, 4}
[772262](#) (2700K)^{1, 3, 4}

Flood

Item #
[772265](#) (3000K)^{1, 3, 4}
[772266](#) (3000K)^{1, 3, 4}

6.5W
PAR20
50W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

PREFERRED & PREMIUM PAR30 Short Neck



Preferred

N.Flood

Flood

Item #

[772763](#) (2700K)
[772767](#) (3000K)

[772764](#) (2700K)
[772768](#) (3000K)

10W
PAR30SN
75W Equiv.



Premium

N.Flood

Flood

Item #

[772273](#) (2700K)^{1,2}
[772277](#) (3000K)^{1,2}

[772274](#) (2700K)^{1,2}
[772278](#) (3000K)^{1,2}

10W
PAR30SN
75W Equiv.





PREFERRED & PREMIUM PAR30 Long Neck



Preferred

N.Flood

Flood

Item #

[772775](#) (2700K)

[772776](#) (2700K)

[772779](#) (3000K)

[772780](#) (3000K)

10W
PAR30LN
75W Equiv.



Premium

Flood

Item #

[772286](#) (2700K)^{1,2}

[772290](#) (3000K)^{1,2}

10W
PAR30LN
75W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS

*Great for
Landscaping Lighting*

PREFERRED & PREMIUM PAR38



Preferred

N.Flood

Flood

Item #
[772787](#) (2700K)

Item #
[772788](#) (2700K)
[772792](#) (3000K)

15W
PAR38
120W Equiv.



Premium

N.Flood

Flood

Item #
[772297](#) (2700K)^{1,2}
[772301](#) (3000K)^{1,2}

Item #
[772298](#) (2700K)^{1,2}
[772302](#) (3000K)^{1,2}

15W
PAR38
120W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



SORAA®

**WE CARRY VIVID AND BRILLIANT HL PRODUCTS
CONTACT US FOR MORE INFORMATION**

SORAA® IS A REGISTERED TRADEMARK OF ECOSENSE.

120V MR16 GU10



Preferred

Item #
771119 (2700K)
771120 (3000K)

6.5W
PAR16
50W Equiv.



Premium

Item #
771221 (2700K)^{1,2}
771218 (3000K)^{1,2}

5.5W
PAR16
50W Equiv.



12V MR16 GU5.3



Preferred

Item #
[771207](#) (2700K)
[771208](#) (3000K)

6.5W
 MR16
 50W Equiv.



Preferred

Item #
[771211](#) (2700K)
[771212](#) (3000K)

7W
 MR16
 75W Equiv.



Premium

Item #
[771101](#) (2700K)^{1,2}
[771102](#) (3000K)^{1,2}

6.5W
 MR16
 50W Equiv.



Premium

Item #
[771203](#) (2700K)¹⁻²
[771204](#) (3000K)¹⁻²

7.5W
 MR16
 75W Equiv.



SEE INDEX FOR FULL PRODUCT SPECS



Light that
gets you

Check out bulbritesolana.com for more details

BULBRITE[®]
solana
LED SMART BULBS

BULBRITE SOLANA® Smart Filament - Clear



Item #
[292115](#)
(2200K-6500K)²

4W
B11
40W Equiv.
E12 Base



Item #
[290110](#)
(2200K-6500K)¹

5.5W
A19
40W Equiv.
E26 Base



Item #
[290125](#)
(2200K-6500K)^{1, 2}

8W
A19
60W Equiv.
E26 Base



Item #
[291125](#)
(2200K-6500K)^{1, 2}

8W
ST18
60W Equiv.
E26 Base



Item #
[293120](#)
(2200K-6500K)¹

5.5W
G25
60W Equiv.
E26 Base



Item #
[293125](#)
(2200K-6500K)^{1, 2}

8W
G25
60W Equiv.
E26 Base



SEE INDEX FOR FULL PRODUCT SPECS

BULBRITE SOLANA® Smart Filament - Milky



Item #
[290111](#)
(2200K-6500K)

5.5W
A19
40W Equiv.



Item #
[293121](#)
(2200K-6500K)

5.5W
G25
60W Equiv.



BULBRITE SOLANA® Smart BR30, A19 Color



Item #
[196110](#)
(2200K-6500K)

8W
BR30
65W Equiv.



Item #
[190120](#)
(2200K-6500K)

8W
A19
60W Equiv.



Item #
[195125](#) (2200K-6500K)¹
Multicolor

9W
A19
60W Equiv.


Simple. Smart.





Set the Mood

BULBRITE SOLANA® 36' Smart String Light

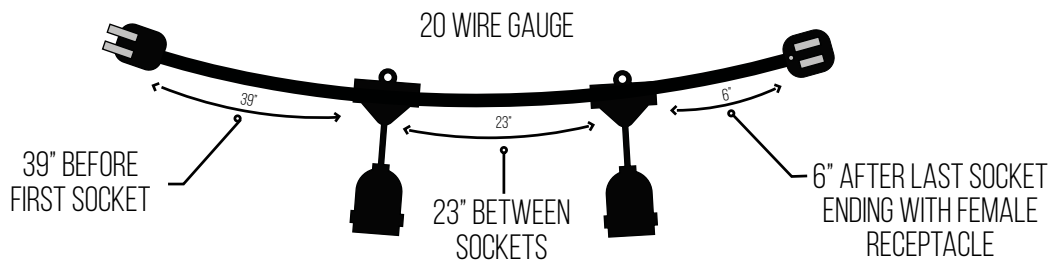

Item #
[814361](#) (2200K-6500K)
 Multicolor
 18 Sockets

16W
 S14
 7.5W Equiv.
 LED




A rooftop terrace at dusk, featuring a wooden deck, a light-colored sofa with several pillows, and a wooden coffee table. The coffee table is set with a teapot, a plate with a cup, and several lit candles. Two strings of warm white string lights are strung across the terrace, illuminating the scene. In the background, a city skyline is visible under a twilight sky.

STRING LIGHTS
OUTDOOR BULBS

Outdoor

14' STRING LIGHTS
30' STRING LIGHTS
48' STRING LIGHTS

14' String Lights E12 Bulbs

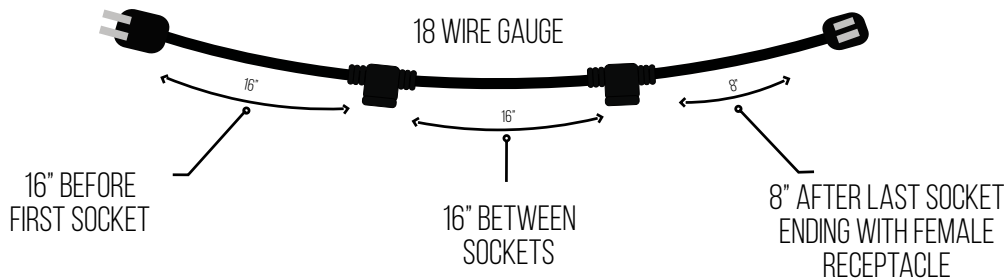

Item #
[812123](#) (2700K)
10 Sockets

0.7W LED G16
Connect up to
40 strings



Item #
[810054](#) (2700K)¹
10 Sockets

11W Incand G16
Connect up to
7 strings



Item #
[810150](#) (2700K)¹
10 Sockets

15W Incand Prism
Connect up to
7 strings



Item #
[810151](#) (2700K)¹
10 Sockets

25W Incand Fiesta
Connect up to
3 strings




Item #
[810056](#)
10 Sockets

No bulbs
included

Ideal for
**Balconies, porches and
smaller outdoor spaces**



14' String Lights E26 Bulbs

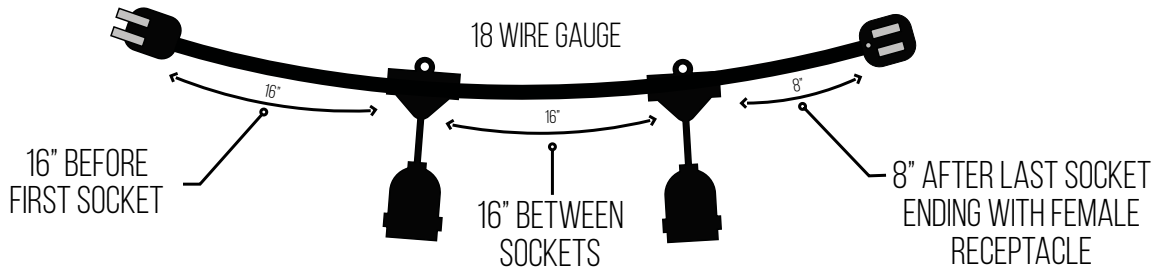

Item #
[812143](#) (2700K)
10 Sockets

1W LED S14
Connect up to 40 strings



Item #
[810006](#) (2700K)¹
10 Sockets


11W Incand S14
Connect up to 8 strings



SEE INDEX FOR FULL PRODUCT SPECS

30' String Lights E26 Bulbs

Ideal for
patios, decks and pergolas

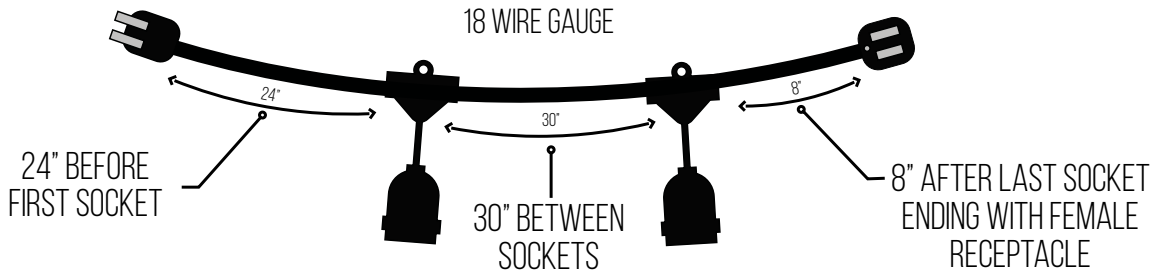

Shatter Resistant



Item #
[812313](#) (2700K)
12 Sockets

Item #
[812312](#) (2700K)
12 Sockets

Item #
[812300](#) (2700K)
12 Sockets

1W LED S14
Connect up to 30
strings

11W Incand S14
Connect up to 6
strings

No bulbs
included



String Bulbs C7, C9, G16, S14



Item #
[770171](#) (2700K)⁴

0.6W
C7
5W Equiv.
E12 Base



Item #
[770191](#) (2700K)⁴

0.6W
C9
5W Equiv.
E17 Base



Item #
[776786](#) (2700K)^{1, 4}

0.7W
G16
11W Equiv.
E12 Base



Item #
[776785](#) (2700K)^{1, 4}

1W
S14
11W Equiv.
E26 Base




Item #
[776684](#) (2400K)^{1, 2, 3}
[776685](#) (2700K)^{1, 2, 3}

0.7W
S14
11W Equiv.
E26 Base



Item #
[776950](#) (2700K)^{1, 2, 3}


2.5W
S14
25W Equiv.
E26 Base



SEE INDEX FOR FULL PRODUCT SPECS

48' String Lights E26 Bulbs

Ideal for
expansive areas

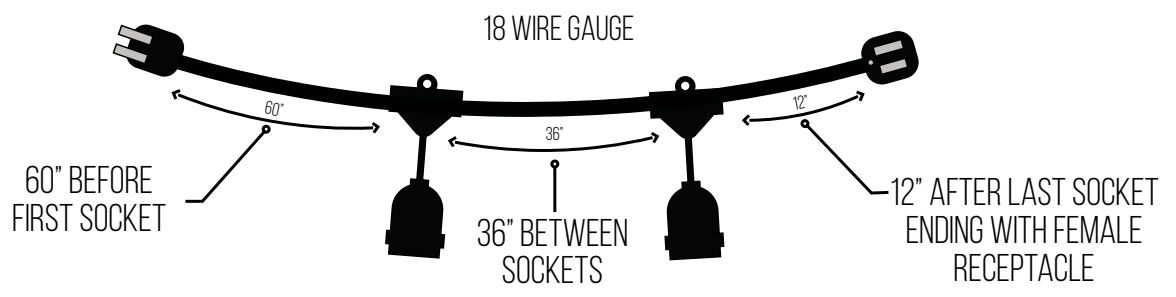

Item #
812483 (2700K)
15 sockets

1W LED S14
Connect up to 25 strings




Item #
812482 (2700K)
15 sockets

11W Incand S14
Connect up to 5 strings



48' String Lights E26 Bulbs

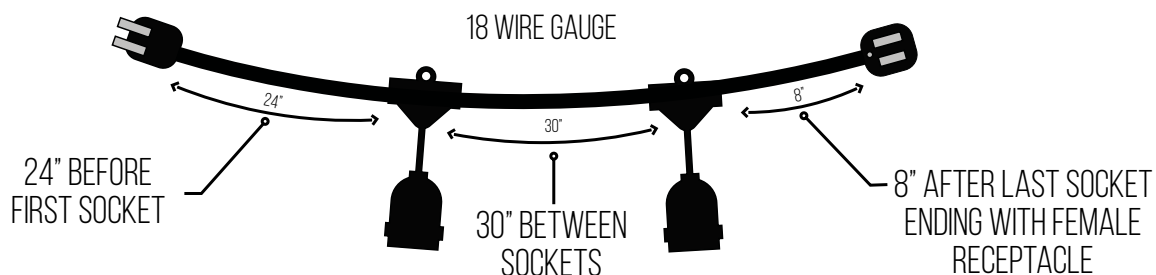

Item #
[810002](#) (2700K)¹
15 sockets

11W LED S14
Connect up to 4 strings



Item #
[810004](#) (2200K)¹
15 sockets

25W Incand A19
Connect up to 3 strings



Item #
[812480](#)
15 sockets

No bulbs
included



SEE INDEX FOR FULL PRODUCT SPECS

Counter Mat

Item # 900061 Ordering Code: COUNTERMAT/DISPLAY

- Show customers which bulb is the perfect fit for their new fixture
- QR code allows customers to view all Bulbrite bulb options
- Minimal dedicated space needed



5CCT Ceiling Light Counter Display

Item # 900174 Ordering Code: LEDFM/COUNTER/DISPLAY

- Interactive counter display with dimmer
- Features 5CCT J-Box Downlight with accessible switch to change color temperature
- 100 Bulbrite Ceiling Solutions tri-fold brochure included



HALF MOON COUNTER DISPLAY SERIES



Half Moon Display

Dimensions: 18" W x 6" H
Item #900036 Ordering Code: MOONDISPLAY



Multi-CCT Half Moon Display

Dimensions: 18" W x 6" H
Item #900210 Ordering Code: MOONDISPLAY/CCTS



Decorative Half Moon Display

Dimensions: 18" W x 6" H
Item # 900022 Ordering Code: MOONDISPLAY/DECORATIVE



Builder Half Moon Display

Dimensions: 18" W x 6" H
Item # 900023 Ordering Code: MOONDISPLAY/BUILDER



4000K Half Moon Display

Dimensions: 18" W x 6" H
Item # 900208 Ordering Code: MOONDISPLAY/4000K




5000K Half Moon Display

Dimensions: 18" W x 6" H
Item #900209 Ordering Code: MOONDISPLAY/5000K

Large Wall-Mounted Wheel

Item # 900155 Ordering Code: LARGE/ROUND/WHEEL/DISPLAY

- Hardwood wall-mounted display to showcase 16 Bulbrite bulbs
- 29" Diameter wheel with Sixteen (16) E26 base sockets
- Custom product and branding stickers available

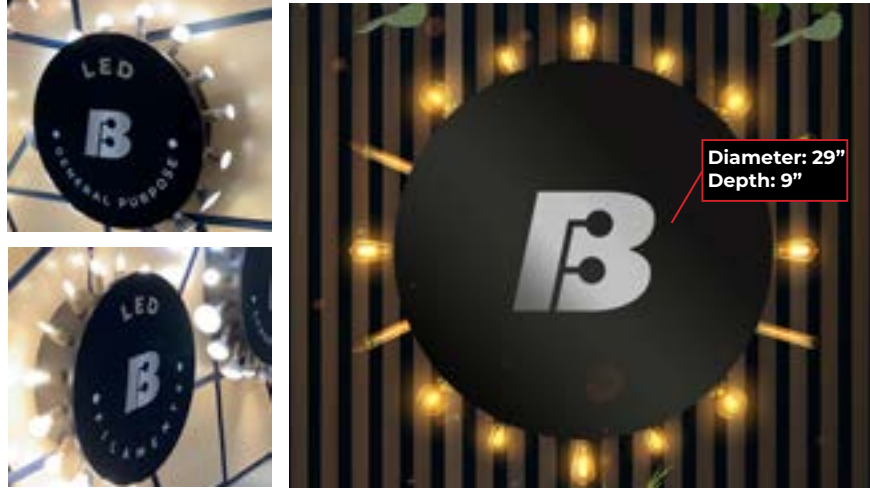

LED Warm Dim Collection



You have to *dim it*
to believe it



Warm Dim Tent Card

Dimensions: 8.5" W x 5" H x 3.5" D
Item # 900203 Ordering Code: WARMDIM/DISPLAY/TENTCARD

Create some buzz by placing these tent cards throughout your store.

Warm Dim Counter Display


Dimensions: 18.18" W x 12.06" H x 5.5" D
Item # 900196 Ordering Code: WARMDIM/DISPLAY/DIMMER

See LED Warm Dim in a side-by-side comparison with a traditional incandescent.

Warm Dim Gallery Display

Dimensions: 20" W x 48" H
Item # 900201 Ordering Code: WARMDIM/DISPLAY/GALLERY

Showcase the full **LED Warm Dim Collection** with our gallery that features 5 sockets, a fully operational dimmer and wide shelf for displaying product.

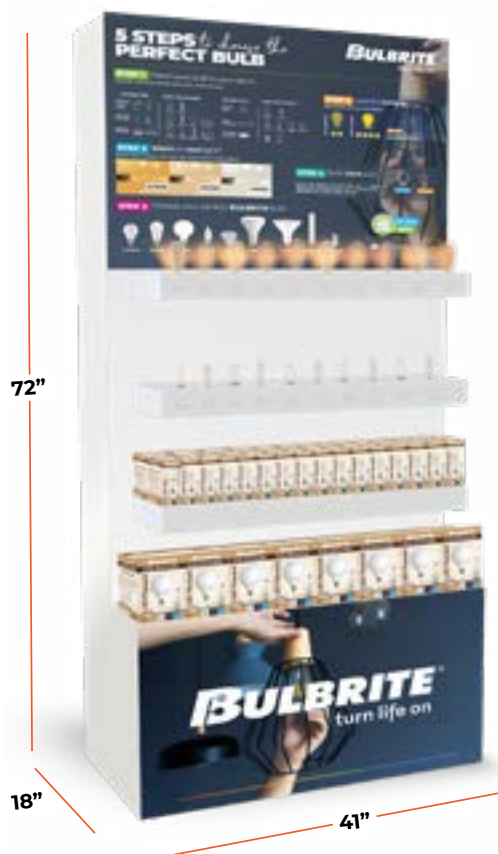

Four Shelf Floor Display with Sockets

Item # 900062 Ordering Code: 4SHELF/FLOOR/DISPLAY

- Includes two shelves of 10 E26 sockets with individual dimmers
- Two additional shelves for displaying product boxes
- Top design features lighting facts and educational bulb information
- Option to design your own design with your company logo

Linear Bulb Display

Discover how proper merchandising **boosts sales**, enhances training, and strengthens branding. Boost your bulb presence with Bulbrite's **new customizable linear wall display**

Option A: Showcase Breadth of Product



Dimensions: 30" W x 20" H x 12" D
Item # 900204 Ordering Code: SHELF/WALL/DISPLAY

Option B: Showcase a product line



Option C: Showcase your brand



LED 1, 2, 3 or 5 YEAR LIMITED WARRANTY

Bulbrite offers 1, 2, 3, or 5-year limited warranties on LED products (based on average household use of 3 hours per day according to federal estimation standards issued by the Department of Energy and Federal Trade Commission).

For product-specific warranty information, please visit www.bulbrite.com. You can also find warranty information listed on product packaging. If a covered product fails within the specified warranty period, please contact:

Bulbrite Industries, Inc.,
800.528.5555,
productsupport@bulbrite.com

Bulbrite reserves the right to examine all failed lamps, components, and/or ballasts and reserves the right to be the sole judge of whether any lamps and/or Bulbrite lighting products are defective and covered under this warranty. This product will be credited, repaired, or replaced at Bulbrite's option, and we will not cover associated labor costs. This warranty will not apply in the event of conditions demonstrating abnormal use or stress, improper storage, improper installation, or extended daily use that is beyond reasonable operating hours for the intended application. The warranty is void if the product is not used for the intention of which it was manufactured.

LIMITATION OF LIABILITY

THE FOREGOING WARRANTY CONSTITUTES BULBRITE'S EXCLUSIVE LIABILITY AND THE EXCLUSIVE REMEDY TO A CUSTOMER FOR ANY BREACH OF OR ANY OTHER NONCONFORMITY OF THE PRODUCTS COVERED BY THIS WARRANTY. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES. BULBRITE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

NO REPRESENTATIVE, EMPLOYEE, DISTRIBUTOR, OR DEALER OF BULBRITE HAS THE AUTHORITY TO MAKE OR IMPLY ANY WARRANTY, REPRESENTATION, PROMISE, OR AGREEMENT, WHICH IN ANY WAY VARIES THE TERMS OF THE WARRANTY SET FORTH ABOVE.

THE BULBRITE PRODUCTS SOLD TO CUSTOMERS ARE INTENDED TO BE USED ONLY IN THE APPLICATION(S) SPECIFIED BY BULBRITE. ANY OTHER USE RENDERS THE WARRANTY EXPRESSED HEREIN AND ALL IMPLIED WARRANTIES NULL AND VOID AND SAME ARE HEREBY EXCLUDED.

UNDER NO CIRCUMSTANCES SHALL BULBRITE BE LIABLE TO CUSTOMER OR ANY THIRD PARTY FOR CONSEQUENTIAL, INCIDENTAL, INDIRECT, EXEMPLARY, SPECIAL, OR OTHER DAMAGES WHETHER IN AN ACTION BASED ON CONTRACT, TORT (INCLUDING NEGLIGENCE), OR ANY OTHER LEGAL THEORY, ARISING OUT OF OR RELATED TO THE PRODUCTS SOLD TO CUSTOMER, INCLUDING BUT NOT LIMITED TO LOST PROFITS OR LOSS OF BUSINESS, EVEN IF BULBRITE IS APPRISED OF THE LIKELIHOOD OF SUCH DAMAGES OCCURRING..

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WAR-RANTY YEARS	SAFETY RATING UL/ETL	PAGE #
776821	LED4ST15/27K/FIL/3	4	ST15	E12	120	Clear	2700K	90	400	15000	4.630	2.500	40W	5	UL	6
190120	SL8WA19/W/FR/1P	8	A19	E26	120	Frost	2200K-6500K	80	800	25000	4.330	2.360	60W	2	UL	63
195125	SL9WA19/90/WC/FR/1P	9	A19	E26	120	Frost	2200K-6500K/ Multi-Color	90	800	25000	4.940	3.750	60W	2	ETL	63
196110	SL8WBR30/W/FR/1P	8	BR30	E26	120	Frost	2200K-6500K	80	650	25000	4.520	2.340	65W	2	UL	63
290110	SL5WA19/W/CL/1P	5.5	A19	E26	120	Clear	2200K-6500K	80	600	15000	4.250	2.380	40W	2	UL	61
290111	SL5WA19/90/W/MK/1P	5.5	A19	E26	120	Milky	2200K-6500K	90	500	15000	4.250	2.380	40W	2	UL	62
290125	SL8WA19/90/W/CL/1P	8	A19	E26	120	Clear	2200K-6500K	90	800	15000	5.400	2.300	60W	2	UL	61
291125	SL8WST18/90/W/CL/1P	8	ST18	E26	120	Clear	2200K-6500K	90	800	15000	4.060	1.380	60W	2	UL	61
292115	SL4WB11/90/W/CL/1P	4	B11	E12	120	Clear	2200K-6500K	90	400	15000	5.040	3.150	40W	2	UL	61
293120	SL5WG25/W/CL/1P	5.5	G25	E26	120	Clear	2200K-6500K	80	600	15000	4.690	3.130	60W	2	UL	61
293121	SL5WG25/90/W/MK/1P	5.5	G25	E26	120	Milky	2200K-6500K	90	500	15000	4.690	3.130	60W	2	UL	62
293125	SL8WG25/90/W/CL/1P	8	G25	E26	120	Clear	2200K-6500K	90	800	15000	2.190	0.880	60W	2	UL	61
770171	LED/C7C	0.6	C7	E12	120	Clear	2700K	-	-	30000	2.940	1.130	5W	3	UL	69
770191	LED/C9C	0.6	C9	E17	120	Clear	2700K	-	-	30000	1.420	0.570	5W	3	UL	69
770571	LED2G4/30K/12	2	JC	G4	12	Clear	3000K	80	180	15000	1.690	0.630	15W	5	UL	47
770572	LED3G4/30K/12	3	JC	G4	12	Clear	3000K	80	280	15000	1.810	0.690	25W	5	UL	47
770576	LED4GY8/30K/120/D	4.5	T6	GY8	120	Clear	3000K	80	400	25000	1.950	0.630	40W	5	UL	46
770577	LED3G9/30K/120	3.5	T5	G9	120	Clear	3000K	80	330	25000	2.170	0.710	25W	5	UL	42
770579	LED4G9/30K/120/D	4.5	T6	G9	120	Clear	3000K	80	400	25000	2.170	0.710	40W	5	UL	42
770580	LED4G9/30K/120/F/D	4.5	T6	G9	120	Frost	3000K	80	340	25000	2.060	0.700	40W	5	UL	42
770581	LED4E11/30K/120/D	4.5	T6	E11	120	Clear	3000K	80	400	25000	2.060	0.700	40W	5	UL	44
770582	LED4E11/30K/120/F/D	4.5	T6	E11	120	Frost	3000K	80	340	25000	1.460	0.590	40W	5	UL	44
770583	LED2WEDGE/30K/12	2.5	T5	WEDGE	12	Clear	3000K	80	230	15000	2.130	0.700	20W	5	UL	48
770584	LED4E12/30K/120/D	4.5	T6	E12	120	Clear	3000K	80	400	25000	2.130	0.700	40W	5	UL	45
770585	LED4E12/30K/120/F/D	4.5	T6	E12	120	Frost	3000K	80	340	25000	1.420	0.570	40W	5	UL	45
770586	LED2G4/27K/12	2	JC	G4	12	Clear	2700K	80	180	15000	1.690	0.630	15W	5	UL	47
770587	LED3G4/27K/12	3	JC	G4	12	Clear	2700K	80	280	15000	1.810	0.690	25W	5	UL	47
770588	LED4GY8/27K/120/D	4.5	T6	GY8	120	Clear	2700K	80	400	25000	1.950	0.630	40W	5	UL	46
770589	LED3G9/27K/120	3.5	T5	G9	120	Clear	2700K	80	330	25000	2.170	0.710	25W	5	UL	42
770590	LED4G9/27K/120/D	4.5	T6	G9	120	Clear	2700K	80	400	25000	2.170	0.710	40W	5	UL	42
770591	LED4G9/27K/120/F/D	4.5	T6	G9	120	Frost	2700K	80	340	25000	2.060	0.700	40W	5	UL	42
770592	LED4E11/27K/120/D	4.5	T6	E11	120	Clear	2700K	80	400	25000	2.060	0.700	40W	5	UL	44
770593	LED4E11/27K/120/F/D	4.5	T6	E11	120	Frost	2700K	80	340	25000	1.460	0.590	40W	5	UL	44
770594	LED2WEDGE/27K/12	2.5	T5	WEDGE	12	Clear	2700K	80	230	15000	2.130	0.700	20W	5	UL	48
770595	LED4E12/27K/120/D	4.5	T6	E12	120	Clear	2700K	80	400	25000	2.130	0.700	40W	5	UL	45
770596	LED4E12/27K/120/F/D	4.5	T6	E12	120	Frost	2700K	80	340	25000	2.430	0.570	40W	5	UL	45
770597	LED3G9/27K/W/D	3.5	T4	G9	120	Clear	2700K	80	300	15000	2.430	0.570	20W	5	UL	43
770598	LED3G9/30K/W/D	3.5	T4	G9	120	Clear	3000K	80	300	15000	2.580	0.630	20W	5	UL	43
770599	LED4G9/27K/W/D	4.5	T5	G9	120	Clear	2700K	80	450	15000	2.576	0.628	40W	5	UL	43
770600	LED4G9/30K/W/D	4.5	T5	G9	120	Clear	3000K	80	450	15000	2.576	0.628	40W	5	UL	43

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
770600	LED4G9/30K/W/D	4.5	T5	G9	120	Clear	3000K	80	450	15000	2.580	0.630	40W	5	UL	43
770611	LED1/FEST/30K/12/2	0.8	T3	FEST	12	Clear	3000K	82	55	25000	1.640	0.420	20W	5	ETL	48
770612	LED1/FEST/27K/12/2	0.8	T3	FEST	12	Clear	2700K	82	55	25000	1.640	0.420	20W	5	ETL	48
770613	LED1/FEST/30K/24/2	0.8	T3	FEST	24	Clear	3000K	82	55	25000	1.640	0.410	20W	5	ETL	48
770614	LED1/FEST/27K/24/2	0.8	T3	FEST	24	Clear	2700K	82	55	25000	1.640	0.410	20W	5	ETL	48
770615	LED4GY6/30K/D/2	4.5	T6	GY6.35	120	Clear	3000K	80	400	25000	1.810	0.730	40W	5	-	46
770616	LED4GY6/27K/D/2	4.5	T6	GY6.35	120	Clear	2700K	80	400	25000	1.810	0.730	40W	5	-	46
770617	LED4SC/30K/12	4.5	T4	BA15S	12	Clear	3000K	80	400	25000	2.100	0.680	40W	5	UL	48
770618	LED4SC/27K/12	4.5	T4	BA15S	12	Clear	2700K	80	400	25000	2.100	0.680	40W	5	UL	48
770619	LED4DC/30K/D	4.5	T5	BA15D	120	Clear	3000K	80	400	25000	2.100	0.670	40W	5	ETL	48
770620	LED4DC/27K/D	4.5	T5	BA15D	120	Clear	2700K	80	400	25000	2.100	0.670	40W	5	ETL	48
770621	LED3G4/WA/30K/12	2.8	WAFER	G4	12	Clear	3000K	80	280	25000	1.560	1.190	25W	5	UL	47
770622	LED3G4/WA/27K/12	2.8	WAFER	G4	12	Clear	2700K	80	280	25000	1.560	1.190	25W	5	UL	47
770623	LED4G4/27K/12	4.5	T5	G4	12	Clear	2700K	80	400	25000	1.810	0.670	40W	5	UL	47
770624	LED4G4/30K/12	4.5	T5	G4	12	Clear	3000K	80	400	25000	1.810	0.670	40W	5	UL	47
770625	LED5GY6/27K/12	5	T7	GY6.35	12	Clear	2700K	80	550	25000	2.050	0.890	60W	5	UL	47
770626	LED5GY6/30K/12	5	T7	GY6.35	12	Clear	3000K	80	550	25000	2.050	0.89	60W	5	UL	47
770629	LED5E11/27K/120/D	5	T6	E11	120	Clear	2700K	80	550	25000	2.280	0.750	60W	5	UL	44
770630	LED5E11/30K/120/D	5	T6	E11	120	Clear	3000K	80	550	25000	2.280	0.750	60W	5	UL	44
770631	LED5E12/27K/120/D	5	T6	E12	120	Clear	2700K	80	550	25000	2.320	0.750	60W	5	UL	45
770632	LED5E12/30K/120/D	5	T6	E12	120	Clear	3000K	80	550	25000	2.320	0.750	60W	5	UL	45
770637	LED6R7S/30K/S/D	6	J-TYPE	R7S	120	Clear	3000K	80	550	25000	3.060	0.930	50W	5	UL	48
770638	LED10R7S/30K/L/D	10	J-TYPE	R7S	120	Clear	3000K	80	1100	25000	4.640	0.930	75W	5	UL	48
770640	LED6E11/27K/120/D	6.5	T6	E11	120	Clear	2700K	80	700	15000	2.830	0.750	70W	5	UL	44
770641	LED6E11/30K/120/D	6.5	T6	E11	120	Clear	3000K	80	700	15000	2.830	0.750	70W	5	UL	44
770642	LED6E12/27K/120/D	6.5	T6	E12	120	Clear	2700K	80	700	15000	2.890	0.750	70W	5	UL	45
770643	LED6E12/30K/120/D	6.5	T6	E12	120	Clear	3000K	80	700	15000	2.890	0.750	70W	5	UL	45
770644	LED6G9/27K/120/D	6.5	T6	G9	120	Clear	2700K	80	700	15000	2.720	0.750	70W	5	UL	42
770645	LED6G9/30K/120/D	6.5	T6	G9	120	Clear	3000K	80	700	15000	2.720	0.750	70W	5	UL	42
770647	LED5G9/27K/120/D/2	5	T6	G9	120	Clear	2700K	80	550	25000	2.170	0.750	60W	5	UL	42
770648	LED5G9/30K/120/D/2	5	T6	G9	120	Clear	3000K	80	550	25000	2.170	0.750	60W	5	UL	42
770649	LED2G4/27K/W/D	1.8	T5	G4	12	Clear	2700K	90	140	15000	1.950	0.520	15W	5	UL	47
770650	LED2G4/30K/W/D	1.8	T5	G4	12	Clear	3000K	90	140	15000	1.950	0.520	15W	5	UL	47
770651	LED2G4/27K/W/M/D	1.8	T5	G4	12	Frost	2700K	90	140	15000	1.950	0.520	15W	5	UL	47
770652	LED2G4/30K/W/M/D	1.8	T5	G4	12	Frost	3000K	90	140	15000	1.950	0.520	15W	5	UL	47
770653	LED2GY6/27K/12/W/D	1.8	T5	GY6.35	12	Clear	2700K	90	140	15000	2.050	0.520	15W	5	UL	47
770654	LED2GY6/30K/12/W/D	1.8	T5	GY6.35	12	Clear	3000K	90	140	15000	2.050	0.520	15W	5	UL	47
770655	LED2GY6/27K/12/W/M/D	1.8	T5	GY6.35	12	Frost	2700K	90	140	15000	2.050	0.520	15W	5	UL	47
770656	LED2GY6/30K/12/W/M/D	1.8	T5	GY6.35	12	Frost	3000K	90	140	15000	2.050	0.520	15W	5	UL	47
770657	LED4G9/27K/W/M/D	4.5	T5	G9	120	Frost	2700K	90	450	15000	2.580	0.630	40W	5	UL	43
770658	LED4G9/30K/W/M/D	4.5	T5	G9	120	Frost	3000K	90	450	15000	2.580	0.630	40W	5	UL	43

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
770659	LED3G9/27K/W/M/D	3.5	T5	G9	120	Frost	2700K	90	300	15000	2.430	0.570	25W	5	UL	43
770660	LED3G9/30K/W/M/D	3.5	T5	G9	120	Frost	3000K	90	300	15000	2.430	0.570	25W	5	UL	43
771101	LED6MR16FL35/50/927/J/D/4	6.5	MR16	GU5.3	12	Flood	2700K	90	500	25000	1.900	1.970	50W	3	UL	59
771102	LED6MR16FL35/50/930/J/D/4	6.5	MR16	GU5.3	12	Flood	3000K	90	500	25000	1.900	1.970	50W	3	UL	59
771117	LED6PAR16FL40/50/830/D/4	6.5	PAR16	E26	120	Flood	3000K	80	500	15000	2.760	1.950	60W	3	UL	53
771119	LED6PAR16GUFL40/50/827/D/4	6.5	PAR16	GU10	120	Flood	2700K	80	500	25000	2.040	1.970	50W	3	UL	58
771120	LED6PAR16GUFL40/50/830/D/4	6.5	PAR16	GU10	120	Flood	3000K	80	500	25000	2.040	1.970	50W	3	UL	58
771203	LED7MR16FL35/75/927/J/D	7.5	MR16	GU5.3	12	Flood	2700K	90	570	25000	1.910	1.970	75W	3	UL	59
771204	LED7MR16FL35/75/930/J/D	7.5	MR16	GU5.3	12	Flood	3000K	90	570	25000	1.910	1.970	75W	3	UL	59
771207	LED6MR16FL35/50/827/D	6.5	MR16	GU5.3	12	Flood	2700K	80	500	25000	1.900	1.970	50W	3	UL	59
771208	LED6MR16FL35/50/830/D	6.5	MR16	GU5.3	12	Flood	3000K	80	500	25000	1.910	1.970	50W	3	UL	59
771211	LED7MR16FL35/75/827/D	7	MR16	GU5.3	12	Flood	2700K	80	570	25000	1.910	1.970	75W	3	UL	59
771212	LED7MR16FL35/75/830/D	7	MR16	GU5.3	12	Flood	3000K	80	570	25000	1.910	1.970	75W	3	UL	59
771218	LED5PAR16GUFL40/50/930/J/D	5.5	PAR16	GU10	120	Flood	3000K	90	420	25000	2.160	1.970	50W	3	UL	58
771221	LED5PAR16GUFL40/50/927/J/D	5.5	PAR16	GU10	120	Flood	2700K	90	400	25000	2.160	1.970	50W	3	UL	58
772261	LED6PAR20/NFL25/927/WD/2	6.5	PAR20	E26	120	Narrow Flood	2700K	90	500	25000	3.130	2.500	50W	3	UL	53
772262	LED6PAR20/FL40/927/WD/2	6.5	PAR20	E26	120	Flood	2700K	90	500	25000	3.130	2.500	50W	3	UL	53
772265	LED6PAR20/NFL25/930/WD/2	6.5	PAR20	E26	120	Narrow Flood	3000K	90	500	25000	3.130	2.500	50W	3	UL	53
772266	LED6PAR20/FL40/930/WD/2	6.5	PAR20	E26	120	Flood	3000K	90	500	25000	3.130	2.500	50W	3	UL	53
772273	LED10PAR30S/NF25/927/WD/2	10	PAR30SN	E26	120	Narrow Flood	2700K	90	830	25000	3.560	3.750	75W	3	UL	54
772274	LED10PAR30S/FL40/927/WD/2	10	PAR30SN	E26	120	Flood	2700K	90	830	25000	3.560	3.750	75W	3	UL	54
772277	LED10PAR30S/NF25/930/WD/2	10	PAR30SN	E26	120	Narrow Flood	3000K	90	830	25000	3.560	3.750	75W	3	UL	54
772278	LED10PAR30S/FL40/930/WD/2	10	PAR30SN	E26	120	Flood	3000K	90	830	25000	3.560	3.750	75W	3	UL	54
772286	LED10PAR30L/FL40/927/WD/2	10	PAR30LN	E26	120	Flood	2700K	90	800	25000	4.560	3.750	75W	3	UL	55
772290	LED10PAR30L/FL40/930/WD/2	10	PAR30LN	E26	120	Flood	3000K	90	800	25000	4.560	3.750	75W	3	UL	55
772297	LED15PAR38/NF25/927/WD/2	15	PAR38	E26	120	Narrow Flood	2700K	90	1200	25000	5.190	4.750	120W	3	UL	56
772298	LED15PAR38/FL40/927/WD/2	15	PAR38	E26	120	Flood	2700K	90	1200	25000	5.190	4.750	120W	3	UL	56
772301	LED15PAR38/NF25/930/WD/2	15	PAR38	E26	120	Narrow Flood	3000K	90	1200	25000	5.190	4.750	120W	3	UL	56
772302	LED15PAR38/FL40/930/WD/2	15	PAR38	E26	120	Flood	3000K	90	1200	25000	5.190	4.750	120W	3	UL	56
772751	LED7PAR20/NF25/827/WD/2	7	PAR20	E26	120	Narrow Flood	2700K	80	500	25000	3.130	2.500	50W	3	UL	53
772752	LED7PAR20/FL40/827/WD/2	7	PAR20	E26	120	Flood	2700K	80	500	25000	3.130	2.500	50W	3	UL	53
772755	LED7PAR20/NF25/830/WD/2	7	PAR20	E26	120	Narrow Flood	3000K	80	500	25000	3.130	2.500	50W	3	UL	53
772756	LED7PAR20/FL40/830/WD/2	7	PAR20	E26	120	Flood	3000K	80	500	25000	3.130	2.500	50W	3	UL	53
772763	LED10PAR30S/NF25/827/WD/2	10	PAR30SN	E26	120	Narrow Flood	2700K	80	800	25000	3.560	3.750	75W	3	UL	54
772764	LED10PAR30S/FL40/827/WD/2	10	PAR30SN	E26	120	Flood	2700K	80	800	25000	3.560	3.750	75W	3	UL	54
772767	LED10PAR30S/NF25/830/WD/2	10	PAR30SN	E26	120	Narrow Flood	3000K	80	800	25000	3.560	3.750	75W	3	UL	54
772768	LED10PAR30S/FL40/830/WD/2	10	PAR30SN	E26	120	Flood	3000K	80	800	25000	3.560	3.750	75W	3	UL	54
772775	LED10PAR30L/NF25/827/WD/2	10	PAR30LN	E26	120	Narrow Flood	2700K	80	800	25000	4.560	3.750	75W	3	UL	55
772776	LED10PAR30L/FL40/827/WD/2	10	PAR30LN	E26	120	Flood	2700K	80	800	25000	4.560	3.750	75W	3	UL	55
772779	LED10PAR30L/NF25/830/WD/2	10	PAR30LN	E26	120	Narrow Flood	3000K	80	800	25000	4.560	3.750	75W	3	UL	55

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
772780	LED10PAR30L/FL40/830/WD/2	10	PAR30LN	E26	120	Flood	3000K	80	800	25000	4.560	3.750	75W	3	UL	55
772787	LED15PAR38/NF25/827/WD/2	15	PAR38	E26	120	Narrow Flood	2700K	80	1200	25000	5.190	4.750	120W	3	UL	56
772788	LED15PAR38/FL40/827/WD/2	15	PAR38	E26	120	Flood	2700K	80	1200	25000	5.190	4.750	120W	3	UL	56
772792	LED15PAR38/FL40/830/WD/2	15	PAR38	E26	120	Flood	3000K	80	1200	25000	5.190	4.750	120W	3	UL	56
772864	LED7R20/827/D/4	7.5	R20	E26	120	Frost	2700K	80	525	15000	3.740	2.480	50W	2	UL	52
772865	LED7R20/830/D/4	7.5	R20	E26	120	Frost	3000K	80	525	15000	3.740	2.480	50W	2	UL	52
772870	LED8BR30/827/D/4	8	BR30	E26	120	Frost	2700K	80	650	25000	5.200	3.740	65W	2	UL	52
772871	LED8BR30/830/D/4	8	BR30	E26	120	Frost	3000K	80	650	25000	5.200	3.740	65W	2	UL	52
772873	LED11BR30/827/D/4	11	BR30	E26	120	Frost	2700K	80	1050	15000	5.200	3.760	75W	2	UL	52
772874	LED11BR30/830/D/4	11	BR30	E26	120	Frost	3000K	80	1050	15000	5.200	3.760	75W	2	UL	52
772876	LED15BR40/827/D/4	15	BR40	E26	120	Frost	2700K	80	1100	25000	6.230	4.930	75W	2	UL	52
772877	LED15BR40/830/D/4	15	BR40	E26	120	Frost	3000K	80	1100	25000	6.230	4.930	75W	2	UL	52
774070	LED9A19/930/D2D	9	A19	E26	120	Frost	3000K	90	800	25000	4.330	2.360	60W	2	UL	51
774234	LED9A19/PF60W/927/D/1P	9	A19	E26	120	Frost	2700K	90	800	15000	4.330	2.360	60W	3	UL	50
774235	LED9A19/PF60W/930/D/1P	9	A19	E26	120	Frost	3000K	90	800	15000	4.330	2.360	60W	3	UL	50
774236	LED9A19/PF60W/940/D/1P	9	A19	E26	120	Frost	4000K	90	800	15000	4.330	2.360	60W	5	UL	50
774237	LED9A19/PF60W/950/D/1P	9	A19	E26	120	Frost	5000K	90	800	15000	4.330	2.360	60W	3	UL	50
774238	LED9A19/P60W/927/J/D/1P	9	A19	E26	120	Frost	2700K	90	800	25000	4.330	2.360	60W	5	UL	50
774239	LED9A19/P60W/930/J/D/1P	9	A19	E26	120	Frost	3000K	90	800	25000	4.330	2.360	60W	5	UL	50
774240	LED9A19/P60W/940/J/D/1P	9	A19	E26	120	Frost	4000K	90	800	25000	4.330	2.360	60W	5	UL	50
774241	LED9A19/P60W/927/GU24/J/D/1P	9	A19	GU24	120	Frost	2700K	90	800	25000	4.330	2.360	60W	5	UL	50
774242	LED9A19/P60W/930/GU24/J/D/1P	9	A19	GU24	120	Frost	3000K	90	800	25000	4.330	2.360	60W	5	UL	50
774260	LED11A19/PF75W/927/D/1P	11	A19	E26	120	Frost	2700K	90	1100	15000	4.450	2.360	75W	3	UL	50
774261	LED11A19/PF75W/930/D/1P	11	A19	E26	120	Frost	3000K	90	1100	15000	4.450	2.360	75W	3	UL	50
774276	LED15A19/P100W/927/J/D/1P	15	A19	E26	120	Frost	2700K	90	1600	25000	4.520	2.280	100W	5	UL	50
774277	LED15A19/P100W/930/J/D/1P	15	A19	E26	120	Frost	3000K	90	1600	25000	4.520	2.280	100W	5	UL	50
774278	LED15A19/P100W/927/GU24/J/D/1P	15	A19	GU24	120	Frost	2700K	90	1600	25000	4.520	2.280	100W	5	UL	50
774279	LED15A19/P100W/930/GU24/J/D/1P	15	A19	GU24	120	Frost	3000K	90	1600	25000	4.520	2.280	100W	5	UL	50
774285	LED5/9/14A19/PF100W/827/3WAY/1P	5/9/14	A19	E26	120	Frost	2700K	80	450/ 800/ 1600	25000	4.510	2.260	40/ 60/ 100W	3	UL	51
774286	LED5/9/14A19/PF100W/830/3WAY/1P	5/9/14	A19	E26	120	Frost	3000K	80	450/ 800/ 1600	25000	4.510	2.260	40/ 60/ 100W	3	UL	51
776300	LED4PS52/22K/FIL	4	PS52	E26	120	Clear	2200K	95	190	15000	12.68	6.300	60W	5	UL	38
776301	LED4ET25/22K/FIL	4	ET25	E26	120	Clear	2200K	95	190	15000	15.16	3.150	60W	5	UL	38
776302	LED4G63/22K/FIL	4	G63	E26	120	Clear	2200K	95	190	15000	11.22	7.870	60W	5	UL	38
776303	LED4WB/22K/FIL	4	WB	E26	120	Clear	2200K	95	190	15000	15.16	3.540	60W	5	UL	39
776304	LED4BH/22K/FIL	4	BH	E26	120	Clear	2200K	95	190	15000	15.16	7.870	60W	5	UL	39
776305	LED4DIA/22K/FIL	4	DIA	E26	120	Clear	2200K	95	190	15000	15.35	7.870	60W	5	UL	39
776306	LED4OLIVE/22K/FIL	4	OS	E26	120	Clear	2200K	95	190	15000	16.93	4.530	60W	5	UL	39
776314	LED4BT56/22K/FIL	4	BT56	E26	120	Clear	2200K	95	190	15000	15.16	7.080	60W	5	UL	38
776316	LED4ICE/20K/FIL-NOS	4	ICEBERG	E26	120	Antique	2000K	95	180	15000	11.00	6.500	60W	5	UL	40
776317	LED4DROP/20K/FIL-NOS	4	DROPLET	E26	120	Antique	2000K	95	200	15000	12.50	6.000	60W	5	UL	40
776318	LED4JEWEL/20K/FIL-NOS	4	JEWEL	E26	120	Antique	2000K	95	200	15000	11.50	6.500	60W	5	UL	40

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776319	LED4ORB/20K/FIL-NOS	4	ORB	E26	120	Antique	2000K	95	200	15000	12.50	8.000	60W	5	UL	40
776320	LED4GLACIER/20K/FIL-NOS	4	GLACIER	E26	120	Antique	2000K	95	200	15000	12.50	7.750	60W	5	UL	40
776321	LED4C53/30K/FIL/GRAD/SMK	4.5	C53	E26	120	Clear/Smoke	3000K	80	200	15000	10.25	6.750	60W	5	UL	36
776322	LED4C53/30K/FIL/GRAD/BLU	4.5	C53	E26	120	Clear/Blue	3000K	80	200	15000	10.25	6.750	60W	5	UL	37
776400	LED9A19/30K-18K/WMDM/FIL/M	9	A19	E26	120	Milky	1800K-3000K	90	800	15000	4.130	2.360	60W	5	UL	29
776401	LED5B11/30K-18K/WMDM/FIL/M	5	B11	E12	120	Milky	1800K-3000K	90	500	15000	4.720	1.370	60W	5	UL	28
776402	LED5CA10/30K-18K/WMDM/FIL/M	5	CA10	E12	120	Milky	1800K-3000K	90	500	15000	4.720	1.370	60W	5	UL	28
776403	LED5G16/30K-18K/WMDM/FIL/M	5	G16	E12	120	Milky	1800K-3000K	90	500	15000	3.220	1.960	60W	5	UL	28
776404	LED9G25/30K-18K/WMDM/FIL/M	9	G25	E26	120	Milky	1800K-3000K	90	800	15000	4.640	3.150	60W	5	UL	29
776405	LED8ST18/30K-18K/WMDM/FIL/M	9	ST18	E26	120	Milky	1800K-3000K	90	800	15000	5.040	2.280	60W	5	UL	29
776513	LED4ST18/22K/FIL-NOS/CURV/1890	4	ST18	E26	120	Antique	2200K	95	200	15000	5.130	2.300	40W	5	UL	11
776514	LED4A19/21K/FIL-NOS/CURV/LOOP	4.5	A19	E26	120	Clear	2100K	80	350	15000	4.090	2.360	25W	5	UL	10
776515	LED3ST18/21K/FIL-NOS/CURV/HAIRPIN	3	ST18	E26	120	Clear	2100K	80	230	15000	5.040	2.280	25W	5	UL	11
776516	LED4G25/21K/FIL-NOS/CURV/SPIRAL	4.5	G25	E26	120	Clear	2100K	80	350	15000	4.640	3.140	40W	5	UL	20
776518	LED4T14/21K/FIL-NOS/CURV/SPIRAL	4.5	T14	E26	120	Clear	2100K	80	350	15000	4.250	1.770	40W	5	UL	25
776580	LED4F15/27K/FIESTA/CLR	4	F15	E26	120	Clear/Iridescent	2700K	90	320	15000	4.410	1.380	40W	2	UL	34
776581	LED4F15/21K/FIESTA/AMB	4	F15	E26	120	Amber	2100K	80	280	15000	4.410	1.380	40W	2	UL	34
776590	LED4C11/27K/FIL/SPUN/SAT	4	C11	E12	120	Satin	2700K	90	350	15000	4.150	1.890	40W	2	UL	35
776591	LED4C11/21K/FIL/SPUN/AMB	4	C11	E12	120	Amber	2100K	80	250	15000	4.150	1.890	40W	2	UL	35
776592	LED4C15/27K/FIL/SPUN/SAT	4	C15	E26	120	Satin	2700K	90	350	15000	4.250	1.850	40W	2	UL	35
776593	LED4C15/21K/FIL/SPUN/AMB	4	C15	E26	120	Amber	2100K	80	250	15000	4.250	1.850	40W	2	UL	35
776594	LED4T6SL/27K/FIL/3	4.5	T6SL	E12	120	Clear	2700K	90	400	15000	3.750	0.750	40W	5	UL	34
776595	LED4T6SL/30K/FIL/3	4.5	T6SL	E12	120	Clear	3000K	90	400	15000	3.750	0.750	40W	5	UL	34
776596	LED4PRISM/30K/FIL/3	4	Prism	E12	120	Clear	3000K	90	350	15000	4.750	1.500	40W	5	UL	34
776612	LED4G16/27K/FIL/M/3	4	G16	E12	120	Milky	2700K	80	350	15000	3.340	1.960	40W	5	UL	18
776626	LED5B11/27K/FIL/E12/3	5	B11	E12	120	Clear	2700K	80	500	15000	3.850	1.370	60W	5	UL	14
776627	LED5B11/30K/FIL/E12/3	5	B11	E12	120	Clear	3000K	80	500	15000	3.850	1.370	60W	5	UL	14
776671	LED4A19/27K/FIL/HM/2	4.5	A19	E26	120	Half Mirror	2700K	80	360	15000	4.100	2.400	40W	5	UL	33
776679	LED5A19/27K/FIL/HG/3	5	A19	E26	120	Half Gold	2700K	90	400	15000	4.090	2.360	40W	5	UL	32
776684	LED1S14/24K/FIL	0.7	S14	E26	120	Clear	2400K	80	75	15000	3.270	1.770	11W	1	UL	69
776685	LED1S14/27K/FIL	0.7	S14	E26	120	Clear	2700K	80	75	15000	3.270	1.770	11W	1	UL	69
776706	LED2G16/27K/FIL/3	2.5	G16	E12	120	Clear	2700K	90	250	15000	3.340	1.960	25W	5	UL	18
776707	LED5T9L/21K/11/FIL-NOS/3*	5	T9 11"	E26	120	Antique	2100K	90	300	15000	11.00	1.180	25W	5	UL	24
776712	LED4G16/30K/FIL/M/3	4	G16	E12	120	Milky	3000K	90	360	15000	3.340	1.960	40W	5	UL	18
776713	LED5T9/21K/7/FIL-NOS/3	5	T9 7.5"	E26	120	Antique	2100K	90	250	15000	7.5005	1.180	25W	5	UL	24
776719	LED5T9L/21K/15/FIL-NOS/3	5	T9 15"	E26	120	Antique	2100K	90	400	15000	15.00	1.180	40W	5	UL	24
776720	LED5T9L/27K/15/FIL/3	5	T9 15"	E26	120	Clear	2700K	90	400	15000	15.00	1.180	40W	5	UL	22
776721	LED5T9L/30K/15/FIL/3	5	T9 15"	E26	120	Clear	3000K	90	400	15000	15.00	1.180	40W	5	UL	22
776722	LED4T8/21K/FIL-NOS/3	4.5	T8	E12	120	Antique	2100K	90	450	15000	5.000	0.980	40W	5	UL	26
776723	LED4T8/27K/FIL/3	4.5	T8	E12	120	Clear	2700K	90	450	15000	5.000	0.980	40W	5	UL	26

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776724	LED4T8/30K/FIL/3	4.5	T8	E12	120	Clear	3000K	90	450	15000	5.000	0.980	40W	5	UL	26
776725	LED5T9/27K/7/FIL/F/3	5	T9 7.5"	E26	120	Frost	2700K	90	350	15000	7.500	1.180	40W	5	UL	23
776726	LED5T9/30K/7/FIL/F/3	5	T9 7.5"	E26	120	Frost	3000K	90	350	15000	7.500	1.180	40W	5	UL	23
776727	LED5T9/27K/11/FIL/F/3	5	T9 11"	E26	120	Frost	2700K	90	400	15000	11.000	1.180	40W	5	UL	23
776728	LED5T9/30K/11/FIL/F/3	5	T9 11"	E26	120	Frost	3000K	90	400	15000	11.000	1.180	40W	5	UL	23
776729	LED4T6/27K/FIL/M/3	4.5	T6	E12	120	Milky	2700K	90	400	15000	3.340	0.780	40W	5	UL	26
776730	LED4T6/30K/FIL/M/3	4.5	T6	E12	120	Milky	3000K	90	400	15000	3.340	0.780	40W	5	UL	26
776731	LED5T9/27K/5/FIL/4/JA8	5	T9 5"	E26	120	Clear	2700K	90	500	15000	4.920	1.180	40W	5	UL	22
776732	LED5T9/30K/5/FIL/4/JA8	5	T9 5"	E26	120	Clear	3000K	90	500	15000	4.920	1.180	40W	5	UL	22
776733	LED5B11/27K/FIL/E26/3	5.5	B11	E26	120	Clear	2700K	90	500	15000	3.700	1.370	60W	5	UL	14
776734	LED5B11/30K/FIL/E26/3	5.5	B11	E26	120	Clear	3000K	90	500	15000	3.700	1.370	60W	5	UL	14
776735	LED5B11/27K/FIL/M/E26/3	5.5	B11	E26	120	Milky	2700K	90	500	15000	3.700	1.370	60W	5	UL	15
776736	LED5B11/30K/FIL/M/E26/3	5.5	B11	E26	120	Milky	3000K	90	500	15000	3.700	1.370	60W	5	UL	15
776737	LED6B11/27K/FIL/3	6.5	B11	E12	120	Clear	2700K	90	750	15000	3.850	1.370	75W	5	UL	14
776738	LED6B11/30K/FIL/3	6.5	B11	E12	120	Clear	3000K	90	750	15000	3.850	1.370	75W	5	UL	14
776739	LED6CA10/27K/FIL/3	6.5	CA10	E12	120	Clear	2700K	90	750	15000	4.250	1.370	75W	5	UL	16
776740	LED6CA10/30K/FIL/3	6.5	CA10	E12	120	Clear	3000K	90	750	15000	4.250	1.370	75W	5	UL	16
776741	LED5CA10/27K/FIL/4/JA8	5	CA10	E12	120	Clear	2700K	90	500	15000	4.250	1.260	60W	5	UL	16
776742	LED5CA10/30K/FIL/4/JA8	5	CA10	E12	120	Clear	3000K	90	500	15000	4.250	1.260	60W	5	UL	16
776743	LED4G16/27K/FIL/4/JA8	4	G16	E12	120	Clear	2700K	90	350	15000	3.220	1.960	40W	5	UL	18
776744	LED4G16/30K/FIL/4/JA8	4	G16	E12	120	Clear	3000K	90	350	15000	3.220	1.960	40W	5	UL	18
776745	LED13ST18/27K/FIL/3/JA8	13	ST18	E26	120	Clear	2700K	90	1400	15000	5.040	2.280	100W	5	UL	12
776746	LED13ST18/30K/FIL/3/JA8	13	ST18	E26	120	Clear	3000K	90	1400	15000	5.040	2.280	100W	5	UL	12
776747	LED13G25/27K/FIL/3/JA8	13	G25	E26	120	Clear	2700K	90	1400	15000	4.640	3.150	150W	5	UL	19
776748	LED13G25/30K/FIL/3/JA8	13	G25	E26	120	Clear	3000K	90	1400	15000	4.640	3.150	150W	5	UL	19
776749	LED8G25/27K/FIL/4/JA8	8.5	G25	E26	120	Clear	2700K	90	800	15000	4.640	3.150	100W	5	UL	19
776750	LED8G25/30K/FIL/4/JA8	8.5	G25	E26	120	Clear	3000K	90	800	15000	4.640	3.150	100W	5	UL	19
776756	LED4B11/27K/FIL/4/JA8	4	B11	E12	120	Clear	2700K	90	350	15000	3.850	1.370	40W	5	UL	14
776763	LED4B11/30K/FIL/4/JA8	4	B11	E12	120	Clear	3000K	90	350	15000	3.850	1.370	40W	5	UL	14
776765	LED5T9L/27K/11/FIL/3	5	T9 11"	E26	120	Clear	2700K	90	350	15000	11.00	1.180	40W	5	UL	22
776767	LED8ST18/27K/FIL/3/JA8	8.5	ST18	E26	120	Clear	2700K	90	850	15000	5.040	2.280	60W	5	UL	12
776768	LED8A19/30K/FIL/3/JA8	8.5	A19	E26	120	Clear	3000K	90	850	15000	4.130	2.360	60W	5	UL	8
776769	LED8ST18/30K/FIL/3/JA8	8.5	ST18	E26	120	Clear	3000K	90	850	15000	5.040	2.280	60W	5	UL	12
776771	LED2G16/27K/FIL/HM/3	2.5	G16	E12	120	Half Mirror	2700K	90	200	15000	3.340	1.960	25W	5	UL	33
776772	LED3B11/27K/FIL/M/3	3.6	B11	E12	120	Milky	2700K	80	300	15000	3.850	1.370	40W	5	UL	15
776773	LED4B11/30K/FIL/M/3	4.5	B11	E12	120	Milky	3000K	90	400	15000	3.850	1.370	40W	5	UL	15
776774	LED8A19/27K/FIL/3/JA8	8.5	A19	E26	120	Clear	2700K	90	850	15000	4.130	2.360	60W	5	UL	8
776780	LED4T6/27K/FIL/3	4.5	T6	E12	120	Clear	2700K	90	450	15000	3.340	0.780	40W	5	UL	26
776781	LED5T9/27K/5/FIL/F/3	5	T9 5"	E26	120	Frost	2700K	90	450	15000	5.000	1.180	40W	5	UL	23
776785	LED1S14/27K/FIL/PL	1	S14	E26	120	Clear	2700K	80	45	10000	3.260	1.730	11W	1	-	69

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776786	LED1G16/27K/FIL/PL	0.7	G16	E12	120	Clear	2700K	80	45	10000	2.710	1.770	11W	1	-	69
776787	LED5CA10/27K/FIL/M/3	5	CA10	E12	120	Milky	2700K	90	500	15000	4.170	1.250	60W	5	UL	17
776788	LED5CA10/30K/FIL/C/3	5	CA10	E12	120	Milky	3000K	90	500	15000	4.170	1.250	60W	5	UL	17
776791	LED4T6/30K/FIL/3	4.5	T6	E12	120	Clear	3000K	90	450	15000	3.340	0.780	40W	5	UL	26
776792	LED5T9/30K/5/FIL/F/3	5	T9 5"	E26	120	Frost	3000K	90	450	15000	5.000	1.18	40W	5	UL	23
776800	LED5G25/22K/FIL-NOS/3	5	G25	E26	120	Antique	2200K	90	450	15000	4.640	3.15	40W	5	UL	20
776801	LED5ST18/22K/FIL-NOS/3	5	ST18	E26	120	Antique	2200K	90	450	15000	5.040	2.280	40W	5	UL	11
776810	LED8G25/30K/FIL/M/3	8.5	G25	E26	120	Milky	3000K	90	800	15000	4.640	3.150	100W	5	UL	19
776819	LED5T14/27K/FIL/3	5	T14	E26	120	Clear	2700K	90	450	15000	4.250	1.770	40W	5	UL	25
776820	LED5T14/30K/FIL/3	5	T14	E26	120	Clear	3000K	90	450	15000	4.250	1.770	40W	5	UL	25
776822	LED4ST15/30K/FIL/3	4	ST15	E12	120	Clear	3000K	90	400	15000	4 000	1.900	40W	5	UL	6
776823	LED4ST15/27K/FIL/M/3	4	ST15	E12	120	Milky	2700K	90	400	15000	4 000	1.900	40W	5	UL	6
776824	LED4ST15/30K/FIL/M/3	4	ST15	E12	120	Milky	3000K	90	400	15000	4 000	1.900	40W	5	UL	6
776825	LED4A15/27K/FIL/E12/3	4	A15	E12	120	Clear	2700K	90	400	15000	3.600	1.900	25W	5	UL	6
776826	LED4A15/30K/FIL/E12/3	4	A15	E12	120	Clear	3000K	90	400	15000	3.600	1.900	25W	5	UL	6
776827	LED4A15/27K/FIL/M/E12/3	4	A15	E12	120	Milky	2700K	90	400	15000	3.600	1.900	25W	5	UL	6
776828	LED4A15/30K/FIL/M/E12/3	4	A15	E12	120	Milky	3000K	90	400	15000	3.600	1.900	25W	5	UL	6
776829	LED7A15/27K/FIL/3	7	A15	E26	120	Clear	2700K	90	800	15000	3.290	1.900	60W	5	UL	7
776830	LED7A15/30K/FIL/3	7	A15	E26	120	Clear	3000K	90	800	15000	3.290	1.900	60W	5	UL	7
776831	LED7A15/27K/FIL/M/3	7	A15	E26	120	Milky	2700K	90	800	15000	3.290	1.900	60W	5	UL	7
776832	LED7A15/30K/FIL/M/3	7	A15	E26	120	Milky	3000K	90	800	15000	3.290	1.900	60W	5	UL	7
776833	LED5A19/27K/FIL/HB/3	5	A19	E26	120	Half Black	2700K	90	400	15000	4.100	2.350	40W	5	UL	30
776834	LED2G16/27K/FIL/HB/3	2.5	G16	E12	120	Half Black	2700K	90	200	15000	3.220	1.960	25W	5	UL	30
776835	LED5G25/27K/FIL/HB/3	5	G25	E26	120	Half Black	2700K	90	400	15000	4.580	3.160	40W	5	UL	30
776836	LED6G40/27K/FIL/HB/3	6	G40	E26	120	Half Black	2700K	90	500	15000	6.750	4.750	60W	5	UL	30
776837	LED5A19/27K/FIL/HW/3	5	A19	E26	120	Half White	2700K	90	400	15000	4.100	2.350	40W	5	UL	31
776838	LED2G16/27K/FIL/HW/3	2.5	G16	E12	120	Half White	2700K	90	200	15000	3.220	1.960	25W	5	UL	31
776839	LED5G25/27K/FIL/HW/3	5	G25	E26	120	Half White	2700K	90	400	15000	4.580	3.160	40W	5	UL	31
776840	LED6G40/27K/FIL/HW/3	6	G40	E26	120	Half White	2700K	90	500	15000	6.750	4.750	60W	5	UL	31
776854	LED3T9/30K/FIL/3	3	T9 5"	E26	120	Clear	3000K	90	250	15000	5.000	1.100	25W	5	UL	22
776857	LED4ST18/27K/FIL/3	4.5	ST18	E26	120	Clear	2700K	90	450	15000	5.040	2.280	40W	5	UL	12
776858	LED2CA10/27K/FIL/E12/3	2.5	CA10	E12	120	Clear	2700K	80	250	15000	4.330	1.260	25W	5	UL	16
776859	LED4CA10/27K/FIL/3	4.5	CA10	E12	120	Clear	2700K	90	350	15000	4.330	1.260	40W	5	UL	16
776860	LED3CA10/27K/FIL/M/3	3.6	CA10	E12	120	Milky	2700K	80	300	15000	4.330	1.260	40W	5	UL	17
776861	LED4CA10/30K/FIL/M/3	4.5	CA10	E12	120	Milky	3000K	90	400	15000	4.170	1.250	40W	5	UL	17
776862	LED4B11/27K/FIL/E26/3	4.5	B11	E26	120	Clear	2700K	90	350	15000	3.850	1.370	40W	5	UL	14
776864	LED4CA10/30K/FIL/3	4.5	CA10	E12	120	Clear	3000K	90	350	15000	4.330	1.260	40W	5	UL	16
776865	LED5T9L/27K/FIL/3	5	T9 11"	E26	120	Clear	2700K	90	450	15000	11.00	1.100	40W	5	UL	22
776866	LED7A19/27K/FIL/M/3	7	A19	E26	120	Milky	2700K	82	800	15000	4.050	2.360	60W	5	UL	9
776869	LED8A19/30K/FIL/M/3	8.5	A19	E26	120	Milky	3000K	90	800	15000	4.130	2.360	60W	5	UL	9

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776870	LED5G25/27K/FIL/HM/3	5	G25	E26	120	Half Mirror	2700K	90	450	15000	4.640	3.150	40W	5	UL	33
776871	LED2A19/27K/FIL/3	2.5	A19	E26	120	Clear	2700K	90	250	15000	4.130	2.360	25W	5	UL	8
776872	LED5A19/27K/FIL/3	5	A19	E26	120	Clear	2700K	90	450	15000	4.050	2.360	40W	5	UL	8
776875	LED4CA10/27K/FIL/E26/3	4.5	CA10	E26	120	Clear	2700K	92	350	15000	4.330	1.260	40W	5	UL	16
776878	LED8G40/27K/FIL/3	8.5	G40	E26	120	Clear	2700K	90	800	15000	7.000	4.920	100W	5	UL	21
776879	LED8G40/30K/FIL/3	8.5	G40	E26	120	Clear	3000K	90	800	15000	7.000	4.920	100W	5	UL	21
776897	LED8G40/27K/FIL/M/3	8.5	G40	E26	120	Milky	2700K	90	800	15000	7.000	4.920	100W	5	UL	21
776899	LED8G40/30K/FIL/M/3	8.5	G40	E26	120	Milky	3000K	90	800	15000	7.000	4.920	100W	5	UL	21
776902	LED4A19/21K/FIL-NOS/3	4.5	A19	E26	120	Antique	2100K	90	410	15000	4.050	2.360	40W	5	UL	10
776903	LED2CA10/21K/FIL-NOS/3	2.5	CA10	E12	120	Antique	2100K	90	160	15000	4.330	1.260	25W	5	UL	17
776904	LED2T6/21K/FIL-NOS/3	2.5	T6	E12	120	Antique	2100K	90	160	15000	3.380	0.780	25W	5	UL	26
776905	LED4T14/21K/FIL-NOS/3	4	T14	E26	120	Antique	2100K	90	315	15000	4.130	1.770	40W	5	UL	25
776906	LED2G16/21K/FIL-NOS/3	2.5	G16	E12	120	Antique	2100K	90	160	15000	3.340	1.960	25W	5	UL	18
776908	LED3T9/21K/FIL-NOS/3	3	T9 5"	E26	120	Antique	2100K	90	200	15000	5.00	1.100	25W	5	UL	24
776909	LED7ST18/21K/FIL-NOS/3	7	ST18	E26	120	Antique	2100K	80	650	15000	5.040	2.280	60W	5	UL	11
776913	LED9A19/27K/FIL/4	9	A19	E26	120	Clear	2700K	90	1100	15000	4.130	2.360	75W	5	UL	8
776914	LED9A19/30K/FIL/4	9	A19	E26	120	Clear	3000K	90	1100	15000	4.130	2.360	75W	5	UL	8
776915	LED14A19/27K/FIL/3	14	A19	E26	120	Clear	2700K	90	1600	15000	4.130	2.360	100W	5	UL	8
776916	LED14A19/30K/FIL/3	14	A19	E26	120	Clear	3000K	90	1600	15000	4.130	2.360	100W	5	UL	8
776917	LED9A19/27K/FIL/M/4	9	A19	E26	120	Milky	2700K	90	1100	15000	4.130	2.360	75W	5	UL	9
776918	LED14A19/27K/FIL/M/3	14	A19	E26	120	Milky	2700K	90	1500	15000	4.130	2.360	100W	5	UL	9
776919	LED14A19/30K/FIL/M/3	14	A19	E26	120	Milky	3000K	90	1500	15000	4.130	2.360	100W	5	UL	9
776920	LED6G40/27K/FIL/HM/3	6	G40	E26	120	Half Mirror	2700K	90	500	15000	6.570	4.920	60W	5	UL	33
776921	LED2G16/27K/FIL/HG/3	2.5	G16	E12	120	Half Gold	2700K	90	200	15000	3.220	1.960	25W	5	UL	32
776922	LED9A19/30K/FIL/M/4	9	A19	E26	120	Milky	3000K	90	1100	15000	4.130	2.360	75W	5	UL	9
776923	LED4G25/27K/FIL/HG/3	4.5	G25	E26	120	Half Gold	2700K	90	350	15000	4.640	3.140	40W	5	UL	32
776924	LED6G40/27K/FIL/HG/3	6	G40	E26	120	Half Gold	2700K	90	500	15000	6.570	4.920	60W	5	UL	32
776925	LED7A19/40K/FIL/3/JA8	7	A19	E26	120	Clear	4000K	90	800	15000	4.130	2.360	60W	5	UL	8
776926	LED9A19/40K/FIL/3	9	A19	E26	120	Clear	4000K	90	1100	15000	4.130	2.360	75W	5	UL	8
776927	LED14A19/40K/FIL/3	14	A19	E26	120	Clear	4000K	90	1500	15000	4.130	2.360	100W	5	UL	8
776928	LED7A19/40K/FIL/M/3	7	A19	E26	120	Milky	4000K	90	800	15000	4.130	2.360	60W	5	UL	9
776929	LED14A19/40K/FIL/M/3	14	A19	E26	120	Milky	4000K	90	1400	15000	4.130	2.360	100W	5	UL	9
776930	LED4B11/40K/FIL/3/JA8	4	B11	E12	120	Clear	4000K	90	300	15000	3.850	1.370	40W	5	UL	14
776931	LED5B11/40K/FIL/3	5	B11	E12	120	Clear	4000K	90	500	15000	3.850	1.370	60W	5	UL	14
776932	LED6B11/40K/FIL/3	6.5	B11	E12	120	Clear	4000K	90	750	15000	3.850	1.370	75W	5	UL	14
776933	LED4B11/40K/FIL/M/3	4	B11	E12	120	Milky	4000K	90	300	15000	3.850	1.370	40W	5	UL	15
776934	LED5B11/40K/FIL/M/3	5	B11	E12	120	Milky	4000K	90	500	15000	3.850	1.370	60W	5	UL	15
776935	LED8ST18/40K/FIL/3/JA8	8.5	ST18	E26	120	Clear	4000K	90	800	15000	5.040	2.280	60W	5	UL	12
776936	LED13ST18/40K/FIL/3/JA8	13	ST18	E26	120	Clear	4000K	90	1400	15000	5.040	2.280	100W	5	UL	12
776938	LED2B11/27K/FIL/4	2.5	B11	E12	120	Clear	2700K	90	250	15000	3.850	1.370	25W	5	UL	14

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LU-MENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776940	LED5B11/27K/FIL/M/4	5	<u>B11</u>	E12	120	Milky	2700K	90	500	15000	3.850	1.370	60W	5	UL	15
776941	LED5B11/30K/FIL/M/4	5	<u>B11</u>	E12	120	Milky	3000K	90	500	15000	3.850	1.370	60W	5	UL	15
776944	LED8G25/27K/FIL/M/3	8.5	<u>G25</u>	E26	120	Milky	2700K	90	800	15000	4.640	3.150	100W	5	UL	19
776946	LED5T9L/30K/11/FIL/4	5	<u>T9 11"</u>	E26	120	Clear	3000K	90	500	15000	11.000	1.180	40W	5	UL	22
776947	LED3T9/27K/FIL/4	3	<u>T9 5"</u>	E26	120	Clear	2700K	90	250	15000	5.000	1.180	25W	5	UL	22
776948	LED5T9/27K/7/FIL/4	3	<u>T9 7.5"</u>	E26	120	Clear	2700K	90	250	15000	7.500	1.180	25W	5	UL	22
776949	LED5T9/30K/7/FIL/4	3	<u>T9 7.5"</u>	E26	120	Clear	3000K	90	250	15000	7.500	1.180	25W	5	UL	22
776950	LED2S14/27K/FIL/4	2.5	<u>S14</u>	E26	120	Clear	2700K	90	250	15000	3.260	1.770	25W	5	UL	69
776951	LED2T6/27K/FIL/3	2.5	<u>T6</u>	E12	120	Clear	2700K	90	250	15000	3.340	0.780	25W	5	UL	26
776952	LED2T6/30K/FIL/4	2.5	<u>T6</u>	E12	120	Clear	3000K	90	250	15000	3.340	0.780	25W	5	UL	26
776953	LED2A19/27K/FIL/M/3	2.5	<u>A19</u>	E26	120	Milky	2700K	90	250	15000	4.130	2.360	25W	5	UL	9
776954	LED5A19/27K/FIL/M/3	5	<u>A19</u>	E26	120	Milky	2700K	90	450	15000	4.130	2.360	40W	5	UL	9
776958	LED8A19/50K/FIL/3	8.5	<u>A19</u>	E26	120	Clear	5000K	90	800	15000	4.130	2.360	60W	5	UL	8
776959	LED8A19/50K/FIL/M/3	8.5	<u>A19</u>	E26	120	Milky	5000K	90	800	15000	4.130	2.360	60W	5	UL	9
776960	LED14A19/50K/FIL/3	14	<u>A19</u>	E26	120	Clear	5000K	90	1500	15000	4.130	2.360	100W	5	UL	8
776961	LED14A19/50K/FIL/M/3	14	<u>A19</u>	E26	120	Milky	5000K	90	1500	15000	4.130	2.360	100W	5	UL	9
776962	LED4B11/50K/FIL/3	4	<u>B11</u>	E12	120	Clear	5000K	90	400	15000	3.850	1.370	40W	5	UL	14
776963	LED4B11/50K/FIL/M/3	4	<u>B11</u>	E12	120	Clear	5000K	90	400	15000	3.850	1.370	40W	5	UL	15
776964	LED5B11/50K/FIL/3	5	<u>B11</u>	E12	120	Clear	5000K	90	500	15000	3.850	1.370	60W	5	UL	14
776965	LED5B11/50K/FIL/M/3	5	<u>B11</u>	E12	120	Milky	5000K	90	500	15000	3.850	1.370	60W	5	UL	15
776966	LED6B11/50K/FIL/3	6.5	<u>B11</u>	E12	120	Clear	5000K	90	750	15000	3.850	1.370	75W	5	UL	14
776967	LED6B11/50K/FIL/M/3	6.5	<u>B11</u>	E12	120	Milky	5000K	90	750	15000	3.850	1.370	75W	5	UL	15
776968	LED6B11/40K/FIL/M/3	6.5	<u>B11</u>	E12	120	Milky	4000K	90	750	15000	3.850	1.370	75W	5	UL	15
776969	LED5CA10/27K/FIL/E26/3	5	<u>CA10</u>	E26	120	Clear	2700K	90	500	15000	4.170	1.260	60W	5	UL	16
776970	LED5CA10/27K/FIL/E26/M/3	5	<u>CA10</u>	E26	120	Milky	2700K	90	500	15000	4.170	1.260	60W	5	UL	17
776971	LED5CA10/30K/FIL/E26/3	5	<u>CA10</u>	E26	120	Clear	3000K	90	500	15000	4.170	1.260	60W	5	UL	16
776972	LED5CA10/30K/FIL/E26/M/3	5	<u>CA10</u>	E26	120	Milky	3000K	90	500	15000	4.170	1.260	60W	5	UL	17
776973	LED5G25/27K/FIL/3	5	<u>G25</u>	E26	120	Clear	2700K	90	500	15000	4.640	3.150	60W	5	UL	19
776974	LED5G25/27K/FIL/M/3	5	<u>G25</u>	E26	120	Milky	2700K	90	500	15000	4.640	3.150	60W	5	UL	19
776975	LED5G25/30K/FIL/3	5	<u>G25</u>	E26	120	Clear	3000K	90	500	15000	4.640	3.150	60W	5	UL	19
776976	LED5G25/30K/FIL/M/3	5	<u>G25</u>	E26	120	Milky	3000K	90	500	15000	4.640	3.150	60W	5	UL	19
776977	LED8G25/40K/FIL/3/JA8	8.5	<u>G25</u>	E26	120	Clear	4000K	90	800	15000	4.640	3.150	100W	5	UL	19
776978	LED8G25/40K/FIL/M/3	8.5	<u>G25</u>	E26	120	Milky	4000K	90	800	15000	4.640	3.150	100W	5	UL	19
776979	LED8G25/50K/FIL/3	8.5	<u>G25</u>	E26	120	Clear	5000K	90	800	15000	4.640	3.150	100W	5	UL	19
776980	LED8G25/50K/FIL/M/3	8.5	<u>G25</u>	E26	120	Milky	5000K	90	800	15000	4.640	3.150	100W	5	UL	19
776981	LED8G40/40K/FIL/3	8.5	<u>G40</u>	E26	120	Clear	4000K	90	800	15000	6.690	4.840	100W	5	UL	21
776982	LED8G40/40K/FIL/M/3	8.5	<u>G40</u>	E26	120	Milky	4000K	90	800	15000	6.690	4.840	100W	5	UL	21
776983	LED8G40/50K/FIL/3	8.5	<u>G40</u>	E26	120	Clear	5000K	90	800	15000	6.690	4.840	100W	5	UL	21
776984	LED8G40/50K/FIL/M/3	8.5	<u>G40</u>	E26	120	Milky	5000K	90	800	15000	6.690	4.840	100W	5	UL	21
776985	LED8ST18/50K/FIL/3	8.5	<u>ST18</u>	E26	120	Clear	5000K	90	800	15000	5.040	2.280	60W	5	UL	12

ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIP-TION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
776986	LED6B11/27K/FIL/M/3	6.5	B11	E12	120	Milky	2700K	90	750	15000	3.850	1.370	75W	5	UL	15
776987	LED13ST18/50K/FIL/3	13	ST18	E26	120	Clear	5000K	90	1400	15000	5.040	2.280	100W	5	UL	12
776988	LED6B11/30K/FIL/M/3	6.5	B11	E12	120	Milky	3000K	90	750	15000	3.850	1.370	75W	5	UL	15
776989	LED5T9/40K/5/FIL/3	5	T9 5"	E26	120	Clear	4000K	90	400	15000	4.920	1.180	40W	5	UL	22
776990	LED5T9/40K/5/FIL/F/3	5	T9 5"	E26	120	Frost	4000K	90	400	15000	4.920	1.180	40W	5	UL	23
776991	LED5T9/50K/5/FIL/3	5	T9 5"	E26	120	Clear	5000K	90	400	15000	4.920	1.180	40W	5	UL	22
776992	LED5T9/50K/5/FIL/F/3	5	T9 5"	E26	120	Frost	5000K	90	400	15000	4.920	1.180	40W	5	UL	23
776993	LED4T6/40K/FIL/3	4.5	T6	E12	120	Clear	4000K	90	450	15000	3.340	0.780	40W	5	UL	26
776994	LED4T6/40K/FIL/M/3	4.5	T6	E12	120	Milky	4000K	90	450	15000	3.340	0.780	40W	5	UL	26
776995	LED4T6/50K/FIL/3	4.5	T6	E12	120	Clear	5000K	90	450	15000	3.340	0.780	40W	5	UL	26
776996	LED4T6/50K/FIL/M/3	4.5	T6	E12	120	Milky	5000K	90	450	15000	3.340	0.780	40W	5	UL	26
776997	LED4G40/30K/FIL/GRAD/SMK	4.5	G40	E26	120	Clear/Smoke	3000K	80	200	15000	6.570	4.920	4.5W	5	UL	36
776998	LED4G40/30K/FIL/GRAD/BLU	4.5	G40	E26	120	Clear/Blue	3000K	80	200	15000	6.570	4.920	4.5W	5	UL	37

String lights

ITEM #	ORDERING CODE	STRING LENGTH	# SOCKETS	BASE	GAUGE	MAX CONNECT	SPACE BEFORE FIRST SOCKET	SPACE AFTER LAST SOCKET	SPACE BETWEEN SOCKETS	BULB TYPE	WATTS PER BULB	WARRANTY YEARS	SAFETY RATING	PAGE #
810002	STRING15/E26-S14KT	48'	15	E26	14 AWG	4	60"	12"	36"	S14	11	1	ETL	71
810004	STRING15/E26-A19KT	48'	15	E26	14 AWG	3	60"	12"	36"	A19	25	1	ETL	71
810006	STRING10/E26/BLACK-S14KT	14'	10	E26	18 AWG	8	16"	8"	16"	S14	11	1	ETL	67
810054	STRING10/E12/BLACK-G16KT	14'	10	E12	18 AWG	7	16"	8"	16"	G16	11	1	ETL	66
810056	STRING10/E12/BLACK	14'	10	E12	18 AWG	-	16"	8"	16"	-	-	1	ETL	66
810150	STRING10/E12/BLACK-F10KT	14'	10	E12	18 AWG	5	16"	8"	16"	FIESTA	15W	1	ETL	66
810151	STRING10/E12/BLACK-PRISMKT	14'	10	E12	18 AWG	3	16"	8"	16"	PRISM	25W	1	ETL	66
812123	STRING10L/14FT/16IN/E12/BLACK/LED/G16	14'	10	E12	18 AWG	40	16"	8"	16"	G16	0.7	1	ETL	66
812143	STRING10L/14FT/16IN/E26/BLACK/LED/S14	14'	10	E26	18 AWG	40	16"	8"	16"	S14	1	1	ETL	67
812300	STRING12L/30FT/30IN/E26/BLACK	30'	12	E26	18 AWG	-	24"	8"	30"	-	-	1	ETL	68
812312	STRING12L/30FT/30IN/E26/BLACK/INC/S14	30'	12	E26	18 AWG	6	24"	8"	30"	S14	11	1	ETL	68
812313	STRING12L/30FT/30IN/E26/BLACK/LED/S14	30'	12	E26	18 AWG	30	24"	8"	30"	S14	1	1	ETL	68
812480	STRING15L/48FT/36IN/E26/BLACK	48'	15	E26	14 AWG	-	60"	12"	36"	-	-	1	ETL	71
812482	STRING15L/48FT/36IN/E26/BLACK/INC/S14	48'	15	E26	18 AWG	5	60"	12"	36"	S14	11	1	ETL	70
812483	STRING15L/48FT/36IN/E26/BLACK/LED/S14	48'	15	E26	18 AWG	25	60"	12"	36"	S14	1	1	ETL	70
814361	STRING18/36FT/24IN/SMART/BLACK/LED	36'	10	-	20 AWG	3	39"	6"	23"	S14	-	1	ETL	64

Transition Updates - August 2024

	ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
NEW	776944	LED8G25/27K/FIL/M/3	8.5	G25	E26	120	Milky	2700K	90	800	15000	4.640	3.150	100	5	UL	17
OLD	776611	LED7G25/27K/FIL/M/3	7	G25	E26	120	Milky	2700K	80	800	15000	4.640	3.150	60W	5	UL	
NEW	776948	LED3T9/27K/7/FIL/4	3	T9 7.5"	E26	120	Clear	2700K	90	250	15000	7.500	1.180	25W	5	UL	20
OLD	776714	LED5T9/27K/7/FIL/3	5	T9 7.5"	E26	120	Clear	2700K	90	300	15000	7.500	1.180	25W	5	UL	
NEW	776949	LED3T9/30K/7/FIL/4	3	T9 7.5"	E26	120	Clear	3000K	90	250	15000	7.500	1.180	25W	5	UL	20
OLD	776715	LED5T9/30K/7/FIL/3	5	T9 7.5"	E26	120	Clear	3000K	90	300	15000	7.500	1.180	25W	5	UL	
NEW	776946	LED5T9L/30K/11/FIL/4	5	T9 11"	E26	120	Clear	3000K	90	500	15000	11.000	1.180	40W	5	UL	20
OLD	776718	LED5T9L/30K/11/FIL/3	5	T9 11"	E26	120	Clear	3000K	90	350	15000	11.000	1.180	40W	5	UL	
NEW	776950	LED2S14/27K/FIL/4	2.5	S14	E26	120	Milky	2700K	90	250	15000	3.260	1.770	25W	5	UL	65
OLD	776851	LED2S14/27K/FIL/3	2.5	S14	E26	120	Clear	2700K	80	250	15000	3.460	1.690	25W	5	UL	
NEW	776947	LED3T9/27K/FIL/4	3	T9 5"	E26	120	Milky	2700K	90	250	15000	5.000	1.180	25W	5	UL	20
OLD	776853	LED3T9/27K/FIL/3	3	T9 5"	E26	120	Clear	2700K	80	300	15000	5.000	1.100	25W	5	UL	
NEW	776938	LED2B11/27K/FIL/4	2.5	B11	E12	120	Clear	2700K	90	250	15000	3.850	1.370	25W	5	UL	12
OLD	776855	LED2B11/27K/FIL/3	2.5	B11	E12	120	Clear	2700K	80	250	15000	3.850	1.370	25W	5	UL	
NEW	776951	LED2T6/27K/FIL/3	2.5	T6	E12	120	Clear	2700K	90	250	15000	3.340	0.780	25W	5	UL	24
OLD	776880	LED2T6/27K/FIL/E12/3	2.5	T6	E12	120	Clear	2700K	80	180	15000	3.380	0.780	25W	5	UL	
NEW	776940	LED5B11/27K/FIL/M/4	5	B11	E12	120	Milky	2700K	90	500	15000	3.850	1.370	60W	5	UL	13
OLD	776887	LED5B11/27K/FIL/M/3	5	B11	E12	120	Milky	2700K	80	500	15000	3.850	1.370	60W	5	UL	
NEW	776941	LED5B11/30K/FIL/M/4	5	B11	E12	120	Milky	3000K	90	500	15000	3.850	1.370	60W	5	UL	13
OLD	776888	LED5B11/30K/FIL/M/3	5	B11	E12	120	Milky	3000K	80	500	15000	3.850	1.370	60W	5	UL	
NEW	776749	LED8G25/27K/FIL/4/JA8	8.5	G25	E26	120	Clear	2700K	90	800	15000	4.640	3.150	100W	5	UL	19
OLD	776775	LED8G25/27K/FIL/3	8.5	G25	E26	120	Clear	2700K	90	800	15000	4.640	3.150	60W	5	UL	
NEW	776914	LED9A19/30K/FIL/4	9	A19	E26	120	Clear	3000K	90	1100	15000	4.130	2.360	75W	5	UL	8
OLD	776814	LED9A19/30K/FIL/3	9	A19	E26	120	Clear	3000K	90	1100	15000	4.050	2.360	75W	5	UL	
NEW	776750	LED8G25/30K/FIL/4/JA8	8.5	G25	E26	120	Clear	3000K	90	800	15000	4.640	3.150	100W	5	UL	19
OLD	776890	LED8G25/30K/FIL/3	8.5	G25	E26	120	Clear	3000K	90	800	15000	4.640	3.150	100W	5	UL	
NEW	776707	LED5T9L/21K/11/FIL-NOS/3	5	T9 11"	E26	120	Antique	2100K	90	300	15000	11.000	1.180	25W	5	UL	24
OLD	776907	LED5T9L/21K/FIL-NOS/3	5	T9 11"	E26	120	Antique	2100K	90	350	15000	11.000	1.100	40W	5	UL	
NEW	776952	LED2T6/30K/FIL/4	2.5	T6	E12	120	Clear	3000K	90	250	15000	3.340	0.780	25W	5	UL	26
OLD	776891	LED2T6/30K/FIL/3	2.5	T6	E12	120	Clear	3000K	80	180	15000	3.380	0.780	25W	5	UL	
NEW	776950	LED2S14/27K/FIL/4	2.5	S14	E26	120	Clear	2700K	90	250	15000	3.260	1.770	25W	5	UL	69
OLD	776851	LED2S14/27K/FIL/3	2.5	S14	E26	120	Clear	2700K	80	250	15000	3.460	1.690	25W	5	UL	
NEW	776946	LED5T9L/30K/11/FIL/4	5	T9 11"	E26	120	Clear	3000K	90	500	15000	11.000	1.180	40W	5	UL	22
OLD	776718	LED5T9L/30K/11/FIL/3	5	T9 11"	E26	120	Clear	3000K	90	350	15000	11.000	1.180	40W	5	UL	
NEW	776731	LED5T9/27K/5/FIL/4/JA8	5	T9 5"	E26	120	Clear	2700K	90	500	15000	4.920	1.180	40W	5	UL	22
OLD	776881	LED5T9/27K/FIL/3	5	T9 5"	E26	120	Clear	2700K	90	400	15000	5.000	1.180	40W	5	UL	
NEW	776943	LED4G16/27K/FIL/M/4	4	G16	E12	120	Milky	2700K	90	300	15000	4.170	1.260	40W	5	UL	18
OLD	776612	LED4G16/27K/FIL/M/3	4	G16	E12	120	Milky	2700K	80	350	15000	3.340	1.960	40W	5	UL	
NEW	776938	LED2B11/27K/FIL/4	2.5	B11	E12	120	Clear	2700K	90	250	15000	3.850	1.370	25W	5	UL	14
OLD	776855	LED2B11/27K/FIL/3	2.5	B11	E12	120	Clear	2700K	80	250	15000	3.850	1.370	25W	5	UL	
NEW	776742	LED5CA10/30K/FIL/4/JA8	5	CA10	E12	120	Clear	3000K	90	500	15000	4.250	1.260	60W	5	UL	16
OLD	776629	LED5CA10/30K/FIL/E12/3	5	CA10	E12	120	Clear	3000K	80	500	15000	4.250	1.250	60W	5	UL	
NEW	776518	LED4T14/21K/FIL-NOS/CURV/SPIRAL	4.5W	T14	E26	120	Clear	2100K	80	350	15000	4.250	1.770	40W	5	UL	25
OLD	776511	LED4T14/22K/FIL-NOS/CURV/SPIRAL	4	T14	E26	120	Antique	2200K	95	230	15000	4.410	1.770	40W	5	UL	
NEW	776917	LED9A19/27K/FIL/M/4	9	A19	E26	120	Milky	2700K	90	1100	15000	4.130	2.360	75W	5	UL	9
OLD	776817	LED9A19/27K/FIL/M/3	9	A19	E26	120	Milky	2700K	90	1100	15000	4.050	2.360	75W	5	UL	
NEW	776743	LED4G16/27K/FIL/4/JA8	4	G16	E12	120	Clear	2700K	90	350	15000	3.220	1.960	40W	5	UL	18
OLD	776873	LED4G16/27K/FIL/3/JA8	4	G16	E12	120	Clear	2700K	80	350	15000	3.340	1.960	40W	5	UL	
NEW	776768	LED8A19/30K/FIL/3/JA8	8.5	A19	E26	120	Clear	3000K	90	850	15000	4.130	2.360	60W	5	UL	8
OLD	774141	LED8A19/30K/FIL/2/JA8	8.5	A19	E26	120	Clear	3000K	90	800	25000	4.350	2.350	60W	5	UL	
NEW	776763	LED4B11/30K/FIL/4/JA8	4	B11	E12	120	Clear	3000K	90	350	15000	3.850	1.370	40W	5	UL	14
OLD	776876	LED4B11/30K/FIL/4/JA8	4	B11	E12	120	Clear	3000K	90	300	15000	3.850	1.370	40W	5	UL	

Transition Updates - September 2024

	ITEM #	ORDERING CODE	WATTS	BULB TYPE	BASE	VOLTS	DESCRIPTION	COLOR TEMP	CRI	LUMENS	AVERAGE RATED LIFE	M.O.L	M.O.D	WATT EQUIV.	WARRANTY YEARS	SAFETY RATING	PAGE #
NEW	776922	LED9A19/30K/FIL/M/4	9	A19	E26	120	Milky	3000K	90	1100	15000	4.130	2.360	75W	5	UL	9
OLD	776898	LED9A19/30K/FIL/M/3	9	A19	E26	120	Milky	3000K	90	1100	15000	4.050	2.360	75W	5	UL	9
NEW	776937	LED8A19/27K/FIL/M/4	8.5	A19	E26	120	Milky	2700K	90	800	15000	4.130	2.360	75W	5	UL	9
OLD	776866	LED7A19/27K/FIL/M/3	7	A19	E26	120	Milky	2700K	82	800	15000	4.050	2.360	60W	5	UL	9
NEW	776942	LED4CA10/27K/FIL/M/3	4	CA10	E12	120	Milky	2700K	90	300	15000	4.170	1.260	40W	5	UL	17
OLD	776860	LED3CA10/27K/FIL/M/3	3.6	CA10	E12	120	Milky	2700K	80	300	15000	4.330	1.260	40W	5	UL	17



NEW JERSEY | SOUTH CAROLINA | TEXAS

800-528-5555 - SERVICE@BULBRITE.COM - BULBRITE.COM

THE BOOK 10/04

©2024 Bulbrite Industries, Inc. All rights reserved. All brand names are trademarks or registered trademarks of Bulbrite Industries, Inc. Printed in USA.