


Brighten Every Moment

# Soft LED Module


Indoor

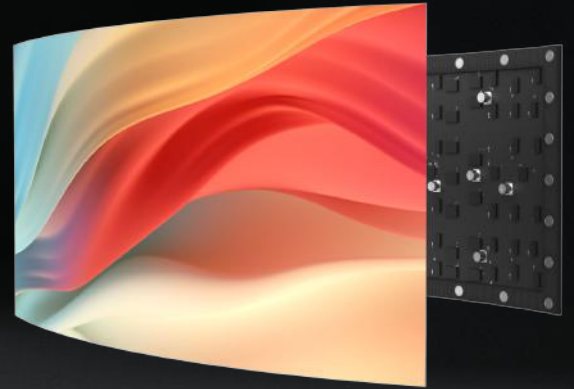

Creative splicing



Energy-saving

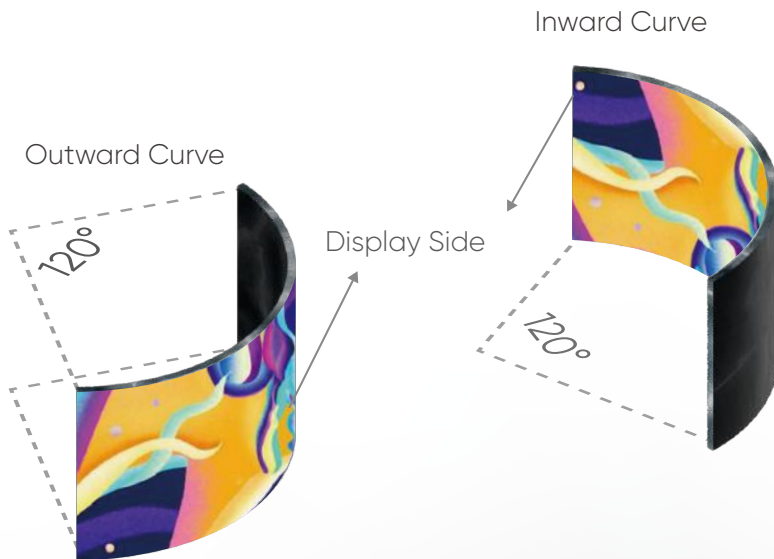


## High Flexibility


Enjoy creative splicing with 120-degree flexibility for both concave and convex bending

## Stable Installation

An updated magnetic column improves the soft LED module's mount on the bracket, making installation more secure

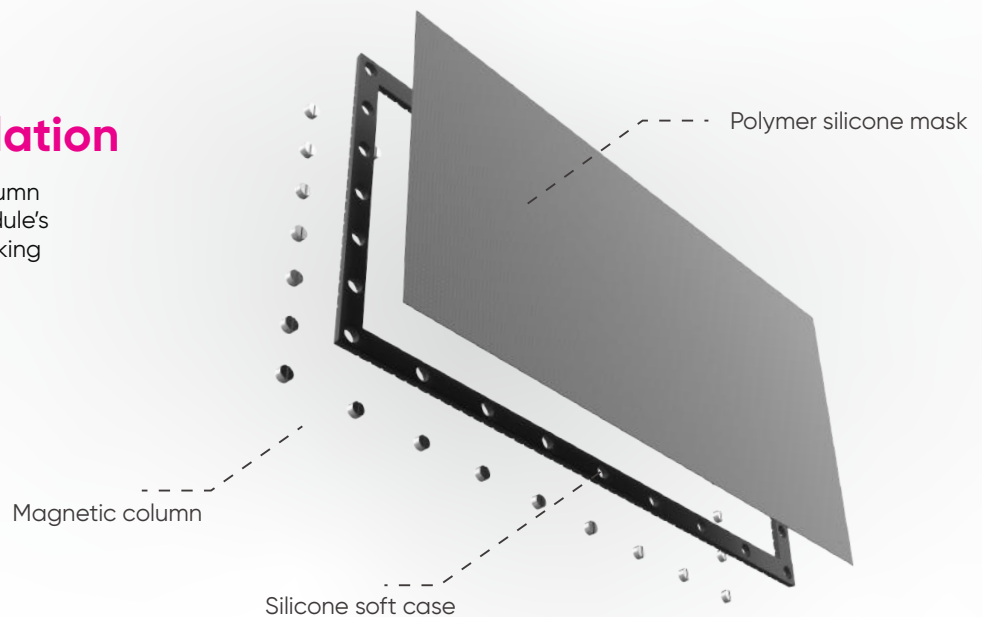


## Standardized Dimensions

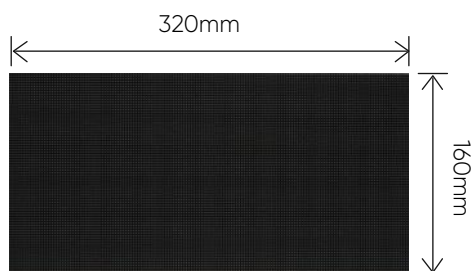

- Standardized 320×160 mm
- Uniform bottom shell screw holes across all models, allowing easy replacement of LED modules of different pixel pitches without changing the cabinet

## Energy-Saving Design

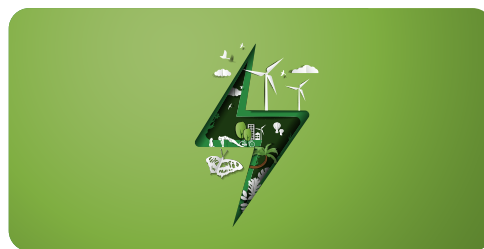

- PWM energy-saving driver IC with built-in current adjustment, offering 64 levels of brightness control
- Supports 4.2V, 4.5V, and 5V switching power supply

## Application Scenarios



## Key Spec

	DS-D41Q12CA-1GS	DS-D41Q15CA-1GS	DS-D41Q18CA-1GS	DS-D41Q20CA-1GS	DS-D41Q25CA-1GS
Pixel Pitch	P1.25	P1.53	P1.86	P2.0	P2.5
Module Size	320*160mm				
Lamp Size	1010	1212	1515	1515	1515
Refresh Rate (Hz)	3840HZ				
Brightness (nits)	600nits				
Resolution	256 * 128 resolution	208 * 104 resolution	172 * 86 resolution	160 * 80 resolution	128 * 64 resolution



Hikvision

HikvisionHQ

HikvisionHQ

Hikvision Corporate Channel

hikvisionoverseas

Hikvision Commercial Display

HikvisionOverseas

**HIKVISION**