



LENTUS

POWER TRANSMISSION & MRO



◀ DUPONT ▶

DOWSIL™

DOWFROST™

FROTH-PAK™

GREAT STUFF

LUCAS OIL



MOLYKOTE™

LentusLLC.com

Sales@LentusLLC.com

+1-270-765-2212

400 Ring Road, Suite 101
Elizabethtown, KY 42701

Table of Contents

Lentus History	1
DOWSIL™ Sealants	2
DOWSIL™ Primers	5
DOWSIL™ Specialty Fluids	6
SILASTIC™ Mold-Making	7
Dow Glycol-Based Heat Transfer Fluids	8
MOLYKOTE® Specialty Lubricants	10
GREAT STUFF™ Gloves	12
GREAT STUFF™ Foams	14
GREAT STUFF™ Work Wipes	16
LENTEK™ Sealants	16
Lucas Oil®	17



DOWSIL™

DOWFROST™

LUCAS OIL.



GREAT STUFF

FROTH-PAK™



MOLYKOTE®

While Lentus strives to make the information in this catalog as timely and accurate as possible, we make no claims or guarantees about the accuracy, completeness, or adequacy of the contents, and expressly disclaims liability for errors and omissions in the content of this catalog.

LENTUS HISTORY

1965

Jim Hartlage (Lentus Founder) began working as a Lab Technician for Dow Corning in Elizabethtown, KY

1970

Jim founded Accumetric, the first authorized repackager of Dow Corning Silicone Sealants

2011

Dow, formerly known as Dow Corning, approached Jim and Jud Hartlage (Lentus President) to become Master Distributor for Dow Silicones

2012

Lentus was founded on July 1



LENTUS

BEST
SELLER



DOWSIL™ 732 Multi-Purpose Sealant

One component, RTV adhesive sealant engineered for general industrial sealing and bonding applications. Features extensive technical specifications for more regulated applications.

APPLICATIONS:

- Sealing and preventing water infiltration and air leakage
- Applications exposed to varying weather conditions
- Sealing roof joints, skylights, flashings, and around chimneys
- Filling gaps or expansion joints between materials

FEATURES:

- Non-sag, paste consistency
- Easy to apply
- Cures to a tough, flexible rubber
- Good adhesion to many substrates
- Excellent dielectric properties
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, NSF 51, and NSF 61 requirements
- UL Listed

PART N°	SIZE	COLOR	CASE / PALLET
1891961	90 mL	Aluminum	12 / 3,000
99179259	300 mL	Aluminum	12 / 1,296
2112531	90 mL	Black	12 / 3,000
99179209	300 mL	Black	12 / 1,296
3138356	90 mL	Clear	12 / 3,000
99179271	300 mL	Clear	12 / 1,296
3140717	90 mL	White	12 / 3,000
99179246	300 mL	White	12 / 1,296



DOWSIL™ 700 Industrial Grade Silicone Sealant

Designed for general industrial sealing and adhesive applications.

APPLICATIONS:

- Caulking, bonding, adhering, and formed-in-place gasketing
- Weatherproofing outdoor spaces
- Protecting electrical conduits

FEATURES:

- One-part room temperature cure
- Free of any petroleum distillates
- Resistant to weathering and adverse conditions
- Long-lasting, airtight seals
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 food contact requirements
- UL 94 HB compliant (low-flammability)

PART N°	SIZE	COLOR	CASE / PALLET
4060123	300 mL	Aluminum	12 / 1,296
4060067	300 mL	Clear	12 / 1,296
4060071	17.4 KG	Clear	1 / 24
4060070	205 KG	Clear	1 / 4
4060069	300 mL	Black	12 / 1,296
4060122	17.4 KG	Black	1 / 24
4063559	205 KG	Black	1 / 4
4060068	300 mL	White	12 / 1,296
4066044	205 KG	Red	1 / 4

DOWSIL™ 733 Glass & Metal Sealant

Conventional one-part RTV sealant with adhesion promoter, designed for use in OEM bonding and sealing applications.

APPLICATIONS:

- Industrial sealing and bonding
- Heavy equipment
- Recreational vehicles

FEATURES:

- Enhanced unprimed adhesion to cleaned substrates, including glass, metals, and plastics
- Good resistance to weathering, vibration, moisture, ozone, and extreme temperatures
- Easy to apply
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, NSF 51, and NSF 61 requirements
- UL 94 HB compliant (low-flammability)



PART N°	SIZE	COLOR	CASE / PALLET
99179264	300 mL	Aluminum	12 / 1,296
99179189	300 mL	Black	12 / 1,296
99179322	300 mL	Clear	12 / 1,296
2468379	17.7 KG	Clear	1 / 24
99179245	300 mL	White	12 / 1,296
2468336	17.7 KG	White	1 / 24

DOWSIL™ 734 Flowable Sealant

Ideally suited for making field repairs on existing equipment where a part of an existing silicone encapsulant has been removed.

APPLICATIONS:

- General industrial sealing and bonding
- Sealing assemblies with fine joints
- Cable entries and connectors

FEATURES:

- Flowable and self-leveling
- Cures to a tough, flexible rubber at room temperature
- Meets MIL-A-46106, FDA Reg 21 CFR 177.2600, and NSF 51 requirements
- UL Listed



PART N°	SIZE	COLOR	CASE / PALLET
4102963	90 mL	Clear	12 / 3,000
99179310	300 mL	Clear	12 / 1,296
4102353	18.1 KG	Clear	1 / 24
4101950	204.1 KG	Clear	1 / 4
4102964	90 mL	White	12 / 3,000
99179270	300 mL	White	12 / 1,296
4102341	18.1 KG	White	1 / 24

DOWSIL™ 736 Heat Resistant Sealant

Non-slumping sealant designed for sealing and bonding applications exposed to temperatures up to 600°F (316°C).

APPLICATIONS:

- Electrical enclosures and connections
- Sealing and encapsulating heating elements
- Aerospace gasketing
- Moving oven belts
- Bag filters on smokestacks

FEATURES:

- High temperature
- One-component silicone that will not sag or run
- Can be applied overhead or on side walls
- Designed to meet MIL-A-46106 Rev. B Spec
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 requirements
- UL 94 HB compliant (low-flammability)



PART N°	SIZE	COLOR	CASE / PALLET
2423472	90 mL	Red	12 / 3,000
99179248	300 mL	Red	12 / 1,296
3145824	17.7 KG	Red	1 / 24
4023912	205 KG	Red	1 / 4

DOWSIL™ 786 Silicone Sealant

Designed to seal non-porous surfaces where high humidity and temperature extremes exist.

APPLICATIONS:

- Ideal for ceramic tile grouting
- Sealing around showers, tubs, and sinks
- Strong seal around plumbing fixtures

FEATURES:

- Cured sealant is mildew-resistant
- Remains permanently flexible without shrinking, cracking, crumbling, or drying out
- Resists staining, spotting, and color changes
- Retains original design properties even after years of exposure
- Meets FDA Reg 21 CFR 177.2600 and NSF 51 requirements



PART N°	SIZE	COLOR	CASE / PALLET
99179247	300 mL	Clear	12 / 1,296
4023914	205 KG	Clear	1 / 4
99179249	300 mL	Trans White	12 / 1,296
99179321	300 mL	White	12 / 1,296
4011651	17.7 KG	White	1 / 24

DOWSIL™ 738 Electrical Sealant

One-part, non-flowing moisture cure adhesive. A durable general-purpose sealant/adhesive for a wide variety of bonding and sealing applications.

APPLICATIONS:

- Electrical assemblies
- Battery pack
- Boards and assemblies
- Components
- Housings

FEATURES:

- Room temperature cure when exposed to moisture
- High elongation for added stress relief
- Faster in-line processing with optional heat acceleration
- UL Listed

PART Nº	SIZE	COLOR	CASE / PALLET
1949101	90 mL	White	12 / 3,000
99180508	300 mL	White	12 / 1,296
1907824	17.6 KG	White	1 / 24



DOWSIL™ 737 Neutral Cure Sealant

Oxime-cure RTV adhesive/sealant with primerless adhesion to most substrates.

APPLICATIONS:

- Substitute for mechanical fasteners on large and small appliances
- Adhering plastic moldings to plastic substrates for trim and decal applications
- Waterproofing electrical components
- Sealing coaxial connectors
- Protecting instrumentation assemblies

FEATURES:

- UV and weather-resistant
- Low odor and non-corrosive to metals and alkalines when compared to alkoxy-based RTVs
- UL 94 HB compliant (low-flammability)



PART Nº	SIZE	COLOR	CASE / PALLET
99180484	300 mL	Black	12 / 1,296
4099910	17.6 KG	Black	1 / 24
4098499	90 mL	Clear	12 / 3,000
99180483	300 mL	Clear	12 / 1,296
4098497	17.6 KG	Clear	1 / 24
4098496	205 KG	Clear	1 / 4
99180646	300 mL	White	12 / 1,296
4099876	17.6 KG	White	1 / 24

DOWSIL™ 832 Multi-Surface Adhesive Sealant

RTV sealant with a built-in adhesion promoter for strong, reliable bonding to a wide range of substrates.

APPLICATIONS:

- Sealing and repairing roof penetrations and gutters
- Sealing concrete floor seams
- Repairing windows
- Sealing pipes and threaded connections
- Assembling original equipment components

FEATURES:

- Superior unprimed adhesion to glass, metal, masonry, concrete, most rubber, and plastics, including ABS, PVC, and polycarbonate
- Low odor
- Will not corrode metal or other corrosion-sensitive materials
- Use temperatures from -67°F to 300°F (-55°C to 149°C); intermittent to 350°F (177°C)
- Forms a flexible, long-lasting seal



PART Nº	SIZE	COLOR	CASE / PALLET
99180523	300 mL	Black	12 / 1,296
4059470	22.7 KG	Black	1 / 24
99180620	300 mL	Gray	12 / 1,296
2654580	22.7 KG	Gray	1 / 24
2823501	228.1 KG	Gray	1 / 4
99180648	300 mL	Off-White	12 / 1,296
4031452	22.7 KG	Off-White	1 / 24

**BEST
SELLER**



DOWSIL™ PR-1200 RTV Prime Coat

A naphtha-based general purpose primer for use with all silicone elastomers and RTVs.

APPLICATIONS:

- Battery packs
- Boards and assemblies
- Components and connectors
- Engine systems
- Housings

FEATURES:

- Water resistant
- Improves the adhesion of silicone sealants, coatings, and rubber to wood, granite, glass, ceramics, plastics, rubbers, and coatings
- Promotes adhesion of certain one-part silicone sealants and coatings to a variety of materials such as plywood, masonry, and metal
- Enhances adhesion of many moisture cure RTV and heat cure silicones

PART N°	SIZE	COLOR	CASE / PALLET
4094479	309 G Can	Clear	6 / 100
4094480	2.9 KG Pail	Clear	1 / 60
4093873	160 KG Drum	Clear	1 / 4
4094481	309 G Can	Red	6 / 100
4094512	2.9 KG Pail	Red	1 / 60

DOWSIL™ 1200 OS Primer

An air drying primer supplied as a dilute solution of moisture reactive materials in volatile siloxane. It is designed to enhance the strength and speed of adhesion when applying room temperature vulcanizing silicone sealants to a wide range of common non-porous substrates.

APPLICATIONS:

- Battery packs
- Boards and assemblies
- Components and connectors
- Engine systems
- Housings

FEATURES:

- Useful for both moisture-curing RTV, and heat-curing silicones
- Diluted in low-molecular-weight silicone fluid
- Meets many international regulations for low VOC content
- Enhances bonding/adhesion of RTV and heat-cure silicones to ceramics, glass, wood, masonry, structural plastics, and many metals



PART N°	SIZE	COLOR	CASE / PALLET
4099614	309 G Can	Clear	6 / 100
4099615	2.9 KG Pail	Clear	1 / 60

DOWSIL™ PR-2260 Prime Coat

Dilute solution of silane coupling agents and other active ingredients.

APPLICATIONS:

- Battery packs
- Boards and assemblies
- Components
- Housings


FEATURES:

- Good adhesion to ceramic, glass, and metal
- Oil resistant
- Adhesion enhancing primer dispersed in heptane for use with RTV and heat cure silicones



PART N°	SIZE	COLOR	CASE / PALLET
4094470	340 G Bottle	Clear	1 / 90
4094468	2.7 KG Pail	Clear	1 / 60
4094469	13.6 KG Pail	Clear	1 / 60
4094471	136 KG Drum	Clear	1 / 4

**BEST
SELLER**

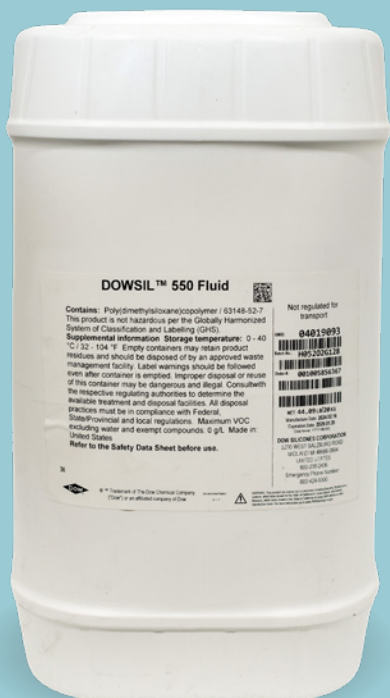

DOWSIL™ 550 Fluid

100% actives, Polyphenylmethyldimethylsiloxane polymer fluid.

APPLICATIONS:

- Base oil for high temperature lubricants
- Heat transfer medium
- Thermostat fluid

FEATURES:

- Low volatility
- Serviceable temperature range of -40°F to 446°F (-40°C to 230°C) in open systems, and up to 599°F (315°C) in closed systems
- Good oxidation and thermal stability
- High flash point

PART N°	SIZE	COLOR	CASE / PALLET
2288494	500 mL Bottle	Clear	1 / 64
2076641	4 KG Pail	Clear	1 / 10
4019093	20 KG Pail	Clear	1 / 24
2639203	220 KG Drum	Clear	1 / 4

DOWSIL™ FS 1265 Fluid 300 cSt

Fluorosilicone oil, useful as ingredient in lubricants and as active ingredient in antifoams for non-aqueous systems.

APPLICATIONS:

- Chemical and petroleum industries
- Oil and gas separation
- Foam control in solvent systems where conventional polydimethylsiloxane fluids are soluble and promote foam

FEATURES:

- Efficient and persistent antifoam
- Insoluble in chlorinated solvents
- Low surface tension
- High flash point



PART N°	SIZE	COLOR	CASE / PALLET
4019160	500 mL Bottle	Clear	1 / 100
3141772	4.5 KG Pail	Clear	1 / 60
1325990	25 KG Jerry Can	Clear	1 / 10
4019161	250 KG Drum	Clear	1 / 4

DOWSIL™ 710 Fluid

Polyphenylmethyldimethylsiloxane fluid used for a variety of applications such as lubricant for timing devices, instruments and bearings operating at 32°F to 500°F (0°C to 260°C).

APPLICATIONS:

- Lubricant for timing devices, instruments, and bearings
- Good base oil for high temperature greases thickened with molybdenum disulphide
- Heat exchange fluid in high temperature baths and in heat treating baths for metals

FEATURES:

- Retains its properties after continuous use at temperatures up to 500°F (260°C) in closed systems
- Low volatility even at elevated temperatures
- Highly resistant to oxidation and gumming



PART N°	SIZE	COLOR	CASE / PALLET
2695707	4 KG Pail	Clear	1 / 48
4019122	20 KG Pail	Clear	1 / 24
4019123	225 KG Drum	Clear	1 / 4

SILASTIC™ RTV-3110 Mold-Making Base

General purpose low viscosity silicone mold making rubber suited for the reproduction of simple objects.

APPLICATIONS:

- Simple patterns with no undercuts
- Electronic potting
- Encapsulation

FEATURES:

- Two-part RTV silicone rubbers
- Low mixed viscosity
- Adjustable cure times
- Reproduce intricate details
- Wide range of service temperatures from -67°F to 392°F (-55°C to 200°C)



SILASTIC™ RTV-3120 Mold-Making Base

General purpose silicone mold making rubber recommended for high temperature applications.

APPLICATIONS:

- Simple patterns with no undercuts
- Applications where vacuum de-airing isn't required
- Electronic potting
- Encapsulation

FEATURES:

- Two-part RTV silicone rubbers
- Low mixed viscosity
- Adjustable cure times
- Easy to use
- Reproduces intricate details
- Wide range of service temperature from -67°F to 572°F (-55°C to 300°C)



PART N°	SIZE	COLOR	CASE / PALLET
4107656	453 G Bucket	Off-White	24 / 648
4107661	4 KG Pail	Off-White	1 / 10
4107665	18.1 KG Pail	Off-White	1 / 24
4134209	181.4 KG Drum	Off-White	1 / 4

PART N°	SIZE	COLOR	CASE / PALLET
4107663	453 G Bucket	Red	24 / 648
4107664	4 KG Pail	Red	1 / 10
4107666	18.1 KG Pail	Red	1 / 24
4107672	181.4 KG Drum	Red	1 / 4

SILASTIC™ RTV-3010-S Catalyst

Catalyst used for RTV-3 Series silicone mold making rubbers.

APPLICATIONS:

- Simple patterns with no undercuts
- Electronic potting
- Encapsulation

FEATURES:

- Two-part RTV silicone rubbers
- Low mixed viscosity
- Adjustable cure times
- Easy to use
- Reproduces intricate details
- Wide range of service temperature

**BEST
SELLER**

PART N°	SIZE	COLOR	CASE / PALLET
4107697	45 G Tube	Light Blue	24 / 2,400
4107699	409 G Bucket	Light Blue	4 / 2,160
4107698	1.8 KG Pail	Light Blue	1 / 36
4107700	18.1 KG Pail	Light Blue	1 / 36



Glycol-Based Heat Transfer Fluids



PROPYLENE GLYCOL

DOWFROST™ Heat Transfer Fluid

A formulation of 96% food-grade propylene glycol plus 4% food-grade corrosion inhibitors. Acceptable for use as a heat transfer fluid where there is a possibility of incidental food contact.

APPLICATIONS:

- HVAC
- Chill water and hydronic heating loops
- Geothermal
- Snow melt, defrosting, and turf heating
- Solar hot water heating
- Fire water sprinkler systems
- Food and beverage processing
- Cold room dehumidifying
- Refrigeration and freezing
- Ice skating rinks
- Secondary heat transfer loops

FEATURES:

- Industrially inhibited heat transfer fluid with an operating range of -50°F to 250°F (-46°C to 121°C)
- Made with pharmaceutical grade DOW PuraGuard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Made entirely from food grade raw materials conforming to FDA CFR 21 and NSF guidelines
- Clear DOWFROST™ is Generally Regarded As Safe (GRAS) by the FDA

**BEST
SELLER**



DOWFROST™ HD Heat Transfer Fluid

A formulation of 94% propylene glycol and a specially designed 6% package of industrial corrosion inhibitors.

APPLICATIONS:

- HVAC
- Chill water and hydronic heating systems
- Geothermal
- Snow melt and turf heating systems
- Solar hot water heating
- Fire water sprinkler systems
- Refrigeration
- Ice skating rinks
- Large-scale chiller systems
- Cold storage, refrigerated warehouse
- Thermal Energy Storage (TES)

FEATURES:

- Engineered for closed loop HVAC systems with operating range of -50°F to 325°F (-46°C to 163°C)
- Made with pharmaceutical grade DOW PuraGuard™ Propylene Glycol USP/EP
- Provides freeze protection to below -60°F (-51°C) and burst protection to below -100°F (-73°C), depending on concentration
- Industrial corrosion inhibitors offer additional protection for systems containing copper components
- Widely used wherever low toxicity, environmentally friendly heat transfer fluids are needed - school and hospitals
- Fluorescent yellow for leak detection

Only select part numbers displayed. Contact Lentus for additional sizes.

PART N°	PRODUCT	SIZE	COLOR	CASE / PALLET
9992103	DOWFROST™ HD	1 Gal Bottle	Yellow	4 / 108
9992102	DOWFROST™ HD	5 Gal Pail	Yellow	1 / 24
9992101	DOWFROST™ HD	55 Gal Drum	Yellow	1 / 4
9992158	DOWFROST™ HD 70	1 Gal Bottle	Yellow	4 / 108
9992157	DOWFROST™ HD 70	5 Gal Pail	Yellow	1 / 24
9992156	DOWFROST™ HD 70	55 Gal Drum	Yellow	1 / 4
9990323	DOWFROST™	1 Gal Bottle	Blue	4 / 108
9990321	DOWFROST™	5 Gal Pail	Blue	1 / 24
9990221	DOWFROST™	55 Gal Drum	Blue	1 / 4
9990623	DOWFROST™ 70	1 Gal Bottle	Blue	4 / 108
9990621	DOWFROST™ 70	5 Gal Pail	Blue	1 / 24
9990521	DOWFROST™ 70	55 Gal Drum	Blue	1 / 4
9995006	DOWCAL™ 200	1 Gal Bottle	Blue	4 / 108
9995005	DOWCAL™ 200	5 Gal Pail	Blue	1 / 24
9995000	DOWCAL™ 200	55 Gal Drum	Blue	1 / 4
9996003	DOWFROST™ LC 25	5 Gal Pail	Yellow	1 / 24
9996002	DOWFROST™ LC 25	55 Gal Drum	Yellow	1 / 4
9996005	DOWFROST™ LC 25	265 Gal Tote	Yellow	1 / 1

Glycol-Based Heat Transfer Fluids



DOWCAL™ 200 Heat Transfer Fluid

Aluminum-safe glycol used in a wide range of industrial, construction, and infrastructure applications. Its low acute toxicity makes it especially suitable for applications where toxicity is a concern.

APPLICATIONS:

- Solar heating
- Floor heating
- Snow melting systems
- Process heating
- Heat recovery
- Cooling of electronic systems and components
- Wind turbine systems
- Photo-voltaic (PV) inverters
- Data center cooling
- Ice skating rinks

FEATURES:

- Provides long lasting and efficient corrosion protection, particularly for aluminum alloys
- Low acute oral toxicity
- Free of nitrite, borax and CMR (carcinogenic, mutagenic and reprotoxic)
- Recommended operating temperature range between -50°F to 350°F (-46°C to 177°C)



DOWFROST™ LC 25 Heat Transfer Fluid

The optimal fluid for efficient heat removal in Datacom Equipment Cooling Systems (DECS) and Coolant Distribution Units (CDUs) located within server racks. A customized inhibitor package provides superior corrosion protection for liquid-cooled, direct-to-chip applications with high surface area copper components.

APPLICATIONS:

- Direct-to-chip liquid cooling systems
- Liquid-based Datacom Equipment Cooling System (DECS)
- Glycol Cooled Computer Room AC Units (CRAC)
- Pumped refrigerant and glycol loop heat exchangers

FEATURES:

- Engineered and optimized to specifically serve the emerging liquid cooling needs of the data center and AI industries
- Manufactured using USP/EP grade propylene glycol
- Provides exceptional freeze protection down to -60°F (-51°C) and burst protection down to -100°F (-73°C)
- Compatible with a wide range of metals and elastomers used in DECS hardware
- Maintains functionality and protection in extreme conditions
- Fluorescent yellow for easy leak detection
- Thermal stability from -14°F to 195°F (-26°C to 91°C)
- Resists and prevents bio-fouling

ETHYLENE GLYCOL

DOWTHERM™ SR-1 Heat Transfer Fluid

A formulation of 95.5% ethylene glycol and a specially designed 4.5% package of industrial corrosion inhibitors.

APPLICATIONS:

- Solar heating
- Ice skating rinks
- FSRU (Floating Storage Regasification Unit) for chillers, heat pumps, temperature-sensitive materials, deicing, defrosting, and dehumidifying
- HVAC systems

FEATURES:

- Manufactured with 100% virgin ethylene glycol and formulated with heavy-duty industrial inhibitor packages that prevent corrosion
- Provides freeze protection for the system loop down to 14°F (-10°C)
- Specifically engineered for metal components with a high copper surface area
- Cost-effective cooling solution vs air cooling systems
- Fluorescent pink for easy leak detection
- Recommended temperature range of -60°F to 250°F (-51°C to 121°C)



PART N°	PRODUCT	SIZE	COLOR	CASE / PALLET
99092000	DOWTHERM™ SR-1	55 Gal Drum	Pink	1 / 4

**BEST
SELLER**



MOLYKOTE® 111 Compound

Lubrication for control and pressure plug valves, water softener, and faucet valves.

APPLICATIONS:

- Control cables
- Rubber and elastomer lubrication
- Valves, packings, seals, and O-rings

FEATURES:

- NLGI #3-4
- Wide service-temperature range of -40°F to 392°F (-40°C to 200°C)
- Excellent water resistance
- Compatible with many plastics and elastomers
- Low vapor pressure
- Low volatility
- Meets several global standards for water contact

Only select part numbers displayed. Contact Lentus for additional sizes.

PART Nº	SIZE	COLOR	CASE / PALLET
4109788	150 G	White	12 / 2,160
4109803	400 G	White	10 / 100
4111557	3.6 KG	White	1 / 36
4109896	18 KG	White	1 / 24
4109923	200 KG	White	1 / 4

MOLYKOTE® 7 Release Compound

Used primarily as a release agent or cable-pulling lubricant.

APPLICATIONS:

- Mold release agent for foundry shell and core molds
- Release agent for adhesives and glues
- Cable-pulling lubricant to draw rubber-covered cable through conduit
- Release agent for plastic extruders and processing equipment

FEATURES:

- NLGI #1
- Very robust thermal stability -40°F to 400°F (-40°C to 204°C)
- Excellent release and sealing properties
- Resistant to oxidation
- Shows little tendency to dry out in service
- Meets FDA Regulation 21 CFR 175.300, NSF 51 and NSF 61 requirements

Only select part numbers displayed. Contact Lentus for additional sizes.

PART Nº	SIZE	COLOR	CASE / PALLET
1927582	150 G	Trans White	12 / 2,160
1922602	3.6 KG	Trans White	1 / 36



MOLYKOTE® 4 Electrical Insulating Compound

Silicone-based compound with semi-flowable consistency that exhibits excellent dielectric strength and electrical insulating properties.

APPLICATIONS:

- Control cables
- Electrical
- Valves, packings, seals, and O-rings

FEATURES:

- NLGI #2-3
- Good adhesion to most dry materials, including metals, elastomers, polymers, and ceramics
- Low volatility and evaporation
- Good moisture resistance, water repellency, and thermal oxidation stability
- Meets FDA Reg 21 CFR 175.300, NFS 51, and NSF 61



Only select part numbers displayed. Contact Lentus for additional sizes.

PART N°	SIZE	COLOR	CASE / PALLET
1927574	150 G	Trans White	12 / 2,160

MOLYKOTE® 33 Medium Extreme Low Temperature Grease

Grease for use under a wide range of temperature conditions for light-load applications where there is metal-to-metal or metal-to-plastic friction at low to high speeds.

APPLICATIONS:

- Control cables
- Electrical
- Plain bearings, bushings, and sleeves
- Plastic lubrication
- Power screw drives
- Rolling element bearings
- Rubber and elastomer lubrication
- Slides, guides, and tracks

FEATURES:

- NLGI #2
- Good oxidation resistance
- Wide service-temperature range -99°F to 356°F (-73°C to 180°C)
- Superior low-temperature characteristics
- Compatible with most plastics
- Water-resistant



Only select part numbers displayed. Contact Lentus for additional sizes.

PART N°	SIZE	COLOR	CASE / PALLET
4016023	150 G	Off-White	12 / 2,160
4016034	400 G	Off-White	10 / 100

MOLYKOTE® BG-20 Synthetic Bearing Grease

High-performance grease for metal-on-metal combinations involving rapid movements and medium to heavy loadings.

APPLICATIONS:

- Machining spindles
- Plain bearings, bushings, and sleeves
- Power screw drives
- Rolling element bearings
- Slides, guides, and tracks

FEATURES:

- NLGI #2
- Contains no lead or nickel
- High load-carrying capacity
- Suitable for long-term lubrication by virtue of low oil evaporation and low tendency towards oxidation
- Wide service-temperature range from -49°F to 356°F (-45°C to 180°C)
- Suitable for very high rotational speeds



Only select part numbers displayed. Contact Lentus for additional sizes.

PART N°	SIZE	COLOR	CASE / PALLET
2405831	400 G	Beige	10 / 100

MOLYKOTE® BR-2 Plus High Performance Grease


High-performance grease with solid lubricants for metal-on-metal combinations involving slow to fast movements, particularly with medium to high loads.

APPLICATIONS:

- Machining spindles
- Multi-purpose penetrant
- Plain bearings, bushings, and sleeves
- Power screw drives
- Rolling element bearings
- Slides, guides, and tracks

FEATURES:

- NLGI #2
- High load-carrying capacity
- Suitable for long-term lubrication
- Good oxidation resistance
- Emergency running properties



Only select part numbers displayed. Contact Lentus for additional sizes.

PART N°	SIZE	COLOR	CASE / PALLET
4112876	400 G	Black	10 / 100

**BEST
SELLER**



GREAT STUFF™ Construction Work Gloves

Offers high visibility, abrasion resistance, and unparalleled grip in wet and dry conditions. The lightweight, 18-gauge liner enhances dexterity, allowing for precise handling of tools and materials. The reinforced thumb saddle provides added durability.

APPLICATIONS:

- Handling of tools and materials
- Heavy machinery operation
- Concrete work and masonry
- Automotive assembly and repair

FEATURES:

- Sandy nitrile coating
- High visibility
- Breathable, comfortable, and flexible for long wear
- Silicone and latex free

PART N°	SIZE	PACK	CASE / PALLET
5000148	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000150	L	12 Pairs	72 Pairs / 2,592 Pairs
5000151	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000152	XXL	12 Pairs	72 Pairs / 2,592 Pairs



Touchscreen
Compatible



GREAT STUFF™ Multi Purpose Work Gloves


The sandy nitrile coating offers abrasion resistance and ensures excellent performance in challenging environments, including those with grease, oils, and hydrocarbons. The elastic knit wrist fits securely, preventing dirt and debris from entering.

APPLICATIONS:

- Material handling
- Maintenance tasks
- Construction

FEATURES:

- Sandy nitrile coating
- Enhanced dexterity
- Comfortable and breathable
- Lightweight, 15-gauge liner
- Silicone and latex free

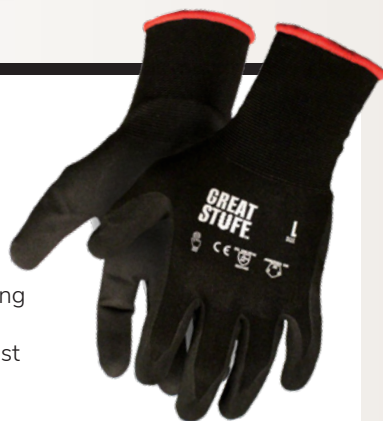

Touchscreen
Compatible



PART N°	SIZE	PACK	CASE / PALLET
5000141	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000102	L	12 Pairs	72 Pairs / 2,592 Pairs
5000103	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000104	XXL	12 Pairs	72 Pairs / 2,592 Pairs

GREAT STUFF™ Cut Protection Work Gloves

Crafted with an HPPE/steel/fiberglass blend shell and 360° cut resistance, these gloves provide reliable protection in demanding environments.

APPLICATIONS:

- Installing panels, gears, trim pieces, and windshields or mirrors
- Working with sheet metal, wire, utility knives, glass, lumber, and saws

FEATURES:

- Sandy nitrile coating
- Breathable, comfortable, and flexible for long wear
- Lightweight, 18-gauge liner
- Silicone and latex free
- Reinforced thumb saddle



Touchscreen
Compatible



PART N°	SIZE	PACK	CASE / PALLET
5000143	S/M	12 Pairs	72 Pairs / 2,592 Pairs
5000112	L	12 Pairs	72 Pairs / 2,592 Pairs
5000113	XL	12 Pairs	72 Pairs / 2,592 Pairs
5000114	XXL	12 Pairs	72 Pairs / 2,592 Pairs

GREAT STUFF™ Impact Protection Work Gloves

Engineered for impact and cut resistance while ensuring a superior grip. With an HPPE/steel/fiberglass blend shell and high visibility back-of-hand impact guards, this glove is designed to protect against smash and pinch hazards while safeguarding your hands from all angles.

APPLICATIONS:

- Operating machinery or heavy materials
- Handling sharp tools or materials like bricks or stones
- Working with sheet metal, wire, utility knives, and saws

FEATURES:

- High-visibility back-of-hand impact guards
- 360° cut resistance
- Sandy nitrile coating
- Reinforced thumb saddle
- Lightweight, 18-gauge liner
- Silicone and latex free



ANSI / ISEA 138



Touchscreen
Compatible

ANSI/ISEA 105



PART N°	SIZE	PACK	CASE / PALLET
5000144	S/M	12 Pairs	36 Pairs / 1,440 Pairs
5000117	L	12 Pairs	36 Pairs / 1,440 Pairs
5000118	XL	12 Pairs	36 Pairs / 1,440 Pairs
5000119	XXL	12 Pairs	36 Pairs / 1,440 Pairs

GREAT STUFF™ Nitrile with TentaGrip™ Disposable Gloves

Patent-pending TentaGrip™ texture that revolutionizes grip, ensuring a secure hold in various applications and wet or dry conditions.

APPLICATIONS:

- Working with oily or greasy parts
- Handling small components
- Food and beverage processing

FEATURES:

- Safe for ESD sensitive applications
- FDA food safe certified (US FDA 21 CFR 177.2600)
- Puncture resistance
- Latex, powder, and silicone free
- Ambidextrous



Touchscreen
Compatible



Chemical
Resistance

PART N°	SIZE	EACH	CASE / PALLET
5000153	S/M	100 Gloves	10 Boxes / 480 Boxes
5000154	L	100 Gloves	10 Boxes / 480 Boxes
5000155	XL	100 Gloves	10 Boxes / 480 Boxes
5000156	S/M	10 Gloves	20 Packs / 1,920 Packs
5000157	L	10 Gloves	20 Packs / 1,920 Packs
5000158	XL	10 Gloves	20 Packs / 1,920 Packs

GREAT STUFF™ Latex / Nitrile Blend Disposable Gloves

The puncture resistant gloves have the comfort and dexterity of latex and the durability and strength of nitrile, offering industrial grade protection.

APPLICATIONS:

- Construction
- HVAC and plumbing
- Automotive
- Warehousing and manufacturing

FEATURES:

- Puncture resistant
- Powder-free and polymer-coated
- Ambidextrous



Industrial Grade
Thickness



Touchscreen
Compatible

PART N°	SIZE	EACH	CASE / PALLET
5000089	L	100 Gloves	10 Boxes / 480 Boxes
5000090	XL	100 Gloves	10 Boxes / 480 Boxes
5900005	L	10 Gloves	20 Packs / 1,920 Packs
5900002	1/4 Pallet Display	100 Gloves	8 Cases (80 Boxes)

**BEST
SELLER**



GREAT STUFF™ Window & Door

This polyurethane foam sealant is a specially formulated, minimal-expanding foam with a low-pressure build that remains soft and flexible after curing.

APPLICATIONS:

- Windows and their rough openings
- Doors and their rough openings

FEATURES:

- Bonds to vinyl, wood, and metal frames
- Formed without trimming to create a long-lasting, airtight, and water-resistant seal proven not to bow window or door frames

PART Nº	SIZE	COLOR	CASE / PALLET
99108862	12 OZ Smart Dispenser	Yellow	12 / 768
00187273	20 OZ PRO Gun Foam	Yellow	12 / 768
00197711	20 OZ Straw	Yellow	12 / 768

GREAT STUFF™ Gaps & Cracks

Minimize airflow in holes, gaps, and cracks all around the home. It's ready to use and creates seals made to last.

APPLICATIONS:

- Seal basement and attics
- Pipe penetrations
- Ducting
- Plumbing penetrations
- Electrical outlets and panels
- Rim joints

FEATURES:

- Adheres to wood, metal, masonry, glass, and most plastics
- Expands to fill, seal, and insulate gaps up to 1" (25 mm)
- Helps keep insects, moisture, condensation, and allergens out
- Paintable, stainable, and sandable
- Takes the shape of gaps and cracks
- Water-resistant around plumbing and electrical
- UL Classified



PART Nº	SIZE	COLOR	CASE / PALLET
99108824	12 OZ Smart Dispenser	Yellow	12 / 768
00157911	20 OZ Straw	Yellow	12 / 768
00157901	12 OZ Straw	Yellow	12 / 768
00341557	24 OZ PRO Gun Foam	Orange	12 / 768
00341558	30 OZ PRO Gun Foam	Orange	12 / 768

GREAT STUFF™ Multipurpose Black

The jack-of-all-trades solution for discreetly filling unwanted gaps across a wide range of projects, both inside and outside of the home.

APPLICATIONS:

- Exterior of electrical lines
- Service penetrations, air conditioning lines, refrigerant lines, and gas lines
- Repair of masonry walls, sidewalks, and porches
- Outdoor landscaping

FEATURES:

- Expands to fill, seal, and insulate gaps up to 1" (25 mm)
- Reduces unwanted noise and vibration
- All-direction dispensing
- Black color blends into environment
- Creates a long-lasting, airtight, weather-resistant seal
- Paintable, stainable, and sandable
- UL Classified



PART Nº	SIZE	COLOR	CASE / PALLET
99112876	12 OZ Smart Dispenser	Black	12 / 768

GREAT STUFF™ Big Gap Filler

Fills, seals and insulates bigger gaps, providing a water-resistant barrier to help minimize unwanted airflow and improve energy efficiency in high-loss areas.

APPLICATIONS:

- Rim joists
- Sill plates
- Exterior opening
- Pipe penetrations
- Ducting

FEATURES:

- Expands to fill, seal, and insulate gaps up to 3" (76 mm)
- Adheres to wood, metal, masonry, glass, and most plastics
- Forms a long-lasting, airtight, weather-resistant seal
- Interior and exterior use
- Paintable, stainable, and sandable
- Tack-free in 5-15 minutes; trimmable in one hour
- Cream-colored foam for easy identification
- UL Classified



PART N°	SIZE	COLOR	CASE / PALLET
00157906	12 OZ Straw	Yellow	12 / 768
99108860	12 OZ Smart Dispenser	Yellow	12 / 768

GREAT STUFF PRO™ Foam Cleaner

Uniquely formulated to dissolve uncured polyurethane foam from project surfaces and applicators for easy removal.

APPLICATIONS:

- Cleaning GREAT STUFF PRO™ Dispensing Guns from the inside
- Remove any uncured GREAT STUFF™ product residue

FEATURES:

- Threaded cap
- Comes with spray nozzle and gun adapter attachment
- Point and spray foam removal



PART N°	SIZE	COLOR	CASE / PALLET
12084890	12 OZ	Clear	12 / 1,080

GREAT STUFF PRO™ Dispensing Guns

No-drip precision application, GREAT STUFF PRO™ Dispensing Gun provides total control over every seal, ensuring professionals get the maximum yield out of every can.

APPLICATIONS:

- Applying GREAT STUFF PRO™ products
- Sealing and insulating gaps, cracks, and window and door jams

FEATURES:

- Lightweight, high-strength aluminum body with a metal trigger
- Flow-control mechanism dispenses beads from 1/8" to 3"
- Provides greater precision and access to hard-to-reach areas
- Large flow control knob with a secured back-crew system
- Replaceable smooth dispensing nozzle
- Maximum foam yield and minimal waste



PART N°	PRODUCT	CASE
00230408	13" Gun	30
99046685	14" Gun Blister Pack	3

GREAT STUFF™ Heavy Duty Work Wipes

Durable and strong scrub removes uncured GREAT STUFF™ foams and more.

APPLICATIONS:

- Removes uncured foams, adhesives, silicone, and fillers
- Cleans up oil, paint, grease, grime, and other heavy messes
- Heavy duty cleaning jobs that regular wipes can't handle

FEATURES:

- Large sized 9.8" by 7.9"
- Lint free
- Active cleaning solution
- 30 wet wipes per reusable package
- Made with sustainable materials

PART N°	SIZE	CASE
7500104	Case	24 Packs (2 Shelf Ready Boxes)
5900004	1/4 Pallet Display	8 Cases (192 Packs)



LENTEK™ Sealants



LENTEK™ Insulating Foam Sealant

Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam. Provides a simple, cost-effective solution to eliminate unwanted airflow and improve energy efficiency.

APPLICATIONS:

- Wider gaps, joints, and cavities
- Insulating door and window frames
- Penetrations in walls
- Insulating electrical outlets, water pipes, ducts, refrigerant lines, and condensate drain pans
- Vibration dampening
- Expansion joint filling
- Sealing and air barrier

FEATURES:

- 18-month shelf life
- Triple expanding
- Interior and exterior use
- Long-lasting, airtight, and weather-resistant seals
- Adheres to wood, metal, masonry, glass, and most common building materials
- UL Classified



LENTEK™ Fireblock Foam Sealant

Impedes spread of fire and smoke through service penetrations. Fills and insulates gaps efficiently with the power of long-lasting, water-resistant, expanding foam. Orange-colored foam for easy identification and inspection.

APPLICATIONS:

- Seals service penetrations between floors and electrical runs through wall studs
- HVAC equipment penetrations
- Ductwork in walls, floors, and ceiling
- Fire damper installations

FEATURES:

- 18-month shelf life
- Cost-effective polyurethane foam sealant
- B2 fire rating
- Adheres to wood, metal, masonry, glass, and most common building materials
- UL Classified



PART N°	SIZE	COLOR	CASE / PALLET
2299120	12 OZ Straw	Tan	12 / 912

PART N°	SIZE	COLOR	CASE / PALLET
2299121	12 OZ Straw	Orange	12 / 912

**BEST
SELLER**



Lucas Red “N” Tacky Grease

Smooth, tacky, red lithium complex grease fortified with rust and oxidation inhibitors.

APPLICATIONS:

- Reduce friction between moving metal parts
- Plain bearings, sliding parts, and open gears
- Industrial
- Automotive
- Agricultural

FEATURES:

- NLGI #2
- Water-resistant
- Excellent mechanical stability
- Long storage life
- Suitable for heavy loads over extended periods
- Enhanced tackiness enables longer performance
- Multi-purpose extreme pressure grease

PART Nº	SIZE	COLOR	CASE / PALLET
11025	11 OZ Aerosol	Red	12 / 1,296
10005-30	14 OZ Cartridge	Red	30 / 1,800
10574	1 LB Tub	Red	12 / 1,200
10027	35 LB Pail	Red	1 / 48
10028	120 LB Keg	Red	1 / 9
10029	400 LB Drum	Red	1 / 4

Lucas Hydraulic Oil Booster & Stop Leak

One-of-a-kind, long-lasting blend of oils and petroleum-extracted additives that add lubricity and thermal stability to any hydraulic oil.

APPLICATIONS:

- Stops leaks
- Prevents major overhauls
- Reduces heat
- Adds life to pumps, rams, seals, and the treated hydraulic fluid
- Stops slip, chatter, and fading

FEATURES:

- Designed for correcting existing problems
- Treat rate for preventative maintenance is only 5-10%
- Anti-foam agents present



Lucas White Lithium Grease

A high-quality formulation with selective additives and virgin base oils, blended to provide outstanding long-term lubrication.

APPLICATIONS:

- Garage doors, hinges, openers, and springs
- Chassis, trucks, tractors, and contractor equipment
- Cables and chains
- Latches and hinges

FEATURES:

- NLGI #2
- Long-lasting and reduces wear
- Extreme friction reducer



PART Nº	SIZE	COLOR	CASE / PALLET
10019	1 Quart	Red	12 / 840
10018	1 Gal	Red	4 / 240
10039	5 Gal Pail	Red	1 / 48
10040	55 Gal Drum	Red	1 / 4

PART Nº	SIZE	COLOR	CASE / PALLET
10533	8 OZ Tube	White	12 / 840
10535	35 LB Pail	White	1 / 48

Lucas X-tra Heavy Duty Grease

EP-fortified that exceeds OEM specifications and is virtually washout-proof, featuring a robust extreme pressure additive package.

APPLICATIONS:

- Hard-working equipment with irregular maintenance schedules
- High-speed bearings
- Industrial
- Automotive
- Agricultural

FEATURES:

- NLGI #2
- Enhanced stability compared to conventional lithium grease
- Last four times longer than regular grease
- The ultimate grease for high-speed bearings

PART N°	SIZE	COLOR	CASE / PALLET
10301-30	14.5 OZ Cartridge	Green	30 / 1,800
10330	1 LB Tub	Green	12 / 1,200
10305	35 LB Pail	Green	1 / 48
10316	120 LB Keg	Green	1 / 9
10335	400 LB Drum	Green	1 / 4



Lucas Marine Grease

Premium, multi-purpose, Overbased Calcium Sulfonate (OBCS) grease containing unique polymers, anti-wear agents, and tackifiers with inherent rust and oxidation resistance to provide the highest-performance properties.

APPLICATIONS:

- Freshwater and saltwater corrosion protection
- Trailer wheel bearings
- Trailer chassis lubrication
- Outboards
- Automotive wheel bearing

FEATURES:

- NLGI #2
- Extreme pressure properties, water resistance, and shock-loading protection
- Typical weld point of 500 KG; the minimum industry standard is 200 KG
- Timken Load 65 LBS
- Dropping point 570°F (299°C)

PART N°	SIZE	COLOR	CASE / PALLET
10320-30	14 OZ Cartridge	Blue	30 / 1,800
11148	1 LB Tub	Blue	12 / 1,200
10321	35 LB Pail	Blue	1 / 48
10322	120 LB Keg	Blue	1 / 9
10660	400 LB Drum	Blue	1 / 4

Lucas Industrial Gear Oils

Blended with the highest quality base oils and additives to provide extreme pressure protection, resistance to foam, and rust protection.

APPLICATIONS:

- Bevel, spur, herringbone, planetary, worm, and industrial hypoid gears
- Chain drives, sprockets, plain and anti-friction bearings, slide guides, and flexible couplings

FEATURES:

- Excellent shock-loading properties
- Designed to withstand heavy loads
- Non-corrosive to brass, bronze, steel, and other copper alloys



Only select part numbers displayed. Contact Lentus for additional sizes.

PART Nº	PRODUCT	SIZE	COLOR	CASE / PALLET
10673	ISO 150	55 Gal Drum	Amber	1 / 4
10590	ISO 220	55 Gal Drum	Amber	1 / 4
10592	ISO 320	55 Gal Drum	Amber	1 / 4
10496	ISO 680	55 Gal Drum	Amber	1 / 4

Lucas Penetrating Oil

A high-performance penetrant that dissolves rust and corrosion without drying, reaching into the smallest crevices to lubricate metal parts.

APPLICATIONS:

- Nuts, bolts, and hinges
- Bearings
- Motorcycle and bicycle chains

FEATURES:

- Fortified with powerful corrosion inhibitors and wetting agents
- Slow evaporation that leaves a tenacious film that fights water and corrosion
- Use in any position, even upside down
- Low odor



PART Nº	SIZE	COLOR	CASE / PALLET
11043	11 OZ Aerosol	Amber	12 / 1,296

Lucas Multi-Purpose Parts Cleaner & Degreaser

Specially formulated to dissolve stubborn deposit and restore optimal performance to key engine and brake components.

APPLICATIONS:

- Degrease carburetors, chokes, brake calipers, rotors, air intakes, throttle bodies, and unpainted metal parts
- Helps remove unwanted deposits such as gum, varnish, oil, brake fluid, grease, dirt, and sludge

FEATURES:

- Formulated with advanced Polyetheramine (PEA) detergents
- Fast drying
- Does not contain CFCs or chlorinated solvents
- 50 state VOC compliance



PART Nº	SIZE	CASE / PALLET
11115	16 OZ Aerosol	12 / 1,080
11115-6	16 OZ Aerosol	6 / 540



LENTUS



10/2025



«DUPONT»

DOWSIL

DOWFROST™

FROTH-PAK™

GREAT STUFF

LUCAS OIL

LENTEK

MOLYKOTE

LentusLLC.com

Sales@LentusLLC.com

+1-270-765-2212

400 Ring Road, Suite 101
Elizabethtown, KY 42701