

GET SMART

# THE CONNECTED SHOP



**SMART LIGHTBULB CAMERA  
USER MANUAL**

Welcome to the Smart Lightbulb Camera User Manual. This comprehensive, step-by-step guide will assist you in setting up and connecting your Smart Lightbulb Camera. Designed for user-friendliness, this innovative device aims to replace conventional camera monitors with a more modern solution.



# SUMMARY

---

## I. Before Set Up



- a) Packaging List.....Page 3
- b) Device Details.....Page 4

## II. Device Set Up






- a) Insert SD card.....Page 5
- b) Screw the device.....Page 5
- c) Reset the device.....Page 6

## III. Mobile App Connection



- a) Download the Mobile App.....Page 6
- b) Register & Log In.....Page 6
- c) Add Devices.....Page 7
- d) Reset Password.....Page 9
- e) Add Locations.....Page 10
- f) Add Members.....Page 13

## a) Packaging List

<p>1. Lightbulb Camera</p> 	<p>The smart lightbulb camera that will replace your current lightbulb and camera.</p>
<p>2. Lightbulb Holder</p> 	<p>The device used to secure and hold the lightbulb camera in place, which can be screwed on the ceiling using the provided screws.</p>
<p>3. Screws</p> 	<p>The screws are used to fasten the lightbulb holder in place when mounted on an elevated flat surface.</p>

## I. BEFORE INSTALLATION



### b) Device Details



## II. DEVICE SETUP



### a) Insert the SD Card

- Take all items out of their original packaging.
- Take the SD card (if any) and locate the SD card slot at the top head of the camera lightbulb as seen in the diagram from the previous page.
- Insert the SD card into the slot and put the cover back.

### b) Screw the Device

- Take the lightbulb holder and the screws to mount it on a flat surface as intended.
- Take the lightbulb and screw it on the mounted lightbulb holder.
- Make sure that everything is tightened securely before activating the device.

## II. DEVICE SETUP



### c) Reset the Device

- To reset the device, open the cover of the SD card slot on the top of the lightbulb.
- There you will find a small reset button right next to the SD card slot.
- Take a pin to press the button for 5-10 seconds until you hear a beep.
- Wait for a few more seconds before the device activates.

NOTE: It is important to reset the device first before setting up the network.



### III. MOBILE APP CONNECTION



#### a) Download The Mobile App

Download the app from the Google Play Store or Apple App Store by searching for “Tuya Smart” or by scanning the provided QR code.




Look for the Tuya Smart Logo



#### b) Log In and Register

- After downloading, select your country.
- You will be redirected to register via email.
  - For existing users, log in using your registered email and password on the login page.
- A verification code will be sent to your email; enter it in the app within the specified time limit.
- Once the verification code is entered, you will be prompted to set your password.
- After completing these steps, you will have full access to the Tuya Smart app on your mobile phone to start adding your device.

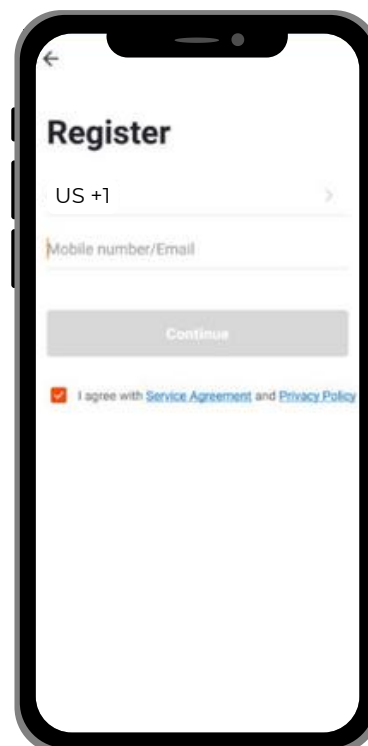



### III. MOBILE APP CONNECTION



#### c) Adding Devices

To include devices in the app, please adhere to the following instructions. Ensure that both your devices and phone are connected to the same 2.4 GHz Wi-Fi network for this process to be successful.



- To include a new device, either click on the 'Add Device' option or tap the '+' button located in the top-right corner of your screen, then choose 'Add Device.'
- Choose 'Camera&Lock', then click 'Smart Camera' to proceed.
- Ensure that the device remains powered on and that your mobile phone is nearby.


- Enter your 2.4 GHz Wi-Fi password and confirm.
- The app will then prompt a QR code.
- Scan the QR code using the lightbulb camera (needs to be 20-30cm away from the phone screen).
- Once done, select 'I Heard a Prompt' to continue with connecting the device.



### III. MOBILE APP CONNECTION

Please refer to the video below and follow the steps to connect the device to the app.

NOTE: Make sure to reset the device before and/or after setting up the network to successfully pair it.

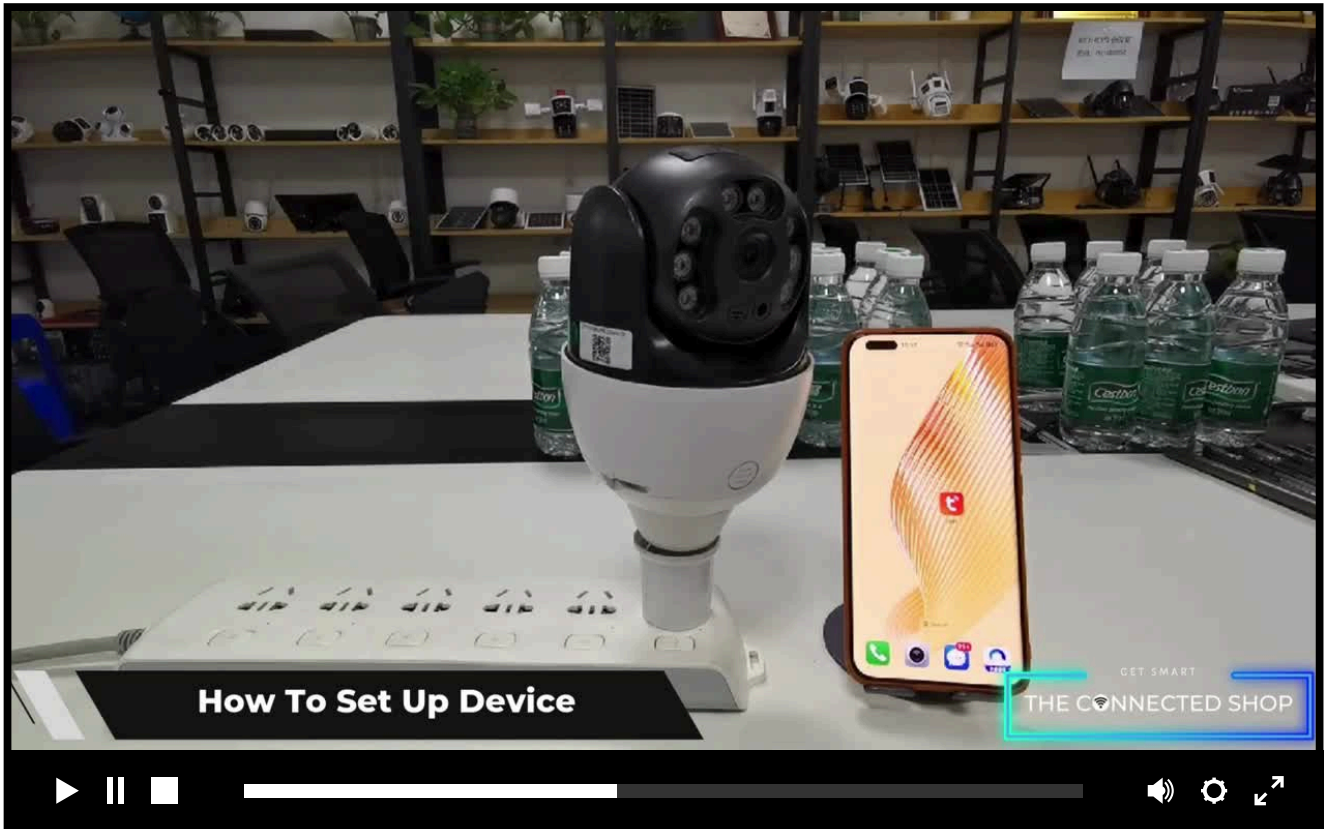


### III. MOBILE APP CONNECTION



#### d) Reset Password

- On the login page, click the “Forgot Password” button located below the “Login” button.
- Select your country, which the app will usually detect automatically, and proceed with the password reset process.
- Enter your email address to receive a verification code.
- Once you receive the code, enter it into the app within the allotted time.
- You will then be prompted to set a new password, giving you full access to the Tuya Smart Platform.

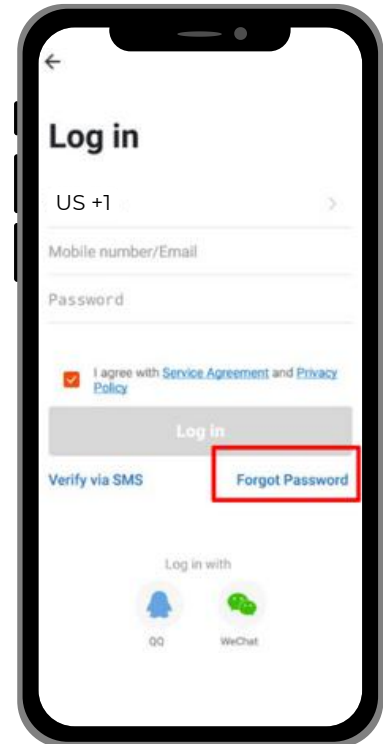


### III. MOBILE APP CONNECTION




#### e) Add Locations

- Tap the button in the top-left corner of the screen and select 'Home Management' from the dropdown list.
- A single account can manage multiple locations simultaneously, allowing the user to operate multiple devices within a selected location.

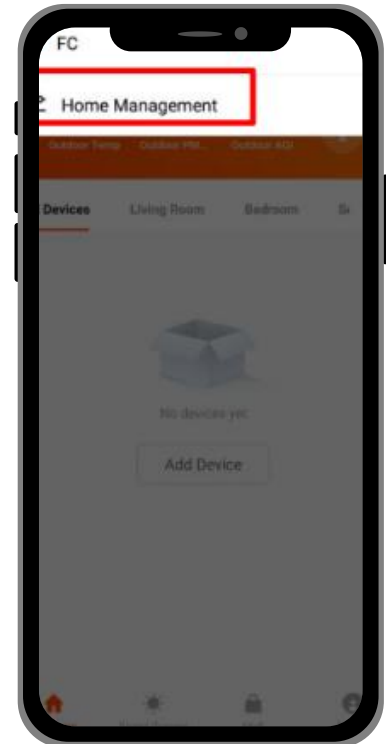


### III. MOBILE APP CONNECTION

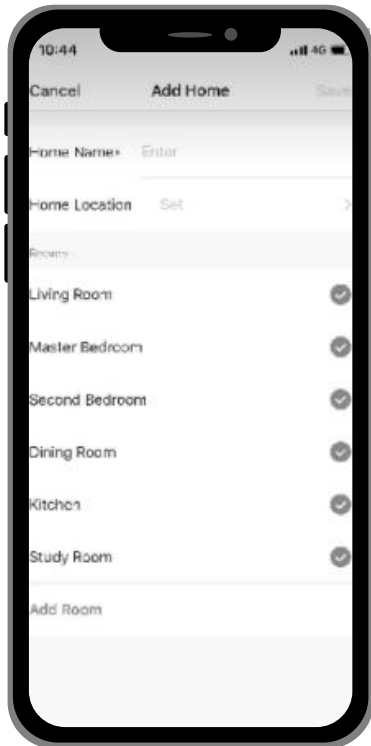

- If you already have a Home set up, click 'Join a Home.' If not, click 'Create a Home.'
- Enter the required details on the screen and click 'Confirm.'


Note: Other household members will have the ability to control the smart devices registered to this household, but they will not have the authority to modify, add, or delete devices.

### III. MOBILE APP CONNECTION

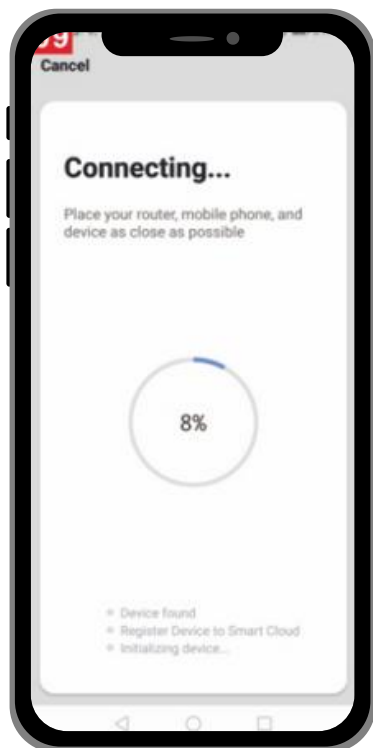

- Make sure to place your mobile phone, device, and router as close together as possible while the app is connecting.
- Allow the app to complete the search for the device until you see a successful confirmation message.
- Afterward, you can rename the device as desired.

- Once successfully added, the app will return to its home page where you can now easily access and manage the device.

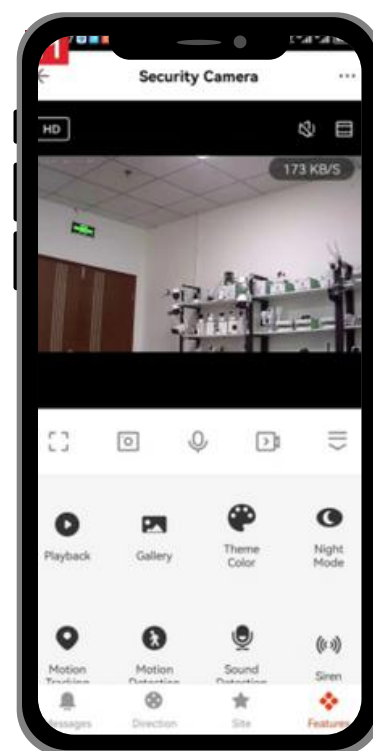

### III. MOBILE APP CONNECTION



#### f) Add Members

To grant others access to a device by adding them as members of a specific location or room, follow these steps:



- Tap the 'Me' tab at the bottom-right corner of your screen.
- Click on 'Home Management.'
- Select the location where you want to add the new member.
- Tap 'Add Member' and choose the method to share the invitation with the new member.

## Congratulations!

You have successfully set up your very own Smart Lightbulb  
Camera.

Thank you for being a valued customer of The Connected Shop.

[www.theconnectedshop.com](http://www.theconnectedshop.com)







GET SMART

THE  CONNECTED SHOP