

GET SMART

THE C^oNNECTED SHOP



SMART DOOR LOCK
USER MANUAL

Your step-by-step guide for installing, configuring, and connecting your ADA Smart Door Lock.

This device is engineered for ease of use and is compatible with various modern door types, including main entry doors, bedroom doors, sliding doors, and traditional swing doors.

This lock is designed to seamlessly replace existing door handles, ensuring both convenience and security.



SUMMARY

I. Before Installation



- a) Packaging List.....Page 4
- b) Device Details.....Page 5
- c) Handle Direction.....Page 6

II. Device Installation



- a) Remove Existing Lock.....Page 7
- b) Insert New Latch.....Page 7
- c) Install Lock Handles.....Page 7
- f) Tighten Screws.....Page 7
- g) Install New Batteries.....Page 7

III. Device Programming



- a) Reset & Keypad Legend.....Page 8
- b) Access Door Lock Settings.....Page 9
- c) Add Administrator.....Page 10
- d) Delete Administrator.....Page 11
- e) Language Setting.....Page 12
- f) Passage Mode.....Page 13

SUMMARY

IV. Mobile App Connection



- a) Download the Mobile App.....Page 14
- b) Log In & Register.....Page 14
- c) Reset Password.....Page 15
- d) Add Locations.....Page 16
- e) Connect To Network.....Page 18
- f) Add Devices.....Page 19
- g) Add Members.....Page 24

V. Mobile App Features



- a) Access Log Records.....Page 25
- b) Alert Notifications.....Page 25
- c) Dynamic Password.....Page 26
- d) Temporary Password.....Page 26
- e) Remote Unlock.....Page 27

VI. Additional Information








- a) Auto Lock.....Page 28
- b) Wrong Password Lockout.....Page 28
- c) Low Battery Notifications.....Page 28

I. BEFORE INSTALLATION




a) Packaging List

<p>1. Handles</p> 	<p>The smart door handles that will replace your current door handles on your door.</p>
<p>2. Latch</p> 	<p>The lock mechanism to fit in the pocket cutout into your door's edge. This is paired with the smart door lock handles</p>
<p>3. Metal Rod/Spindle</p> 	<p>The metal rod connecting the door handles to the lock mechanism inside the door.</p>
<p>4. Screws</p> 	<p>The screws hold the lock handles firm on the door and the mortise in position inside the door.</p>
<p>5. Mechanical Keys</p> 	<p>Physical backup keys to open the lock in case of low battery.</p>

I. BEFORE INSTALLATION



b) Device Details

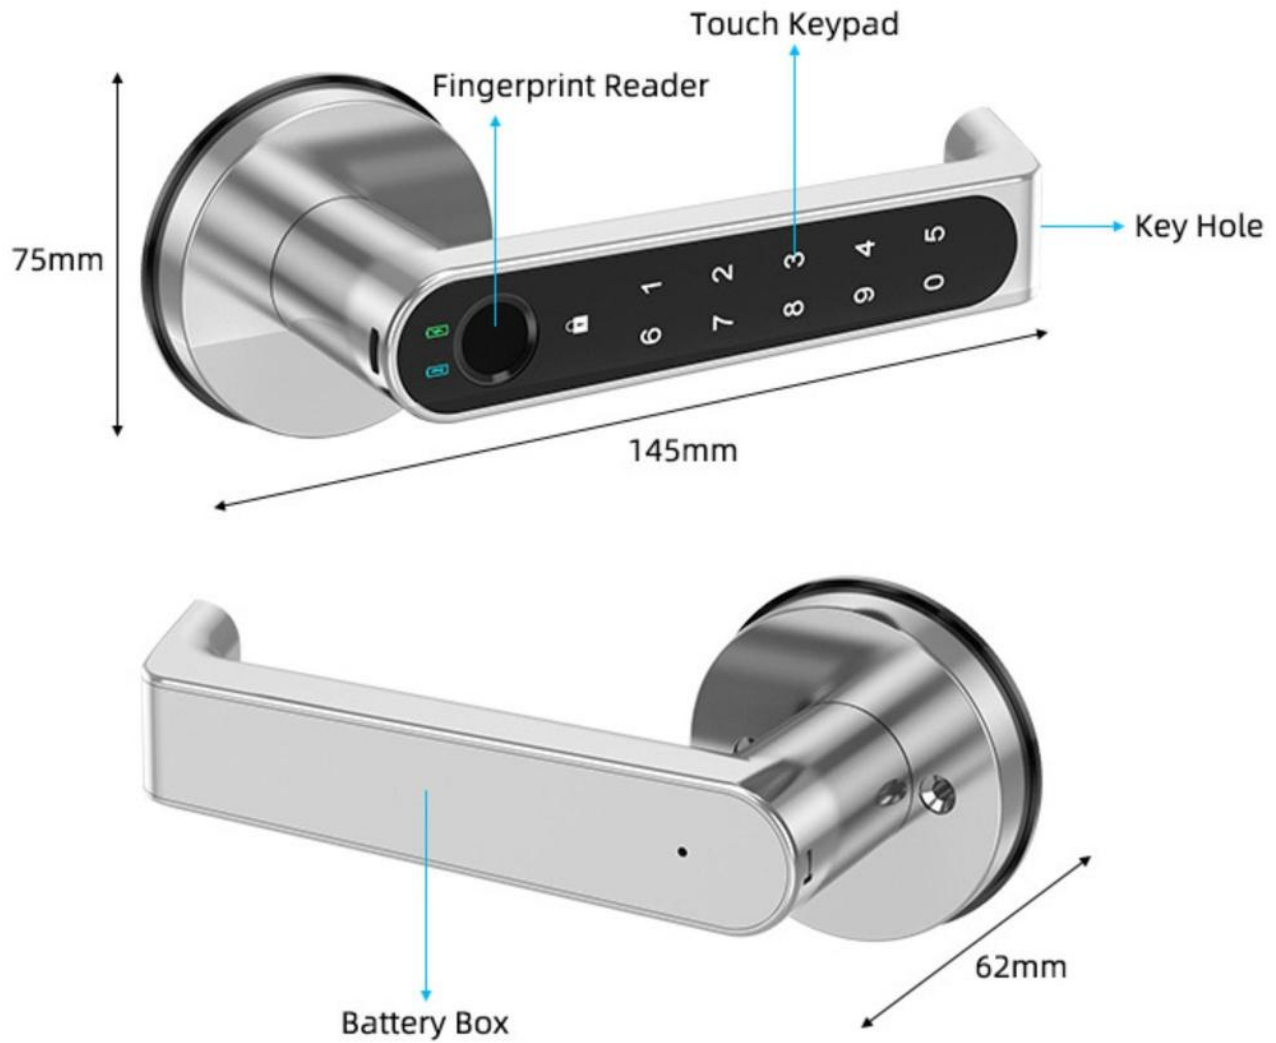


I. BEFORE INSTALLATION



c) Handle Direction (Optional)

To adjust the handle direction on the Smart Lock based on your door's opening or orientation, ensure the handle is properly aligned before securing the screws and refer to the following steps:

- Loosen the screw on the handle to adjust the handle direction either to the left or right.
- Fix the screw by tightening it after.

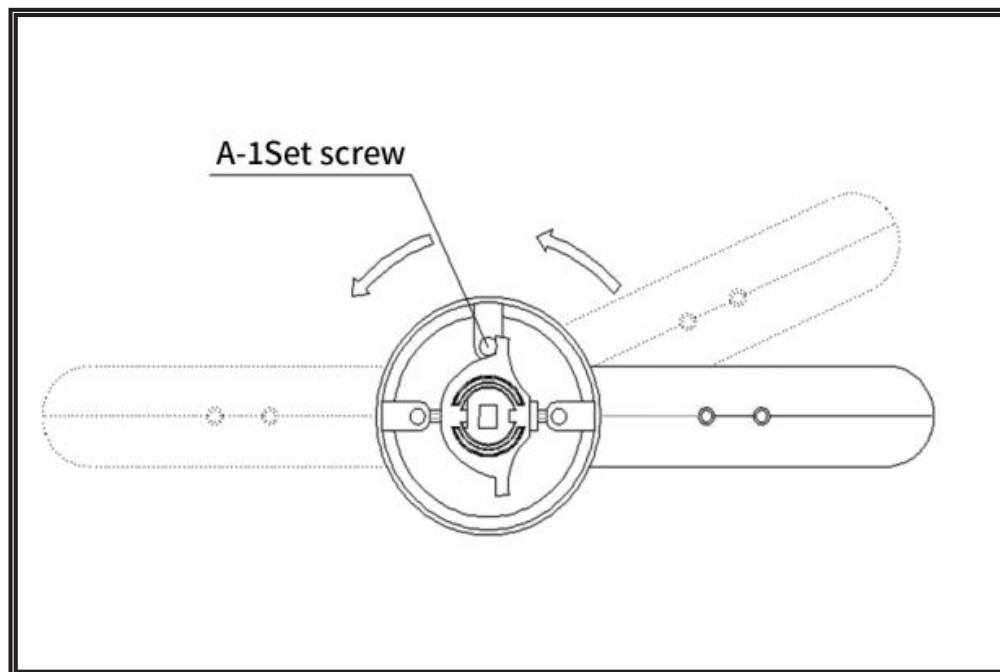

Important Note:

Verify that the handle returns to its correct position after adjustment; otherwise, it may become misaligned or too loose.

II. DEVICE INSTALLATION



a) Remove Existing Lock

Begin by unscrewing the bolts that secure your current door knob. Carefully pull out the existing lock.



b) Insert New Latch

- Insert the new Mortise and Strike Plate into the door frame.
- Secure them by tightening the screws on the top and bottom sides.
- Ensure that the latch bolt is positioned at the top side of the lock.

c) Install Lock Handles

- Secure the Front Handle to the door by inserting the Metal Rod into the middle hole behind the handle. Ensure the positioning pins pop out and hold the handles in place.
- Use the Lock Body Screws to pass the Metal Rod through the door, securing the handle firmly.

d) Tighten Screws

Insert the power cord from the Front Handle through the door to connect it to the Back Door Handle.

e) Install New Batteries (optional)

After fixing both handles with screws, insert the batteries into the designated compartment. Close the compartment by placing the cover on top and securing it with screws.




III. DEVICE PROGRAMMING



a) Reset & Keypad Legend

To ensure that your smart lock is in its initial state before programming, perform a reset by doing the following:

- Locate a small hole or button on the lock handle.
- Use a pin to long-press the button for at least 10 seconds or until you see a green light flash.
- Remove your finger once a red light flashes.
- Finally, the light would turn green and go off. Operation successful.

* /  = to go back or return.

/  = to enter or confirm everytime you input a code

123456 = the default administrator information.

Note:

Under the initial state, any fingerprint, keycard, and password can unlock or open the smart lock.

III. DEVICE PROGRAMMING



b) Access Door Lock Settings

- Only an authorized fingerprint and passcode can unlock the device, as well as through the mobile app.
- Always remember to activate your Smart Lock first before entering your administrator passcode.


III. DEVICE PROGRAMMING






c) Add Administrator

Make sure to reset the lock before adding an administrator for the first time. The Administrator will be User 00 and can be set up using a passcode or fingerprint.


To add a fingerprint:

- Touch the keypad to activate it, and press 1 and .
- Blue light would flash. Press the fingerprint sensor with any finger, and the lock will beep and the blue light will stop at the same time.
- Press the fingerprint sensor with the unlocking finger six times. Every time you press the sensor it would be accompanied by a beep and a flash of green light.
 - (Please change the position of the finger whenever pressing the sensor).
- Add a fingerprint successfully after a long beep and the green light going off.

To add a passcode:

- Touch the keypad to activate it, and press 1 and .
- A Blue light will flash. Press the fingerprint sensor with any finger, and the lock will beep and the blue light will stop at the same time.
- Enter your code (6 digits) and confirm it by pressing . A green light will go on accompanied by a long beep.
- Enter the code again and confirm it by pressing 
 - If the code you entered is the same, the lock would make a long beep, and the green light would go off. Operation successful. Otherwise, the lock would beep thrice, and a red light would go on. Please try again.

To add a user:


- Touch the keypad to activate it, and press 1 and .
- A blue light would flash. Unlock with one of the entered admin codes or fingerprints.
- The lock would make a long beep and the blue light would go off. Repeat steps if desired.

III. DEVICE PROGRAMMING



d) Delete Users

To delete a user or administrator from your Smart Lock, follow the steps below:

- Touch the keypad to activate the lock, enter 888 and press . A red light would flash.
- Please unlock with one of the entered admin codes or fingerprints, then the red light will turn green accompanied by a long beep. Deleting all users successfully.

Alternatively, you may reset the lock by following the steps found on page 8 to delete all users.

III. DEVICE PROGRAMMING



e) Language Setting

To set the language of your Smart Lock to English, follow these steps:



- Open the mobile app and go to Settings.
- Locate the option to change the language.
- Select English and click save to continue.

III. DEVICE PROGRAMMING



f) Passage Mode

To enable passage mode on your Smart Lock, allowing it to remain unlocked for a certain period, follow these steps:

- Touch the keypad to activate the lock, enter 555 and press . A purple light would flash.
- Please unlock with one of the entered admin codes or fingerprints, then the light will turn green accompanied by a long beep.
 - Please repeat the steps to change to automatic locking mode/disable passage mode.
- To manually lock the lock while in passage mode, touch the keypad to activate the lock, and press  to lock.
- Use any entered code or fingerprint to unlock.

IV. MOBILE APP CONNECTION



a) Download The Mobile App

Download the app from the Google Play Store or Apple App Store by searching for “Tuya Smart” or by scanning the provided QR code.




Look for the Tuya Smart Logo



b) Log In and Register

- After downloading, select your country.
- You will be redirected to register via email.
 - For existing users, log in using your registered email and password on the login page.
- A verification code will be sent to your email; enter it in the app within the specified time limit.
- Once the verification code is entered, you will be prompted to set your password.
- After completing these steps, you will have full access to the Tuya Smart app on your mobile phone to start adding your device.

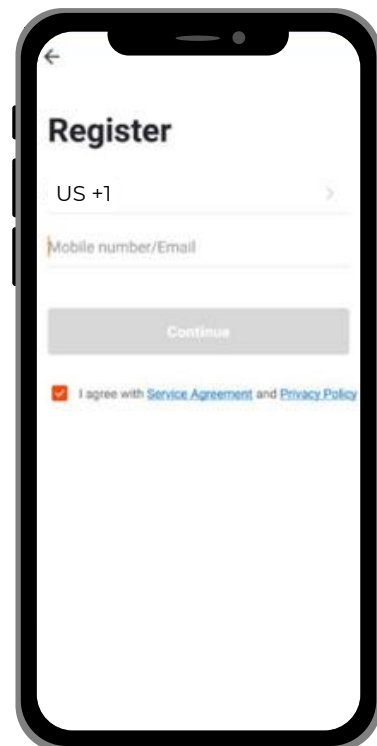


IV. MOBILE APP CONNECTION



c) Reset Password

- On the login page, click the “Forgot Password” button located below the “Login” button.
- Select your country, which the app will usually detect automatically, and proceed with the password reset process.
- Enter your email address to receive a verification code.
- Once you receive the code, enter it into the app within the allotted time.
- You will then be prompted to set a new password, giving you full access to the Tuya Smart Platform.

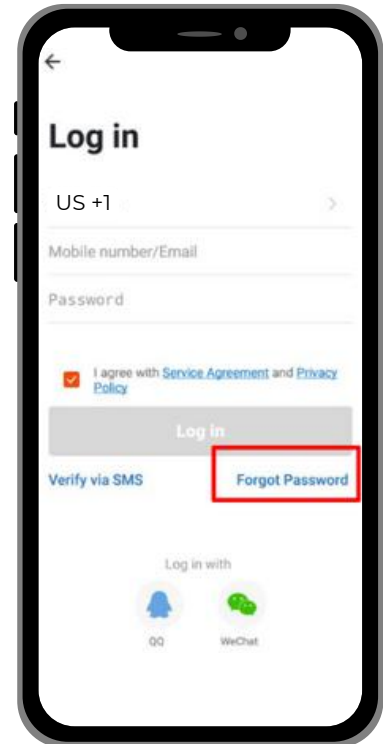


IV. MOBILE APP CONNECTION




d) Add Locations

- Tap the button in the top-left corner of the screen and select 'Home Management' from the dropdown list.
- A single account can manage multiple locations simultaneously, allowing the user to operate multiple devices within a selected location.

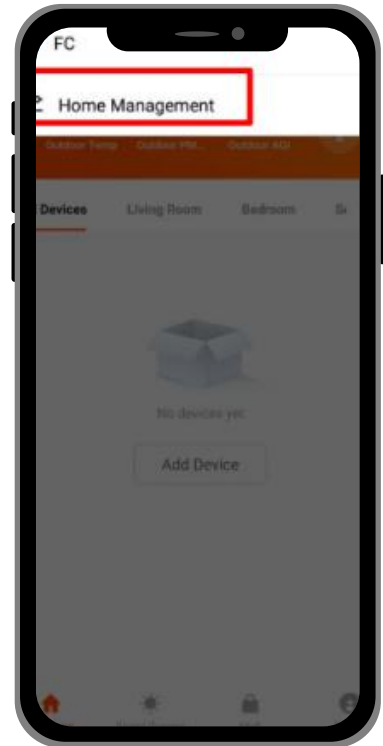

IV. MOBILE APP CONNECTION

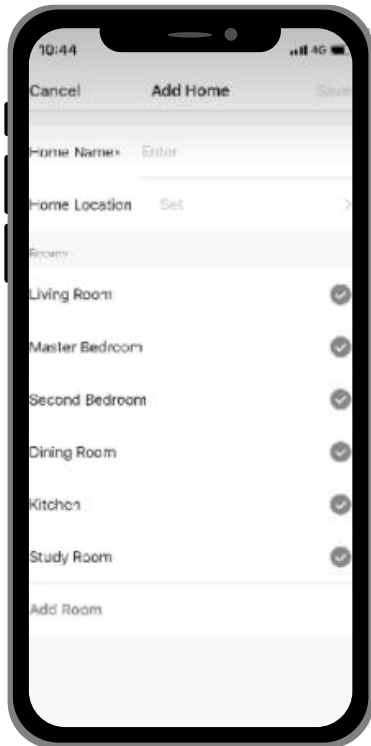

- If you already have a Home set up, click 'Join a Home.' If not, click 'Create a Home.'
- Enter the required details on the screen and click 'Confirm.'

Note: Other household members will have the ability to control the smart devices registered to this household, but they will not have the authority to modify, add, or delete devices.


IV. MOBILE APP CONNECTION



e) Connect To Network

To pair your smart lock with the mobile app:

- Activate the smart lock and press 1 and # on the keypad to enter pairing mode.
- Enter your Administrator Passcode when prompted.
- Open the mobile app to add the device (please refer to the following instructions on programming the lock via the mobile app).

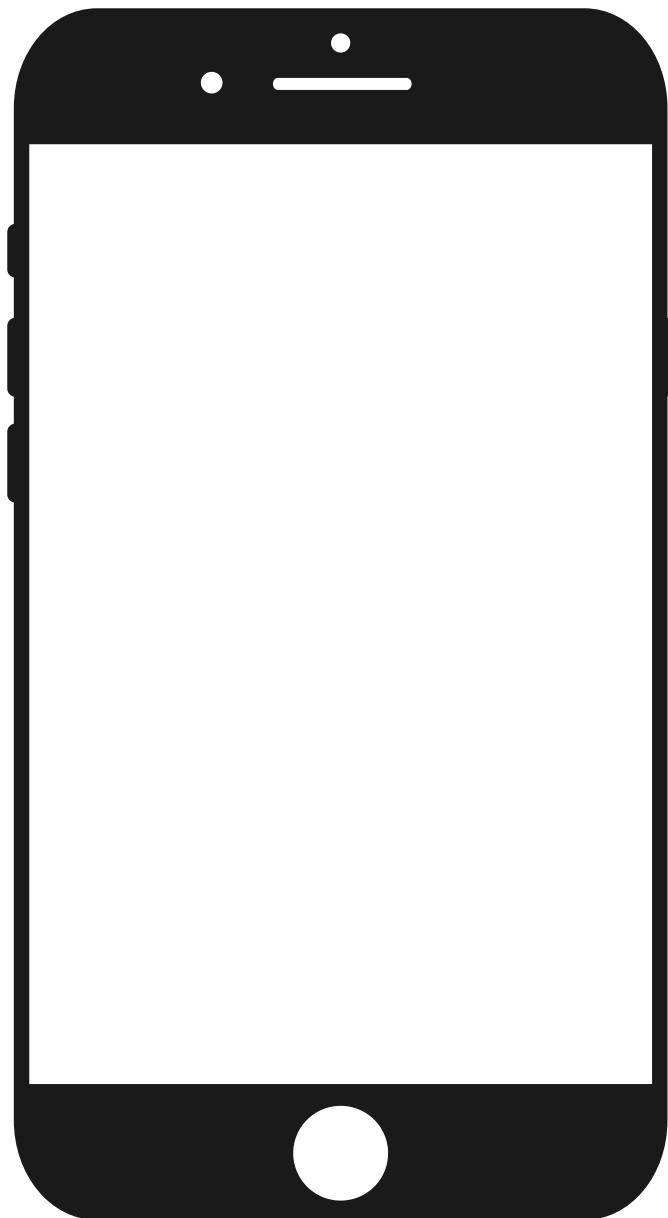


IV. MOBILE APP CONNECTION




f) Add Devices

- Ensure that both your devices and phone are connected to the same 2.4GHz Wi-Fi network.
- To connect the lock to the app, touch any button on the keypad to light it up.
- Press "1" followed by "#". The lock will then prompt you for administrator information. If no administrator is set, enter the default code "123456" and press "#" to confirm.
- The lock's hotspot will now be activated. Make sure you have the Tuya Smart app downloaded on your phone.

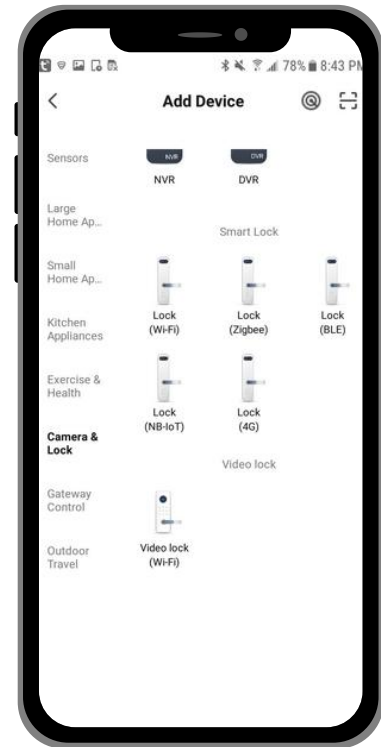


IV. MOBILE APP CONNECTION

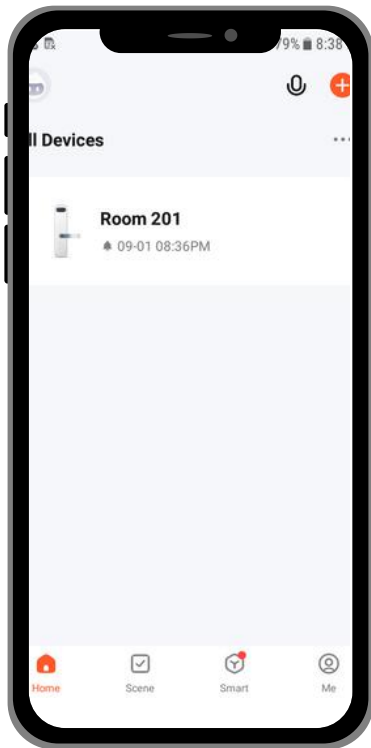

- To add a device, tap 'Add Device' or the "Plus" button at the top-right corner of the app screen, and select 'Add Device.'
- From the list of devices, choose 'Camera & Lock' on the left side, then click 'Lock (Wi-Fi)' to select your Smart Lock device.

Follow the remaining prompts to complete the setup process.

IV. MOBILE APP CONNECTION

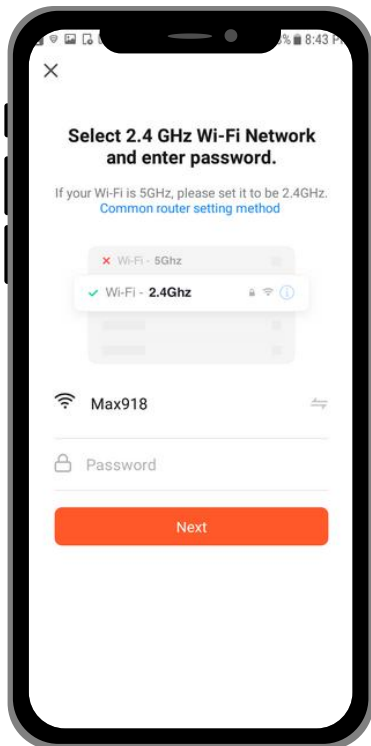

- You will be prompted to connect the Smart Lock to your 2.4 GHz home WiFi network. Ensure that you input the WiFi password correctly. Next, select AP mode and confirm that the indicator light is blinking. At the same time, make sure that the "0" is blinking on the keypad.
- Then, go to your phone's Settings > WiFi, refresh the page, and find the "Smart Life xxx" connection. Connect to this network.
- Do not worry if the connection shows "no internet," as this is the lock's hotspot that will connect to your home WiFi network.

Note: Ensure that both your phone and the Smart Lock are connected to the 2.4 GHz WiFi network, not a 5 GHz or other network, as the lock will not be added to the app on other connections.


Note: Ensure that both your phone and the Smart Lock are connected to the 2.4 GHz WiFi network, not a 5 GHz or other network, as the lock will not be added to the app on other connections.

IV. MOBILE APP CONNECTION




- Check if the light indicator is blinking.
- After tapping the 'Confirmation' button, you will be prompted to select the current status of the light indicator. You will have two options:
 - AP Mode ("Access Point mode"): This uses access points like a Wi-Fi Hotspot. If you choose AP Mode, you must connect your phone to the lock or device's hotspot before proceeding to the next step.
 - EZ Mode ("Easy-connect mode"): This mode is generally most compatible if you are directly connecting your phone to the Wi-Fi router.

Select the appropriate mode based on your current setup to continue.

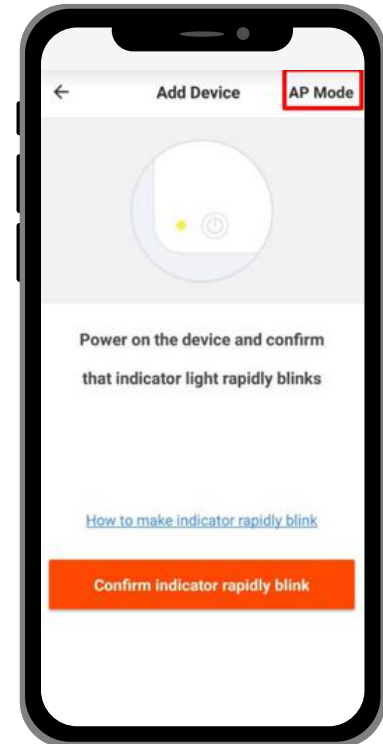


IV. MOBILE APP CONNECTION

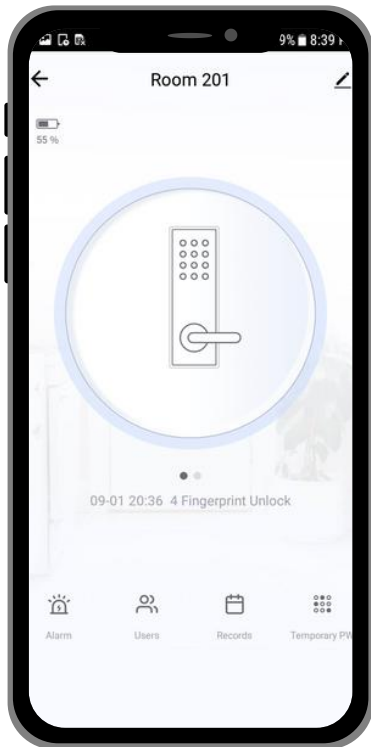

- After completing these steps, ensure that your phone and the device are close. You will receive a prompt on both the lock and your screen confirming that the pairing was successful.

- Once pairing is completed, you can proceed to finish adding your device. Afterward, you have the option to change the device's name and manage its functions as needed.

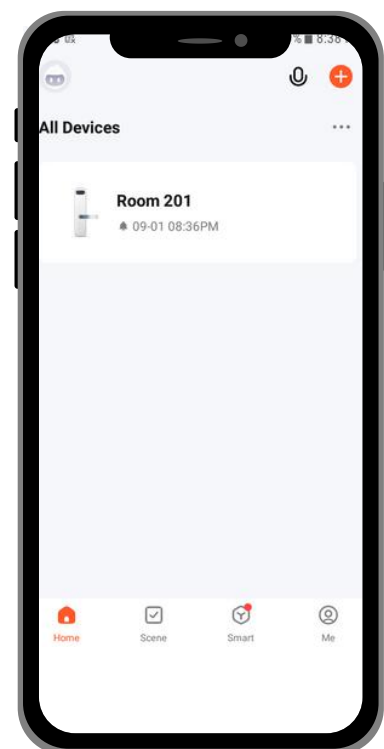

IV. MOBILE APP CONNECTION



g) Add Members

To grant others access to a device by adding them as members of a specific location or room, follow these steps:





- Tap the 'Me' tab at the bottom-right corner of your screen.
- Click on 'Home Management.'
- Select the location where you want to add the new member.
- Tap 'Add Member' and choose the method to share the invitation with the new member.

V. MOBILE APP FEATURES

a) Access Log Records

- From the Home Page, select the Smart Lock you want to review.
- Click on 'Records' to access the unlock history.

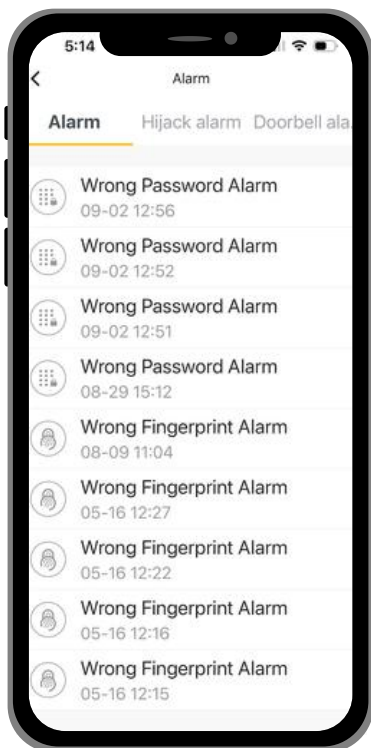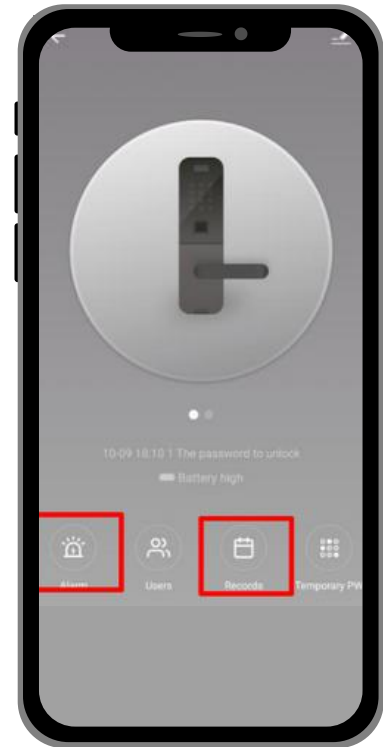

b) Alert Notifications

- From the Home Page, select the Smart Lock you wish to use.
- Choose the 'Alarm' option to view the history of the lock, including any instances where it may have been compromised or when an incorrect password was entered.

V. MOBILE APP FEATURES




c) Dynamic Password (optional)

- Tap the 'Key' button on your phone screen to generate a Dynamic Password (a short-term password valid for only a few minutes).
- Enter the Dynamic Password on the lock pad to unlock the device.

d) Temporary Password (optional)

- On the Lock Screen, tap the 'Temporary PW' button located at the bottom right.
- Click 'Add' and set the temporary password, the name of the user, and the start and end date/time. Ensure that the time on your mobile app and the lock are synchronized.
- Click 'Done' in the top-right corner to complete the setup.
- Activate the lock pad, enter the temporary code you created, and press '#' to confirm and enable the temporary lock function.

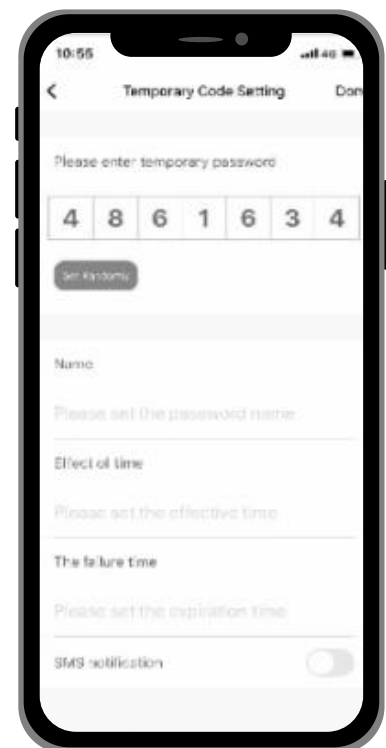

V. MOBILE APP FEATURES



e) Remote Unlock

To grant access to someone when you are away, instruct them to press 9 and # on the lock keypad. This action will send a notification or request to your mobile app, allowing you to confirm and remotely unlock the door.

VI. ADDITIONAL INFORMATION



a) Auto Lock

The system will automatically exit if there is no operation for over 10 seconds.

b) Wrong Password Lockout

If an incorrect password is entered more than five times consecutively, the keypad will lock for 30 seconds and will not respond to any input during this time.

c) Low Battery Notifications

When the battery is low, the lock will emit a sound each time it is opened. After the alarm sounds, the lock can only be opened 200 more times. Once this limit is reached, each unlocking attempt will be delayed by 5 seconds. It is essential to replace the batteries before reaching the 200 unlock limit.

Congratulations!

You have successfully installed your very own ADA Smart Door Lock.
Thank you for being a valued customer of The Connected Shop.

THECONNECTEDSHOP.COM





GET SMART

THE  CONNECTED SHOP