

DEWALT®

POWER TOOLS ACCESSORIES



GUARANTEED TOUGH.®

www.DeWALT.com



POWER TOOLS ACCESSORIES

CONTENTS

SECTION	PAGE
DRILL BITS, POINTS AND CHISELS	4-27
METAL DRILL BITS	28-41
WOOD DRILL BITS	42-51
HOLE SAWS	52-57
SCREWDRIVING	58-73
CIRCULAR SAW BLADES	74-85
JIGSAW BLADES	86-93
RECIPROCATING AND ALLIGATOR® SAW BLADES	94-105
WOOD SHAPING	106-109
COATED ABRASIVES	110-125
BONDED ABRASIVES	126-133
DIAMOND CUTTING, GRINDING AND DRILLING ACCESSORIES	134-145
MULTI-TOOL ACCESSORIES	146-151
SETS	152-183



GUARANTEED TOUGH **DRILL BITS, POINTS AND CHISELS**

Complete Solutions

DEWALT® is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provide a fully integrated system solution for applications in concrete, masonry, metal and wood.

Manufacturing

To ensure maximum performance and customer satisfaction, DEWALT® drill bits undergo the most rigorous manufacturing and testing procedures, and the most advanced production and quality management process.

Product Development

Through extensive and continuous field research, DEWALT® has gained a comprehensive knowledge of user needs and applications. Its world class development facility utilises the latest Catia CAD system and automated test equipment to develop and test all drill bits prior to and during manufacture.

Quality Control

DEWALT® is a long standing member of PRUF GEMEINSCHAFT MAUERBOHRER (PGM), an internationally recognised organisation that verifies the suitability of drill bits for use in anchor fixing. To test drill bit life and durability, 1 million holes are drilled into 350 tonnes of concrete each year. If there is any variability in quality, it is detected before the products are delivered to the end user. All drill bits are certified to the latest ISO 9001:200 quality standards.





DRILL BITS, POINTS AND CHISELS

DEWALT® professional accessories offer concrete and masonry drill bits for any task level. Whether it's light duty, occasional use, heavy duty, or continuous use in the toughest concrete, DEWALT® offers the right accessory for the job.



**ELITE
SERIES**

SDS Max & Plus Drill Bits


Specially engineered to offer extreme durability, multiplied performance and proven productivity.



EXTREME

SDS Max & Plus Drill Bits

A maximised central core and solid two cutter head delivers a fast and efficient drilling speed.

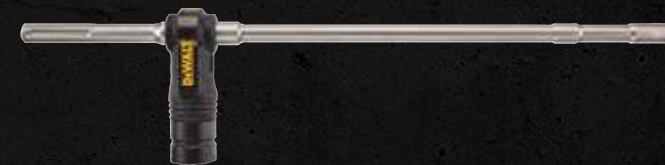

EXTREME

SDS Max & Plus Hollow Drill Bits

SDS Max and SDS Plus fitments match common rebar sizes for fast drilling into concrete with less dust.



Concrete Cores, Adapters, Points & Chisels

Designed for durability and high performance, even in the toughest of environments.



EXTREME

Masonry Drill Bits

Engineered with an anti-slip shank and a hardened steel body with core reinforcement for superior performance.



Standard Masonry Drill Bits

A versatile range of carbide tipped drill bits, ideal for masonry, concrete, natural and artificial stone.



Diamond Tile Drill Bits

Tough and hard wearing, these drill bits will cope with almost any hardness of tile.



Multi-material drill bits

Our range of multi-material drill bits offer versatility with DEWALT® durability and reliability built in.

ELITE
SERIES

PERFORM
PROTECT

BUILT TO
LAST

INCREASED DURABILITY

High speed blasting strengthens the bit to reduce the risk of breakage.

REBAR STRIKE RESISTANT

Single-piece, Tungsten Carbide Tip stands up to high impact forces. Designed to resist breakage when striking rebar.

TOUGH CORE

Tapered core is thicker to increase strength and resist flute breaks especially when drilling deep holes.

WEAR MARK

Indicates that the holes you drill are the diameter you need - ideal for accurate mechanical anchor installation.

UP TO 2X LIFE

Patented carbide tip geometry with 4 cutting edges breaks up hard concrete with ease.

IRON
BLAST
TECHNOLOGY

REBAR
STRIKE
RESISTANT

TOUGH
CORE

High speed blasting strengthens the bit to reduce the risk of breakage.

WEAR MARK

mm

mm

The wear mark is visible - this indicates that the bit is drilling a hole to the required diameter.

The wear mark is no longer visible - the bit has had extensive use, potentially compromising the diameter of the drilled hole.

OPTIMISED FLUTE DESIGN

Removes dust quickly from the hole for fast drilling.

APPLICATIONS

For drilling a wide variety of stone, masonry and concrete, including reinforced concrete. Ideal for accurate mechanical anchor installation.

FOR USE WITH

SDS MAX hammer drills.

Made in Germany.

SINGLE PACKS				
Cat. No.	Diameter (mm)	Total Length (mm)	Working Length (mm)	Qty
DT60800-QZ	12	340	200	1
DT60801-QZ	12	400	260	1
DT60805-QZ	14	340	200	1
DT60806-QZ	14	540	400	1
DT60807-QZ	15	340	200	1
DT60809-QZ	16	340	200	1
DT60810-QZ	16	540	400	1
DT60811-QZ	18	340	200	1
DT60812-QZ	18	540	400	1
DT60813-QZ	19	340	200	1
DT60814-QZ	19	540	400	1
DT60815-QZ	19	670	550	1
DT60816-QZ	20	340	200	1
DT60817-QZ	20	540	400	1
DT60818-QZ	20	920	800	1
DT60819-QZ	22	340	200	1
DT60820-QZ	22	540	400	1
DT60821-QZ	22	920	800	1
DT60822-QZ	24	340	200	1
DT60823-QZ	24	540	400	1
DT60824-QZ	25	340	200	1
DT60825-QZ	25	540	400	1
DT60826-QZ	25	920	800	1
DT60827-QZ	26	340	200	1
DT60828-QZ	26	540	400	1
DT60829-QZ	28	380	250	1
DT60830-QZ	28	570	450	1
DT60831-QZ	28	670	550	1
DT60832-QZ	30	380	250	1
DT60833-QZ	30	570	450	1
DT60834-QZ	32	380	250	1
DT60835-QZ	32	570	450	1
DT60836-QZ	32	920	800	1
DT60837-QZ	35	380	250	1
DT60838-QZ	35	570	450	1
DT60839-QZ	35	670	550	1
DT60840-QZ	36	570	450	1
DT60841-QZ	38	380	250	1
DT60842-QZ	38	570	450	1
DT60843-QZ	38	670	550	1
DT60844-QZ	40	380	250	1
DT60845-QZ	40	570	450	1
DT60846-QZ	40	920	800	1
DT60847-QZ	42	570	450	1

EXTREME

SDS MAX CARBIDE DRILL BITS

SPEED

4 flute helix with maximum flute entry enables faster debris removal.

CORE REINFORCEMENT

For optimum impact and breakage stability. Enables more efficient energy transmission to the drill bit head.

OPTIMUM IMPACT TRANSMISSION

Maximised central core enables more efficient energy transmission to the drill bit head.

CARBIDE TIP

The solid two cutter head is flanked by two individual cutting tips (16-52mm) delivering a fast and efficient drilling speed. These carbide tips and body are brazed together to create a strong and durable bond.

APPLICATIONS

For drilling (reinforced) concrete, masonry, natural and artificial stone.

FOR USE WITH

SDS MAX concrete drill bits, (Hilti type F, G, or Y) for anchor, fixing or clearance holes in masonry, concrete, brick or block work.

Made in Germany.

SDS max

PGM

DT9400-QZ

DT9401-QZ

DT9405-QZ

DT9406-QZ

DT9409-QZ

DT9410-QZ

DT9411-QZ

DT9412-QZ

DT9416-QZ

DT9417-QZ

DT9418-QZ

DT9419-QZ

DT9420-QZ

DT9421-QZ

DT9422-QZ

DT9423-QZ

DT9424-QZ

DT9425-QZ

DT9426-QZ

DT9428-QZ

DT9429-QZ

DT9430-QZ

DT9431-QZ

DT9433-QZ

DT9434-QZ

DT9435-QZ

DT9436-QZ

DT9438-QZ

DT9439-QZ

DT9440-QZ

DT9442-QZ

DT9445-QZ

DT9446-QZ

DT9447-QZ

DT9448-QZ

DT9449-QZ

DT9450-QZ

Cat. No.	Ø mm	Total length mm	Working length mm	Cutters	Pack Qty.
DT9400-QZ	12	340	200	2	1
DT9401-QZ	12	540	400	2	1
DT9405-QZ	14	340	200	2	1
DT9406-QZ	14	540	400	2	1
DT9409-QZ	16	340	200	4	1
DT9410-QZ	16	540	400	4	1
DT9411-QZ	18	340	200	4	1
DT9412-QZ	18	540	400	4	1
DT9416-QZ	20	340	200	4	1
DT9417-QZ	20	540	400	4	1
DT9418-QZ	20	920	800	4	1
DT9419-QZ	22	340	200	4	1
DT9420-QZ	22	540	400	4	1
DT9421-QZ	22	920	800	4	1
DT9422-QZ	24	340	200	4	1
DT9423-QZ	24	540	400	4	1
DT9424-QZ	25	340	200	4	1
DT9425-QZ	25	540	400	4	1
DT9426-QZ	25	920	800	4	1
DT9428-QZ	26	540	400	4	1
DT9429-QZ	28	380	250	4	1
DT9430-QZ	28	570	450	4	1
DT9431-QZ	28	670	550	4	1
DT9433-QZ	30	570	450	4	1
DT9434-QZ	32	380	250	4	1
DT9435-QZ	32	570	450	4	1
DT9436-QZ	32	920	800	4	1
DT9438-QZ	35	570	450	4	1
DT9439-QZ	35	670	550	4	1
DT9440-QZ	36	570	450	4	1
DT9442-QZ	38	570	450	4	1
DT9445-QZ	40	570	450	4	1
DT9446-QZ	40	920	800	4	1
DT9447-QZ	42	570	450	4	1
DT9448-QZ	45	570	450	4	1
DT9449-QZ	50	570	450	4	1
DT9450-QZ	52	570	450	4	1



EXTREME[®] SDS MAX HOLLOW DRILL BITS

PERFORM PROTECT.

SDS MAX
Compatible with SDS MAX fitment hammer drills

HOLLOW SHAFT
Vacuum assisted dust extraction means less dust, reduced resistance, faster drilling, and less hole cleaning. Fit with a M class vacuum to remove 98% of drilling dust from the drill tip area

AIRLOCK™ ADAPTOR
Connects directly to DeWALT's Airlock™ System forming a secure connection between bit and dust extractor

FAST DRILLING IN CONCRETE
Resistance is reduced as drilling dust is routed internally

Y-CUTTER CARBIDE
For exact positioning of SDS MAX drill bit diameters, delivering accurate starting and durability



APPLICATIONS

Fast drilling into concrete with less dust. Ideal for interior applications. Less hole cleaning required. Please refer to anchor ETA for correct installation information.

FOR USE WITH
SDS MAX hammer drills.

Made in Germany.



SINGLE PACKS

Cat. No.	Ø mm	Working length mm	Total length mm	Cutters	Pack Qty.
DT60230-QZ	16	400	600	4	1
DT60231-QZ	18	400	600	4	1
DT60232-QZ	20	400	600	4	1
DT60233-QZ	24	400	600	4	1
DT60234-QZ	28	400	600	4	1
DT60235-QZ	32	400	600	4	1



ELITE
SERIES

BUILT TO
LAST

SDS PLUS DRILL BITS

INCREASED DURABILITY

High speed blasting strengthens the bit to reduce the risk of breakage.

REBAR STRIKE RESISTANT

Ideal for drilling holes in concrete. Designed to resist breakage when striking rebar.

WEAR MARK

Indicates that the holes you drill are the diameter you need - ideal for accurate mechanical anchor installation.

UP TO 2X LIFE

Proprietary Circulating Cutting Carbide design, offers more carbide surface area than previous 4 cutter design to increase wear resistance when drilling into concrete.

IRON
BLAST
TECHNOLOGY

REBAR
STRIKE
RESISTANT

APPLICATIONS

Designed to drill through hard concrete and resist breakage when striking rebar.

FOR USE WITH

SDS PLUS fitment hammer drills (cordless and corded).

Made in Germany.

SDS-plus®

PGM

SINGLE PACKS 4 CUTTER HEAD CARBIDE (RESISTANCE WELDED)				
Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT8907-QZ	5	110	50	1
DT8908-QZ	5	160	100	1
DT8909-QZ	5	210	150	1
DT8910-QZ	5.5	110	50	1
DT8911-QZ	5.5	160	100	1
DT8912-QZ	6	110	50	1
DT8913-QZ	6	160	100	1
DT8914-QZ	6	210	150	1
DT8915-QZ	6	260	200	1
DT8916-QZ	6.5	160	100	1
DT8917-QZ	6.5	210	150	1
DT8918-QZ	6.5	260	200	1
DT8919-QZ	6.5	310	250	1
DT8920-QZ	7	160	100	1
DT8921-QZ	7	210	150	1
DT8922-QZ	8	110	50	1
DT8923-QZ	8	160	100	1
DT8924-QZ	8	210	150	1
DT8925-QZ	8	260	200	1
DT8926-QZ	8	310	250	1
DT8927-QZ	8	460	400	1
DT8928-QZ	10	160	100	1
DT8929-QZ	10	210	150	1
DT8930-QZ	10	260	200	1
DT8931-QZ	10	310	250	1
DT8932-QZ	10	460	400	1
DT8933-QZ	12	160	100	1
DT8934-QZ	12	200	150	1
DT8935-QZ	12	260	200	1
DT8936-QZ	12	310	250	1
DT8937-QZ	12	460	400	1
DT8938-QZ	14	160	100	1
DT8939-QZ	14	200	150	1
DT8940-QZ	14	260	200	1
DT8941-QZ	14	310	250	1
DT8942-QZ	14	460	400	1

SINGLE PACKS - 4 CUTTER HEAD (COPPER BRAZED)

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT9680-QZ	16	250	200	1
DT9681-QZ	16	450	400	1
DT9682-QZ	18	250	200	1
DT9683-QZ	18	450	400	1
DT9684-QZ	20	250	200	1
DT9685-QZ	20	450	400	1
DT9686-QZ	22	250	200	1
DT9687-QZ	22	450	400	1
DT9688-QZ	24	250	200	1
DT9689-QZ	24	450	400	1
DT9690-QZ	25	250	200	1
DT9691-QZ	25	450	400	1
DT9692-QZ	26	450	400	1
DT9693-QZ	28	250	200	1
DT9694-QZ	28	450	400	1
DT9695-QZ	30	250	200	1
DT9696-QZ	30	450	400	1

DEPTH SETTER

Cat. No.	Description
DT8933G-QZ	12 x 160mm, Depth Setter

BULK PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT8950-QZ	5	110	50	10
DT8951-QZ	5	160	100	10
DT8955-QZ	6	110	50	10
DT8956-QZ	6	160	100	10
DT8957-QZ	6	210	150	10
DT8961-QZ	6.5	260	200	10
DT8965-QZ	8	160	100	10
DT8966-QZ	8	210	150	10
DT8967-QZ	10	160	100	10
DT8968-QZ	10	210	150	10
DT8969-QZ	10	260	200	10
DT8971-QZ	12	160	100	10
DT8972-QZ	12	200	150	10
DT8973-QZ	14	200	150	10

SETS

Cat. No.	Description	Ø mm
DT8976-QZ	7 piece hammer drill bits in metal cassette	5 / 6 / 8 (110mm) 6 / 8 / 10 / 12 (160mm)



EXTREME® SDS PLUS 2 CUTTER

2-STAGE HELIX*

Effective dust removal improves drilling performance.

WEAR MARK*

Indicates that the holes you drill are the diameter you need - ideal for accurate mechanical anchor installation.

TOUGH CORE™**

Tapered central core increases stability and durability and increases breakage resistance.

FEATURES

TOUGH CORE™**



Adds strength and resistance when drilling deep holes with increased side loads.

Reduces flexing between the flute and shank, preventing bit fracturing.

WEAR MARK*



The wear mark is visible - this indicates that the bit is drilling a hole to the required diameter.

The wear mark is no longer visible - the bit has had extensive use, potentially compromising the diameter of the drilled hole.

2 STAGE HELIX*

This accelerates the removal of any concrete mill from the tip, reducing the working temperature and speeding up drilling.



Made in Germany.

APPLICATIONS

Ideal for fast drilling of anchor and plug holes in concrete.

FOR USE WITH

SDS PLUS hammer drills.



*WEAR MARK, TOUGH CORE™ and 2-stage helix are not available on all SKUs - see distributor listing for details. The WEAR MARK is an indicator of the bit's ability to drill a specified hole diameter.

SINGLE PACKS

Cat. No.	Diameter (mm)	Total Length (mm)	Working Length (mm)	2-stage Helix	TOUGH CORE™	WEAR MARK	Qty
DT9625-QZ	3	135	75				1
DT9500-QZ	3.5	110	50				1
DT9501-QZ	3.5	135	75				1
DT9502-QZ	4	110	50				1
DT9503-QZ	4	160	100				1
DT9504-QZ	5	110	50				1
DT9505-QZ	5	160	100				1
DT9506-QZ	5	210	150	✓	✓	✓	1
DT9507-QZ	5	310	250	✓	✓	✓	1
DT9620-QZ	5	460	400	✓	✓	✓	1
DT9508-QZ	5.5	110	50				1
DT9509-QZ	5.5	160	100		✓	✓	1
DT9510-QZ	5.5	210	150	✓	✓	✓	1
DT9511-QZ	5.5	260	200	✓	✓	✓	1
DT9512-QZ	5.5	310	250	✓	✓	✓	1
DT9513-QZ	5.5	460	400	✓	✓	✓	1
DT9514-QZ	6	110	50				1
DT9515-QZ	6	160	100		✓	✓	1
DT9516-QZ	6	210	150	✓	✓	✓	1
DT9818-QZ	6	210	150	✓	✓	✓	1
DT9517-QZ	6	260	200	✓	✓	✓	1
DT9621-QZ	6	310	250	✓	✓	✓	1
DT9518-QZ	6	460	400	✓	✓	✓	1
DT9519-QZ	6.5	110	50				1
DT9520-QZ	6.5	160	100		✓	✓	1
DT9521-QZ	6.5	210	150	✓	✓	✓	1
DT9846-QZ	6.5	210	150	✓	✓	✓	1
DT9522-QZ	6.5	260	200	✓	✓	✓	1
DT9523-QZ	6.5	310	250	✓	✓	✓	1
DT9524-QZ	7	110	50				1
DT9525-QZ	7	160	100		✓	✓	1
DT9526-QZ	7	210	150	✓	✓	✓	1
DT9527-QZ	7	260	200	✓	✓	✓	1
DT9528-QZ	8	110	50				1
DT9529-QZ	8	160	100		✓	✓	1
DT9530-QZ	8	210	150	✓	✓	✓	1
DT9531-QZ	8	260	200	✓	✓	✓	1
DT9532-QZ	8	310	250	✓	✓	✓	1
DT9533-QZ	8	410	350	✓	✓	✓	1
DT9534-QZ	8	460	400	✓	✓	✓	1
DT9535-QZ	8	600	540	✓	✓	✓	1
DT9536-QZ	9	160	100		✓	✓	1
DT9537-QZ	9	210	150	✓	✓	✓	1
DT9539-QZ	10	110	50				1
DT9833-QZ	10	110	50				1
DT9540-QZ	10	160	100		✓	✓	1
DT9834-QZ	10	160	100		✓	✓	1
DT9541-QZ	10	210	150	✓	✓	✓	1
DT9542-QZ	10	260	200	✓	✓	✓	1
DT9543-QZ	10	310	250	✓	✓	✓	1
DT9544-QZ	10	350	290	✓	✓	✓	1
DT9545-QZ	10	460	400	✓	✓	✓	1
DT9546-QZ	10	600	540	✓	✓	✓	1
DT9548-QZ	11	160	100		✓	✓	1
DT9549-QZ	11	210	150	✓	✓	✓	1
DT9552-QZ	12	160	110		✓	✓	1
DT9553-QZ	12	200	150	✓	✓	✓	1
DT9554-QZ	12	260	210	✓	✓	✓	1
DT9555-QZ	12	300	250	✓	✓	✓	1
DT9556-QZ	12	350	300	✓	✓	✓	1
DT9557-QZ	12	450	400	✓	✓	✓	1
DT9558-QZ	12	600	550	✓	✓	✓	1
DT9560-QZ	13	160	110		✓	✓	1
DT9561-QZ	13	200	150	✓	✓	✓	1
DT9562-QZ	13	260	210	✓	✓	✓	1
DT9563-QZ	13	300	250	✓	✓	✓	1
DT9566-QZ	14	160	110		✓	✓	1
DT9567-QZ	14	200	150	✓	✓	✓	1
DT9568-QZ	14	260	210	✓	✓	✓	1
DT9569-QZ	14	300	250	✓	✓	✓	1
DT9570-QZ	14	450	400	✓	✓	✓	1
DT9571-QZ	14	600	550	✓	✓	✓	1
DT9573-QZ	15	160	110		✓	✓	1
DT9574-QZ	15	200	150	✓	✓	✓	1
DT9575-QZ	15	260	210	✓	✓	✓	1
DT9576-QZ	15	300	250	✓	✓	✓	1
DT9578-QZ	16	160	110		✓	✓	1
DT9579-QZ	16	200	150	✓	✓	✓	1
DT9580-QZ	16	260	210	✓	✓	✓	1
DT9581-QZ	16	300	250	✓	✓	✓	1
DT9582-QZ	16	450	400	✓	✓	✓	1
DT9583-QZ	16	600	550	✓	✓	✓	1

SINGLE PACKS

Cat. No.	Diameter (mm)	Total Length (mm)	Working Length (mm)	2-stage Helix	TOUGH CORE™	WEAR MARK	Qty
DT9586-QZ	17	200	150	✓	✓	✓	1
DT9587-QZ	18	200	150	✓	✓	✓	1
DT9588-QZ	18	250	200	✓	✓	✓	1
DT9589-QZ	18	300	250	✓	✓	✓	1
DT9590-QZ	18	450	400	✓	✓	✓	1
DT9591-QZ	18	600	550	✓	✓	✓	1
DT9594-QZ	19	200	150	✓	✓	✓	1
DT9597-QZ	20	200	150	✓	✓	✓	1
DT9598-QZ	20	300	250	✓	✓	✓	1
DT9599-QZ	20	450	400	✓	✓	✓	1
DT9600-QZ	20	600	550	✓	✓	✓	1
DT9602-QZ	22	250	200	✓	✓	✓	1
DT9603-QZ	22	300	250	✓	✓	✓	1
DT9604-QZ	22	450	400	✓	✓	✓	1
DT9605-QZ	22	600	550	✓	✓	✓	1
DT9609-QZ	24	250	200	✓	✓	✓	1
DT9611-QZ	25	250	200	✓	✓	✓	1
DT9612-QZ	25	300	250	✓	✓	✓	1
DT9613-QZ	25	450	400	✓	✓	✓	1
DT9615-QZ	26	250	200	✓	✓	✓	1
DT9616-QZ	26	450	400	✓	✓	✓	1
DT9618-QZ	30	250	200				1
DT9619-QZ	30	450	400				1
DT9610-QZ	24	450	400	✓	✓	✓	1

BULK PACKS

Cat. No.	Diameter (mm)	Total Length (mm)	Working Length (mm)	2-stage Helix	TOUGH CORE™	WEAR MARK	Qty
DT9800-QZ	5	110	50			✓	10
DT9803-QZ	5	160	100		✓	✓	10
DT9806-QZ	5.5	110	50			✓	10
DT9812-QZ	6	110	50			✓	10
DT9814-QZ	6	110	50			✓	100
DT9815-QZ	6	160	100		✓	✓	10
DT9817-QZ	6	160	100		✓	✓	100
DT9826-QZ	8	110	50			✓	10
DT9827-QZ	8	160	100		✓	✓	10
DT9828-QZ	8	160	100		✓	✓	50
DT9830-QZ	8	210	150	✓	✓	✓	10
DT9831-QZ	8	260	200	✓	✓	✓	50
DT9835-QZ	10	160	100		✓	✓	10
DT9837-QZ	10	210	150	✓	✓	✓	10
DT9838-QZ	10	260	200	✓	✓	✓	10
DT9839-QZ	12	160	110		✓	✓	10
DT9841-QZ	12	200	150	✓	✓	✓	10
DT9842-QZ	12	260	210	✓	✓	✓	10
DT9844-QZ	14	200	150	✓	✓	✓	10
DT9574G-QZ	15	200	150	✓	✓	✓	10

EXTREME® 2 SDS-plus

Cat. No.	Description	Contents	Length (mm)	Pack Quantity
DT70753-QZ	10pc SDS-plus EXTREME® 2 Set	SDS-plus EXTREME® DeWALT 2 masonry drill bits: 5mm x 110mm, 6mm x 110mm x2, 6mm x 160mm x2, 7mm x 160mm, 8mm x 160mm, 9mm x 160mm, 10mm x 160mm, 12mm x 160mm	110 160	4
DT7940-QZ	10pc SDS-plus EXTREME® Drilling Set	SDS-plus EXTREME® masonry drill bits mm: 5mm x 160mm, 5.5mm x 160mm x3, 7mm x 160mm x3, 8mm x 160mm, 10mm x 160mm, 12mm x 160mm	160	8

SETS

Cat. No.	No. of Bits	Bits x 110mm Diameter	Bits x 160mm Diameter
DT9700-QZ	4	1 x 5mm, 1 x 6mm	1 x 8mm, 1 x 10mm
DT9701-QZ	7	1 x 5mm, 1 x 6mm, 1 x 8mm	1 x 6mm, 1 x 8mm, 1 x 10mm, 1 x 12mm
DT9702-QZ	4	-	1 x 5mm, 1 x 7mm, 1 x 8mm, 1 x 10mm

Cat. No.	Description	Ø mm
DT9674-QZ	10 pack SDS PLUS Extreme® 2 Cutter drill bits plus thermal mug	6mm
DT9675-QZ	10 pack SDS PLUS Extreme® 2 Cutter drill bits plus thermal mug	7mm

EXTREME® SDS PLUS HOLLOW DRILL BITS

PERFORM PROTECT


SDS PLUS
Compatible with
SDS PLUS fitment
hammer drills

HOLLOW SHAFT
Vacuum assisted dust extraction means less dust, reduced resistance, faster drilling, and less hole cleaning. Fit with a M class vacuum to remove 98% of drilling dust from the drill tip area

FAST DRILLING
IN CONCRETE
Resistance is reduced as drilling dust is routed internally

AIRLOCK™ ADAPTOR
Connects directly to DeWALT's Airlock™ System forming a secure connection between bit and dust extractor

2-CUTTER CARBIDE
For exact positioning of SDS PLUS drill bit diameters, delivering accurate starting and durability



APPLICATIONS
Fast drilling into concrete with less dust. Ideal for interior applications. Less hole cleaning required. Please refer to anchor ETA for correct installation information.

FOR USE WITH
SDS PLUS hammer drills.



SINGLE PACKS

Cat. No.	Ø mm	Working length mm	Total length mm	Cutters	Pack Qty.
DT60340-QZ	12	200	320	2	1
DT60341-QZ	14	250	370	2	1
DT60342-QZ	16	250	370	2	1
DT60343-QZ	18	250	370	2	1



SDS PLUS FITMENT

DURABILITY
Additional core reinforcement for optimum impact energy transmission and breakage stability.

FLUTE DESIGN
2 flute helix: specially developed drilling helix for efficient removal of dust


CARBIDE TIP
Optimised drill head design with 2 cutting edges.

APPLICATIONS

Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FOR USE WITH

SDS PLUS hammer drills, (cordless and corded).



MERCHANDISER SETS

Cat. No.	Description	Contents
DT9396-QZ	5pc SDS PLUS Drilling Set (12 Set Counter Top Display)	SDS PLUS SDS PLUS masonry drill bits: 5mm, 6mm x2, 8mm x2, 160mm
DT9397-QZ	5pc SDS PLUS Drilling Set (12 Set Counter Top Display)	SDS PLUS SDS PLUS masonry drill bits: 5.5mm x3, 7mm x2, 160mm
DT9398-QZ	5pc SDS PLUS Drilling Set (12 Set Counter Top Display)	SDS PLUS masonry drill bits: 5.5mm x3, 7mm x2, 110mm
DT9399-QZ	5pc SDS PLUS Drilling Set (12 Set Counter Top Display)	SDS PLUS masonry drill bits: 5mm, 6mm x2, 8mm x2, 110mm

SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT9630-QZ	4	110	50	1
DT9662-QZ	5	110	50	1
DT9631-QZ	5	160	100	1
DT9632-QZ	5	210	150	1
DT9633-QZ	5.5	160	100	1
DT9634-QZ	5.5	210	150	1
DT9663-QZ	6	110	50	1
DT9635-QZ	6	160	100	1
DT9636-QZ	6	210	150	1
DT9637-QZ	6.5	160	100	1
DT9638-QZ	6.5	210	150	1
DT9639-QZ	7	160	100	1
DT9640-QZ	7	210	150	1
DT9664-QZ	8	110	50	1
DT9641-QZ	8	160	100	1
DT9642-QZ	8	210	150	1
DT9643-QZ	8	310	250	1
DT9665-QZ	10	110	50	1
DT9644-QZ	10	160	100	1
DT9645-QZ	10	210	150	1
DT9646-QZ	10	310	250	1
DT9647-QZ	12	160	100	1
DT9648-QZ	12	210	150	1
DT9649-QZ	12	310	250	1
DT9650-QZ	14	160	100	1
DT9651-QZ	14	210	150	1
DT9652-QZ	14	310	250	1
DT9653-QZ	16	210	150	1
DT9654-QZ	16	460	400	1
DT9655-QZ	18	210	150	1
DT9656-QZ	18	460	400	1
DT9657-QZ	20	210	150	1
DT9658-QZ	20	460	400	1
DT9659-QZ	22	460	400	1
DT9660-QZ	24	460	400	1
DT9661-QZ	25	460	400	1

SETS

Cat. No.	Description	Ø mm
DT60301-QZ	5 piece SDS PLUS drill bit set in plastic cassette	5 / 2x 6 / 8 / 10mm
DT60302-QZ	6 piece SDS PLUS drill bit set in plastic cassette	2x 6 / 2x 8 / 2x 10mm
DT9679-QZ	15 piece SDS PLUS drill bit and chisel set + 4 chisels in aluminium case	5 / 5.5 / 2x 6 / 7 / 2x 8 2x 10 / 12 / 14mm, Point Chisel 250mm, Flat Chisel 250mm x 20mm, Flat Chisel 250mm x 40mm x2
DT9670-QZ	15pc SDS PLUS Drill & Chisel Set in an Aluminium case	4mm x 110mm, 5mm x 110mm, 5.5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 7mm x 110mm, 7mm x 160mm x2, 10mm x 160mm, 12mm x 160mm, 14mm x 210mm, Point Chisel 250mm, Flat Chisel 250mm x 20mm, Flat Chisel 250mm x 40mm x2
DT60331-QZ	6pc SDS PLUS Drill and Chisel Set	SDS PLUS drill bits: 5.5mm x 160mm, 6mm x 160mm, 7mm x 160mm, Point Chisel 250mm, Flat Chisel 250mm x 20mm, Flat Chisel 250mm x 40mm

SDS MAX CORE CUTTERS



APPLICATIONS
For clean round holes in blocks, bricks and light concrete.



FOR USE WITH
For drilling holes in concrete or masonry from 65 to 125mm diameter.
To be used with heavy duty SDS MAX core drills in conjunction with a pilot bit.



CARBIDE CORE CUTTERS - SINGLE PACKS

Cat. No.	Ø Size	Total length mm	Pack Qty.
DT6762-QZ	65	107	1
DT6763-QZ	80	107	1
DT6766-QZ	125	107	1

CORE ADAPTERS AND PILOT BITS

Cat. No.	Description	Total length mm	Pack Qty.
DT6770-QZ	Adapter SDS MAX	180	1
DT6771-QZ	Adapter SDS MAX	400	1
DT6772-QZ	Pilot drill 12mm	155	1

SINGLE PACKS

Cat. No.	Description	Pack Qty.
DT6830-QZ	SDS MAX to SDS PLUS	1
DT7030-QZ	SDS PLUS 1/2" x 20 UNF (chuck adapter)	1

SDS PLUS CORE CUTTERS



APPLICATIONS
For fitting drainage and water pipes, heating pipes, switches, junction and distribution boxes.



FOR USE WITH
To be used with light duty SDS PLUS core drills, must be used with a pilot bit.



CARBIDE CORE CUTTERS - SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT6745-QZ	68	72	1
DT6747-QZ	80	72	1

CORE BITS AND PILOT DRILLS - SINGLE PACKS

Cat. No.	Description	Ø Size	Total length mm	Pack Qty.
DT6750-QZ	Adapter SDS PLUS	110	1	1
DT6751-QZ	Adapter SDS PLUS	300	1	1
DT6753-QZ	Pilot drill bit 9mm	120	1	1

SDS MAX SINGLE PIECE CARBIDE CORE BITS

APPLICATIONS
For fitting drainage and water pipes, heating pipes, switches, junction and distribution boxes.

FOR USE WITH
To be used with SDS MAX drills, must be used with a pilot bit.

CORE BITS AND PILOT DRILLS - SINGLE PACKS

Cat. No.	Description	Ø Size	Total length mm	Pack Qty.
DT6789-QZ	SDS MAX core drill bit	68	300	1
DT6784-QZ	SDS MAX core drill bit	80	300	1
DT6785-QZ	Replacement pilot drill	12	128	1

XLR POINTS and CHISELS

LIFE/PRODUCTIVITY

High durability shock resistant steel minimises breakage and increases durability

WEAR RESISTANT

Strong, wear resistant steel to maintain impact face longer


SPEED/PRODUCTIVITY

Optimised tip geometry maintain breaking speed

STEEL POINTS AND CHISELS

Fully hardened steel point/chisel face for high wear resistance and increased productivity. The special 'Stay Sharp' chisel tip ensures a long-lasting sharpness of the chisel and thus an extended durability.

XLR SDS MAX POINTS and CHISELS



APPLICATIONS

For heavy duty chiselling, channelling and demolition tasks in concrete/rebar and hard stone.

The XLR chisels combined with DeWALT® demolition hammers are ideal for even the toughest environments.



SINGLE PACKS

Cat. No.	Description	Width mm	Length mm	Pack Qty.
DT6888-QZ	Pointed chisel	-	300	1
DT6889-QZ	Pointed chisel	-	400	1
DT6811-QZ	Flat chisel	25	300	1
DT6812-QZ	Flat chisel	25	400	1
DT6818-QZ	Flat chisel	50	400	1
DT6980-QZ	Pointed chisel	75	400	1

SDS MAX POINTS and CHISELS



APPLICATIONS

For heavy duty chiselling, channelling, and demolition tasks in concrete, stone (medium hardness), floor and wall tiles, general masonry and mortar.



FEATURES AND BENEFITS

Specially toughened steel and micro-processor controlled heat treatment ensures consistent tough bits with long life.



SINGLE PACKS

Cat. No.	Description	Width mm	Total length mm	Pack Qty.
DT6820-QZ	Pointed chisel	-	300	1
DT6821-QZ	Pointed chisel	-	400	1
DT8087-QZ	Pointed chisel	-	600	1
DT6822-QZ	Flat chisel	25	300	1
DT6823-QZ	Flat chisel	25	400	1
DT6824-QZ	Flat chisel	50	360	1
DT6825-QZ	Flat chisel	80	300	1
DT8088-QZ	Flat chisel	25	600	1
DT6826-QZ	Hollow chisel	26	300	1
DT6834-QZ	Flat chisel	80	300	1
DT6837-QZ	TCT comb chisel	38	280	1
DT6838-QZ	Bush hammer	45	240	1
DT8090-QZ	Clay spade	110	400	1
DT8091-QZ	Asphalt cutter	90	400	1
DT8093-QZ	Earth rod driver	16.5	260	1



SDS PLUS POINTS and CHISELS



SINGLE PACKS

Cat. No.	Description	Width mm	Total length mm	Pack Qty.
DT6978-QZ	Pointed chisel	-	300	1
DT6979-QZ	Flat chisel	20	300	1
DT6984-QZ	Flat chisel	40	300	1

SDS PLUS FITMENT POINTS and CHISELS



APPLICATIONS
Suitable for use in SDS PLUS hammer drills, with rotation stop for light chiselling applications in plaster, masonry, tiles etc.



FOR USE WITH
SDS PLUS hammer drills.



SINGLE PACKS

Cat. No.	Description	Width mm	Total length mm	Pack Qty.
DT6801-QZ	Pointed chisel	-	250	1
DT6802-QZ	Flat chisel	20	250	1
DT6803-QZ	Flat chisel	40	250	1
DT6804-QZ	Flat chisel	22	250	1
DT6805-QZ	Hollow chisel	22	240	1
DT6806-QZ	Flat chisel	50	250	1
DT6810-QZ	HM-joints chisel	32	200	1



HEXAGONAL SHANK POINTS and CHISELS



19mm HEX CHISELS

Cat. No.	Description	Width mm	Length mm	Pack Qty.
DT6940-QZ	Pointed	-	400	1
DT6942-QZ	Flat	25	400	1
DT6943-QZ	Flat	25	600	1
DT6945-QZ	Flat	60	450	1

28mm HEX CHISELS

Cat. No.	Description	Width mm	Length mm	Pack Qty.
DT6927-QZ	Hexagon point	-	400	1
DT6928-QZ	Spade	140	584	1
DT6929-QZ	Cold chisel	32	521	1
DT6932-QZ	Scaling tool	75	521	1
DT6934-QZ	Steel asphalt cutter	127	445	1

30mm HEX CHISELS

Cat. No.	Description	Width mm	Length mm	Pack Qty.
DT6808-QZ	Pointed	-	410	1
DT6809-QZ	Spade	36	420	1



SDS PLUS FITMENT DRILLING and CHISELLING SETS



DRILLING AND CHISELING SETS

Cat. No.	Description
DT60330-QZ	3 piece set: 250mm point chisel 20mm x 250 and 40mm x 250mm flat chisel
DT9679-QZ	15 Piece SDS PLUS drill bit and chisel set in aluminium case 5, 5.5, 6, 6, 7, 8, 8, 10, 10, 12, 14mm 4 chisels
DT60331-QZ	6pc SDS PLUS Drill and Chisel Set SDS PLUS drill bits: 5.5mm x 160mm, 6mm x 160mm, 7mm x 160mm, Point Chisel 250mm, Flat Chisel 250mm x 20mm, Flat Chisel 250mm x 40mm
DT9670-QZ	15pc SDS PLUS Drill & Chisel Set in an Aluminium case Contents: 4mm x 110mm, 5mm x 110mm, 5.5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 7mm x 110mm, 7mm x 160mm x2, 10mm x 160mm, 12mm x 160mm, 14mm x 210mm, Point Chisel 250mm, Flat Chisel 250mm x 20mm, Flat Chisel 250mm x 40mm x2



EXTREME[®] MASONRY

ANTI-SLIP SHANK
Three milled clamping surfaces prevent rotation of the drill bit in the chuck.

HARDENED STEEL BODY
With core reinforcement and a large-volume machined spiral. For maximum tensile strength combined with high drilling speeds in the hardest concrete and masonry

UNIQUE HARD METAL
With low-stress high-temperature copper soldering, optimised for maximum durability and break-out safety

2x LONG LIFE

APPLICATIONS
Typically used for drilling anchor, plastic plug, fixing or pipework clearance holes.

Suitable for masonry, brick, stone, tiles and light concrete.

FOR USE WITH
Percussion drills and cordless hammer drills.

Made in Germany.



SINGLE PACKS				
Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT6695-XJ	3	110	70	1
DT6671-XJ	4	75	50	1
DT6672-XJ	5	85	50	1
DT6673-XJ	5	150	100	1
DT6674-XJ	5.5	85	50	1
DT6675-XJ	6	100	60	1
DT6676-XJ	6	150	100	1
DT6677-XJ	6	200	150	1
DT6678-XJ	6.5	100	60	1
DT6679-XJ	6.5	150	100	1
DT6680-XJ	7	100	60	1
DT6681-XJ	7	150	100	1
DT6682-XJ	8	120	80	1
DT6683-XJ	8	200	150	1
DT6684-XJ	9	120	80	1
DT6685-XJ	10	120	80	1
DT6686-XJ	10	200	150	1
DT6687-XJ	12	150	100	1
DT6688-XJ	12	200	150	1
DT6689-XJ	13	150	100	1
DT6690-XJ	14	150	100	1
DT6691-XJ	14	200	150	1
DT6692-XJ	16	150	100	1
DT6693-XJ	16	200	150	1

SETS		
Cat. No.	Description	mm
DT6956-QZ	5 piece set in plastic cassette	4 / 5 / 6 / 8 / 10mm
DT70712-QZ	19 piece set in small ToughCase [™] with EXTREME [®] masonry drill bits Bits 25mm: 4x Ph2, 4x Pz2 50mm: Ph2, Pz2, SL5.5 Magnetic holder	4 / 5 / 5.5 / 6 / 7 / 8mm



STANDARD PERCUSSION

FEATURES AND BENEFITS

- Rotary/percussion masonry drill bit 130° Douglas form carbide tip.
- Shank diameter of drill bits 10-13mm is reduced to 9.5mm.
- Shank diameter of drill bits larger than 13mm is reduced to 12.7mm.

APPLICATIONS
For drilling into concrete, masonry, natural and artificial stone, brick, etc

FOR USE WITH
Heavy duty corded and cordless hammer drills.



SINGLE PACKS				
Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT6500-QZ	3	60	28	1
DT6504-QZ	4	75	38	1
DT6505-QZ	5	85	44	1
DT6552-QZ	5	150	82	1
DT6502-QZ	5.5	85	44	1
DT6506-QZ	6	100	54	1
DT6556-QZ	6	150	82	1
DT6606-QZ	6	200	135	1
DT6503-QZ	6.5	100	54	1
DT6507-QZ	7	100	54	1
DT6557-QZ	7	150	82	1
DT6508-QZ	8	120	67	1
DT6558-QZ	8	150	82	1
DT6608-QZ	8	200	135	1
DT6708-QZ	8	400	230	1
DT6509-QZ	9	120	67	1
DT6510-QZ	10	120	67	1
DT6560-QZ	10	150	80	1
DT6610-QZ	10	200	135	1
DT6710-QZ	10	400	230	1
DT6732-QZ	10	600	400	1
DT6562-QZ	12	150	82	1
DT6612-QZ	12	200	135	1
DT6712-QZ	12	400	230	1
DT6733-QZ	12	600	400	1
DT6563-QZ	13	150	82	1
DT6564-QZ	14	150	82	1
DT6714-QZ	14	400	230	1
DT6566-QZ	16	150	82	1
DT6716-QZ	16	400	230	1
DT6718-QZ	18	400	230	1
DT6720-QZ	20	400	230	1

SETS	
Cat. No.	Description
DT6952-QZ	5 piece set in plastic cassette 4 / 5 / 6 / 8 / 10mm



EXTREME® DIAMOND TILE DRILL BITS

ROBUST DIAMOND CUT

Resistant and extremely hard. Allows easy drilling into the material at 45° and suitable for almost all degrees of hardness of ceramic tile.

DIAMOND GRIT EDGED HEAD

Tough and hard wearing, enables 'easy start' drilling at 45° into material and copes with almost any hardness of tile.

ROUNDED SHANK

For mounting in quick-clamping chuck.

EJECTION SLOT

Enables easy removal of material 'core' after drilling in deeper tiles.

WATER BEARING HELIX

Open head design helps more effective cooling with water.



APPLICATIONS

Clean concentric holes in all wall and floor tiles (up to and including Class 5 hardness), porcelain, marble, granite and slate.

Ideal for installing fixtures and fittings in bathrooms and kitchens.

FOR USE WITH

Corded and cordless drills.



DIAMOND DRILL BITS - SINGLE PACKS

Cat. No.	Ø mm	Pack Qty.
DT6037-QZ	5	1
DT6038-QZ	6	1
DT6039-QZ	7	1
DT6040-QZ	8	1
DT6041-QZ	10	1
DT6042-QZ	12	1
DT6043-QZ	15	1
DT6044-QZ	20	1
DT6045-QZ	25	1

SETS

Cat. No.	Description	Size mm
DT6046-QZ	5 piece set diamond tile drill bits in plastic box with water supply system	5 / 6 / 7 / 8 / 10mm
DT6047-QZ	Water supply system for diamond tip drill bits for ceramics and granite	



MULTI MATERIAL DRILL BITS



FEATURES AND BENEFITS

- CrNiMo steel for optimal power transmission and breakage stability even in the toughest applications.
- Carbide tip with unique 120° tip grind for maximum sharpness, faster drilling and extended life.
- Robust diamond cut.
- Resistant and extremely hard.
- Allows easy drilling into the material at 45° and suitable for almost all degrees of hardness of ceramic tile.
- Anti slip shank with 3 milled clamping surfaces prevent rotation of the drill bit in the chuck.

APPLICATIONS

Suitable for wood, plastics, mild steel and non ferrous metals and masonry.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT6515-QZ	3	113	83	1
DT6516-QZ	3.5	113	83	1
DT6517-QZ	4	103	73	1
DT6518-QZ	5	113	83	1
DT6527-QZ	5.5	113	83	1
DT6528-QZ	5.5	200	170	1
DT6519-QZ	6	123	93	1
DT6529-QZ	6	200	170	1
DT6520-QZ	6.5	123	93	1
DT6530-QZ	6.5	200	170	1
DT6521-QZ	7	123	93	1
DT6522-QZ	8	134	104	1
DT6531-QZ	8	200	170	1
DT6523-QZ	9	134	104	1
DT6524-QZ	10	134	104	1
DT6533-QZ	10	200	170	1
DT6525-QZ	12	153	123	1
DT6526-QZ	13	160	130	1



IMPACT READY MULTI MATERIAL DRILL BITS



FEATURES AND BENEFITS

- Carbide head design allows faster drilling and longer durability.

APPLICATIONS

Suitable for wood, plastics, concrete, brick, light building materials, multi-layer materials and masonry.

FOR USE WITH

Drills and hammer drills (cordless and corded). Impact drivers and screwdrivers with bit holder or chuck.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT60000-QZ	4	152	100	1
DT60001-QZ	5	152	100	1
DT60003-QZ	6	152	100	1
DT60004-QZ	8	152	100	1

SET

Cat. No.	Description	Ø mm	Pack Qty.
DT60099-QZ	5 piece set Impact Ready multi-purpose drill bits	4 / 5 / 5.5 / 6 / 8mm	5





METAL DRILL BITS

Engineered to match the DEWALT® standard of drilling tools, our extensive range of metal drill bits offer versatility, high performance and reliability.



EXTREME®

Cobalt Alloy Steel

Made with 5% cobalt content for maximum temperature resistance and wear resistance.



BLACK & GOLD™

BLACK & GOLD

Made with a special black & gold coating to prevent rust and a tapered web design reduces the risk of breakage.



EXTREME® 2

HSS-G

Ground drill bit made of one piece for an increased resistance to breakage and clean holes.



EXTREME®

Impact Tap Drill Bits

For fast drilling and tapping of holes in one application.



HSS-G High Performance

High-performance, high-speed steel (HSS) manufactured to DIN 33 for longer life.



Step Drill Bits

Choose titanium round shank bits or Quick Change Impact bits for drilling and enlarging holes in metal from 4mm to 34mm.



HSS-R High Performance

Non alloyed black oxide precision ground twist drill bit for rapid drilling, long life and excellent concentricity.

EXTREME COBALT ALLOY STEEL

LONG LASTING
5% cobalt content maintains a sharper cutting edge and delivers 4 x longer life (vs HSS-R).

SIZE INDICATORS
Away from abrasion and, located outside of grip zone, positioning ensures easy readability (from 5mm diameter and up).

NO-WALK TIP
The 'no walk' tip allows for easier penetration of all surfaces (5mm and above). Cleaner, more accurate, burr-free holes due to recessed cutting wings.

NO-SLIP SHANK
Spin proof 3 sided shaft for optimal grip in drill chuck (diameters 5mm and above only).

STRONG CENTRAL CORE
Increasing in thickness towards the chuck, the central core improves fracture stability, particularly in freehand use (4.8mm diameter and up).

FASTER DRILLING
The optimised tip and flute geometry delivers 4 x the penetration speed (vs HSS-R). It also removes debris faster and reduces heat build up.

APPLICATIONS

Suitable for portable or stationary drilling of high alloy content steels and metals with a tensile strength up to 1100N/mm² e.g. heat and acid proof steel, cast iron, bronze, welded seams, stainless and chrome nickel steels.

FOR USE WITH

Corded and cordless drills.

Made in Germany.



PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT4958-QZ	1	34	12	2
DT4959-QZ	1.5	40	18	2
DT4900-QZ	2	49	24	2
DT4901-QZ	2.5	57	30	2
DT4902-QZ	3	61	33	2
DT4960-QZ	3.3	65	36	2
DT4903-QZ	3.5	70	39	2
DT4904-QZ	4	75	43	2
DT4961-QZ	4.2	75	43	1
DT4905-QZ	4.5	80	47	1
DT4906-QZ	5	86	52	1
DT4907-QZ	5.5	93	57	1
DT4908-QZ	6	93	57	1
DT4909-QZ	6.5	101	63	1
DT4910-QZ	6.8	109	66	1
DT4911-QZ	7	109	69	1
DT4962-QZ	7.5	109	66	1
DT4912-QZ	8	117	75	1
DT4963-QZ	8.5	117	75	1
DT4913-QZ	9	125	81	1
DT4964-QZ	9.5	125	78	1
DT4914-QZ	10	133	87	1
DT4965-QZ	10.5	133	87	1
DT4915-QZ	11	142	94	1
DT4966-QZ	11.5	142	91	1
DT4916-QZ	12	151	101	1
DT4967-QZ	12.5	151	98	1
DT4917-QZ	13	151	101	1

COBALT ALLOY STEEL



BULK PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT4918-QZ	2	49	24	10
DT4919-QZ	2.5	57	30	10
DT4920-QZ	3	61	33	10
DT4921-QZ	3.2	65	36	10
DT4922-QZ	3.3	65	36	10
DT4923-QZ	3.5	70	39	10
DT4924-QZ	4	75	43	10
DT4925-QZ	4.1	75	43	10
DT4926-QZ	4.2	75	43	10
DT4927-QZ	4.5	80	47	10
DT4928-QZ	4.8	86	52	10
DT4929-QZ	5	86	52	10
DT4930-QZ	5.1	86	52	10
DT4931-QZ	5.2	86	52	10
DT4932-QZ	5.5	93	57	10
DT4933-QZ	6	93	57	10
DT4934-QZ	6.5	101	63	10
DT4935-QZ	6.8	109	66	10
DT4936-QZ	7	109	69	10
DT4937-QZ	7.5	109	66	10
DT4938-QZ	8	117	75	10
DT4939-QZ	8.5	117	75	10
DT4940-QZ	9	125	81	10
DT4941-QZ	9.5	125	81	10
DT4942-QZ	10	133	87	10
DT4943-QZ	10.2	133	87	10
DT4944-QZ	10.5	133	87	5
DT4945-QZ	11	142	94	5
DT4946-QZ	11.5	142	91	5
DT4947-QZ	12	151	101	5
DT4948-QZ	12.5	151	98	5

SETS

Cat. No.	Description	Ø mm
DT4956-QZ	6 piece set of metal drills HSS-Co in plastic cassette	2 / 3 / 4 / 5 / 6 / 8mm
DT5936-QZ	19pc Cobalt Drilling Set	Cobalt metal drill bits: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5mm x 86mm, 5.5mm x 93mm, 6mm x 93mm, 6.5mm x 101mm, 7mm x 109mm, 7.5mm x 109mm, 8mm x 117mm, 8.5mm x 117mm, 9mm x 125mm, 9.5mm x 125mm, 10mm x 133mm
DT4957-QZ	29 piece of metal drills HSS-Co in index cassette	1 / 1.5 / 2 / 2.5 3 / 3.2 / 3.3 / 3.5 4 / 4.2 / 4.5 / 4.8 5 / 5.5 / 6 / 6.5 7 / 7.5 / 8 / 8.5 9 / 9.5 / 10 / 10.5 / 11 / 11.5 12 / 12.5 / 13mm

EXTREME[®] 2 HSS-G

INCREASED DURABILITY AND SPEED
Up to 50% stronger (vs HSS-R).
Up to 4X faster drilling (vs HSS-R).

NO-SLIP SHANK
With 3 flat sides eliminates slipping in the chuck (diameters 5.0mm and above only).

NO-WALK TIP
Easy starting on curved surfaces. Cleaner, more accurate, burr-free holes due to recessed cutting wings.

STRONG CENTRAL CORE
Innovative tapered web greatly reduces breakage. Gold ferrous oxide coating prevents overheating for longer bit life.

APPLICATIONS
Suitable for portable drilling of steel, alloyed and non-alloyed up to 900 N/mm².

FOR USE WITH
Corded or cordless drills.

PACKS				
Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT5034-QZ	1	34	12	2
DT5035-QZ	1.5	40	18	2
DT5036-QZ	2	49	24	2
DT5037-QZ	2.5	57	30	2
DT5038-QZ	3	61	33	2
DT5039-QZ	3.2	65	36	2
DT5040-QZ	3.3	65	36	2
DT5041-QZ	3.5	70	39	2
DT5042-QZ	4	75	43	2
DT5063-QZ	4.1	75	43	1
DT5043-QZ	4.2	75	43	1
DT5044-QZ	4.5	80	46	1
DT5045-QZ	4.8	86	46	1
DT5046-QZ	5	86	46	1
DT5047-QZ	5.5	93	57	1
DT5048-QZ	6	93	57	1
DT5049-QZ	6.5	101	58	1
DT5067-QZ	6.8	109	66	1
DT5050-QZ	7	109	66	1
DT5051-QZ	7.5	109	66	1
DT5052-QZ	8	117	72	1
DT5053-QZ	8.5	117	72	1
DT5054-QZ	9	125	78	1
DT5055-QZ	9.5	125	78	1
DT5056-QZ	10	133	84	1
DT5057-QZ	10.5	133	84	1
DT5058-QZ	11	142	91	1
DT5059-QZ	11.5	142	91	1
DT5060-QZ	12	151	98	1
DT5061-QZ	12.5	151	98	1

EXTREME[®] 2 HSS-G



BULK PACKS				
Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT5535-QZ	1	34	12	10
DT5536-QZ	1.5	40	18	10
DT5537-QZ	2	49	24	10
DT5538-QZ	2.5	57	30	10
DT5539-QZ	3	61	33	10
DT5540-QZ	3.2	65	36	10
DT5541-QZ	3.3	65	36	10
DT5542-QZ	3.5	70	39	10
DT5543-QZ	4	75	43	10
DT5566-QZ	4.1	75	43	10
DT5544-QZ	4.2	75	43	10
DT5545-QZ	4.5	80	46	10
DT5546-QZ	4.8	86	46	10
DT5547-QZ	5	86	46	10
DT5567-QZ	5.1	86	46	10
DT5568-QZ	5.2	86	46	10
DT5548-QZ	5.5	93	57	10
DT5549-QZ	6	93	57	10
DT5550-QZ	6.5	101	58	10
DT5551-QZ	7	109	66	10
DT5552-QZ	7.5	109	66	10
DT5553-QZ	8	117	72	10
DT5554-QZ	8.5	117	72	10
DT5555-QZ	9	125	78	10
DT5556-QZ	9.5	125	78	10
DT5557-QZ	10	133	84	10
DT5558-QZ	10.5	133	84	10
DT5559-QZ	11	142	91	10
DT5560-QZ	11.5	142	91	10
DT5561-QZ	12	151	98	10
DT5562-QZ	12.5	151	98	10

SETS		
Cat. No.	Description and Contents	Ø mm
DT70710-QZ	13 piece set in small ToughCase™ with EXTREME [®] 2 HSS-G Metal Drill Bits	1.5 / 2 / 2.5 3 / 3.2 / 3.5 4 / 4.5 / 5 / 5.5 6 / 6.5 / 7mm
DT70711-QZ	19 piece set in small ToughCase™ with EXTREME [®] 2 HSS-G metal drill bits drill bits 25mm: 4x Ph2, 4x Pz2 50mm: Ph2, Pz2, SL5.5 Magnetic holder	2 / 3 / 4 / 5 / 6 / 8mm
DT7926-XJ	29 piece set in index cassette with EXTREME [®] 2 HSS-G metal drill bits	1 / 1.5 / 2 / 2.5 3 / 3.2 / 3.3 / 3.5 4 / 4.2 / 4.5 / 4.8 5 / 5.5 / 6 / 6.5 / 7 / 7.5 8 / 8.5 / 9 / 9.5 / 10 / 10.5 11 / 11.5 / 12 / 12.5 / 13mm
DT70756-QZ	36 piece set in small ToughCase™ with EXTREME [®] 2 HSS-G metal drills drill bits 25mm: Pz1 / 2x Pz2 / Pz3 / Ph1 / Ph2 / Ph3 / T20 / T25 50mm: Pz2 / Ph2 70mm: T20 / T25 Magnetic holder (60mm)	1 / 1.5 2 / 2.5 3 / 3.2 / 3.3 / 3.5 4 / 4.2 / 4.5 / 4.8 5 / 5.5 6 / 6.5 7 / 7.5 8 10 12mm



HSS-G HIGH PERFORMANCE



FEATURES AND BENEFITS

- Special steel made from high-performance, high-speed steel (HSS) manufactured to DIN 33 for longer life.
- Spiral groove ground from solid stock right hand cutting, type N flute, precision ground at 118° point angle. Drills above 13mm (1/2") have a shank reduced to 12.7mm.
- Milled shaft. Drill bit diameter over 13mm manufactured with shaft milled at 12.7mm.
- Precision ground twist for rapid drilling, long life and excellent concentricity. Diameter tolerance to H8.

APPLICATIONS

Suitable for portable or stationary drilling in steel cast steel, alloyed and non-alloyed material, grey cast-iron, spherical-graphite cast iron, sintered iron, nickel, brass etc up to 900N/mm².

FOR USE WITH

Corded and cordless drills.



PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT5201-QZ	1	34	12	2
DT5202-QZ	1.5	40	18	2
DT5203-QZ	2	49	24	2
DT5204-QZ	2.5	57	30	2
DT5205-QZ	3	61	33	2
DT5206-QZ	3.2	65	36	2
DT5208-QZ	3.5	70	39	2
DT5209-QZ	4	75	43	2
DT5211-QZ	4.2	75	43	1
DT5212-QZ	4.5	80	47	1
DT5213-QZ	4.8	86	52	1
DT5214-QZ	5	86	52	1
DT5215-QZ	5.5	93	57	1
DT5216-QZ	6	93	57	1
DT5217-QZ	6.5	101	63	1
DT5218-QZ	7	109	69	1
DT5219-QZ	8	117	75	1
DT5220-QZ	8.5	117	75	1
DT5221-QZ	9	125	81	1
DT5222-QZ	10	133	87	1
DT5224-QZ	11	142	94	1
DT5226-QZ	12	151	101	1
DT5227-QZ	13	151	101	1
DT5228-QZ	14	160	108	1
DT5229-QZ	15	169	114	1
DT5230-QZ	16	178	120	1

SETS

Cat. No.	Description	Ø mm
DT5921-QZ	10 piece set in plastic case	1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10mm
DT5922-QZ	13 piece set in plastic case	1.5 / 2 / 2.5 / 3.2 / 3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5mm
DT5923-QZ	19 piece set in plastic case	1 / 1.5 / 2 / 2.5 / 3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 8.5 / 9 / 9.5 / 10mm
DT5929-QZ	29 piece set in plastic case	1 / 1.5 / 2 / 2.5 / 3 / 3.2 / 3.3 / 3.5 / 4 / 4.2 / 4.5 / 4.8 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 8.5 / 9 / 9.5 / 10 / 10.5 / 11 / 11.5 / 12 / 12.5 / 13mm

BULK PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT5301-QZ	1	34	12	10
DT5311-QZ	2	49	24	10
DT5321-QZ	3	61	33	10
DT5332-QZ	4	75	43	10
DT5342-QZ	5	86	52	10
DT5352-QZ	6	93	57	10
DT5362-QZ	7	109	69	10
DT5372-QZ	8	117	75	10
DT5377-QZ	8.5	117	75	10
DT5382-QZ	9	125	81	10
DT5387-QZ	9.5	125	81	10
DT5392-QZ	10	133	87	10
DT5393-QZ	10.5	133	87	10
DT5394-QZ	11	142	94	5
DT5396-QZ	12	151	101	5

HSS-R HIGH PERFORMANCE



FEATURES AND BENEFITS

- Non alloyed black oxide precision ground twist drill bit for rapid drilling, long life and excellent concentricity.
- Ground from solid stock right hand cutting, type N flute, precision ground 118° point angle.

APPLICATIONS

Portable or stationary drilling in steel, alloyed and non alloyed material, cast iron, sintered iron, nickel, brass, etc. (up to 900N/mm²).

FOR USE WITH

Corded and cordless drills.



PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT5101-QZ	1	34	12	10
DT5106-QZ	1.5	40	18	10
DT5110-QZ	2	49	24	10
DT5116-QZ	2.5	57	30	10
DT5121-QZ	3	61	33	10
DT5123-QZ	3.2	65	36	10
DT5124-QZ	3.25	70	39	10
DT5127-QZ	3.5	75	43	10
DT5132-QZ	4	75	43	10
DT5134-QZ	4.2	80	47	10
DT5137-QZ	4.5	86	52	10
DT5142-QZ	5	86	52	10
DT5147-QZ	5.5	93	57	10
DT5152-QZ	6	93	57	10
DT5157-QZ	6.5	101	63	10
DT5162-QZ	7	109	69	10
DT5167-QZ	7.5	109	69	10
DT5172-QZ	8	117	75	10
DT5177-QZ	8.5	117	75	10
DT5182-QZ	9	125	81	10
DT5191-QZ	10	133	87	5
DT5193-QZ	10.5	133	87	5
DT5194-QZ	11	133	87	5
DT5196-QZ	12	151	101	5
DT5197-QZ	12.5	151	101	5
DT5198-QZ	13	151	101	5


SETS

Cat. No.	Description	Ø mm
DT5911-QZ	10 piece set in plastic case	1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10mm
DT5912-QZ	13 piece set in plastic case	1.5 / 2 / 2.5 / 3.2 / 3 / 3.5 / 4 / 4.5 / 2x 5 / 5.5 / 6 / 6.5mm
DT5913-QZ	19 piece set in plastic case	1 / 1.5 / 2 / 2.5 / 3 / 3.5 / 4 / 4.5 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 8.5 / 9 / 9.5 / 10mm
DT5930-QZ	29 piece set in plastic case	1 / 1.5 / 2 / 2.5 / 3 / 3.2 / 3.3 / 3.5 / 4 / 4.2 / 4.5 / 4.8 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 8.5 / 9 / 9.5 / 10 / 10.5 / 11 / 11.5 / 12 / 12.5 / 13mm





BLACK & GOLD HSS-G DRILL BITS

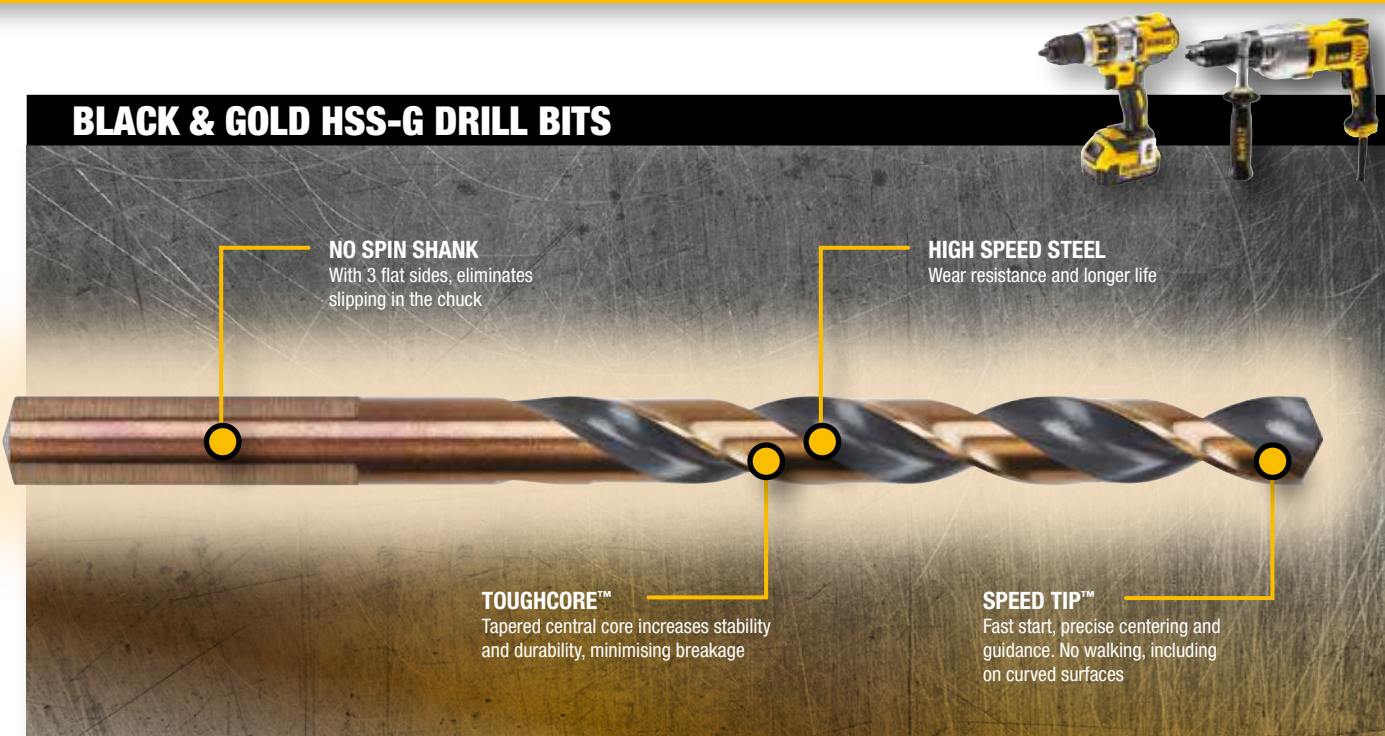

BLACK & GOLD™



APPLICATIONS

For clean, accurate holes in steel, alloyed and non-alloyed sheet metal. Also ideal for basic drilling applications in wood, plastic and other thin materials.



FOR USE WITH

Corded and cordless drills



SINGLE PACKS

Cat. No.	Description	Ø mm
DT20510-QZ	Black Gold HSS Drill Bit 3pc	1mm
DT20511-QZ	Black Gold HSS Drill Bit 3pc	1.5mm
DT20512-QZ	Black Gold HSS Drill Bit 3pc	2mm
DT20513-QZ	Black Gold HSS Drill Bit 3pc	2.5mm
DT20514-QZ	Black Gold HSS Drill Bit	3mm
DT20515-QZ	Black Gold HSS Drill Bit	3.2mm
DT20516-QZ	Black Gold HSS Drill Bit	3.5mm
DT20517-QZ	Black Gold HSS Drill Bit	4mm
DT20518-QZ	Black Gold HSS Drill Bit	4.2mm
DT20519-QZ	Black Gold HSS Drill Bit	4.5mm
DT20520-QZ	Black Gold HSS Drill Bit	5mm
DT20521-QZ	Black Gold HSS Drill Bit	5.5mm
DT20522-QZ	Black Gold HSS Drill Bit	6mm
DT20523-QZ	Black Gold HSS Drill Bit	6.5mm
DT20524-QZ	Black Gold HSS Drill Bit	7mm
DT20525-QZ	Black Gold HSS Drill Bit	7.5mm
DT20526-QZ	Black Gold HSS Drill Bit	8mm
DT20527-QZ	Black Gold HSS Drill Bit	8.5mm
DT20528-QZ	Black Gold HSS Drill Bit	9mm
DT20529-QZ	Black Gold HSS Drill Bit	9.5mm
DT20530-QZ	Black Gold HSS Drill Bit	10mm
DT20531-QZ	Black Gold HSS Drill Bit	10.5mm
DT20532-QZ	Black Gold HSS Drill Bit	11mm
DT20533-QZ	Black Gold HSS Drill Bit	11.5mm
DT20534-QZ	Black Gold HSS Drill Bit	12mm
DT20535-QZ	Black Gold HSS Drill Bit	12.5mm
DT20536-QZ	Black Gold HSS Drill Bit	13mm

SETS

Cat. No.	Description	Ø mm
DT70727-QZ	14pc	1 / 1.5 x2 / 2 x2 / 2.5 / 3 x2 / 3.5 / 4 x2 / 5 / 6 / 8mm
DT70728-QZ	19pc	1 / 1.5 / 2 x2 / 2.5 x2 / 3 x2 / 3.5 x2 / 4 x2 / 5 x2 / 5.5 / 6 / 7 / 8 / 10mm
DT70729-QZ	23pc	1 x2 / 1.5 x2, / 2 x2 / 2.5 x2 / 3 x2 / 3.5 x2 / 4 x2 / 4.5 / 5 x2 / 6 / 7 / 8 / 9 / 10 / 12mm
DT70755-QZ	21pc	1 / 1.5 / 2 / 2.5 / 3 / 3.2 / 3.3 / 3.5 / 4 / 4.2 / 4.5 / 4.8 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 10 / 12mm



IMPACT READY BLACK & GOLD HEX DRILL BITS

IMPACT READY®
1/4" Hex Shank designed to resist radial torque with impact drivers and is compatible with most power drills.

BLACK & GOLD FINISHING
Helps prevent rust.

DURABILITY
strong tapered cored design for extreme durability and resistance to breakage.

SPLIT POINT TIP
The 135° split point tip design helps to reduce walking.

BLACK & GOLD

APPLICATIONS
For clean, accurate holes in steel, alloyed and non-alloyed sheet metal. Also ideal for basic drilling applications in wood, plastic and other thin materials.

FOR USE WITH
Impact drivers.



Metal drill bits
Impact Titanium

Cat. No.	Ø mm	Total length mm	Working length mm
DT20603-QZ	3.5	76	29
DT20604-QZ	4	80	32
DT20605-QZ	4.5	86	36
DT20606-QZ	5	95	56
DT20607-QZ	5.5	98	59
DT20608-QZ	6	102	63
DT20609-QZ	6.5	105	67
DT20610-QZ	7	111	73
DT20611-QZ	7.5	114	76
DT20612-QZ	8	117	79
DT20613-QZ	8.5	120	82
DT20614-QZ	9	127	89
DT20615-QZ	9.5	130	92
DT20616-QZ	10	138	100
DT20617-QZ	11	145	107
DT20618-QZ	12	145	107
DT20619-QZ	13	145	107

Cat. No.	Ø mm	Total length mm	Working length mm
DT20600-QZ	2	55	12
DT20601-QZ	2.5	2	15
DT20602-QZ	3	72	26

Cat. No.	Description	Contents
DT20620-QZ	10pc Black & Gold Hex Drill Bit Set	Bit tip holder, Tinted Safety Glasses
3mm	3.2mm	3.5mm
4mm	4.5mm	5mm
6mm	8mm	10mm
12mm		



EXTREME® IMPACT TAP DRILL BITS



APPLICATIONS
For fast drilling and tapping of holes in one application.

FOR USE WITH
Impact Drivers.

SET	Cat. No.	Description	Size mm	Pack Qty.
	DT50060-QZ	Impact Tap Drill Bits	M4, M5, M6, M8, M10	5



EXTREME[®]

IMPACT STEP BITS

QUICK CHANGE

QUICK CHANGE SHANK
for rapid change of accessory

TITANIUM COATING
For increased wear resistance, corrosion resistance and upto 2 x life (vs black oxide)

OPTIMISED GEOMETRY
Penetrates material faster. Precise drilling without walking. Specially ground shoulder cutters milling exact, circular holes with clean edges

APPLICATIONS

For enlarging drill holes.

Suitable for construction steel, ferrous and non-ferrous metals, plastic, and thin-walled materials up to 3mm.

For drilling and enlarging holes in metal from 4mm to 34mm.

FOR USE WITH

Impact drivers.

SINGLE PACKS			
Cat. No.	Description	Size mm	Pack Qty.
DT5026-QZ	Impact step bit	4-12mm	1
DT5027-QZ	Impact step bit	6-18mm	1
DT5030-QZ	Impact step bit	14-25mm	1
DT5031-QZ	Step Bit	20-34mm	1

TITANIUM ROUND SHANK STEP BITS

LASER-ENGRAVED NUMBERS
Helps to increase step visibility.

INNOVATIVE DOUBLE-SPIRAL FLUTE DESIGN
For long life and outstanding chip removal.

APPLICATIONS

For enlarging drill holes.

Suitable for construction steel, ferrous and non-ferrous metals, plastic, and thin-walled materials up to 3mm.

For drilling and enlarging holes in metal from 4mm to 34mm.

FOR USE WITH

Drill drivers.

SINGLE PACKS			
Cat. No.	Description	Size mm	Pack Qty.
DT90246-QZ	Titanium round shank step bits	4-22mm	1
DT90247-QZ	Titanium round shank step bits	5-35mm	1
DT90248-QZ	Titanium round shank step bits	6-20mm	1



WOOD DRILL BITS

Engineered for tough tasks and harsh environments, the DEWALT® range of wood drilling bits deliver consistent, high performance with durability you can rely on.

Frame Bit

For fast, accurate and cleanest drill hole results in hard and soft wood, as well as in wet form panels.

Auger Bit

For fast, precise drilling in hard and soft wood and plywood.

Spade Bit

Pilot point and optimised outer cutting edges ensure accurate drill bit positioning, delivering a clean hole. Perfect for drilling large holes in hard, soft, and composite timbers.

Brad Point

High quality chrome vanadium alloyed drill bit with a pilot point, and two outer cutting edges. For fast and accurate holes in hard, soft and construction timbers.

Flatwood

Ground central point and cutting edges for accurate location and clean cutting.

Tri-Flute

Tri-Flute tapered design for faster removal of wood chips and less binding.

Forstner

For clean and accurate boreholes in hardwood and softwood, wooden boards and more. Self feed pilot point pulls the forstner bit through the timber without the need for downward pressure.

Hinge Hole Cutter

For precise drilling in plywood, and natural hard and soft wood.



BRAD POINT DRILL BITS



FEATURES AND BENEFITS

- High quality chrome-vanadium-alloyed drills with centering point, two shoulders and peripheral cutting edges (Form B).
- Similar to DIN 7487, hardened and ground centric.

APPLICATIONS

For drilling plywood and natural hard and softwood. Particularly suitable for drilling dowel holes and through-holes.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT4503-QZ	3	70	46	1
DT4504-QZ	4	80	52	1
DT4505-QZ	5	90	60	1
DT4506-QZ	6	100	66	1
DT4507-QZ	7	110	72	1
DT4508-QZ	8	120	80	1
DT4509-QZ	9	130	84	1
DT4510-QZ	10	133	90	1
DT4511-QZ	11	150	100	1
DT4512-QZ	12	155	102	1
DT4513-QZ	13	155	102	1
DT4514-QZ	14	160	107	1
DT4516-QZ	16	165	112	1
DT4518-QZ	18	200	130	1
DT4520-QZ	20	200	130	1

SET

Cat. No.	Description	Ø mm
DT4535-QZ	5 piece set woodspiral drill bits in plastic cassette	4 / 5 / 6 / 8 / 10mm



FRAME DRILL BITS



APPLICATIONS

For fast, accurate and cleanest drill hole results in hardwood, softwood and laminate.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT4871-QZ	8	600	1
DT4872-QZ	10	600	1
DT4873-QZ	12	600	1
DT4874-QZ	16	600	1
DT4875-QZ	18	600	1
DT4876-QZ	20	600	1
DT4877-QZ	22	600	1



WOOD AUGER DRILL BITS



FEATURES AND BENEFITS

- Cylindrical shank. All other sizes are delivered with hexagonal shaft.
- Spiral groove shape 'LEWIS' allows maximum chip transport and high drilling progress.
- Self-pulling thread for accurate drilling.
- Periferial cutting allows clean holes with minimal spalling.

APPLICATIONS

Special wood drill for fast, precise drilling.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty.
DT4600-QZ	6	200	100	1
DT4602-QZ	8	200	100	1
DT4604-QZ	10	200	100	1
DT4606-QZ	12	200	100	1
DT90231-QZ	13	200	100	1
DT4608-QZ	14	200	100	1
DT4610-QZ	16	200	100	1
DT4612-QZ	18	200	100	1
DT90233-QZ	18	200	100	1
DT4614-QZ	20	200	100	1
DT90234-QZ	20	200	100	1
DT4615-QZ	22	200	100	1
DT4616-QZ	24	200	100	1
DT4618-QZ	26	200	100	1
DT4619-QZ	28	200	100	1
DT4620-QZ	30	200	100	1
DT4621-QZ	32	200	100	1
DT4632-QZ	8	380	280	1
DT90235-QZ	8	380	280	1
DT4634-QZ	10	380	280	1
DT4636-QZ	12	380	280	1
DT90232-QZ	13	380	280	1
DT4638-QZ	14	380	280	1
DT4640-QZ	16	380	280	1
DT4642-QZ	18	380	280	1
DT4644-QZ	20	380	280	1
DT4645-QZ	22	380	280	1
DT4646-QZ	24	380	280	1
DT90236-QZ	25	380	280	1
DT4648-QZ	26	380	280	1
DT4649-QZ	28	380	280	1
DT4650-QZ	30	380	280	1
DT4651-QZ	32	380	280	1



SCOTCH PATTERN AUGER DRILL BITS



FEATURES AND BENEFITS

- Hex shank prevents chuck slippage.
- Forged SAE 1060 steel, lasts longer bit life due to heat treated steel and anti-corrosive oil coating.
- Self-feeding screw point, fast boring into all types of wooden materials.
- Mathieson-type twist design capable of effortlessly drilling into hardwood timbers.

APPLICATIONS

Suitable for hardwood drilling applications.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total Length mm	Pack Qty.
DT90215-QZ	16	305	1
DT90217-QZ	17	305	1
DT90218-QZ	19	305	1
DT90220-QZ	21	305	1
DT90222-QZ	22	305	1
DT90223-QZ	25	305	1
DT90224-QZ	6	305	1
DT90225-QZ	8	305	1
DT90226-QZ	14	610	1
DT90227-QZ	16	610	1
DT90228-QZ	19	610	1
DT90229-QZ	22	610	1
DT90230-QZ	25	610	1

BULK SETS

Cat. No.	Ø mm	Total Length mm	Pack Qty.
DT90216-QZ	16	305	-
DT90219-QZ	19	305	-
DT90221-QZ	21	305	-



EXTREME® FORSTNER DRILL BITS



FEATURES AND BENEFITS

- Anti slip shank. 3 flat surfaces prevent rotation in the drill chuck and ensure maximum power transmission.
- Threaded pilot point pulls forstner bit through the material
- 3 extra sharp cutting edges for fast drilling.

APPLICATIONS

For rapid drilling of clean and accurate holes in hardwood, softwood, wooden boards and plaster boards.

FOR USE WITH

Impact drivers, corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Pack Qty.
DT4575-QZ	25	1
DT4576-QZ	28	1
DT4577-QZ	32	1
DT4578-QZ	35	1
DT4579-QZ	38	1
DT4580-QZ	41	1
DT4581-QZ	45	1
DT4582-QZ	51	1
DT4583-QZ	54	1
DT4584-QZ	57	1
DT4585-QZ	65	1
DT4586-QZ	68	1
DT4587-QZ	74	1
DT4588-QZ	76	1
DT4589-QZ	92	1
DT4590-QZ	117	1
DT4592-QZ	Extension piece 140mm	1

SET

Cat. No.	Description
DT4593-QZ	8pc Self-Feed Forstner Bit Set Contents: 25mm, 28mm, 32mm, 38mm, 45mm, 54mm, 65mm



EXTREME® IMPACT SPADE BITS

STEEL CONSTRUCTION

Extra thick and robust for outstanding durability.
1/4" shank ensures easy and slip-proof clamping



BEVELLED PILOT DRILL

Bevelled outer cut edges enable precise positioning of the drill and a clean hole pattern, even in wood with nails.



APPLICATIONS

For fast and accurate results in hardwood, softwood, lumber, and wood with nails.

FOR USE WITH

Impact drivers, corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT4762-QZ	10	152	1
DT4763-QZ	12	152	1
DT4764-QZ	13	152	1
DT4765-QZ	14	152	1
DT4766-QZ	16	152	1
DT4767-QZ	18	152	1
DT4768-QZ	20	152	1
DT4769-QZ	22	152	1
DT4770-QZ	24	152	1
DT4771-QZ	25	152	1
DT4772-QZ	26	152	1
DT4773-QZ	28	152	1
DT4774-QZ	30	152	1
DT4775-QZ	32	152	1
DT4776-QZ	35	152	1
DT4777-QZ	38	152	1
DT4778-QZ	40	152	1

EXTENSION PIECE

Cat. No.	Description	Pack Qty.
DT4849-QZ	300 x 1/4"	1

SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT4780-QZ	10	406	1
DT4781-QZ	12	406	1
DT4783-QZ	14	406	1
DT4784-QZ	16	406	1
DT4785-QZ	20	406	1
DT4786-QZ	22	406	1
DT4787-QZ	24	406	1
DT4788-QZ	25	406	1
DT4789-QZ	26	406	1
DT4791-QZ	30	406	1
DT4792-QZ	32	406	1
DT4793-QZ	35	406	1

SET

Cat. No.	Description	Component Mix
DT4797-QZ	4pc Extreme Flatwood Set	152mm: 20mm, 22mm, 25mm, 32mm
DT4798-QZ	5pc Standard Flatwood Set	152mm: 14mm, 18mm, 22mm, 25mm, 32mm
DT70751-QZ	9pc EXTREME Impact Flatwood Set	EXTREME Flatwood drill bits 152mm: 12, 14, 16, 18, 20, 22, 25, 28, 32. Hex shank

FLATWOOD DRILL BITS



FEATURES AND BENEFITS

- High quality chrome vanadium flat drill bit.
- Ground central point and cutting edges for accurate location and clean cutting.
- Ground chip breaker to reduce splintering for cleaner holes and improved drilling efficiency

APPLICATIONS

Suitable for natural hard and soft wood, chipboard and other man-made materials.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT4810-QZ	10	160	1
DT4812-QZ	12	160	1
DT4813-QZ	13	160	1
DT4814-QZ	14	160	1
DT4816-QZ	16	160	1
DT4818-QZ	18	160	1
DT4820-QZ	20	160	1
DT4822-QZ	22	160	1
DT4824-QZ	24	160	1
DT4825-QZ	25	160	1
DT4826-QZ	26	160	1
DT4828-QZ	28	160	1
DT4830-QZ	30	160	1
DT4832-QZ	32	160	1
DT4838-QZ	38	160	1

SETS

Cat. No.	Ø mm
DT4798-QZ	5pc Standard Flatwood Set 152mm: 14mm, 18mm, 22mm, 25mm, 32mm
DT70750-QZ	8pc Flatwood Set 152mm: 12, 16, 18, 20, 22, 25, 28, 32



EXTREME® TRI-FLUTE BITS

QUICK CHANGE SHANK

Fits standard Quick-Change extensions and 1/4" / 6mm hex bit adapters, preventing spinning.

TRI-FLUTE TAPERED DESIGN

For faster removal of wood chips and less binding.

FULL SCREW TIP

Allows bit to self-feed for ease of use and pull through.

3 CUTTING EDGES

Up to 6x faster cutting* combined with tri-flute design for optimum chip removal.

CUTTING SPURS

Three cutting spurs for cleaner, faster holes and extended drilling life.

* Vs DeWALT High Performance flat bits.



APPLICATIONS

Suitable for wood drilling applications for holes up to 100mm deep.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total Length mm	Shank Type	Shank Size mm	Pack Qty.
DT90239-QZ	13	152	Hexagonal	6.35	1
DT90292-QZ	14	152	Hexagonal	6.35	1
DT90240-QZ	16	152	Hexagonal	6.35	1
DT90293-QZ	18	152	Hexagonal	6.35	1
DT90241-QZ	20	152	Hexagonal	6.35	1
DT90242-QZ	22	152	Hexagonal	6.35	1
DT90243-QZ	25	152	Hexagonal	6.35	1
DT90244-QZ	28	152	Hexagonal	6.35	1
DT90245-QZ	32	152	Hexagonal	6.35	1

SETS

Cat. No.	Ø mm	Total Length mm	Shank Type	Shank Size mm	Pack Qty.
DT90237-QZ	13	152	Hexagonal	6.35	1
DT90238-QZ	14	152	Hexagonal	6.35	1



HINGE BORING DRILL BITS



FEATURES AND BENEFITS

- Anti slip shank. Hexagonal shank for secure fit in drill chuck.
- Centering point and hard metal cutting edge. Enables exact holes for inserting cup hinges.



APPLICATIONS

Suitable for drilling hardboard, plywood, and natural hardwoods and softwoods.



FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Pack Qty.
DT4541-QZ	26	65	1
DT4543-QZ	35	65	1



CHUCKS



KEYLESS 10-13mm - SINGLE PACKS

Cat. No.	Material	Shank	Clamping Range mm	1 or 2 Piece	Pack Qty.
DT7002-QZ	Plastic	1/2" x 20 UNF	1.5 - 13	2	1
DT7043-QZ	Metal	1/2" x 20 UNF	1.5 - 13	2	1
DT7044-QZ	Metal	1/2" x 20 UNF	1.5 - 13	2	1
DT7045-QZ	Metal	1/2" x 20 UNF	1.5 - 13	1	1
DT7046-QZ	Metal	1/2" x 20 UNF	1.5 - 13	1	1
DT7025-QZ	Plastic	1/2" x 20 UNF	1.5 - 13	2	1

KEYED 10-13mm - SINGLE PACK

Cat. No.	Shank	Clamping Range mm	Pack Qty.
DT7013-QZ	3/8" x 24 UNF	1.0 - 10	1

CHUCK KEYS



SINGLE PACK

Cat. No.	Shank	Pack Qty.
DT7021-QZ	Drill chuck key	1

SPECIAL CHUCKS AND ADAPTORS



SINGLE PACKS

Cat. No.	Shank	Clamping Range mm	Pack Qty.
DT7005-QZ	1/2" x 20 UNF keyed chuck with SDS adaptor	1.5 - 13	1
DT7030-QZ	SDS-plus 1/2" x 20 UNF chuck adaptor / screwdriver bit	-	1
DT7018-QZ	2 sleeve metal chuck for 2kg and 4kg quick change hammer drills (eg D25404K)	1.5 - 13	1

MIXER PADDLES



FEATURES AND BENEFITS

- Universal stirring/mixing tool for hand-held drills with a 13mm chuck. Mixing effect from bottom to top.
- Suitable for DW130.
- M14 version also available.

APPLICATIONS

For disperse paints, varnishes, wall paints, wallpaper adhesives, etc.

SINGLE PACKS

Cat. No.	Shank	Ø mm	Total length mm	Pack Qty.
DT4950-QZ	Hexagonal	100	600	1
DT4951-QZ	Hexagonal	120	600	1
DT4952-QZ	M14	120	600	1





HOLE SAWS

EXTREME®

The DEWALT® EXTREME® range of hole saws offers high performance cutting through a variety of materials including metal, nail embedded wood and masonry. Specialised for the removal of material for running cables, pipes and ducting, the range is available in a variety of sizes.

QUICK CHANGE

Arbors and Pilot Bits

Changing saws and pilot bits is made easy with the new range of Quick Change arbors and pilot bits.



EXTREME® CARBIDE MULTI-MATERIAL HOLE SAWS



DRILLS THROUGH THICK MATERIALS IN ONE PASS

Tall body easily drills through 2X dimensional lumber (60mm internal depth).

VERSATILE DESIGN

Carbide teeth are optimised to cut through a variety of materials including nail embedded wood, concrete block, fibre cement and brick.



UP TO 6X FASTER

Large carbides and aggressive tooth design cuts through material faster for rough-in applications.

DURABILITY

High performance carbides are brazed to the cutting edge which allow for ripping through nails and help prevent tooth loss.



APPLICATIONS

Optimised to cut through a variety of materials including nail embedded wood, concrete block, fibre cement and brick.



FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Cutting Depth mm
DT90430-QZ	19mm MultiMat Carbide Hole Saw	60
DT90401-QZ	20mm MultiMat Carbide Hole Saw	60
DT90402-QZ	22mm MultiMat Carbide Hole Saw	60
DT90403-QZ	25mm MultiMat Carbide Hole Saw	60
DT90404-QZ	30mm MultiMat Carbide Hole Saw	60
DT90405-QZ	32mm MultiMat Carbide Hole Saw	60
DT90406-QZ	35mm MultiMat Carbide Hole Saw	60
DT90407-QZ	38mm MultiMat Carbide Hole Saw	60
DT90408-QZ	40mm MultiMat Carbide Hole Saw	60
DT90409-QZ	41mm MultiMat Carbide Hole Saw	60
DT90410-QZ	44mm MultiMat Carbide Hole Saw	60
DT90411-QZ	51mm MultiMat Carbide Hole Saw	60
DT90400-QZ	54mm MultiMat Carbide Hole Saw	60
DT90412-QZ	57mm MultiMat Carbide Hole Saw	60
DT90413-QZ	60mm MultiMat Carbide Hole Saw	60
DT90414-QZ	64mm MultiMat Carbide Hole Saw	60
DT90415-QZ	65mm MultiMat Carbide Hole Saw	60
DT90416-QZ	68mm MultiMat Carbide Hole Saw	60
DT90417-QZ	70mm MultiMat Carbide Hole Saw	60
DT90418-QZ	76mm MultiMat Carbide Hole Saw	60
DT90419-QZ	79mm MultiMat Carbide Hole Saw	60
DT90420-QZ	86mm MultiMat Carbide Hole Saw	60
DT90421-QZ	92mm MultiMat Carbide Hole Saw	60
DT90422-QZ	95mm MultiMat Carbide Hole Saw	60
DT90423-QZ	102mm MultiMat Carbide Hole Saw	60
DT90424-QZ	108mm MultiMat Carbide Hole Saw	60
DT90425-QZ	111mm MultiMat Carbide Hole Saw	60
DT90426-QZ	127mm MultiMat Carbide Hole Saw	60
DT90427-QZ	95mm MultiMat Carbide (Masonry) Pilot Bit	60
DT90428-QZ	95mm MultiMat Spade (Wood) Pilot Bit	60
DT90429-QZ	32-152mm QC MultiMat Arbor	60
DT90362-QZ	Quick Change Arbor 10mm Chuck (Ø14 - 30mm)	60
DT90365-QZ	Standard Arbor 6.35mm Chuck (Ø14 - 30mm)	60
DT90366-QZ	Standard Arbor 10mm Chuck (Ø14 - 30mm)	60
DT90367-QZ	Standard Arbor 13mm Chuck (Ø14 - 30mm)	60

EXTREME® BI-METAL HOLE SAWS



VERSATILE DRILLING PERFORMANCE

High speed steel cutting edge effectively drills through wood, metal and plastic

FAST PLUG EJECTION

Large, continuous slot provides leverage for easy plug ejection and removal

DESIGNED FOR THICK MATERIALS

Deeper saw design cuts thicker materials in one pass



UP TO 2X LONGER LIFE*

Patented tooth forms optimize chip removal for efficient drilling and long life

FAST WOOD DRILLING

Aggressive tooth design removes more wood with each rotation for fast drilling

*vs. previous range



APPLICATIONS

High Speed Steel cutting edge effectively drills through wood, metal and plastic.

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Ø mm	Cutting depth mm	Pack Qty.
DT90295-QZ	14	46.5	1
DT90296-QZ	16	46.5	1
DT90297-QZ	17	46.5	1
DT90298-QZ	19	46.5	1
DT90299-QZ	20	46.5	1
DT90300-QZ	21	46.5	1
DT90301-QZ	22	46.5	1
DT90302-QZ	24	46.5	1
DT90303-QZ	25	46.5	1
DT90304-QZ	27	46.5	1
DT90305-QZ	29	46.5	1
DT90307-QZ	32	46.5	1
DT90308-QZ	33	46.5	1
DT90309-QZ	35	46.5	1
DT90310-QZ	37	46.5	1
DT90311-QZ	38	46.5	1
DT90312-QZ	40	46.5	1
DT90313-QZ	41	46.5	1
DT90314-QZ	43	46.5	1
DT90315-QZ	44	46.5	1
DT90316-QZ	46	46.5	1
DT90317-QZ	48	46.5	1
DT90318-QZ	51	46.5	1
DT90319-QZ	52	46.5	1
DT90320-QZ	54	46.5	1
DT90321-QZ	56	46.5	1
DT90322-QZ	57	46.5	1
DT90323-QZ	60	46.5	1

SINGLE PACKS

Cat. No.	Ø mm	Cutting depth mm	Pack Qty.
DT90324-QZ	64	46.5	1
DT90325-QZ	65	46.5	1
DT90326-QZ	67	46.5	1
DT90327-QZ	68	46.5	1
DT90328-QZ	70	46.5	1
DT90329-QZ	73	46.5	1
DT90330-QZ	76	46.5	1
DT90331-QZ	79	46.5	1
DT90332-QZ	83	46.5	1
DT90333-QZ	86	46.5	1
DT90334-QZ	89	46.5	1
DT90335-QZ	92	46.5	1
DT90336-QZ	95	46.5	1
DT90337-QZ	98	46.5	1
DT90338-QZ	102	46.5	1
DT90339-QZ	105	46.5	1
DT90340-QZ	108	46.5	1
DT90341-QZ	111	46.5	1
DT90342-QZ	114	46.5	1
DT90343-QZ	121	46.5	1
DT90344-QZ	127	46.5	1
DT90372-QZ	133	46.5	1
DT90345-QZ	140	46.5	1
DT90346-QZ	152	46.5	1
DT8260-QZ	160	46.5	1
DT90373-QZ	168	46.5	1
DT8266-QZ	177	46.5	1
DT8267-QZ	210	46.5	1

EXTREME BI-METAL HOLE SAW SETS



SINGLE PACKS

Cat. No.	Diameter mm
DT90350-QZ	BIM Hole Saw General 13pc
DT90351-QZ	BIM Hole Saw Elec. 11pc
DT90352-QZ	BIM Hole Saw Elec. 11pc
DT90353-QZ	BIM Hole Saw General 11pc
DT90354-QZ	BIM Hole Saw Elec. 11pc
DT90355-QZ	BIM Hole Saw Plumber 11pc
DT90356-QZ	BIM Hole Saw Elec. 11pc
DT90357-QZ	BIM Hole Saw General 10pc
DT90358-QZ	BIM Hole Saw General 10pc
DT90359-QZ	BIM Hole Saw General 11pc
DT90360-QZ	BIM Hole Saw General 12pc
DT90361-QZ	BIM Hole Saw General 13pc

Each set includes: 2x Mandrels and 2x Pilot Bits

QUICK CHANGE ARBORS AND PILOT BITS

QUICK CHANGE

FEATURES

- Easy side to engage and release saws without additional tools or fasteners. Universally compatible the design enables adjusting or replacing pilot bits without needing to remove the hole saw.

FOR USE WITH

Bi-Metal hole saws

ARBOR SINGLE PACKS

Cat. No.	Diameter mm
DT20625-QZ	Quick Change Arbor 13mm Chuck (Ø32 - 210mm)
DT20626-QZ	Quick Change Arbor 10mm Chuck (Ø14 - 30mm)

PILOT BITS - SINGLE PACKS

Cat. No.	Diameter mm
DT20627-QZ	(83mm) (3 1/4") Pilot Bit
DT20628-QZ	108mm (4 1/4") Pilot Bit
DT20629-QZ	95mm Carbide pilot bit for masonry
DT20630-QZ	95mm Spade pilot bit for wood



IMPACT CONNECT

PVC/PEX PIPE CUTTER



FEATURES

Offers 6x faster cutting of PVC and PEX pipes and is 100x less effort compared to using hand tools.

APPLICATIONS

Fast cutting through PVC and PEX pipes that measure up to 50mm in diameter.

FOR USE WITH



Connects in seconds to all DeWalt 18V XR and selected competitor pro-grade impact drivers.

SINGLE PACKS

Cat. No.	Description	Qty
DT20560-QZ	Impact Attachment PVC/PEX Pipe Cutter	1





SCREWDRIVING

Engineered to meet the DEWALT standard of fastening accessories, our range of bits, holders and sockets offer unbridled versatility, high performance and reliability.



EXTREME **FLEXTORQ**

The built in torsion zone of the Extreme FlexTorq screwdriver bits absorbs and controls high impact forces; protecting the bit and transferring all of the power into driving the screw.



Standard Screwdriver Bits

Made from high quality materials to deliver on precision and efficiency.



Screwdriver Bit Holders

Maximise the potential of your driver with our range of magnetic bit holders and drive guides.



Modular Right Angle Attachment

Ideal for screwing and drilling in tight spaces and difficult to access areas, with four modular options for increased versatility.



Impact Sockets

Heavy duty sockets designed to withstand the high levels of torque that corded and cordless impact drivers deliver.



EXTREME



FLEX TORQ

FULL FIT BIT HEAD



User Benefits

- Longer bit life
- Eliminates rounded screw heads
- Eliminates wobbles

Developed Through
Measuring 3000+ Screws



Better Fit
More Surface Area
Increased Friction
Less Slippage
Less than 4° Movement



Worse Fit
Less Surface Area
Less Friction
Increased Slippage
More than 4° Movement

EXTREME

FLEX TORQ

IMPACT READY
IMPACT DRIVER ACCESSORIES

+100%
MORE SCREWS PER BIT™

Our longest lasting
PH2 bit yet

Flex optimised to transfer
maximum torque through
the screw and maximise life

Contoured area of the bit
flexes with the torque of
the impact driver

Impact Ready® 1/4"
hex shank

Full fit head eliminates wobble
and screw head rounding

SUPERIOR
FITMENT™

Effortless one-handed
driving (T20 to T40)

Optimised torsion zone,
maximising bit life and
turning force when used
in extreme applications

Highly visible sizes for
quick bit selection





EXTREME®

FLEX TORQ



PHILLIPS® SCREWDRIVER BIT PACKS

Cat. No.	Size	Total length mm	Pack Qty.
DT7993T-QZ	PH1	25	5
DT7994T-QZ	PH2	25	5
DT7995T-QZ	PH3	25	5
DT7997T-QZ	PH1	57	5
DT70532T-QZ	PH2	57	2
DT7998T-QZ	PH2	57	5
DT7999T-QZ	PH3	57	5
DT70567T-QZ	PH2	89	2



POZI DRIVE SCREWDRIVER BIT PACKS

Cat. No.	Size	Total length mm	Pack Qty.
DT7386T-QZ	PZ1	25	5
DT7387T-QZ	PZ2	25	5
DT7388T-QZ	PZ3	25	5
DT7390T-QZ	PZ1	57	5
DT70531T-QZ	PZ2	57	2
DT7391T-QZ	PZ2	57	5
DT7392T-QZ	PZ3	57	5
DT70566T-QZ	PZ2	89	2



TORX SCREWDRIVER BIT PACKS

Cat. No.	Size	Total length mm	Pack Qty.
DT7379T-QZ	T10	25	5
DT7380T-QZ	T15	25	5
DT7381T-QZ	T20	25	5
DT7382T-QZ	T25	25	5
DT7383T-QZ	T27	25	5
DT7384T-QZ	T30	25	5
DT7373-QZ	T40 non torsion	25	5
DT7393T-QZ	T10	57	5
DT7394T-QZ	T15	57	5
DT70533T-QZ	T20	57	2
DT7395T-QZ	T20	57	5
DT70534T-QZ	T25	57	2
DT7396T-QZ	T25	57	5
DT7397T-QZ	T27	57	5
DT7398T-QZ	T30	57	5
DT7399T-QZ	T40	57	5
DT70568T-QZ	T20	89	2
DT70569T-QZ	T25	89	2



EXTREME® MAGNETIC SCREW LOCK



FEATURES

- The Magnetic Screw Lock™ system holders and sleeves all feature floating ring magnets with 10 x holding power. So you have stability and access for almost any project.
- The Magnetic Screw Lock™ sleeve features a floating ring magnet, so you no longer need a third hand to hold your fastener stable.

APPLICATIONS

For all screwdriving applications. Only suitable for the DeWALT® 50mm EXTREME® Impact Torsion screwdriver bit.

FOR USE WITH

Impact drivers, corded and cordless drills.



SINGLE PACK

Cat. No.	Description	Pack Qty.
DT70570T-QZ	ALU Magnetic Sleeve for FLEX TORQ screwdriver bits	1

EXTREME® FLEX TORQ



57mm FLEX TORQ BITS WITH MAGNETIC SCREW LOCK ACCESSORY

Cat. No.	Size	Total length mm	Pack Qty.
DT70535T-QZ	PZ2	57	3
DT70536T-QZ	PH2	57	3
DT70537T-QZ	T20	57	3
DT70538T-QZ	T25	57	3

SMALL BULK STORAGE SETS

Cat. No.	Size	Total length mm	Pack Qty.
DT70555T-QZ	PH2	25	25
DT70556T-QZ	PZ2	25	25
DT70557T-QZ	T20	25	25
DT70558T-QZ	T25	25	25
DT70559T-QZ	T40	25	25

57mm FLEX TORQ BITS - KEYRING SETS/MERCHANDISERS

Cat. No.	Description	Contents
DT7274-QZ	10pc PH/PZ FlexTorq Bits Keyring (50 Set Plastic Jar Merchandiser)	PZ2 x6, PZ3 x2, PH2 x2
DT7275-QZ	10-Piece TORX FlexTorq Bits Keyring (50 Set Plastic Jar Merchandiser)	T20 x3, T25 x4, T30 x6
DT7276-QZ	10-Piece POZI FlexTorq Bits Keyring (50 Set Plastic Jar Merchandiser)	PZ1 x 2, PZ2 x6, PZ3 x2



FOR USE WITH
Impact drivers, corded
and cordless drills.



SETS

Cat.No.	Description	Pack Qty.
DT70523T-QZ	32pc Set 25mm: PH1, PH2 x3, PH3, PZ1 x2, PZ2 x5, PZ3 x3, T10 x2, T15 x2, T20 x2, T25 x2, T27, T30, T40, SL6 x2, SL8, PR2 x2, Magnetic bit tip holder	32

Cat.No.	Description	Pack Qty.
DT70523TM-QZ	32pc Set 25mm: PH1, PH2 x3, PH3, PZ1 x2, PZ2 x5, PZ3 x3, T10 x2, T15 x2, T20 x2, T25 x2, T27, T30, T40, SL6 x2, SL8, PR2 x2, Magnetic bit tip holder	32

Cat.No.	Description	Pack Qty.
DT70560T-QZ	32pc Set 25mm: PH1, PH2 x5, PH3 x2, PZ1, PZ2 x10, PZ3 x3, T15, T20, T25 x2, T27, T30 x3, Adapter, Magnetic bit tip holder	32

Cat.No.	Description	Pack Qty.
DT70587T-QZ	32pc Set 25mm: PH1, PH2 x3, PH3, PZ1 x2, PZ2 x5, PZ3 x3, T10 x2, T15 x2, T20 x2, T25 x2, T27, T30, T40, SL6 x2, SL8, PR2 x2, Magnetic Bit Holder with Torsion Zone	32

Cat.No.	Description	Pack Qty.
DT70578T-QZ	10pc Set 25mm: PH2 x2, PZ2, T10, T15, T20 x2, T25, T30, Pivoting Bit Holder	10

STANDARD SCREWDRIVER BITS

FEATURES

- High quality professional screwdriver bits.
- Flexible torsion zone absorbs torque peaks and reduces breakage.
- All bits are provided in sturdy plastic re-useable storage containers.

APPLICATIONS

For all screwdriving applications.

FOR USE WITH

Corded and cordless drills.



STANDARD BITS FOR SLOTTED SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7105-QZ	4.5	25	5
DT7106-QZ	5.5	25	5
DT7107-QZ	6.5	25	5

STANDARD BITS FOR PHILLIPS® CROSS-CUT SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7231-QZ	Ph1	25	5
DT7237-QZ	Ph1	25	20
DT7232-QZ	Ph2	25	5
DT7238-QZ	Ph2	25	20
DT7233-QZ	Ph3	25	5
DT7235-QZ	Ph2 Reduced tip	25	5
DT7245-QZ	Ph1 With extra grip 'ribs'	50	5
DT7246-QZ	Ph2 With extra grip 'ribs'	50	5
DT7204-QZ	Ph2	110	5
DT7236-QZ	Ph2 Reduced Tip	25	20

STANDARD BITS FOR PZ-CROSS-HEAD SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7211-QZ	Pz1	25	5
DT7212-QZ	Pz2	25	5
DT7218-QZ	Pz2	25	20
DT7213-QZ	Pz3	25	5
DT7219-QZ	Pz3	25	20
DT7226-QZ	Pz2	50	5
DT7227-QZ	Pz3	50	5
DT7203-QZ	Pz2	110	5
DT7225-QZ	Pz1 with extra grip 'ribs'	50	5



STANDARD SCREWDRIVER BITS



STANDARD BITS FOR TORX® SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7253-QZ	T10	25	5
DT7254-QZ	T15	25	5
DT7265-QZ	T15	25	20
DT7255-QZ	T20	25	5
DT7266-QZ	T20	25	20
DT7256-QZ	T25	25	5
DT7267-QZ	T25	25	20
DT7257-QZ	T27	25	5
DT7258-QZ	T30	25	5
DT7268-QZ	T30	25	20
DT7259-QZ	T40	25	5
DT7290-QZ	T10	70	5
DT7291-QZ	T15	70	5
DT7292-QZ	T20	70	5
DT7293-QZ	T25	70	5
DT7294-QZ	T27	70	5
DT7295-QZ	T30	70	5
DT7296-QZ	T40	70	5



STANDARD BITS FOR INTERNAL SQUARE-HEAD SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7170-QZ	1	25	5
DT7171-QZ	2	25	5
DT7172-QZ	3	25	5



STANDARD BITS FOR HEXAGONAL SOCKET SCREWS

Cat. No.	Size	Total length mm	Pack Qty.
DT7165-QZ	4	25	5
DT7166-QZ	5	25	5
DT7167-QZ	6	25	5
DT7168-QZ	8	25	5

STANDARD



HIGH PERFORMANCE - 25MM BITS - SLIM POCKET CASE SET

Cat. No.	Description	Contents
DT7915-QZ	11 Piece Pocket Set	PZ1 / PZ2 / PZ3 PH1 / PH2 / PH3 SL4.5 / SL5.5 / SL6.5 / SL8 Magnetic bit tip holder

HIGH PERFORMANCE - 25MM BITS - SLIM POCKET CASE SET

Cat. No.	Description	Contents
DT7916-QZ	11 Piece Pocket Set	PZ1 / PZ2 / PZ3 PH1 / PH2 / PH3 T10 / T15 / T20 / T25 Magnetic bit tip holder

HIGH PERFORMANCE - 25MM BITS - SLIM POCKET CASE SET

Cat. No.	Description	Contents
DT7917-QZ	11 Piece Pocket Set Torx	T7 / T8 / T9 / T10 T15 / T20 / T25 / T27 / T30 / T40 Magnetic bit tip holder

HIGH PERFORMANCE - 25MM BITS - SLIM POCKET CASE SET

Cat. No.	Description	Contents
DT71570-QZ	14 Piece Pocket Set	PH1 / PH2 x2 PZ2 T10 / T15 x2 / T20 x2 / T25 x2 / T30 Magnetic drive guides x2 (compact and longer version)

DRYWALL SCREWDRIVER ACCESSORIES

FEATURES

- High quality replacement bits for the magazine attachment of the DeWALT® dry screwdriver DCF6201



PACKS

Cat. No.	Size	Total length mm	Pack Qty.
DT7205-QZ	Pr2*	153	1
DT7206-QZ	Pr2*	153	5
DT7207-QZ	Pr2*	153	20
DT7520-QZ	Magnetic bit holder for 25mm drywall screwdriver bits	1	5
DT20425-QZ	Pr2*	156	5

*Comparable to PH2, with a slightly reduced head size



EXTREME® IMPACT SOCKET SETS

FOR USE WITH

Impact drivers and cordless drills.



SETS

Cat. No.	Description	Pack Qty.
DT7507-QZ	9 piece Impact wrench socket set 10 / 13 / 15 / 17 / 19 / 22 / 24 / 27mm adapter 1/4" na 1/2"	9
DT7506-QZ	17 piece Impact wrench socket set 6 / 8 / 10 / 11 / 12 / 13 / 14 / 16 / 17 18 / 19 / 20 / 21 / 22 / 24 / 27mm adapter 1/4" na 1/2"	17



1/2" IMPACT SOCKETS

FEATURES

- 6-point convex pattern for increased durability.

FOR USE WITH

Industrial tested and approved on both pneumatic and battery powered impact wrenches.



1/2" IMPACT SOCKETS (SHALLOW) PACKS

Cat. No.	Description / Size mm	Torque Nm.
DT7530-QZ	12mm	264
DT7531-QZ	13mm	264
DT7532-QZ	14mm	367
DT7533-QZ	15mm	441
DT7534-QZ	16mm	529
DT7535-QZ	17mm	618
DT7536-QZ	18mm	705
DT7537-QZ	19mm	735
DT7538-QZ	20mm	741
DT7539-QZ	21mm	741
DT7540-QZ	22mm	741
DT7541-QZ	24mm	741

1/2" IMPACT SOCKETS (DEEP) PACKS

Cat. No.	Description / Size mm	Torque Nm.
DT7546-QZ	12mm	264
DT7547-QZ	13mm	264
DT7548-QZ	14mm	367
DT7549-QZ	15mm	441
DT7550-QZ	16mm	529
DT7551-QZ	17mm	618
DT7552-QZ	18mm	705
DT7553-QZ	19mm	735
DT7554-QZ	20mm	741
DT7555-QZ	21mm	741
DT7556-QZ	22mm	741
DT7557-QZ	24mm	741



EXTREME® IMPACT WRENCH ADAPTERS

APPLICATIONS

For all screwdriving applications.



SINGLE PACKS

Cat. No.	Description	Pack Qty.
DT7508-QZ	1/4" hex to 1/2" square Impact wrench adapter	1
DT7512-QZ	1/4" hex to 1/2" square Impact driver adapter	1

EXTREME® CLEANABLE NUT DRIVER

FEATURES

- Easily cleanable of any swarf
- Socket drive
- Hex shaft for easy attachment

FOR USE WITH

Impact drivers and cordless drills.



SINGLE PACKS

Cat. No.	Description	Size mm	Total length mm	Pack Qty.
DT7465-QZ	Cleanable nut driver	8	75	1
DT7466-QZ	Cleanable nut driver	10	75	1
DT7467-QZ	Cleanable nut driver	13	75	1



REMOVABLE SOCKET
FOR EASY CLEANING



1/4" HEXAGON MAGNETIC SOCKET DRIVERS

FEATURES

- Magnetic socket drive
- Hex shaft for easy attachment

FOR USE WITH

Corded and cordless drills.



SINGLE PACKS

Cat. No.	Description	Size mm	Total length mm	Pack Qty.
DT7401-QZ	Magnetic nut/socket driver	7	50	1
DT7402-QZ	Magnetic nut/socket driver	8	50	1
DT7403-QZ	Magnetic nut/socket driver	10	50	1
DT7423-QZ	Magnetic nut/socket driver	11	50	1
DT7404-QZ	Magnetic nut/socket driver	13	50	1

COMPACT NUT/SOCKET DRIVERS

Cat. No.	Description	Size mm	Total length mm	Pack Qty.
DT7462-QZ	Compact magnetic nut driver	8	35	1
DT7463-QZ	Compact magnetic nut driver	10	35	1
DT7464-QZ	Compact magnetic nut driver	13	35	1

EXTREME® IMPACT CLUTCH BIT HOLDER

APPLICATION

For use in metal to metal application where torque levels are high. Also used where the drill driver does not have its own safety clutch.

FOR USE WITH

Impact drivers, corded and cordless drills.



SETS

Cat. No.	Description	Pack Qty.
DT7513T-QZ	Magnetic hard joint Impact clutch inc. PH2 25mm EXTREME® FlexTorq bit tripping torque 5.5 Nm	1

SCREWDRIVER BIT HOLDERS

FOR USE WITH

Corded and cordless drills.



Cat. No.	Description	Total length mm	Pack Qty.
DT7500-QZ	Magnetic bit holder	60	1
DT7511-QZ	Magnetic quick change bit holder holder	60	1
DT7515-QZ	ClicFix magnetic quick change bit holder	60	1
DT7521-QZ	Drywall bit holder and depth setter inc. PH2 25mm	75	2
DT7701-QZ	Magnetic bit holder with drive guide sleeve	80	1
DT7702-QZ	Magnetic bit holder with drive guide sleeve	120	1
DT7505-QZ	EXTREME® Impact pivoting bit tip holder inc. PZ2 25mm	87	2

Cat. No.	Description	Total length mm	Pack Qty.
DT7522-QZ	Magnetic Bit Holder - Impact Ready with Torsion Zone	92	1
DT7523-QZ	Magnetic Drive Guide - Impact Ready with Torsion Zone	90	1
DT7524-QZ	Magnetic Bit Holder - Impact Ready	76	1
DT7525-QZ	Magnetic Drive Guide - Impact Ready	79	1

Cat. No.	Description	Total length mm	Pack Qty.
DT90392-QZ	100 x DT7500-QZ Magnetic Bit Holder in Plastic Jar	60	100
DT7500-QZ	100 per Jar Merchandiser	60	100
DT90393-QZ	50 x DT7522-QZ Magnetic Bit Holder - Impact Ready with Torsion Zone in Plastic Jar	92	50
DT7522-QZ	50 per Jar Merchandiser	92	50
DT90394-QZ	75 x DT7701-QZ Magnetic Bit Holder with Drive Guide Sleeve in Plastic Jar	80	75
DT7701-QZ	75 per Jar Merchandiser	80	75

FLIP 'N' DRIVE **QUICK CHANGE** SYSTEM

FEATURES

- Complete drill drive accessory system for drilling countersink and pilot holes in one action and screwdriving.
- One-handed connector release with push forward collar for easily changing between drilling and screwdriving applications.
- 5/16" (8mm) shank for added durability.

APPLICATIONS

For use in hard and soft wood, composite board and MDF.

Ideal for cabinet making, furniture assembly, remodelling and shop fitting.

FOR USE WITH

Corded and cordless drills.



QUICK-EXCHANGE UNITS

Cat. No.	Description	Size	Pack Qty.
DT7600-XJ	Connector, countersink, pilot drill bit (2.38mm) and PZ2 screwdriver bit	No 6	1
DT7601-XJ	Connector, countersink, pilot drill bit (2.77mm) and PZ2 screwdriver bit	No 8	1
DT7602-XJ	Connector, countersink, pilot drill bit (3.17mm) and PZ2 screwdriver bit	No 10	1
DT7603-XJ	Connector, countersink, pilot drill bit (3.17mm) and PZ2 screwdriver bit	No 12	1

HSS PILOT DRILL

Cat. No.	Description	Size	Pack Qty.
DT7608-XJ	Pilot drill bit (2.38mm) for 3mm screws	No 6	3
DT7609-XJ	Pilot drill bit (2.77mm) for 4mm screws	No 8	3
DT7610-XJ	Pilot drill bit (3.17mm) for 5mm screws	No 10	3

PILOT DRILL WITH COUNTERSINK

Cat. No.	Description	Size	Pack Qty.
DT7604-XJ	Pilot drill bit (2.38mm) with countersink for 3mm screws	No 6	1
DT7605-XJ	Pilot drill bit (2.77mm) with countersink for 4mm screws	No 8	1
DT7606-XJ	Pilot drill bit (3.17mm) with countersink for 5mm screws	No 10	1
DT7607-XJ	Pilot drill bit (3.17mm) with countersink for 6mm screws	No 12	1

QUICK-CHANGE SET

Cat. No.	Description	Size	Pack Qty.
DT7612-XJ	Countersink pilot bit set	No. 6, 8, 10, 12 PZ2 25mm x2 PH2 25mm x2	10



EXTREME MODULAR RIGHT ANGLE ATTACHMENT



FEATURES

- 1/4" hexagonal shank
- Max. torque: 40 Nm
- Integrated magnet ring holds screw
- Includes 9 EXTREME® FlexTorq bits.

APPLICATIONS

For screwing and drilling in tight spaces and difficult to access areas.

FOR USE WITH

Impact drivers and cordless drills.

Cat. No.	Description	Pack Qty.
DT20503-QZ	Ultra Compact Impact Right Angle Attachment	1
DT20500-QZ	Impact Right Angle Attachment	1
DT20501-QZ	Impact Flexi Attachment	1
DT20502-QZ	Impact Right Angle & Flexi Attachment	1





CIRCULAR SAW **BLADES**

Our range of circular saw blades start sharp and stay sharp, producing super smooth cuts time and time again.

ELITE
SERIES



For use with portable saws with a thinner cut for more efficiency and longer tool life.

Designed for high quality cutting in wood, coated and uncoated wood materials and plastics.



For cutting premium timbers in a workshop environment where bespoke woodworking is performed.

XR EXTREME
RUNTIME



Optimised for cordless circular saws and stationary saws for first and second fix applications. Delivering maximum productivity from the power available. Also compatible with corded saws where specifications match.

Multi Material
Cutting



A range of poly-crystalline diamond toothed saw blades for cutting multi materials including fibre cement.

DEWALT
CONSTRUCTION



For rough cutting and first fix applications where durability is more important than cut finish.



EXTREME[®] CIRCULAR SAW BLADES

WORKSHOP

C4 PREMIUM CARBIDE

For extended life and up to 5 regrinds

LASER CUT PLATE

For improved balance

RIM EXPANSION SLOTS

Eliminate rim flex and maintain alignment

HARMONIC SLOTS

No blade ringing or scoring

ULTRA-SHARP CARBIDE TEETH

Reduces tear out

OPTIMISED GRIND ANGLES

Reduces tear out



- Designed for stationary saws -the first choice for professional workshop operation.
- The hallmark EXTREME[®] circular saw blades for stationary saws.
- Specially designed to achieve precise cutting and a high quality finish in for use in wood, coated and uncoated wood materials and plastic.



FLAT TOP GRIND (FT)

Tooth geometry, in which the cutting edge of the tooth is ground straight and without any inclination. This tooth form is used for longitudinal cuts and for universal applications if high cutting quality is less important.

TRIPLE CHIP GRIND (TCG)

Tooth geometry, in which a flat tooth is alternately arranged, followed by a slightly higher trapezoidal ground tooth. This higher tooth cuts correspondingly deeper, however, due to its upper edges which are chamfered on both sides, but somewhat narrower than the following flat tooth. This makes the splitting of brittle materials, e.g. laminate is prevented.

ALTERNATE TOP BEVEL (ATB)

Tooth geometry, in which the cutting edges of the teeth are alternately obliquely ground, the angle being from 10° to 20°. For universal use but ideal for cross cuts in hardwood and softwood.

HOLLOW GROUND (HG)

Tooth geometry, in which the teeth have been ground to a concave profile that produces clean cuts in melamine and other coated boards, without the need for scoring.



EXTREME[®] CIRCULAR SAW BLADES

WORKSHOP

SINGLE PACKS - PORTABLE

Cat. No.	Diameter mm	Arbor Diameter mm	Tooth Count	Grind Geometry	Hook Angle	KERF mm	Plate Thickness mm	Harmonic Slots
DT4057-QZ	160	20	36	ATB	10°	2.6	1.8	No
DT4084-QZ	160	16/20	48	TCG	-5°	2.6	1.8	No
DT1089-QZ	165	20	18	FT	18°	2.3	1.6	No
DT4026-QZ	165	20	24	ATB	25°	2.6	1.8	No
DT4027-QZ	165	30	24	ATB	25°	2.6	1.8	No
DT1091-QZ	165	20	40	ATB	-5°	1.9	1.4	No
DT1090-QZ	165	20	48	ATB	5°	2.2	1.6	No
DT1086-QZ	165	20	48	TCG	5°	2.3	1.6	No
DT4087-QZ	165	20	48	TCG	-5°	2.6	1.8	No
DT4088-QZ	165	30	48	TCG	-5°	2.6	1.8	No
DT1087-QZ	165	20	54	MTCG	0°	2.3	1.6	No
DT1088-QZ	165	20	54	TCG	-5°	2.3	1.6	No
DT4031-QZ	184	16	28	ATB	25°	2.6	1.8	No
DT4063-QZ	184	16	40	ATB	10°	2.6	1.4	No
DT4092-QZ	184	16	48	TCG	-5°	2.6	1.8	No
DT4033-QZ	190	30	28	ATB	10°	2.6	1.8	No
DT4064-QZ	190	30	40	ATB	10°	2.6	1.8	No
DT4094-QZ	190	30	48	TCG	-5°	2.6	1.8	No
DT4036-QZ	235	30	28	ATB	25°	3.2	2.2	No
DT4067-QZ	235	30	40	ATB	10°	3.2	2.2	No
DT4097-QZ	235	16/25/30	56	TCG	-5°	3.2	2.2	No

SINGLE PACKS - STATIONARY

Cat. No.	Diameter mm	Arbor Diameter mm	Tooth Count	Grind Geometry	Hook Angle	KERF mm	Plate Thickness mm	Harmonic Slots
DT90263-QZ	184	16/20	48	TCG	5°	3.2	1.75	No
DT4310-QZ	♦ 216	30	24	ATB	-5°	2.6	1.8	Yes
DT4320-QZ	♦ 216	30	48	ATB	-5°	2.6	1.8	Yes
DT4350-QZ	♦ 216	30	60	ATB	-5°	2.6	1.8	Yes
DT4370-QZ	♦ 216	30	60	TCG	-5°	2.6	1.8	Yes
DT4286-QZ	216	16/20/25/25.4/30	80	TCG	-5°	2.6	1.8	No
DT4202-QZ	250	30	24	FT	10°	2.8	1.8	No
DT4301-QZ	250	30	24	FT	10°	3.0	2.2	Yes
DT4311-QZ	♦ 250	30	24	FT	10°	3.0	2.2	Yes
DT4321-QZ	♦ 250	30	30	ATB	10°	3.0	2.2	Yes
DT4226-QZ	250	30	30	ATB	20°	3.0	2.2	No
DT4322-QZ	250	30	40	ATB	20°	3.0	2.2	Yes
DT4323-QZ	250	30	48	ATB	20°	3.0	2.2	Yes
DT4345-QZ	250	30	50	HG	10°	3.2	2.5	Yes
DT4351-QZ	♦ 250	30	60	ATB	10°	3.0	2.2	Yes
DT4217-QZ	250	30	60	HG	10°	3.2	2.5	Yes
DT4352-QZ	♦ 250	30	60	TCG	-5°	3.0	2.2	Yes
DT4353-QZ	♦ 250	30	80	ATB	10°	3.0	2.2	Yes
DT4287-QZ	250	30	80	TCG	-5°	3.0	2.2	No
DT90267-QZ	254	16/20/25/25.4/30	80	ATB	5°	3.2	1.75	Yes
DT90266-QZ	254	16/20/25/25.4/30	80	ATB	7°	3.2	1.75	Yes
DT90264-QZ	254	16/20/25/25.4/30	80	TCG	0°	3.6	1.75	No
DT4282-QZ	250	30	96	TCG	-5°	3.0	2.2	No
DT4324-QZ	♦ 260	30	48	ATB	10°	2.6	1.8	Yes
DT4280-QZ	260	30	80	TCG	-5°	2.6	1.8	No
DT4281-QZ	300	30	80	TCG	-5°	3.0	2.2	No
DT90265-QZ	305	16/20/25/25.4/30	80	ATB	7°	3.6	1.75	Yes
DT4210-QZ	305	30	32	ATB	-5°	2.6	1.8	No
DT4330-QZ	♦ 305	30	36	ATB	-5°	3.0	2.2	Yes
DT4340-QZ	♦ 305	30	48	ATB	10°	3.0	2.2	Yes
DT4260-QZ	305	16/20/25/25.4/30	60	ATB	-5°	2.6	1.8	No
DT4331-QZ	305	16/20/25/25.4/30	60	ATB	-5°	3.0	2.2	Yes
DT4346-QZ	305	30	60	HG	10°	3.2	2.5	Yes
DT4218-QZ	305	30	72	HG	10°	3.2	2.5	Yes
DT4283-QZ	305	16/20/25/25.4/30	80	TCG	-5°	2.6	1.8	No
DT4288-QZ	305	30	80	TCG	-5°	3.0	2.2	No
DT4290-QZ	305	16/20/25/25.4/30	96	TCG	-5°	3.0	2.2	No
DT4332-QZ	♦ 315	30	48	ATB	10°	3.0	2.2	Yes
DT4305-QZ	350	30	36	FT	10°	3.0	2.2	Yes
DT4291-QZ	350	30	96	TCG	-5°	3.0	2.2	No
DT4317-QZ	♦ 400	30	36	ATB	10°	3.0	2.4	Yes
DT4338-QZ	400	30	60	ATB	10°	3.0	2.4	Yes

♦ Marked saw blades have laser lines for vibration and sound insulation or corrosion-protected teeth

ELITE
SERIES

DEWALT

DT10304-QZ

Nail Tough

Ø190mm

24

2x
LIFE

NA010984

EXCLUSIVE PLATE TECHNOLOGY

Body shots dampen vibration - improving cutting feel and performance while reducing noise

ANTI-KICKBACK

Design reinforces carbide tip for impact resistance

PREMIUM C3 GRADE CARBIDE

Resharpens up to 3x

OPTIMISED FACE SHEAR and Face Grind

ULTRA-SHARP CARBIDE TEETH

Reduces Splintering

APPLICATIONS

Designed for high quality cutting in wood, coated and uncoated wood materials and plastics.

FOR USE WITH

Portable circular saws.

2x
LIFE

Nail Tough

IMPACT RESISTANCE

PREMIUM CARBIDE

FAST ACCURATE CUTTING

SINGLE PACKS							
Cat. No.	Description	Blade thickness mm	Kerf thickness mm	Kerf Type	Tooth Direction	Tooth Geometry	Tooth angle
DT10302-QZ	ELITE CSB 184 x 16mm 24T	0.99mm	1.65mm	Thin	Anti Clockwise	ATB	18°
DT10303-QZ	ELITE CSB 184 x 16mm 40T	0.99mm	1.65mm	Thin	Anti Clockwise	ATB	18°
DT10304-QZ	ELITE CSB 190 x 30mm 24T	0.99mm	1.65mm	Thin	Anti Clockwise	ATB	18°
DT10624-QZ	ELITE CSB 165 x 20mm 24T	0.99mm	1.65mm	Thin	Clockwise	ATB	18°
DT10640-QZ	ELITE CSB 165 x 20mm 40T	0.99mm	1.65mm	Thin	Clockwise	ATB	18°
DT1670-QZ	ELITE CSB 184 x 16mm 60T	0.99mm	1.65mm	Thin	Anti Clockwise	ATB	18°

SET							
Cat. No.	Description	Blade thickness mm	Kerf thickness mm	Kerf Type	Tooth Direction	Tooth Geometry	Tooth angle
DT10397-QZ	3 x ELITE CSB 2x165 24T 1x165 40T	0.99mm	1.65mm	Thin	Clockwise	ATB	18°
DT10399-QZ	ELITE CSB 190 24T 3PACK	0.99mm	1.65mm	Thin	Anti Clockwise	ATB	18°



XR
EXTREME
RUNTIME

DEWALT

EXTREME

DT09560-QZ

Ø165mm

24T

20mm x 1.53mm

XR
EXTREME
RUNTIME

MAX rpm 7000

FEED / PUSH

FEED / PUSH

ERC

OPTIMISED FOR CORDLESS

Up to 2x more cuts per charge and ideal for FlexVolt tools

C3 NEXT GENERATION CARBIDE

Up to 3 regrinds

THIN KERF

Ideal for cordless and less push force required

FULL KERF

Minimises blade deflection for a straighter cut

EXPANSION SLOTS

Dampen noise and vibration

PATENTED GRIND ANGLES

For faster cuts with lower force

FOR USE WITH

XR FlexVolt range and all compatible corded and cordless circular saws, mitre saws and table saws.

XR
FLEX
VOLT

Nail Tough

SINGLE PACKS										
Cat. No.	Blade Ø mm	Bore Ø mm	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT99560-QZ	165	20	1.2	1.76	Thin	24	Anti-clockwise	ATB+R	10°	7000
DT99561-QZ	165	20	1.2	1.76	Thin	42	Anti-clockwise	ATB+R	10°	7000
DT99562-QZ	190	30	0.82	1.55	Thin	24	Anti-clockwise	ATB+R	25°	7000
DT99563-QZ	190	30	0.82	1.55	Thin	36	Anti-clockwise	ATB+R	25°	7000
DT99577-QZ	184	20	0.82	1.55	Thin	24	Anti-clockwise	ATB+R	25°	7000
DT99578-QZ	184	20	0.82	1.55	Thin	36	Anti-clockwise	ATB+R	25°	7000
DT99579-QZ	184	20	0.82	1.55	Thin	60	Anti-clockwise	ATB+R	25°	7000
DT99565-QZ	210	30	1.24	1.8	Thin	24	Clockwise	ATB+R	20°	7000
DT99566-QZ	210	30	1.24	1.8	Thin	36	Clockwise	ATB+R	20°	7000
DT99567-QZ	210	30	1.24	1.8	Thin	60	Clockwise	ATB+R	20°	7000
DT99568-QZ	216	30	1.6	2.16	Thin	24	Clockwise	ATB+R	7°	7000
DT99569-QZ	216	30	1.6	2.16	Thin	36	Clockwise	ATB+R	7°	7000
DT99570-QZ	216	30	1.6	2.16	Thin	60	Clockwise	ATB+R	7°	7000
DT99571-QZ	250	30	1.6	2.16	Thin	24	Clockwise	ATB+R	7°	6000
DT99572-QZ	250	30	1.6	2.16	Thin	36	Clockwise	ATB+R	7°	6000
DT99573-QZ	250	30	1.6	2.16	Thin	60	Clockwise	ATB+R	7°	6000
DT99574-QZ	305	30	1.6	2.16	Thin	42	Clockwise	ATB+R	7°	4800
DT99575-QZ	305	16/20/25/25.4/30	1.6	2.16	Thin	60	Clockwise	ATB+R	7°	4800
DT99576-QZ	305	16/20/25/25.4/30	1.6	2.16	Thin	78	Clockwise	ATB+R	7°	4800
DT99595-QZ	305	25.4	1.6	2.16	Thin	60	Clockwise	ATB+R	7°	4800
DT99596-QZ	305	25.4	1.6	2.16	Thin	78	Clockwise	ATB+R	7°	4800

DIAMOND BORE SINGLE PACKS										
Cat. No.	Blade Ø mm	Bore Type	Blade thickness mm	Kerf thickness mm	Kerf Type	No of teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT40270	190	◆	1.0	1.55	Thin	24	Clockwise	ATB+R	25°	7000
DT40271	190	◆	1.0	1.55	Thin	36	Clockwise	ATB+R	25°	7000



CONSTRUCTION BLADES FOR PORTABLE CORDLESS SAWS



APPLICATIONS

Nail Tough - ideal for sawing wood with nails.



FOR USE WITH
Cordless saws.

Nail Tough



SINGLE PACKS

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT1946-QZ	Cordless - Fast cutting	136	10	1	1.86	Thin	16	Clockwise	ATB	20°	7000
DT1947-QZ	Cordless - Framing	136	10	1	1.86	Thin	24	Clockwise	ATB	20°	7000
DT20434-QZ	Construction Circ Saw Blade	140	20	1	1.60	Thin	24	Clockwise	ATB	20°	7000
DT1948-QZ	Cordless - Fast cutting	165	20	1	1.86	Thin	16	Clockwise	ATB	20°	7000
DT1949-QZ	Cordless - Framing	165	20	1	1.86	Thin	24	Clockwise	ATB	20°	7000
DT1950-QZ	Cordless - Framing	165	20	1	1.86	Thin	36	Clockwise	ATB	20°	7000
DT1951-QZ	Cordless - Framing	184	20	1.13	1.79	Thin	24	Clockwise	ATB	18°	7000

TWIN PACK

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT90270-QZ	165mm 2 pack (1x 24T, 1 x 36T)	165	20	1	-	Thin	24	Clockwise	ATB	24°	7000
		165	20	1	-	Thin	36	Clockwise	FTOP	3°	7000



FEATURES

- Extremely robust, solid construction site sheets for the toughest requirements.
- Designed for rapid cutting of natural woods and composites, as well as formwork.
- Ideal for simple to good transverse and longitudinal cutting results.



CONSTRUCTION BLADES FOR CORDED PORTABLE HAND SAWS

SINGLE PACKS

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT1930-QZ	Portable - Framing	152	20	1.5	2.4	Full	24	Anti-clockwise	ATB	10°	7000
DT1931-QZ	Portable - Fast cut	160	20	1.5	2.4	Full	18	Anti-clockwise	ATB	20°	7000
DT1932-QZ	Portable - General purpose	160	20	1.5	2.4	Full	30	Anti-clockwise	ATB	10°	7000
DT1933-QZ	Portable - Fast cut	165	20	1.5	2.4	Full	18	Anti-clockwise	ATB	20°	7000
DT1934-QZ	Portable - Framing	165	20	1.2	1.8	Thin	24	Anti-clockwise	ATB	10°	7000
DT1935-QZ	Portable - General purpose	165	20	1.5	2.4	Full	30	Anti-clockwise	ATB	10°	7000
DT1936-QZ	Portable - Fast cut	165	30	1.5	2.4	Full	18	Anti-clockwise	ATB	20°	7000
DT1937-QZ	Portable - General purpose	165	30	1.5	2.4	Full	30	Anti-clockwise	ATB	10°	7000
DT1941-QZ	Portable - Fast cut	184	30	1.7	2.6	Full	18	Anti-clockwise	ATB	20°	7000
DT1942-QZ	Portable - General purpose	184	30	1.7	2.6	Full	30	Anti-clockwise	ATB	10°	7000
DT1943-QZ	Portable - Fast cut	190	30	1.7	2.6	Full	18	Anti-clockwise	ATB	20°	7000
DT1944-QZ	Portable - Framing	190	30	1.7	2.6	Full	24	Anti-clockwise	ATB	16°	7000
DT1945-QZ	Portable - General purpose	190	30	1.7	2.6	Full	40	Anti-clockwise	ATB	10°	7000
DT1954-QZ	Portable - Fast rip	235	30	1.7	2.6	Full	24	Anti-clockwise	ATB	20°	5500
DT1955-QZ	Portable - General purpose	235	30	1.7	2.6	Full	40	Anti-clockwise	ATB	10°	5500

PACKS

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT1965-QZ	165mm 3 pack (2x18T 1x 30T)	165	20	1.5	2.4	Full	18 30	Anti-clockwise	ATB	20°/10°	7000

CONSTRUCTION BLADES FOR STATIONARY SAWS



FEATURES

- Extremely robust, nail-resistant construction saw blades for the toughest requirements.
- Designed for use on stationary circular saws for cutting natural woods and composite materials such as formwork, they enable simple to good lateral and longitudinal cutting results.

FOR USE WITH
Stationary saws.



SINGLE PACKS

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Reduction Ring	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT1938-QZ	Stationary - Fast cut	184	16		1.7	2.6	Full	18	Clockwise	ATB	20°	7000
DT1939-QZ	Stationary - Framing	184	16		1.2	1.8	Thin	24	Clockwise	ATB	16°	7000
DT1940-QZ	Stationary - General purpose	184	16		1.7	2.6	Full	30	Clockwise	ATB	10°	7000
DT90251-QZ	Const. CSB 184x24T (20/16mm)	184	20	16	0.99	1.65	Thin	24	Anti-clockwise	ATB	18°	7000
DT90252-QZ	Const. CSB 184x36T (20/16mm)	184	20	16	0.99	1.65	Thin	36	Anti-clockwise	ATB	15°	7000
DT1952-QZ	Stationary - Fast rip	216	30		1.7	2.6	Full	24	Clockwise	ATB	-5°	7000
DT1953-QZ	Stationary - General purpose	216	30		1.7	2.6	Full	40	Clockwise	ATB	-5°	7000
DT1956-QZ	Stationary - Fast rip	250	30		2	3	Full	24	Clockwise	ATB	10°	6000
DT1957-QZ	Stationary - General purpose	250	30		2	3	Full	48	Clockwise	ATB	10°	6000
DT90249-QZ	Const. CSB 254x40T	254	30	16/25 /25.4	1.75	2.7	Std	40	Clockwise	ATB	7°	4800
DT90250-QZ	Const. CSB 254x60T	254	30	16	1.75	2.7	Std	60	Clockwise	ATB	7°	4800
DT1958-QZ	Stationary - Fast rip	305	30		2	3	Full	24	Clockwise	ATB	-5°	4800
DT1959-QZ	Stationary - General purpose	305	30		2	3	Full	48	Clockwise	ATB	10°	4800
DT1960-QZ	Stationary - Fine finish	305	30		2	3	Full	60	Clockwise	ATB	-5°	4800
DT1961-QZ	Stationary - Fast rip	315	30		2.2	3.2	Full	24	Clockwise	ATB	20°	4800

SETS

Cat. No.	Description	Blade Ø mm	Bore Ø mm	Reduction Ring	Blade thickness mm	Kerf thickness mm	Kerf Type	No of Teeth	Tooth Direction	Tooth Geometry	Tooth Angle	N MAX RPM
DT90253-QZ	2 pack 184x24/36T	184	20	16	0.99	1.65	Thin	24	Anti-clockwise	ATB	18°	7000
DT1962-QZ	216mm 3 pack (2X 24T / 1X 40T)	216	30		1.7	2.6	Full	24/40	Clockwise	ATB	-5°	7000
DT1963-QZ	250mm 3 pack (2X 24T / 1X 48T)	250	30		1.7	2.6	Full	24/48	Clockwise	ATB	10°	6000
DT1964-QZ	305mm 3 pack (1X 24T / 1X 48T / 1X 60T)	305	30		2	3	Full	24/48/60	Clockwise	ATB	10°/-5°	4800



MULTI MATERIAL CUTTING BLADES



APPLICATIONS

- A multi material blade designed to cut through abrasive materials such as fibre cement or laminate.
- Perfect for cutting through cement fibre board and other dense composite panels.
- In addition this blade performs extremely well on dozens of other applications including: laminated and melamine surfaces, soft and hardwoods, MDF, plywood and chipboard.

**FOR USE WITH**

Compatible with stationary and portable circular saws.



MULTI MATERIAL - SINGLE PACKS

Cat. No.	Ø Blade mm	Ø Bore mm	Reduction Ring	Blade thickness mm	Kerf thickness mm	Kerf Type	No of teeth	Tooth Direction	Tooth Geometry	Tooth angle	N MAX RPM
DT1470-QZ	160	20		1.4	1.8	Full	4	Anti-clockwise	FTG	12°	7000
DT1471-QZ	165	20		1.4	1.8	Full	4	Anti-clockwise	FTG	12°	7000
DT9025-QZ	184	20	16	1.4	1.8	Full	4	Anti-clockwise	FTG	12°	7000
DT1472-QZ	190	30		1.4	1.8	Full	4	Anti-clockwise	FTG	12°	7000
DT1473-QZ	216	30		1.5	2.0	Full	8	Clockwise	FTG	12°	7000
-QZ	250	30		1.6	2.2	Full	12	Clockwise	FTG	12°	6000
DT1475-QZ	305	30		1.8	2.4	Full	16	Clockwise	FTG	12°	4800

BISCUIT JOINTER BLADES

**FOR USE WITH**

Jointers.



SINGLE PACKS

Cat. No.	Description	Diameter mm	Thickness mm	Bore mm	No of teeth
DT1306-QZ	Straight cutters for DW682K / DW685K	102	4	22	12
DT1307-QZ	Straight cutters for DW685K	105	2	22	30

CIRCULAR SAW BLADES QUICK REFERENCE CHART - STATIONARY

																						
	Cat.No.	Blade/Bore mm	No. of teeth	Tooth Geometry	Tooth Angle	XR EXTREME® RUNTIME™, EXTREME® or DC	Cutting type	Hardwood	Wood	Reclaimed wood with nails	Soft wood	Plywood	Laminate	MDF	Veneer	Coated panels	Plastic	Aluminum	Metal/ Steel	Composite Decking	Fibre Cement	
184	DT1668	184/16	40	ATB	7°	2	FC	✓				✓	✓	✓								
	DT1669	184/16	24	ATB	7°	2	UU	✓				✓	✓	✓								
	DT1670	184/16	60	ATB	7°	2	FC					✓	✓	✓								
	DT1938	184/16	18	ATB	20°	2	EFC		✓	✓		✓	✓	✓								
	DT1939	184/16	24	ATB	16°	2	UU		✓	✓		✓	✓	✓								
	DT1940	184/16	24	ATB	10°	2	UU		✓	✓		✓	✓	✓								
	DT90251	184/20	24	ATB	18°	1	UU		✓	✓		✓	✓	✓								
	DT90252	184/20	36	ATB	15°	1	FC		✓	✓		✓	✓	✓								
	DT90256	184/20	40	FTG	12°	2	-														✓	
	DT90257	184/20	24	ATB	18°	2	UU	✓				✓	✓	✓								
DT90259	184/20	60	ATB	18°	2	FC	✓				✓	✓	✓									
DT90263	184/20	48	TCG	5°	2	FC									✓	✓	✓	✓				
210	DT99565	210/30	24	ATB+R	20°	3	UU	✓				✓	✓	✓								
	DT99566	210/30	36	ATB+R	20°	3	FC	✓				✓	✓	✓								
	DT99567	210/30	60	ATB+R	20°	3	XFC	✓				✓	✓	✓								
216	DT1473	216/30	8	FTG	12°	2	-														✓	
	DT1655	216/30	60	ATB	7°	1	EFC	✓	✓		✓	✓	✓	✓								
	DT1952	216/30	24	ATB	-5°	1	EFC		✓	✓	✓											
	DT1953	216/30	40	ATB	-5°	1	UU		✓	✓	✓											
	DT4286	216/30	80	TCG	-5°	2	XFC											✓				
	DT4310	216/30	24	ATB	-5°	2	FC	✓	✓		✓	✓	✓	✓								
	DT4320	216/30	48	ATB	-5°	2	XFC	✓	✓		✓	✓	✓	✓								
	DT4350	216/30	60	ATB	-5°	2	XFC	✓	✓		✓	✓	✓	✓								
	DT4370	216/30	60	TCG	-5°	2	XFC	✓	✓		✓	✓	✓	✓	✓	✓	✓					
	DT90262	216/30	60	ATB	7°	2	XFC	✓	✓		✓	✓	✓	✓	✓							
	DT99568	216/30	24	ATB+R	7°	3	UU	✓	✓			✓	✓	✓	✓							
	DT99569	216/30	36	ATB+254	7°	3	FC	✓				✓	✓	✓	✓							
DT99570	216/30	60	ATB+R	7°	3	XFC	✓				✓	✓	✓	✓								
250	DT1474	250/30	12	FTG	12°	2	-														✓	
	DT1915	250/30	60	TCG	-5°	1	XFC											✓				
	DT1956	250/30	24	ATB	10°	1	EFC		✓	✓	✓											
	DT1957	250/30	48	ATB	10°	1	UU		✓	✓	✓											
	DT4202	250/30	24	FTG	10°	2	EFC		✓		✓	✓		✓								
	DT4217	250/30	60	HG	10°	2	XFC									✓						
	DT4226	250/30	30	ATB	20°	2	UU	✓				✓	✓	✓								
	DT4282	250/30	96	TCG	-5°	2	XFC								✓	✓	✓	✓				
	DT4287	250/30	80	TCG	-5°	2	XFC								✓	✓	✓	✓				
	DT4301	250/30	24	FTG	10°	2	XFC	✓	✓		✓	✓	✓	✓								
	DT4311	250/30	24	FTG	10°	2	FC	✓	✓		✓	✓	✓	✓								
	DT4321	250/30	30	ATB	10°	2	FC	✓	✓		✓	✓	✓	✓								
	DT4322	250/30	40	ATB	10°	2	UU	✓				✓	✓	✓	✓							
	DT4323	250/30	48	ATB	20°	2	UU	✓				✓	✓	✓	✓							
	DT4345	250/30	50	HZ	10°	2	XFC								✓	✓	✓					
	DT4351	250/30	60	ATB	10°	2	FC	✓	✓		✓	✓	✓	✓								
	DT4352	250/30	60	TCG	-5°	2	XFC	✓	✓		✓	✓	✓	✓	✓	✓	✓					
	DT4353	250/30	80	ATB	10°	2	FC	✓	✓		✓	✓	✓	✓	✓							
	DT99571	250/30	24	ATB+R	7°	3	UU	✓	✓				✓	✓	✓							
	DT99572	250/30	36	ATB+R	7°	3	FC	✓	✓				✓	✓	✓							
DT99573	250/30	60	ATB+R	7°	3	XFC	✓	✓				✓	✓	✓								

1 = DeWALT Construction (DC) 2 = EXTREME® 3 = XR EXTREME RUNTIME ATB = Alternate Top Bevel ATB+R Alternate Top Bevel + Raker EFC = Extra Fast Cutting FC = Fine Cutting
FTG = Flat Top Grind HG = Hollow Ground TCG = Triple Chip Grind UU = Universal Use XFC = Extra Fine Cutting

CIRCULAR SAW BLADES QUICK REFERENCE CHART - PORTABLE

																						
	Cat.No.	Blade/Bore mm	No. of teeth	Tooth Geometry	Tooth Angle	XR EXTREME® RUNTIME®, EXTREME® DC or Elite	Cutting type	Hardwood	Wood	Reclaimed wood with nails	Soft wood	Plywood	Laminate	MDF	Veneer	Coated panels	Plastic	Aluminum	Metal/ Steel	Stainless steel	Fibre Cement	
136	DT1946	136/10TK*	16	ATB	20°	1	EFC		✓	✓	✓											
	DT1947	136/10TK*	24	ATB	20°	1	UU		✓	✓	✓											
140	DT1910	140/20	30	FTG	3°	1	FC											✓				
	DT1918	140/20	40	TCG	10°	1	EFC													✓		
152	DT1930	152/20	24	ATB	10°	1	UU		✓	✓	✓											
	DT1470	160/20	4	FTG	12°	2	-														✓	
160	DT1931	160/20	18	ATB	20°	1	EFC		✓	✓	✓											
	DT1932	160/20	30	ATB	10°	1	UU		✓	✓	✓											
	DT4057	160/20	36	ATB	10°	2	FC	✓				✓	✓	✓								
	DT4084	160/20	48	TCG	-5°	2	XFC								✓	✓	✓	✓				
165	DT1086	165/20	48	TCG	5°	2	FC	✓	✓			✓	✓	✓								
	DT1087	165/20	54	TCG	0°	2	EFC	✓	✓				✓	✓	✓	✓	✓					
	DT1088	165/20	54	TCG	-5°	2	EFC	✓	✓				✓	✓	✓	✓						
	DT1089	165/20	18	FTG	18°	2	UU	✓	✓		✓											
	DT1090	165/20	48	ATB	5°	2	FC	✓	✓													
	DT1091	165/20	40	ATB	-5°	2	FC	✓	✓				✓	✓	✓	✓						
	DT1471	165/20	4	FTG	12°	2	-														✓	
	DT1933	165/20	18	ATB	20°	1	EFC		✓	✓	✓											
	DT1934	165/20TK*	24	ATB	10°	1	UU		✓	✓	✓											
	DT1935	165/20	30	ATB	10°	1	UU		✓	✓	✓											
	DT1936	165/30	18	ATB	20°	1	EFC			✓	✓											
	DT1937	165/30	30	ATB	10°	1	UU		✓	✓	✓											
	DT1948	165/20TK*	16	ATB	20°	1	EFC		✓	✓	✓											
	DT1949	165/20TK*	24	ATB	20°	1	UU		✓	✓	✓											
	DT1950	165/20TK*	40	ATB	20°	1	FC		✓	✓	✓							✓				
	184	DT4026	165/20	24	ATB	25°	2	UU	✓				✓	✓	✓							
DT4027		165/30	24	ATB	25°	2	UU	✓				✓	✓	✓								
DT4087		165/20	48	TCG	-5°	2	FC	✓	✓				✓	✓	✓							
DT4088		165/30	48	TCG	-5°	2	XFC								✓	✓	✓	✓				
DT10300		165/20	24	ATB	18°	2	UU	✓				✓	✓	✓								
DT10301		165/20	40	ATB	18°	2	FC	✓	✓			✓	✓	✓								
DT10624		165/20	24	ATB	18°	2	UU	✓				✓	✓	✓								
DT10640		165/20	40	ATB	18°	2	FC	✓				✓	✓	✓								
DT99560		165/20	24	ATB+R	10°	3	UU	✓	✓		✓	✓	✓	✓								
DT99561		165/20	42	ATB+R	10°	3	FC	✓	✓		✓	✓		✓								
DT10624		165/20TK*	24	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
DT10640		165/20TK*	40	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
184		DT1941	184/30	18	ATB	20°	1	EFC		✓	✓	✓										
		DT1942	184/30	30	ATB	10°	1	UU		✓	✓	✓										
		DT1951	184/20TK*	24	ATB	18°	1	UU		✓	✓	✓										
		DT4031	184/16	28	ATB	25°	2	UU	✓				✓	✓	✓							
	DT4063	184/16	40	ATB	10°	2	FC	✓				✓	✓	✓								
	DT4092	184/16	48	TCG	-5°	2	XFC								✓	✓	✓	✓				
	DT10302	184/16	24	ATB	18°	2	UU	✓				✓	✓	✓								
	DT10303	184/16	40	ATB	18°	2	FC	✓				✓	✓	✓								
	DT99577	184/20	24	ATB+R	25°	3	UU															
	DT99578	184/20	36	ATB+R	25°	3	FC															
	DT99579	184/20	60	ATB+R	25°	3	XFC															
	DT10302	184/16TK*	24	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
	DT10303	184/16TK*	40	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
	DT1670	184/16TK*	60	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
	190	DT1472	190/30	4	FTG	12°	2	-														✓
		DT1912	190/30	48	TCG	-5°	1	XFC											✓			
DT1943		190/30	18	ATB	20°	1	EFC		✓	✓	✓											
DT1944		190/30TK*	24	ATB	16°	1	UU		✓	✓	✓											
DT1945		190/30	40	ATB	10°	1	UU		✓	✓	✓											
DT4033		190/30	28	ATB	10°	2	UU	✓				✓	✓	✓								
DT4064		190/30	40	ATB	10°	2	FC	✓				✓	✓	✓								
DT4094		190/30	48	TCG	-5°	2	XFC								✓	✓	✓	✓				
DT10304		190/30	24	ATB	18°	2	UU	✓				✓	✓	✓				✓				
DT99562		190/30	24	ATB+R	25°	3	UU	✓			✓	✓	✓	✓								
DT99563		190/30	36	ATB+R	25°	3	FC	✓			✓	✓	✓	✓								
DT10304		190/30TK*	24	ATB	18°	4	UU	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	
235		DT1954	235/30	24	ATB	20°	1	EFC	✓				✓	✓	✓							
		DT1955	235/30	40	ATB	10°	1	UU					✓	✓	✓							
		DT1913	235/30	48	TCG	-5°	1	XFC											✓			
		DT4036	235/30	28	ATB	25°	2	UU	✓				✓	✓	✓							
	DT4067	235/30	40	ATB	10°	2	FC	✓				✓	✓	✓								
DT4097	235/30	56	TCG	-5°	2	XFC									✓	✓	✓	✓				

1 = DeWALT Construction (DC) 2 = EXTREME® 3 = XR EXTREME RUNTIME 4 = Elite Series ATB = Alternate Top Bevel ATB+R Alternate Top Bevel + Raker EFC = Extra Fast Cutting FC = Fine Cutting
FTG = Flat Top Grind HG = Hollow Ground TCG = Triple Chip Grind UU = Universal Use XFC = Extra Fine Cutting * Thin Kerf



JIGSAW BLADES

Our range of jigsaw blades ensure clean lines with every cut and they're built to last. No other jigsaw blade is Guaranteed Tough®.



EXTREME
PRECISION CUT

For increased cut control, burr free cutting, faster cutting, long life and durability.



EXTREME **PROGRESSOR**

For increased durability and performance.



HIGH PERFORMANCE

For high durability and superior cutting results in a variety of materials.

BLADE SELECTION




CROSSED TEETH
For rough and fast cuts in hard and soft wood, plastic and aluminum.



WAVY TEETH
For fine and clean cuts in hardwood and softwood, aluminum, non-ferrous metals and plastics.



INCLINED SHARPENED, CROSSED TEETH
For fast cuts in hardwood and softwood.



STRAIGHT TEETH
For clean cuts in all wood and plastic.

EXTREME

JIGSAW BLADES

PRECISION CUT

PATENTED PLUNGE POINT TIP

Specially developed hardened, aggressive front teeth enable improved, low kick-back penetration with easier chip removal, when plunge cutting

DT2205 HCS

WOOD

PREMIUM STEEL

For maximum durability and accessory life, reinforced blade body for the best control and precision.

CONICAL BLADE BODY

Better control and clean cutting profile with no burning of work pieces, even in narrow curve cuts

TOOTH SPACING AND GEOMETRY

Extremely sharp teeth and extra tooth depth for improved chip removal. Reduced slippage and increased cutting speed. Improved control and extended performance life.



FOR USE WITH
Jigsaws (corded and cordless).



PACKS

Cat. No.	Blade Material	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2205-QZ	HCS	Clean, precise and fast cuts in wood, plywood and joiner plates, laminates as well as plastic up to 30mm thick.	100	75	2.5	30	T101B	5
DT2207-QZ	HCS	Extremely clean, burr-free cuts in laminates and hardwood up to 40mm thick.	100	75	2.5	40	T101BR	5
DT2209-QZ	HCS	Extremely long durability (impact toothing). Clean, precise and fast cuts in wood, plywood and furniture boards, laminates and plastics to 60mm thick.	100	75	4.2	60	T101D	5
DT2210-QZ	HCS	Clean, fast accurate cutting in wood, chipboard, plywood, laminates and plastic up to 60mm thick.	100	75	4.2	60	T101D	20
DT2211-QZ	HCS	Simple, precise cuts in wood, plywood, blockboard, laminates and plastic up to 60mm thick.	100	75	3.1	60	T111C	5
DT2212-QZ	HCS	Coarse, accurate cutting in wood, chipboard, plywood, laminates and plastic up to 60mm thick.	100	75	3.1	60	T111C	20
DT2213-QZ	HCS	Fast, precise cuts in wood, plywood, blockboard, laminates and plastic up to 60mm thick.	100	75	4.2	60	T144D	5
DT2214-QZ	HCS	Fast, accurate cutting in wood, chipboard, plywood, laminates and plastic up to 60mm thick.	100	75	4.2	60	T144D	20
DT2216-QZ	HCS	Precise, clean and fast curve cuts in wood, plywood and blockboards, laminates up to 15mm strength and NOT suitable for plunge cuts.	82	54	2	15	T119B0	5
DT2217-QZ	BIM	Clean, fast and precise cuts in hard woods, plywood and blockboards, laminates and plastics up to 30mm thick. Extremely long durability.	100	75	2.5	30	T101BF	3
DT2218-QZ	BIM	Clean, fast and precise cuts in hard woods, plywood and blockboards, laminates and plastics up to 60mm thick. Extremely long durability.	100	75	4	60	T101DF	3
DT2219-QZ	BIM	Extremely clean, burr-free cuts in laminates and hardwood up to 40mm thick. Extremely long durability (impact toothing).	100	75	2.5	40	T101BRF	3
DT2220-QZ	BIM	Fast, precise cuts in hard woods, plywood and furniture boards, laminates and plastics to 60mm thickness. Extremely long durability.	100	75	4	60	T144DF	3
DT2221-QZ	BIM	Extra long life. For fast accurate cutting in aluminium up to 15mm and plastics up to 30mm	100	75	3	30	T127DF	3

SETS

Cat. No.	Description	Contents
DT2296-QZ	10 piece set	DT2209 x2 / DT2205 x2 / DT2213 x2 DT2216 x1 / DT2218 x1 / DT2217 x1 / DT2220 x1
DT2298-QZ	14 piece set	DT2209 x4 / DT2205 x4 / DT2213 x2 DT2216 x1 / DT2218 x1 / DT2217 x1 / DT2220 x1

EXTREME® BI-METAL FOR METAL



- FEATURES**
- EXTREME® bi-metal jaw saw blades offer an extended durability in non-ferrous and ferro-alloyed metals.
 - Coolant lubricant recommended: cutting oil, emulsion, lubricant / cooling grease (for aluminum, mild steel).

FOR USE WITH
Jigsaws (corded and cordless).



PACKS

Cat. No.	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2150-QZ	Quick cuts in steel up to 3mm, also in aluminum, copper, brass and others non-ferrous metals up to 3mm thickness	86	61	1	3	T118AF	3
DT2154-QZ	Fast cuts in steel up to 6mm, also in aluminum, copper, brass and others non-ferrous metals up to 5mm thickness	76	51	1.8	6	T118BF	3
DT2156-QZ	Fast cuts in sheet metal up to 2.5mm	76	51	0.8	2.5	T118GF	3
DT2054-QZ	Curved cuts in metal and thin steel plate	82	55	1.5	4	T118OF	5



EXTREME® BI-METAL FOR WOOD AND METAL



FOR USE WITH
Jigsaws (corded and cordless).



PACKS


Cat. No.	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2059-QZ	For applications in wood up to 65mm thick as well as metal pipes and profiles of 3-10mm thick. Particularly suitable for cuts with varying material thickness (pull).	132	101	2.4 - 5	Wood 65, metal 10	T345XF	5



EXTREME[®] SPECIALIST JIGSAW BLADES



FOR USE WITH
Jigsaws (corded and cordless).



PACKS

Cat. No.	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2055-QZ	Tungsten carbide tipped blade (TCT) for stainless steel sheet metal (Inox) from 1.5-5mm thick.	82	55	1.4	5	T118EHM	1
DT2080-QZ	Clean, straight cuts in all laminates up to 15mm thickness.	82	59	1.7	15	T101BIF	5
DT2081-QZ	Clean curves in all laminates up to 15mm thick.	82	59	1.4	15	T101AOF	3
DT2101-QZ	Stitch saw blade with HM cutting edge for cuts in stainless steel (INOX) and structural steel 1.2-3 mm.	76	47	1	3	T118AHM	1
DT2102-QZ	Tungsten carbide grit blade for ceramic tiles, fibreglass and reinforced plastic up to 10mm thick.	76	50		10	T130RF	1
DT2056-QZ	Carbide-tipped teeth for cuts in GRP and the like. Plastics up to 65mm, plaster as well as cement-bound board materials (up to 80mm).	132	100	4.3	65	T341HM	1
DT2103-QZ	Carbide-tipped teeth for cuts in GRP, such as plastics up to 20mm as well as in cement-bonded board materials.	100	69	4.3	20	T141HM	1
DT2201-QZ	Knife blade for soft materials, rubber, foam & polystyrene up to 100mm thick.	152	125		100	T313AW	5
DT2084-QZ	Straight and curved sections in sandwich materials up to 120mm and medium-strength steel plates.	180	148	2	120	T718BF	5

HSS BLADES FOR METAL




FEATURES

- HSS jigsaw blades offer high durability and best cutting results in steel and non-ferrous metals.
- Consisting of fully hardened, high-speed cut-to-length steel (HSS).
- Coolant lubricant: cutting oil, emulsion, lubricating / cooling grease (for aluminum, mild steel).

FOR USE WITH

Jigsaws (corded and cordless).



PACKS

Cat. No.	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2160-QZ	Straight cuts in steel sheet and non-ferrous metals	76	50	1.2	4	T118A	5
DT2161-QZ	Straight cuts in solid material (Steel and non-ferrous metals)	76	50	2	6	T118B	5
DT2162-QZ	Straight cuts in very thin steel plate and non-ferrous metals	76	50	0.7	2	T118G	5
DT2085-QZ	Straight cuts in thin steel sheet, non-ferrous metals 1.5-3mm and aluminum up to 65mm	132	108	1.2	3	T318A	5
DT2163-QZ	Fast, straight cuts in aluminum up to 15mm, steel and non-ferrous metals 3-6mm	100	72	3	ALU 15, Metal 6, Plastic 30	T127D	5
DT2058-QZ	For thin to thick sheets, thin tubes and profiles as well as aluminum up to a thickness of 1.5-10mm	100	74	1.2 - 2.6	10	T123X	5

SETS

Cat. No.	Description	Contents
DT2290-QZ	10 piece jigsaw set - wood cutting	DT2165 x2 / DT2050 x1 / DT2168 x1 / DT2177 x2 DT2166 x2 / DT2075 x2 (Bosch equivalent T101B / T119B0 / T101A0 / T111C / T144D / T144DP)
DT2292-QZ	10 piece set HSS stitch saws for metal	DT2172 x2 Straight cuts in very thin steel sheet and non-metal DT2160 x3 Straight cuts in steel sheet and non-metal DT2161 x2 Straight cuts in solid material such as steel and non-metal DT2163 x2 Fast, straight cuts in aluminum, steel, non-ferrous metal and PVC DT2054 x1 BiM - Curve cuts in metal and thin steel sheet DT2054 x1 BiM - Curve cuts in metal and thin steel sheet
DT2294-QZ	10 Piece jigsaw set - wood / metal cutting	DT2165 x2 / DT2050 x2 / DT2163 x2 DT2177 x2 / DT2160 x2 (Bosch equivalent T101B / T119B0 / T127D / T111C / T118A)



HCS CARBON STEEL BLADES FOR WOOD



FEATURES

- HCS jigsaw blades offer high durability and best cutting results
- Consisting of flexible carbon steel (HCS)
- For use in wood, plastic-coated wood fibre boards and plastics.

FOR USE WITH

Jigsaws (corded and cordless).



PACKS

Cat. No.	Application	Total length mm	Working length mm	Teeth pitch mm	Max. cutting depth mm	Bosch Cat. No.	Pack Qty.
DT2050-QZ	Especially for curved cuts in softwood, plywood, plywood and fibre boards.	76	48	2	15	T119B0	5
DT2052-QZ	Especially for curved cuts in softwood, plywood, plywood and fibre boards.	116	87	3	65	T301CD	5
DT2053-QZ	By reverse gear splinter-free cuts in wood, chipboard, plywood, fibreboard and laminate (bevel).	100	73	2.5	40	T101BR	5
DT2164-QZ	Fast, straight cuts in wood, and wood materials.	100	68	4	60	T101D	5
DT2165-QZ	Straight, fine cuts in wood, wood materials and plastics.	100	73	2.5	30	T101B	5
DT2168-QZ	Fine curve cuts in softwood, plywood and coated boards.	76	47	1.4	30	T101AO	5
DT2049-QZ	Fast, extra straight cuts in wood and chipboard.	100	68	4	60	T101DP	5
DT2051-QZ	Fast, rough cuts in wood, chipboard, plywood and fibre boards.	132	100	4	85	T301DL	5
DT2077-QZ	Fast curve cuts in wood.	100	70	4	60	T244D	5
DT2166-QZ	Fast, straight cuts in wood, chipboard, carpentry and fibre boards.	100	68	4	60	T144D	5
DT2186-QZ	Fast, straight cuts in wood, chipboard, plywood, laminated chipboard and plastic up to 60mm thick.	100	68	4	60	T144D	100
DT2169-QZ	Fast, straight cuts in wood and wood materials.	152	116	4	100	T344D	5
DT2048-QZ	For straight and cuts at accurate angles in wood, chipboard, carpentry and fibre boards	116	87	2.5	65	T301BCP	5
DT2075-QZ	Fast, extra straight and angular cuts in wood, chipboard, carpentry and fibre boards.	100	68	4	60	T144DP	5
DT2076-QZ	Fast, extra straight and angular cuts in wood, chipboard, carpentry and fibre boards.	152	116	4	100	T344DP	5
DT2057-QZ	Quick cuts in varying thicknesses in wood, chipboard, joiner and fibre boards up to 65mm.	116	91	2-3	65	T234X	5
DT2167-QZ	Fast, rough cuts in thick wooden planks up to 120mm thickness.	180	155	4	120	T744D	5
DT2060-QZ	Straight, clean cuts in wood, chipboard, plywood, fibre boards and plastics, with U-schank	100	78	2.5	30	U101B	5
DT2061-QZ	Fast cuts in wood and chipboard, with U-schank.	100	76	4	60	U144D	5
DT2074-QZ	Clean, extra straight and angled cuts in wood, plywood, carpentry and fibre boards for border flush cuts	112	74	2.3	65		1

JIGSAW BLADES - QUICK REFERENCE CHART

		Wood Blades						
		High Carbon Steel						
DOC	Pitch	Laminates / Hardwood	Curved cuts in wood	Wood	Wood / Plywood / Laminates / Plastic	Aluminium / Plastics	Softwood / Plywood / Fibre Boards	Wood / Chipboard / Plywood / Laminate / Fibre Board
15mm	15mm				DT2205			
15mm	2.0mm				DT2216		DT2050	
30mm	1.4mm						DT2168	
30mm	2.5mm				DT2217, DT2165			DT2060 (U Shank)
30mm	3.0mm					DT2221		
40mm	2.5mm	DT2207, DT2219						DT2053
60mm	3.1mm				DT2211, DT2212			
60mm	4.0mm		DT2077	DT2164, DT2049, DT2061 (U Shank)	DT2218, DT2220			DT2166, DT2075
60mm	4.2mm				DT2209, DT2210, DT2213, DT2214, DT2186			
65mm	2mm & 3mm							DT2057
65mm	2.3mm							DT2074 (Flush cut)
65mm	2.5mm							DT2048
65mm	3.0mm						DT2052	
85mm	4.0mm							DT2051
100mm	4.0mm			DT2169				DT2076
120mm	4.0mm			DT2167				

		Metal Blades			
		Bi-Metal	HSS		
DOC	Pitch	Steel / Non-Ferrous	Steel / Non-Ferrous	Aluminium / Non Ferrous	Multi Material
2.0mm	0.7mm		DT2162		
3.0mm	1.2mm			DT2085	
3.0mm	1.0mm	DT2150			
2.5mm	0.8mm	DT2156			
4.0mm	1.54mm	DT2054			
6.0mm	1.8mm	DT2154			
4.0mm	1.2mm		DT2160		
6.0mm	2.0mm		DT2161		
30mm	3mm				Alu 15mm, Metal, 6mm, Plastic 30mm

		Specialist Blades						
		TCT	TCT	Bi-Metal	TC Grit	Knife Blade	Bi-Metal	Bi-Metal
DOC	Pitch	GRP / Plastic / Plaster	Inox	Laminates	Ceramic / Fibreglass	Soft Materials / Rubber / Foam / Polystyrene	Sandwich Materials / Steel	Wood / Metal
3.0mm	1.0mm		DT2101					
5.0mm	1.4mm		DT2055					
10mm	n/a							
15mm	1.4mm			DT2081				
15mm	1.7mm			DT2080				
20mm	4.3mm	DT2103						
65/10mm	2.4-5mm							DT2059 (Wood 65mm / Metal 10mm)
65mm	4.3mm	DT2056						
100mm	n/a					DT2201		
120mm	2.0mm						DT2084	



RECIPROCATING AND ALLIGATOR® SAW BLADES

These high quality, durable and long lasting blades make quick work of metal working, woodworking and other demanding cutting applications.




EXTREME® 2x LONG LIFE

For metal and wood.



EXTREME® CARBIDE

For metal and wood.



XR EXTREME RUNTIME

Optimised for cordless tools. For metal and wood.




BI-METAL

Constructed with a HCS body and HSS cutting edge for flexibility and durability.



SPECIALIST MATERIAL BLADES

For wood, hollow brick and insulation materials.



ALLIGATOR® SAW BLADES

Our range of Alligator® saw blades offers versatility, high performance and reliability.

BLADE SELECTION AND FITTING




KNIFE BLADE DESIGN

For clean cuts in fibre insulation, polystyrene, cardboard, carpet, leather and rubber.



CROSSED TEETH

For rough and fast cuts in hard and soft wood, plastic and aluminum.




WAVY TEETH

For fine and clean cuts in hardwood and softwood, aluminum, non-ferrous metals and plastics.



INCLINED SHARPENED, CROSSED TEETH

For fast cuts in hardwood and softwood.



STRAIGHT TEETH

For clean cuts in all wood and plastic.

UNIVERSAL FITTING



Reinforced blade body with aggressive angle ensures high stability and long life (reciprocating saw blades).

EXTREME® BI-METAL RECIPROCATING SAW BLADES

APPLICATION PICTOGRAMS
To identify the application areas of each blade.

TOUGHCOAT™
Heat resistant coating prevents heat build up to maximise blade life

BI-METAL CONSTRUCTION
Combining an HCS body for strength with HSS teeth for sharpness

OPTIMISED TOOTH GEOMETRY
For fast effective cutting with increased cobalt content for longer cutting life.

FOR USE WITH
Corded and cordless reciprocating saws.

PACKS					
Cat. No.	Application	Length mm	Pitch mm	TPI	Pack Qty.
DT2407L-QZ	For extremely hard and abrasive metals	152	1.4-1.8	14-18	5
DT2408L-QZ	For extremely hard and abrasive metals	203	1.4-1.8	14-18	5
DT2409L-QZ	For extremely hard and abrasive metals	305	1.4-1.8	14-18	5
DT2300L-QZ	For fast, rough cuts in hard and soft wood with nails, with Plunge Point tip	152	4.2	6	5
DT2307L-QZ	For fast, rough cuts in hard and soft wood with nails, with Plunge Point tip	228	4.2	6	5
DT2314L-QZ	For fast, rough cuts in hard and soft wood with nails, with Plunge Point tip	305	4.2	6	5
DT2315L-QZ	For fast cuts in multi-materials	100	2.5	10	5
DT2301L-QZ	For fast cuts in multi-materials	152	2.5	10	5
DT2308L-QZ	For fast cuts in multi-materials	228	2.5	10	5
DT2316L-QZ	For fast cuts in multi-materials	305	2.5	10	5

BULK PACKS		
Cat. No.	Description	Pack Qty.
DT2491-QZ	DT2307L-QZ x25	25
DT2492-QZ	DT2308L-QZ x25	25

SETS			
Cat. No.	Description	Contents	Pack Qty.
DT2440L-QZ	6 Piece EXTREME® reciprocating Blade Set	DT2300L x1 / DT2301L x1 / DT2307L x1 / DT2308L x1 / DT2315L x1 / DT2407L x1	6
DT2443L-QZ	8 Piece EXTREME® reciprocating Blade Set	DT2300L x3 / DT2407L x3 / DT2308L x1 / DT2408L x1	8
DT2441L-QZ	12 Piece EXTREME® reciprocating Blade Set	DT2300L x2 / DT2301L x2 / DT2307L x2 / DT2308L x2 / DT2315L x2 / DT2407L x1 / DT2408L x1	12

EXTREME® CARBIDE RECIPROCATING SAW BLADES

FEATURES

- FAST MATERIAL REMOVAL. Larger gullets remove material more quickly*, decreasing cutting time.
- FAST CUTS IN DEMANDING DEMOLITION APPLICATIONS
- Titanium coating makes teeth more wear-resistant so they stay sharp for 2x faster* cuts.
- STANDS UP TO TOUGH APPLICATIONS. Tall and thick blade profile adds durability and minimises blade breaks.
- ENGINEERED FOR PERFORMANCE. Each tooth is precision ground to cut through a wide range of metals and nail embedded wood.
- UP TO 10X LONGER LIFE*. High performance carbides are welded to the cutting edge for durability and to help prevent tooth loss.

*Compared to DeWALT bi-metal blades

FOR USE WITH
Corded and cordless reciprocating saws.

PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Pack Qty.
DT20440-QZ	Carbide Reciprocating Wood Nails	152	4.2	6	1
DT20439-QZ	Carbide Reciprocating Wood Nails	230	4.2	6	1
DT20438-QZ	Carbide Reciprocating Wood Nails	305	1.4-1.8	6	1
DT20437-QZ	Carbide Reciprocating Metal	152	1.4-1.8	8	1
DT20436-QZ	Carbide Reciprocating Metal	102	1.4-1.8	8	1
DT20435-QZ	Carbide Reciprocating Metal	230	1.4-1.8	8	1

10x LONG LIFE* **2x FASTER**

XR EXTREME RUNTIME RECIPROCATING SAW BLADES

FEATURES

- Designed for cordless tools to maximise battery life and runtime. Ideally suited for FlexVolt as part of the increased power and runtime story.
- High efficiency design to achieve more cuts per charge.
- Full range - wood and metal cutting saw blades.
- Variable tooth design (increase blade efficiency).
- ToughCoat™ reduces heat and prolongs blade life.
- Up to 2x runtime.
- Up to 2x longer life.

FOR USE WITH
XR FlexVolt, other corded and cordless reciprocating saws.

PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Pack Qty.
DT99554-QZ	For energy efficient, fast, cutting in hard and soft wood with nails	152	4.2	6	5
DT99555-QZ	For energy efficient, fast, cutting in hard and soft wood with nails	230	4.2	6	5
DT99553-QZ	For energy efficient cutting in extremely hard and abrasive metals	152	1.4-1.8	14-18	5
DT99552-QZ	For energy efficient cutting in extremely hard and abrasive metals	230	1.4-1.8	14-18	5

SETS

Cat. No.	Description	Contents	Pack Qty.
DT99550-QZ	13 piece XR recip blade set	DT99552 x2 / DT99553 x4 / DT99554 x5 / DT99555 x2	13
DT99551-QZ	8 piece XR recip blade set	DT99552 x1 / DT99553 x3 / DT99554 x3 / DT99555 x1	8

BI-METAL RECIPROCATING SAW BLADES FOR METAL



FEATURES

- Bi-metal construction, as a combination of HCS bodies and cobalt-alloyed HSS-cutting.
- Aggressive tooth geometry with a special angle for a fast and effective removal of material, especially for tensile and abrasive metals.
- Ideal for demolition work.

FOR USE WITH

Reciprocating saws (corded and cordless).



HEAVY DUTY METAL

UP TO 50% LONGER LIFE*

Patented tooth forms optimize chip removal for efficient cutting and long life



STRAIGHT CUTS

Tall blade profile provides straight cuts in heavy metal cutting applications



PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Bosch Cat. No.	Pack Qty.
DT2385-QZ	Fine cuts in steel sheet, pipes and profiles up to 1.5mm	152	1.1	23	S922AF	5
DT2384-QZ	Fast cuts in steel sheet, pipes and profiles up to 3mm.	152	1.4	18	S1122EF	5
DT2354-QZ	Fast cuts in steel sheet, pipes and profiles up to 3mm.	203	1.4	18	S1122EF	5
DT2361-QZ	Fast cuts in metals, sheet metal, pipes and profiles (3-8mm).	152	1.8	14	S922BF	5
DT2353-QZ	Fast cuts in metals, sheet metal, pipes and profiles (3-8mm).	203	1.8	14	S1025BF	5
DT2323-QZ	Fast cuts in metals, sheet metal, pipes and profiles	203	1.8	14	S1022BF	100
DT2404-QZ	Progressor blade for different material thicknesses. Thin to thick sheet metal 1-8mm Thin to thick metal profiles 5-100mm	150	1.4- 3.35	8-18	S123XF	5

Cat. No.	Application	L x W x Thickness (in)	L x W x Thickness (mm)	Tpi	Pack Qty.
DT90384-QZ	Thick Metal 3/16" – 1/2"	6 x 1 x .042	152 x 25 x 1.07	10	5
DT90386-QZ	4.8mm – 12.7mm	9 x 1 x .042	228 x 25 x 1.07	10	5
DT90389-QZ		12 x 1 x .042	304 x 25 x 1.07	10	5
DT90385-QZ	Medium– Thick Metal 3/32" – 3/8"	6 x 1 x .042	152 x 25 x 1.07	14	5
DT90387-QZ	2.4mm – 9.5mm	9 x 1 x .042	228 x 25 x 1.07	14	5
DT90390-QZ		12 x 1 x .042	304 x 25 x 1.07	14	5
DT90388-QZ	Medium Metal 1/16" – 1/4"	9 x 1 x .042	228 x 25 x 1.07	18	5
DT90391-QZ	1.6mm – 6.4mm	12 X 1 X .042	304 X 25 X 1.07	18	5

BI-METAL RECIPROCATING SAW BLADES FOR WOOD



FEATURES

- Bi-metal construction, as a combination of HCS bodies and cobalt-alloyed HSS-cutting.
- Aggressive tooth geometry with a special angle for a fast and effective removal of material, especially for tensile and abrasive metals.
- Ideal for demolition work.

FOR USE WITH

Reciprocating saws (corded and cordless).



DEMOLITION

UP TO 50% LONGER LIFE*

Patented tooth forms optimize chip removal for efficient cutting and long life



DURABLE BLADE DESIGN

Bi-metal construction delivers blade flexibility and a long lasting cutting edge



PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Bosch Cat. No.	Pack Qty.
DT2351-QZ	Fine, fast curve cuts in wood and plastic. Special Plunge Point tip for fast and accurate plunge cutting into wood materials.	152	4.2	6	S611DF	5
DT2359-QZ	Fast cuts in wood with nails and hard plastic. Newly developed, patented Plunge Point tip for fast and accurate plunge cutting into wood materials.	152	4.2	6	S611VF	5
DT2349-QZ	Fast cuts in wood with nails and hard plastic. Newly developed, patented Plunge Point tip for fast and accurate plunge cutting into wood materials.	228	4.2	6	S1111VF	5
DT2320-QZ	Fast cuts in wood with nails and tough plastics. Plunge Point tip for fast and accurate plunge cutting into wood materials.	228	4.2	6	S1111VF	100
DT2350-QZ	Fast cuts in wood with nails and hard plastic. Newly developed, patented Plunge Point tip for fast and accurate plunge cutting into wood materials.	305	4.2	6	S1411VF	5

Cat. No.	Application	L x W x Thickness (in)	L x W x Thickness (mm)	TPI	Pack Qty.
DT90380-QZ	Demolition Nail Embedded Wood	152 x 25 x 1.6	6 x 1 x .062	6	5
DT90381-QZ		228 x 25 x 1.6	9 x 1 x .062	6	5
DT90382-QZ		304 x 25 x 1.6	12 x 1 x .062	6	5

BI-METAL RECIPROCATING SAW BLADES FOR UNIVERSAL USE



FEATURES

- Bi-metal construction, as a combination of HCS body and cobalt-alloyed HSS cutting.
- Cobalt-alloyed M2 HSS cutting edges for increased wear resistance.
- Reinforced tooth shoulder for improved stability.

FOR USE WITH

Reciprocating saws (corded and cordless).



UP TO 50% LONGER LIFE*

Patented tooth forms optimize chip removal for efficient cutting and long life

Excludes DT2356-QZ



PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Bosch Cat. No.	Pack Qty.
DT2348-QZ	For sandwich materials up to 100mm, metal up to 10mm	152	1.8-2.5	10-14	S922VF	5
DT2387-QZ	For sandwich materials up to 175mm, metal up to 10mm	203	1.8-2.5	10-14	S1122VF	5
DT2355-QZ	For sandwich materials up to 250mm, metal up to 10mm	305	1.8-2.5	10-14	S1222VF	5
DT2345-QZ	Universal use in wood, wood with nails, aluminum and fiberglass. Ideal for use in battery-powered devices.	152	2.5	10	S922VF	5
DT2406-QZ	Progressor blade for different material thicknesses. wood with nails/metal, chipboard 5-150mm sheet metal, aluminium profiles 3-18mm plastic, fibre glass, reinforced plastic profiles 5-150mm	203	2.4-4.6	5-10	S3456XF	5

Cat. No.	Application	L x W x Thickness (in)	L x W x Thickness (mm)	TPI	Pack Qty.
DT2344-QZ	PVC and Clean Wood	6 x 3/4 x .035	152 x 19 x .9	6	5
DT90383-QZ	Nail Embedded Wood	8 x 3/4 x .050	203 x 19 x 1.3	10	5

BULK PACKS

Cat. No.	Description	Pack Qty.
DT2490-QZ	DT2406-QZ x25	25

HCS RECIPROCATING SAWS BLADES FOR WOOD



FEATURES

- Highly flexible carbon steel (HCS).
- For soft wood, wood materials, plastics and other soft materials
- Universal shank 1/2".

FOR USE WITH

Reciprocating saws (corded and cordless).



PACKS

Cat. No.	Application	Length mm	Pitch mm	TPI	Bosch Cat. No.	Pack Qty.
DT2362-QZ	Fine, fast curve cuts in wood and plastics.	152	4.2	6	S611D	5
DT2363-QZ	Construction wood 6-150mm Chipboard and MDF 6-60mm Plywood, plastic 6-150mm Wooden walls up to 175mm Blade thickness 1.25mm.	228	4.2	6	S1544D	5
DT2364-QZ	Fine, fast cuts in wood and plastics.	305	4.2	6	S1344D	5
DT2402-QZ	Progressor blade for different Material thicknesses. Construction timber 6-150mm Chipboard and MDF 6-60mm Plywood, plastic 6-150mm Wooden panels up to 175mm	203	2.4-4	6-10	S2345X	5
DT2352-QZ	For rough wood without nails 15-190mm Living wood and for grouting up to 190mm Firewood 15-190mm Sheet thickness 1.5mm	240	5 - 6.5	4-5	S1531L	5
DT2432-QZ	For rough wood without nails 20-250mm Living wood and for grooving up to 250mm Leaf thickness 1.25mm	305	8.5	3	S1617K	5

BULK PACKS

Cat. No.	Description	Pack Qty.
DT2493-QZ	DT2352-QZ x25	25

SETS

Cat. No.	Description	Contents	Pack Qty.
DT2442-QZ	8 piece recip set	DT2301-QZ x2 / DT2303-QZ x2 / DT2349-QZ x2 DT2353-QZ x2	8
DT2444-QZ	6 piece recip set	DT2345-QZ x2 / DT2349-QZ x2 / DT2353-QZ x2	6
DT2445-QZ	12 piece recip set	DT2345-QZ x1 / DT2349-QZ x3 / DT2359-QZ x2 DT2353-QZ x3 / DT2361-QZ x3	12

SPECIALIST MATERIAL SAW BLADES



FOR USE WITH
Reciprocating saws (corded and cordless).



LONG LIFE IN ABRASIVE MATERIALS
High performance carbides cut through hard materials like fibre cement, brick, tile, and fibreglass

PACKS

Cat. No.	Application	Length mm	Pitch	TPI	Bosch Cat. No.	Pack Qty.
DT2356-QZ	Bi-Metal blade for cutting plasterboard.	152	1.8	14	S628DF	5
DT2333-QZ	Wear resistant carbide grit edged blade for cutting light masonry blocks, bricks, abrasive materials, ceramics, fibreglass, mild steel and wood with nails.	228	2	13	S1130RIFF	1
DT2335-QZ	Tungsten carbide toothed blade for cutting light masonry blocks, bricks, abrasive materials.	235	1	25		1
DT2400-QZ	Bi-metal reciprocating saw blade for pallet repair, wood with nails / metal 5-175mm, metal sheets, metal pipes, aluminum profiles 3-12mm, especially for flexible flush cuts, blade thickness 0.9mm.	225	2.5	10	S1122HF	100
DT2420-QZ	Tungsten carbide tipped blade for cutting areated concrete, red brick and fibre cement up to 150mm.	240	12.7	2	S1543HM	1
DT2421-QZ	Tungsten carbide tipped blade for cutting areated concrete, red brick and fibre cement up to 250mm.	305	12.7	2	S1243HM	1
DT2422-QZ	Aerated concrete, brick and fibre cement to 365mm, blade thickness 1.5mm.	457	12.7	2	S2243HM	1

Cat. No.	Application	L x W x Thickness (in)	L x W x Thickness (mm)	Tpi	Pack Qty.
DT2332-QZ	Brick, Fibre Cement, Cast Iron	6 x 3/4 x .032	152 x 19 x .8	Grit	1

RECIPROCATING SAW BLADES FOR INSULATION MATERIAL



FOR USE WITH
Reciprocating saws (corded and cordless).



PACKS


Cat. No.	Application	Length mm	Pitch	TPI	Bosch Cat. No.	Pack Qty.
DT2450-QZ	Precision cuts in fibre insulation material up to 100mm	225	4.2	6	S1113AWP	2
DT2451-QZ	Precision cuts in fibre insulation material up to 100mm	300	4.2	6	S1213AWP	2
DT2452-QZ	Precision cuts in fibre insulation material up to 100mm	400	4.2	6	S2013AWP	1

BREAKAWAY™ RECIPROCATING SAW BLADES

HEAT RESISTANT TOUGHCOAT™
For extended blade performance

14/18 TPI
For optimised cuts in metal applications

BREAKAWAY™ FEATURE
Allows for full blade use (See bottom of page)

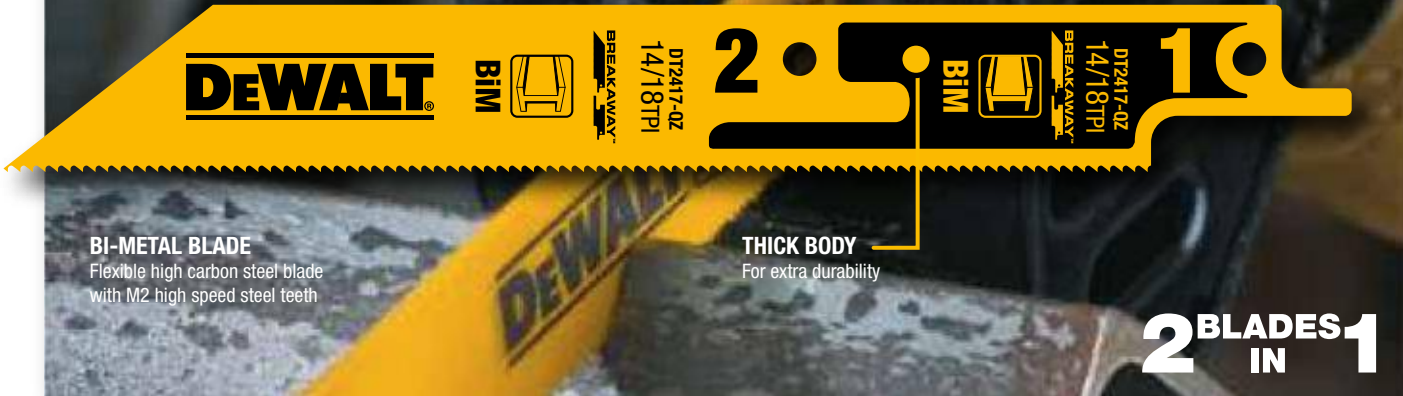


PACKS

Cat. No.	Application	Length mm	TPI	Pack Qty.
DT2416-QZ	Fast cuts in metals, sheets metal, pipes and profiles	230	14 / 18	5
DT2417-QZ	Fast cuts in metals, sheets metal, pipes and profiles	152	14 / 18	5

SET

Cat. No.	Description	TPI	Contents
DT2446-QZ	8 piece break away recip blade set and storage case	14 / 18	DT2416-QZ 228mm x2 DT2417-QZ 152mm x6

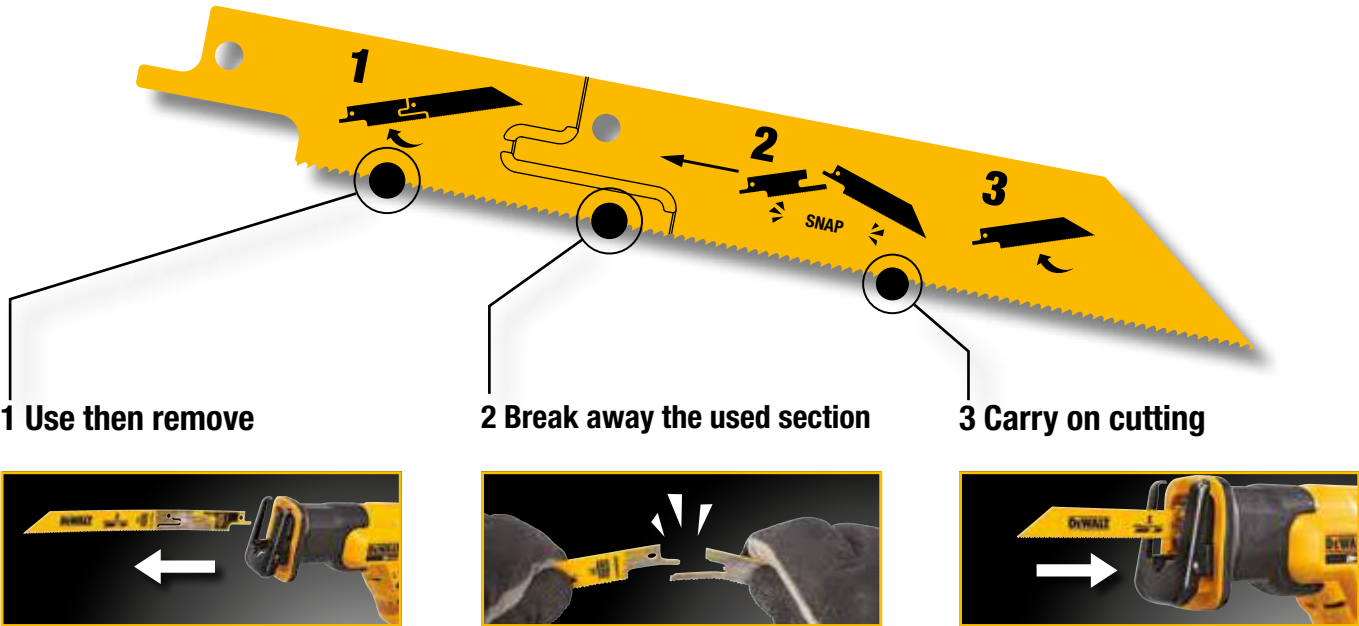

RECIPROCATING BLADES - QUICK REFERENCE CHART

* bulk pack
■ Plunge Point tip
▼ For cordless
HCS = High Carbon Steel
Bi-M = HCS body with cobalt-alloyed M2 HSS-cutting



Length	100 mm	152 mm		203 mm		225 mm		228 mm		230 mm	240 mm		300 mm	305 mm		400 mm	457 mm
Material	Bi-M	HCS	Bi-M	HCS	Bi-M	HCS	Bi-M	HCS	Bi-M	Bi-M	HCS	Bi-M	Bi-M	HCS	Bi-M	HCS	Bi-M
Wood and plastic																	
Corded tool																	
Clean, fast cuts		DT2362	DT2351					DT2363						DT2364			
Wood with nails			■DT2359					■DT2349 ■DT2320							■DT2350		
Varying material thickness				DT2402													
Living wood											DT2352 DT2493*			DT2432			
Cordless tool																	
Clean, fast cuts			▼														
Metal																	
Corded tool																	
Metal < 1.5 mm			DT2385														
Metal < 3 mm			DT2384 DT2407L DT2417 DT99553		DT2354			DT2408L DT99552	DT2416						DT2409L		
Metal 3 to 8 mm			DT2361		DT2353 DT2323*												
Metal 1 to 100 mm			DT2404														
Cordless tool																	
Metal < 3 mm			▼DT2346														
Universal																	
Corded tool																	
Plastics, sandwich materials, tubing			DT2348		DT2387										DT2355		
Metal, rubber, fibreglass, cast iron					DT2406 DT2490*												
Cordless tool																	
Wood with nails, aluminum, fibreglass			DT99554					DT99555							DT2345		
Demolition work																	
Wood			■DT2300L					■DT2307L							■DT2314L		
Metal, metal profiles, metal piping																	
Metal, plastics, sandwich materials	DT2315L		DT2301L					DT2308L							DT2316L		
Other specialist materials																	
Plasterboard			DT2356														
Masonry, brick, ceramics, fibreglass								DT2333									
Masonry, brick								DT2335									
Pallet work							DT2400*										
High-brick, brick, fibre cement														DT2420	DT2421		DT2422
INOX, reinforced plastics																	
Fibre insulation						DT2450							DT2451			DT2452	

XR EXTREME
RUNTIME

ALLIGATOR® SAW BLADES



FEATURES

- Designed for cordless tools to maximise battery life and runtime.
- Ideally suited for FlexVolt.
- High efficiency design achieves more cuts per charge.

FOR USE WITH

- XR FlexVolt, other corded and cordless reciprocating saws.



SINGLE PACKS

Cat. No.	Application	Suitable for	Total length mm	Working length mm	Teeth material	Pack Qty.
DT99590-QZ	Fast cutting of thermal building blocks. Course finish. Not for use in concrete, masonry, brick, breeze blocks or metal.	DCS 396 DWE 396	410	295	TCT	1
DT99591-QZ	Fast cutting of thermal brick blocks up to pressure strength class 12 and aerated concrete blocks.	DCS 397 DWE 397 DWE 398 DWE 399	555	430	TCT	1
DT99592-QZ	Fast cutting of hardwood, softwood, hardboard, plasterboard, and fibreboard. Medium finish. Not recommended for cutting chipboard.	DCS 396 DWE 396	410	295	HSS	1
DT99593-QZ	Fast cutting of hardwood, softwood, hardboard, plasterboard, fibreboard, and logs. Medium finish. Not recommended for cutting chipboard.	DCS 397 DWE 397 DWE 398 DWE 399	555	430	HSS	1





ALLIGATOR® SAW BLADES



FEATURES

- 2-piece blades sheets in HSS quality or hard-metal-matched for optimum performance when used in DeWALT® Alligator® saws.



FOR USE WITH

Alligator® saws DW390 / 391 / 392 / 393.



SINGLE PACKS

Cat. No.	Application	Suitable for	Total length mm	Working length mm	Teeth material	Pack Qty.
DT2960-QZ	Drywall, board	DW 390 DW 391	360	275	HSS	1
DT2961-QZ	Hardwood, softwood, plywood	DW 390 DW 391	360	275	HSS	1
DT2962-QZ	Plywood, chipboard, MDF	DW 390 DW 391	360	275	TCT	1
DT2963-QZ	Building block, Class 12 Poroton	DW 390 DW 391	360	275	TCT	1
DT2964-QZ	Building block, Class 12 Poroton	DW 392 DW 393 DW 394	528	425	TCT	1
DT2965-QZ	Building block, gas beton	DW 390 DW 391	528	425	TCT	1
DT2966-QZ	Building block, Class 20 Poroton	DW 390 DW 391	528	425	TCT	1



ALLIGATOR® SAW BLADES



FOR USE WITH

DWE396 / 397 / 398 / 399.



SINGLE PACKS

Cat. No.	Application	Suitable for	Total length mm	Working length mm	Teeth material	Pack Qty.
DT2970-QZ	Fine wood cutting	DWE 396	410	295	HSS	1
DT2971-QZ	Rough wood cutting	DWE 396	410	295	HSS	1
DT2972-QZ	Fine wood cutting	DWE 396	410	295	TCT	1
DT2973-QZ	Class 12 Poroton	DWE 396	410	295	TCT	1
DT2977-QZ	Class 20 Poroton	DWE 396	410	295	TCT	1
DT2974-QZ	Class 12 Poroton	DWE 397 DWE 398 DWE 399	555	430	TCT	1
DT2975-QZ	Gas beton white	DWE 397 DWE 398 DWE 399	555	430	TCT	1
DT2976-QZ	Class 20 Poroton	DWE 397 DWE 398 DWE 399	555	430	TCT	1
DT2978-QZ	Rough wood cutting	DWE 397 DWE 398 DWE 399	555	430	HSS	1
DT2979-QZ	Insulation material	DWE 397 DWE 398 DWE 399	555	430	HSS	1

BAND SAW BLADES



FEATURES

- Saw blades made of high quality, tempered steel.
- Extremely sharpened and hardened teeth allow cleanest cuts.
- Specially hardened teeth.

FOR USE WITH

DW738, DW739, DW876 and DCS371.



SINGLE PACKS

Cat. No.	Application	Suitable for	Blade Length mm	Cant Angle	Tooth Kerf mm	Blade Thickness mm	Pack Qty.
DT8480-QZ	Wood-fretsaw blade	DW738 DW739	2095	3	0.6	4.2	1
DT8481-QZ	General purpose blade	DW738 DW739	2095	12	0.6	4.2	1
DT8482-QZ	Wood - thick cuts	DW738 DW739	2095	16	0.6	6.4	1
DT8483-QZ	Wood - contour / scroll	DW738 DW739	2095	6	0.6	3.2	1
DT8484-QZ	Non-ferrous metals - thin cuts	DW738 DW739	2095	6	0.6	1.8	1
DT8485-QZ	Non-ferrous metal - thick cuts	DW738 DW739	2095	12	0.6	3.2	1
DT8486-QZ	Wood, laminate and formica	DW738 DW739	2095	10	0.6	3.2	1



SINGLE PACKS

Cat. No.	Application	Suitable for	Blade Length mm	Cant Angle	Tooth Kerf mm	Blade Thickness mm	Pack Qty.
DT8470-QZ	Wood - Fretsaw blade	DW876	2215	4	0.6	1.8	1
DT8471-QZ	Wood - contour / scroll	DW876	2215	6	0.4	4.2	1
DT8472-QZ	Wood - rip and cross-cut	DW876	2215	10	0.4	4.2	1
DT8473-QZ	Wood - fast rip cuts, medium composites	DW876	2215	16	0.6	6.4	1
DT8474-QZ	Wood - fast rip cuts in thick wood	DW876	2215	20	0.6	6.4	1
DT8475-QZ	Non-ferrous metal - thin steel section cuts	DW876	2215	6	0.6	1.4	1
DT8476-QZ	Non-ferrous metal - thick steel section cuts	DW876	2215	12	0.6	1.8	1



MULTI PACKS

Cat. No.	Application	Suitable for	Blade Length mm	Cant Angle	Tooth Kerf mm	Blade Thickness mm	Pack Qty.
DT8460-QZ	Metal 6.35-9.52mm aluminum, stainless steel, plastic	DCS371	835	12	0.5	1.8	4
DT8461-QZ	Metal 3.97-6.35mm aluminum, stainless steel, plastic	DCS371	835	12	0.5	1.4	4
DT8462-QZ	Metal up to 3.97mm aluminum, stainless steel, plastic	DCS371	835	12	0.5	1.05	4
DT8463-QZ	Metal 6.35-9.52mm aluminum, stainless steel, plastic	DCS371	835	12	0.5	1.8/1.4	4
DT8468-QZ	18TPI Bandsaw Blade	DCS377	690	18	0.5	1.8/1.4	3



WOOD SHAPING

High performance accessories for your router and planer.



ROUTER BITS



FEATURES

- Double-edged for precise and burr-free edges.

APPLICATIONS

Basic and flank cutting.

For grooving, rebating, long hole milling and drilling.

The ground drilling drill allows drilling.

Can also be used for straight milling applications in laminate.

FOR USE WITH

Top milling machines.



SINGLE PACKS

Cat. No.	Description	Shank mm (A)	Milling diameter mm (B)	Working length mm (C)	Total length mm	Pack Qty.
DT90001-QZ	Double edged (Z2), HM	8	5	12	50	1
DT90002-QZ	Double edged (Z2), HM	8	6	19	55	1
DT90003-QZ	Double edged (Z2), HM	8	8	20	55	1
DT90004-QZ	Double edged (Z2), HM	8	10	20	52	1
DT90005-QZ	Double edged (Z2), HM	8	12	20	52	1
DT90006-QZ	Double edged (Z2), HM	8	14	20	52	1
DT90007-QZ	Double edged (Z2), HM	8	15	20	52	1
DT90008-QZ	Double edged (Z2), HM	8	16	20	52	1
DT90009-QZ	Double edged (Z2), HM	8	18	20	52	1
DT90010-QZ	Double edged (Z2), HM	8	20	20	52	1
DT90011-QZ	Double edged (Z2), HM	8	22	20	52	1
DT90012-QZ	Double edged (Z2), HM	8	25	20	52	1
DT90013-QZ	Double-edged (Z2), HM	8	22.7	9.5	5	1
DT90014-QZ	Double-edged (Z2), HM	8	24.7	13.5	6	1
DT90015-QZ	Double-edged (Z2), HM	8	31.8	15.9	8	1

SETS

Cat. No.	Description
DT90016-QZ	12pc set incl. storage box with clear lid
DT90017-QZ	22pc set incl. storage box with clear lid

8MM ROUTER BIT SETS



SETS

Cat. No.*	Description and Contents	Ø mm
DT90016-QZ	12 Piece HM milling cutter set incl. storage box with clear cover:	
	Hollow flute cutter	12
	V-slot milling cutter	12.7
	Tine cutter	14.3
	Hollow flute cutter with ball bearing	21.5
	Profile milling cutter with ball bearing	27
	Chamfering mill with ball bearing	28.6
	Groove cutters	8
		12
	Slot milling cutter	16
	Flush end mill cutter with ball bearing	12.7
	Rounding cutters with ball bearing	24.7
		32.7
DT90017-QZ	22 Piece HM milling cutter set incl. storage box with clear cover:	
	Groove cutter	6
	Slot milling cutters	8
		10
	Groove cutter	12
	Slot milling cutters	16
		20
	Tine cutter	14.3
	Hollow flute cutters	8
		12
	V-groove milling cutters	12.7
		12.7
	Quarter-turn milling cutter	21
	Profile milling cutter with ball bearing	22.22
	Chamfering cutter with ball bearing	28.7
	Round milling cutters with ball bearing	22.7
		28.6
	Chamfering cutter with ball bearing	19.9
	Flush end mill cutter with ball bearing	12.7
	Profile milling cutter with ball bearing	27
	Hollow flute cutters with ball bearing	19.5
		25.5
	Folding cutter with ball bearing	31.8

PLANER BLADES



FOR USE WITH

Corded and cordless planers.



SETS

Cat. No.	Description	Suitable for	Length mm	Width mm	Thickness mm	Pack Qty.
DT3901-QZ	80mm TCT reversible planer blades	DW676	80	5.9	1.2	1 pair
DT3905-QZ	82mm HSS reversible planer blades	DCP580 DW678 DW680 D26500 D26501	82	5.5	1.1	1 pair
DT3906-QZ	82mm TCT reversible planer blades	DCP580 DW678 DW680 D26500 D26501	82	5.5	1.1	1 pair





COATED ABRASIVES

The DEWALT® range of coated abrasives includes sanding sheets, belts and abrasive meshes to suit different finishes and different tools.

EXTREME®

Abrasive mesh

The open weave structure enables a more effective removal of sanding dust, resulting in a finer sanding pattern.



Standard abrasives

High-quality aluminium oxide grains for a perfect surface finish.



Flap discs

For rust removal, grinding and cleaning of metal.



EXTREME® ABRASIVE MESH

HOOK AND LOOP



EASY PLACEMENT


The open structure of the grid lines eliminates the need for precise positioning.

LONGER DURABILITY

Up to 4x longer life compared to DeWALT® standard abrasive papers by better removal of the sanding dust.

UP TO 25% BETTER SANDING RESULTS

The open weave structure enables a more effective removal of sanding dust. This results in a finer sanding pattern.

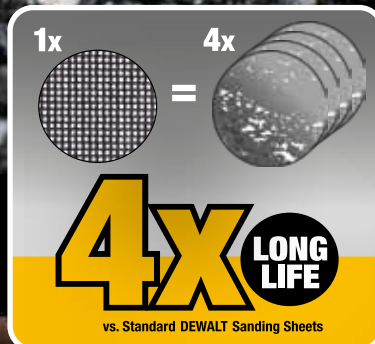

FEATURES

The silicon carbide grain is applied to the nylon braided by a special composite process. This reduces the flexibility, but increases the service life up to 4x compared to DeWALT® standard abrasives.

Due to the large number of small openings in the grid lines, the suction capacity is significantly increased as the dust is transported over a significantly larger surface.

APPLICATIONS

For all basic, intermediate and final sanding applications in wood, metal, paints, varnishes, plaster and drywall.

WATER RESISTANT

After intensive use, dust can be easily washed off. After drying, the abrasive mesh is ready for use again



EXTREME® UNIVERSAL ABRASIVE MESH




FEATURES

• Universal ROS (Random Orbit Sander) sheets.

FOR USE WITH


Works with all dust extraction hole configurations.

Universal ROS (Random Orbit Sanders) e.g. suitable for: DeWALT®, Bosch®, Festool®, Makita®, Metabo®, Milwaukee®.




Ø125mm - ROS PACKS

Cat. No.	Grain size	Pack Qty.
DTM8671-QZ	40	5
DTM8560-QZ	60	5
DTM3103-QZ	80	5
DTM3105-QZ	120	5
DTM3107-QZ	240	5
DTM8562-QZ	320	5
DTM8561-QZ	60	10
DTM3113-QZ	80	10
DTM3115-QZ	120	10
DTM3117-QZ	240	10
DTM8563-QZ	320	10



Ø150mm - ROS PACKS

Cat. No.	Grain size	Pack Qty.
DTM8556-QZ	60	5
DTM3123-QZ	80	5
DTM3125-QZ	120	5
DTM3127-QZ	240	5
DTM8558-QZ	320	5
DTM8557-QZ	60	10
DTM3133-QZ	80	10
DTM3135-QZ	120	10
DTM3137-QZ	240	10
DTM8559-QZ	320	10



Ø225mm - ROS PACKS

Cat. No.	Grain size	Pack Qty.
DTM8680-QZ	60	5
DTM8681-QZ	80	5
DTM8682-QZ	120	5
DTM8684-QZ	150	5
DTM8683-QZ	240	5

FOR USE WITH

Universal ROS (Random Orbit Sanders) e.g. suitable for: Flex, Festool.



EXTREME® ABRASIVE MESH

DETAIL SANDER



FOR USE WITH
Detail sander or
DeWALT® multi tool
DWE315 / DCS355.



93 X 93mm PACKS

Cat. No.	Grain size	Pack Qty.
DTM8667-QZ	40	5
DTM8668-QZ	60	5
DTM3092-QZ	80	5
DTM3093-QZ	120	5
DTM3095-QZ	240	5

DELTA SANDER



FOR USE WITH
Delta sander from Festool®.



100 X 150mm PACKS

Cat. No.	Grain size	Pack Qty.
DTM8553-QZ	80	5
DTM8554-QZ	120	5
DTM8555-QZ	240	5

1/3 SHEET



FOR USE WITH
DeWALT®, Makita®.



93 X 190 PACKS


Cat. No.	Grain size	Pack Qty.
DTM8655-QZ	40	5
DTM8656-QZ	60	5
DTM8621-QZ	80	5
DTM8622-QZ	120	5
DTM8624-QZ	240	5

EXTREME® ABRASIVE MESH

1/4 SHEET



FOR USE WITH
DeWALT®, Bosch®,
Festool®, Metabo®.




115 X 115mm PACKS

Cat. No.	Grain size	Pack Qty.
DTM8663-QZ	40	5
DTM8664-QZ	60	5
DTM3022-QZ	80	5
DTM3023-QZ	120	5
DTM3025-QZ	240	5

1/2 SHEET



FOR USE WITH
DeWALT®, Bosch®,
Festool®, Metabo®.

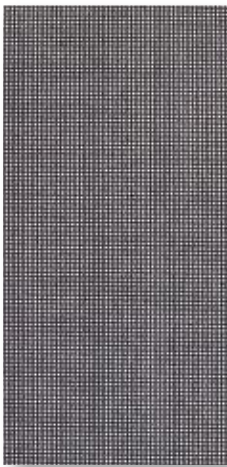


115 X 228mm PACKS

Cat. No.	Grain size	Pack Qty.
DTM8659-QZ	40	5
DTM8660-QZ	60	5
DTM8551-QZ	80	5
DTM8552-QZ	120	5

MULTI-PURPOSE SANDING SHEETS


1/3 SHEETS



93 X 190mm PACKS

Cat. No.	Grain size	Pack Qty.
DT8650-QZ	40	10
DT8620-QZ	60	10
DT8621-QZ	80	10
DT8622-QZ	120	10
DT8623-QZ	180	10
DT8624-QZ	240	10


1/3 SHEETS



93 X 230mm PACKS

Cat. No.	Grain size	Pack Qty.
DT8590-QZ	60	10
DT8591-QZ	80	10
DT8592-QZ	120	10


1/2 SHEETS

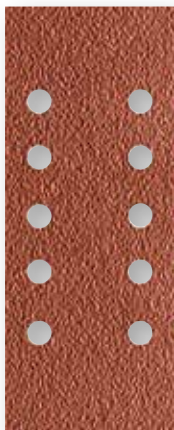

115 X 228mm PACKS

Cat. No.	Grain size	Pack Qty.
DT8550-QZ	60	10
DT8551-QZ	80	10
DT8552-QZ	120	10

1/4 SHEETS



115 X 140mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3011-QZ	40	25
DT3012-QZ	60	25
DT3014-QZ	100	25
DT3015-QZ	150	25
DT3017-QZ	220	25

SANDING SHEETS

1/4 SHEET



FEATURES

- Heat resistant resin adhesive bond, ideal for power sanding.
- Tough, durable paper backing ensures longer disc life and performance.
- Stearate coating reduces clogging, excellent for softwoods and painted surfaces.
- Quick fit nylon loop backing allows fast and easy disc changeover.

APPLICATIONS

For all stripping sanding and finishing tasks on wood, metal and painted surfaces.

FOR USE WITH

DeWALT® multi tool
DWE315 / DCS355.



115 x 115mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3020-QZ	40	10
DT3021-QZ	60	10
DT3022-QZ	80	10
DT3023-QZ	120	10
DT3024-QZ	180	10
DT3025-QZ	240	10
DT3026-QZ	320	10
DT3030-QZ	40	25
DT3031-QZ	60	25
DT3032-QZ	80	25
DT3033-QZ	120	25
DT3034-QZ	180	25
DT3035-QZ	240	25

SANDING SHEETS



FEATURES


- Industrial grade abrasive paper for all stripping, sanding and finishing tasks on wood, paint and fillers.
- High quality aluminium oxide grain gives superior finish.
- Resin bonding provides excellent grain adhesion and heat resistance for powered sanding.
- Tough, durable "E" weight backing ensures longer life and performance.

APPLICATIONS

For all sanding and finishing tasks on wood, painted surfaces and fillers.

FOR USE WITH

DeWALT® multi tool
DWE315 / DCS355.



DETAIL PACKS

Cat. No.	Grain size	Pack Qty.
DT3090-QZ	40	10
DT3091-QZ	60	10
DT3092-QZ	80	10
DT3093-QZ	120	10
DT3094-QZ	180	10
DT3095-QZ	240	10



WATER RESISTANT ABRASIVE PAPER 230 x 280mm

FULL SHEETS MULTI-PURPOSE



FEATURES

- Multi-purpose wet and dry sanding.
- High-quality, sharp aluminium oxide grains.
- High-strength and flexible, water-resistant latex paper for easier contouring and finishing.



APPLICATIONS

Fine sanding of primers and fillers.



FOR USE WITH

Hand sanding.



230 x 280mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3244-QZ	180	10
DT3245-QZ	240	10
DT3246-QZ	320	10
DT3247-QZ	400	10
DT3248-QZ	1000	10
DT3249-QZ	1200	10

ABRASIVE FABRIC FOR METAL 230 x 280mm

FULL SHEETS



FEATURES

- Industrial aluminium oxide grains for fast and aggressive sanding and abrasion
- Resistant, flexible fabric Class J (J = cotton fabric, light weight).



APPLICATIONS

For sanding and removal work as well as for deburring and de-rusting of metal.



FOR USE WITH

Hand sanding.



230 x 280mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3281-QZ	80	10
DT3282-QZ	120	10
DT3283-QZ	180	10
DT3284-QZ	240	10

MULTI-PURPOSE SANDING BELTS



FEATURES

- High-quality aluminium oxide grains for fast and aggressive material removal.
- Heat-resistant and dust-resistant synthetic resin bond for powerful sanding.



APPLICATIONS

For all basic, intermediate and final sanding applications in wood, paints and lacquers as well as metal.



FOR USE WITH

Belt sanders.



45 x 715mm GRINDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3351-QZ	80	3
DT3352-QZ	100	3
DT3353-QZ	120	3
DT3354-QZ	150	3
DT3355-QZ	240	3

64 x 356mm MINI SANDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3661-QZ	60	3
DT3662-QZ	80	3
DT3663-QZ	100	3
DT3664-QZ	150	3
DT3299-QZ	220	3
DT3669-QZ	150	10

75 x 457mm SANDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3640-QZ	40	3
DT3641-QZ	60	3
DT3642-QZ	80	3
DT3643-QZ	100	3

75 x 533mm SANDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3300-QZ	40	3
DT3376-QZ	60	3
DT3377-QZ	80	3
DT3628-QZ	100	3
DT3378-QZ	120	3
DT3301-QZ	40	10
DT3302-QZ	60	10
DT3303-QZ	80	10
DT3304-QZ	100	10
DT3629-QZ	120	10
DT3305-QZ	EXTREME® 150	10
DT3307-QZ	EXTREME® 220	10



100 x 560mm SANDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3312-QZ	40	3
DT3314-QZ	60	3
DT3315-QZ	80	3
DT3316-QZ	100	3
DT3318-QZ	EXTREME® 150	3

100 X 610mm SANDING BELT PACKS

Cat. No.	Grain size	Pack Qty.
DT3320-QZ	40	3
DT3321-QZ	60	3
DT3322-QZ	80	3
DT3323-QZ	100	3
DT3324-QZ	EXTREME® 150	3
DT3670-QZ	40	10
DT3671-QZ	60	10
DT3672-QZ	80	10
DT3673-QZ	100	10

SANDING SHEETS



FEATURES

- Multi-purpose.
- High quality aluminium oxide grains for a perfect surface finish.
- Dust repellent resin bond for powerful sanding.
- High strength and flexible paper of class E (250g /m²) for increased durability and performance.



APPLICATIONS

For all basic, intermediate and final sanding applications in wood, paints and varnishes, as well as fillers.



FOR USE WITH

Vibratory sanders.



SINGLE PACKS

Cat. No.	Grain size	Size Length x Width	Pack Qty.
DT3580-QZ	60	5m x 115mm	1
DT3581-QZ	80	5m x 115mm	1
DT3582-QZ	120	5m x 115mm	1
DT3583-QZ	180	5m x 115mm	1
DT3584-QZ	220	5m x 115mm	1
DT3154-QZ	40	5m x 93mm	1
DT3590-QZ	60	5m x 93mm	1
DT3591-QZ	80	5m x 93mm	1
DT3592-QZ	120	5m x 93mm	1
DT3593-QZ	180	5m x 93mm	1
DT3594-QZ	220	5m x 93mm	1
DT3579-QZ	40	25m x 93mm	1
DT3595-QZ	60	25m x 93mm	1
DT3596-QZ	80	25m x 93mm	1
DT3597-QZ	120	25m x 93mm	1
DT3598-QZ	180	25m x 93mm	1
DT3599-QZ	220	25m x 93mm	1

RANDOM ORBIT SANDING SHEETS



FEATURES

- Heat-resistant synthetic resin base and top bond of the abrasive grain ensure the highest grinding performance and durability.
- Robust and flexible carrier.



APPLICATIONS

For all basic, intermediate and final sanding applications in wood, paints and lacquers as well as metal.



Dust-repellent stearate coating permanently prevents the abrasive surface from clogging.

Nylon velor backing for perfect adhesion on the hook and loop grinding disc.



UNIVERSAL ABRASIVE PAPER 230 x 280mm

FULL SHEETS



FEATURES

- High-quality aluminium oxide grains for a perfect surface finish.
- High-strength and flexible paper of the class C / D (110 - 130 g / m²).
- Stearate coating effectively reduces dust and colour particle clogging.



APPLICATIONS

For basic, intermediate and finish sanding in wood, paints and varnishes.



FOR USE WITH

Hand sanding.



MULTIPURPOSE PACKS

Cat. No.	Grain size	Pack Qty.
DT3230-QZ	40	10
DT3231-QZ	60	10
DT3232-QZ	80	10
DT3233-QZ	120	10
DT3234-QZ	180	10
DT3235-QZ	240	10
DT3236-QZ	320	10

SUITABLE FOR

DeWALT, AEG®, Bosch®, Atlas Copco®, Festool®, Elu®, Fein®, Hitachi®, Kress®, Makita®, Metabo®, Skil®.




8-HOLE, Ø125mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3101-QZ	40	10
DT3102-QZ	60	10
DT3103-QZ	80	10
DT3105-QZ	120	10
DT3106-QZ	180	10
DT3107-QZ	240	10
DT3108-QZ	320	10
DT3111-QZ	40	25
DT3112-QZ	60	25
DT3113-QZ	80	25
DT3115-QZ	120	25
DT3116-QZ	180	25
DT3117-QZ	240	25
DT3118-QZ	320	25

SUITABLE FOR

DeWALT®, Bosch®, Hitachi®, Metabo®, Peugeot®.

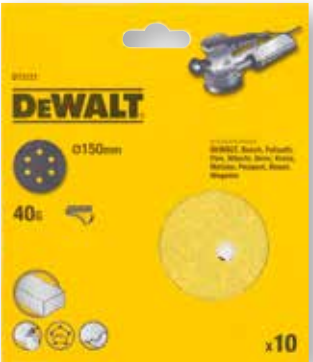

6-HOLE, Ø150mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3121-QZ	40	10
DT3122-QZ	60	10
DT3123-QZ	80	10
DT3125-QZ	120	10
DT3126-QZ	180	10
DT3127-QZ	240	10
DT3128-QZ	320	10
DT3131-QZ	40	25
DT3132-QZ	60	25
DT3133-QZ	80	25
DT3135-QZ	120	25
DT3136-QZ	180	25
DT3137-QZ	240	25
DT3138-QZ	320	25

SANDING SHEETS

ROS DRY WALL SANDER




FEATURES

- Heat resistant resin adhesive bond, ideal for power sanding.
- Tough, durable paper backing ensures longer disc life and performance.
- Stearate coating reduces clogging, excellent for softwoods and painted surfaces (grits 80 or greater).
- Quick fit nylon loop backing allows fast and easy disc changeover.

APPLICATIONS

For all stripping sanding and finishing tasks on wood, metal and painted surfaces.



Ø225mm PACKS

Cat. No.	Grain size	Pack Qty.
DT3164-QZ	60	10
DT3169-QZ	80	10
DT3179-QZ	100	10
DT3170-QZ	120	10



GRINDING AND POLISHING BACKING PLATES

FEATURES

- Thermoplastic backing pad supplied with flange locking nut.

APPLICATIONS

For use with angle grinder fibre discs for grinding and polishing backing pads.

FOR USE WITH

Corded and cordless angle grinders and polishers.



BACKING PAD - SINGLE PACKS

Cat. No.	Max. speed	Diameter mm	Bore	Pack Qty.
DT3610-QZ	13000 U/min	115	M14 (22.2)	1
DT3611-QZ	15000 U/min	125	M14 (22.2)	1
DT3612-QZ		178	M14 (22.2)	1

POLISHING BONNET



FEATURES

- Wool polishing bonnet.

APPLICATIONS

For high-gloss polishing of various materials such as painted surfaces, metal, stone, plastic, etc.

FOR USE WITH

Corded and cordless angle grinders and polishers.



SINGLE PACKS

Cat. No.	Description	Max. speed	Diameter mm	Pack Qty.
DT3621-QZ	Polishing bonnet	13000 U/min	125	1
DT3622-QZ	Polishing bonnet	15000 U/min	178	1
DT3568-QZ	Velcro wool bonnet		180	1



RANDOM ORBIT SANDING PLATTENS




FEATURES

Hook and loop ROS sanding platten.

FOR USE WITH

DeWALT® Random Orbit Sanders.



SINGLE PACKS

Cat. No.	Description	Diameter mm	Pack Qty.
DT3600-QZ	For R/O Sander D26453 8-hole	125	1
DT3601-QZ	For R/O Sander DW443 6-hole	150	1



CORK HAND SANDING BLOCK



SINGLE PACK

Cat. No.	Description	Pack Qty.
DT3199-QZ	40 x 60 x 100mm	1



EXTREME® FLAP DISCS



FEATURES

- Resistant, durable zirconium oxide grain.
- Very robust and resistant, with very high removal rate.
- Zirconium oxide grain allows a 3x faster material removal than conventional resin-bonded fibre discs.
- Type 27 design for grinding angles of 0-15 degrees.

APPLICATIONS

For rust removal, grinding and cleaning of metal.

FOR USE WITH

Corded and cordless angle grinders.



SINGLE PACKS

Cat. No.	Description	Diameter mm	Grit	Type	Pack Qty.
DT30601-QZ	115mm x 22.2mm	115	40	Type 27, Flat	1
DT30611-QZ	115mm x 22.2mm	115	60	Type 27, Flat	1
DT30621-QZ	115mm x 22.2mm	115	80	Type 27, Flat	1
DT30622-QZ	125mm x 22.2mm	125	80	Type 27, Flat	1
DT30602-QZ	125mm x 22.2mm	125	40	Type 27, Flat	1
DT30612-QZ	125mm x 22.2mm	125	60	Type 27, Flat	1



STANDARD FLAP DISCS



FEATURES

- Resistant, durable zirconium oxide grain.
- Very robust and resistant, with very high removal rate.
- Type 27 design for grinding angles of 0-15 degrees.
- Type 29 design for grinding angles of 15-25 degrees.

APPLICATIONS

For rust removal, grinding and cleaning of metal.

FOR USE WITH

Corded and cordless angle grinders.



PACKS

Cat. No.	Diameter mm	Grit	Type	Pack Qty.
DT3255-QZ	115	36	Type 29, Angled	10
DT3256-QZ	115	60	Type 29, Angled	10
DT3257-QZ	115	80	Type 29, Angled	10
DT3258-QZ	115	120	Type 29, Angled	10
DT3265-QZ	125	36	Type 29, Angled	10
DT3266-QZ	125	60	Type 29, Angled	10
DT3267-QZ	125	80	Type 29, Angled	10
DT3268-QZ	125	120	Type 29, Angled	10
DT3292-QZ	115	36	Type 27, Flat	10
DT3293-QZ	115	60	Type 27, Flat	10
DT3294-QZ	115	80	Type 27, Flat	10
DT3295-QZ	115	120	Type 27, Flat	10
DT3308-QZ	125	36	Type 27, Flat	10
DT3309-QZ	125	60	Type 27, Flat	10
DT3310-QZ	125	80	Type 27, Flat	10





BONDED ABRASIVES

Our range of bonded abrasives feature aluminium oxide grain to maximise life and performance. A selection of wire brushes, honing and cutting wheels are also available so you'll always have the right accessory for the job.



Designed to deliver maximum performance in metal cutting and grinding applications, with extended blade life guaranteed.

High Performance



Professional performance bonded discs for metal cutting and general metal grinding applications.

Wire Brushes and accessories



From heavy duty material removal to multi purpose cleaning, DEWALT® has the right accessory for the job.





CUTTING & GRINDING DISCS

Application
DISC COLOUR CODING
 Metal/non-ferrous
 Brick/Concrete
 Aluminum
 Stainless steel/thin sheet

Max. speed (rpm)*
 OSA-Logo
 Safety symbols






Disc type
 Cat. No.
 Disc diameter
 Disc thickness
 Bore diameter
 Disc material
 European norm
DISC COLOUR CODING
 80 m/s
 100 m/s
 50 m/s
 OSA no.
 EAN



ABRASIVES IDENTIFICATION
 DEWALT® uses an industry-recognised colour coding and marking system that helps the user to find the correct grinding disc for a particular application. Other features such as, the speed, size and thickness of the disc, as well as the bore diameter must also be considered when selecting.

TYPES OF ABRASIVE GRAINS
ALUMINUM OXIDE
 Tough durable grain used for cutting, grinding and finishing of metal in bonded abrasives, and metal, wood and coatings in coated abrasives.
TREATED ALUMINUM OXIDE
 Aluminum oxide grain with a coating that increases bond strength for harder longer lasting bonded abrasives.
ZIRCONIA
 Tough durable grain with fine crystal structure used for rugged stock removal of metal in bonded abrasives, and metal and wood in coated abrasives.
CERAMIC
 Tough durable grain with very fine crystal structure to create many more cutting edges in each grain. Used for the highest stock removal of metal in bonded and coated abrasives.
SILICON CARBIDE
 Very hard and brittle grain used on concrete and very soft or very hard metals in bonded abrasives, and for very fine finishing of metal and coatings in coated abrasives.
DIAMOND
 Very hard and durable grain for use in cutting and grinding concrete and metal.





EXTREME[®] BONDED DISCS



FEATURES

- Industrial aluminium oxide grain designed to maximise life and performance.
- OSA accredited.
- High density grain concentration for longer life.



APPLICATIONS

For general metal grinding work and cutting on stainless steel, ferrous and non-ferrous metals, including weld and surface preparation.

FOR USE WITH

Corded and cordless angle grinders.



Cat. No.	Description	Diameter mm	Thickness mm	Material	Pack Qty
DT3440-QZ	100 x 1 x 16mm EXTREME Cutting INOX	100	1	SS	25
DX7901-AE	100 x 6 x 16 mm EXTREME Grinding METAL	100	6	Metal	10
DT3442-QZ	115 x 1 x 22mm EXTREME Cutting INOX	115	1	SS	25
DT43903-QZ	115 x 1.2 x22mm EXTREME Cutting INOX	115	1.2	SS	25
DT43905-QZ	115 x 1.6 x 22mm EXTREME Cutting INOX	115	1.6	SS	25
DX7927-AE	115 x 3 x 22mm EXTREME Cutting METAL	115	3	Metal	25
DX7921-AE	115 x 6 x 22mm EXTREME Grinding METAL	115	6	Metal	10
DT43902-QZ	125 x 1 x 22mm EXTREME Cutting INOX	125	1	SS	25
DT43904-QZ	125 x 1.2 x 22mm EXTREME Cutting INOX	125	1.2	SS	25
DT43906-QZ	125 x 1.6 x 22mm EXTREME Cutting INOX	125	1.6	SS	25
DT43911-QZ	125 x 3 x 22mm EXTREME Cutting METAL	125	3	Metal	25
DX7941-AE	125 x 6 x 22mm EXTREME Grinding METAL	125	6	Metal	10
DT43907-QZ	150 x 1.6 x 22mm EXTREME Cutting INOX	150	1.6	SS	25
DT43908-QZ	180 x 1.6 x 22mm EXTREME Cutting INOX	180	1.6	SS	25
DX7967-AE	180 x 3 x 22mm EXTREME Cutting METAL	180	3	Metal	25
DX7967S-AE	180 x 3 x 22mm EXTREME Cutting INOX	180	3	SS	25
DX7961-AE	180 x 6 x 22mm EXTREME Grinding METAL	180	6	Metal	10
DX7961S-AE	180 x 6 x 22mm EXTREME Grinding INOX	180	6	SS	10
DT43909-QZ	230 x 2 x 22mm EXTREME Cutting INOX	230	2	SS	25
DX7987-AE	230 x 3 x 22mm EXTREME Cutting METAL	230	3	Metal	25
DT43919-QZ	230 x 6 x22mm EXTREME Grinding METAL	230	6	Metal	10
DX7711-AE	350 x 3 x 25.4mm EXTREME Cutting METAL	350	3	Metal	10

MULTI-MATERIAL BONDED ABRASIVES



FEATURES

- Multi-material cutting disc ideal for tradespeople who need to cut multiple materials on the job
- Made with silicon carbide grain which produces a smoother, faster more versatile cut
- Bakelite and glass fibre reinforcement designed to maximise life and performance
- OSA accredited



APPLICATIONS

Engineered to cut a wide variety of general purpose building materials including masonry, stainless steel, ferrous metal, non ferrous metal, aluminium, PVC and ceramic.



FOR USE WITH

Corded and cordless angle grinders.



Cat. No.	Description	Diameter mm	Thickness mm	Material	Pack Qty
DT20595-QZ	125 x 1 x 22.23 Cutting Disc Multi-Material	125	1	SS, Metal, Alu, Ceramic, Masonry, PVC	25
DT20596-QZ	115 x 1 x 22.23 Cutting Disc Multi-Material	115	1	SS, Metal, Alu, Ceramic, Masonry, PVC	25

HIGH PERFORMANCE BONDED DISCS



FEATURES

- Professional aluminium oxide grain designed for cordless tools to maximise life and performance.

APPLICATIONS

For general metal grinding work and cutting on stainless steel, ferrous and non-ferrous metals, including weld and surface preparation.

FOR USE WITH

Corded and cordless angle grinders.



PACKS AND TUBS

Cat. No.	Description	Diameter mm	Thickness mm	Material	Pack Qty
DT20593-QZ	115 x 1 x 22.23 Cutting Disc INOX wrap	115	1	SS	25
DT20594-QZ	125 x 1 x 22.23 Cutting Disc INOX wrap	125	1	SS	25
DT20597-QZ	115 x 1 x 22.23 Cutting Disc INOX plastic tub	115	1	SS	50
DT20598-QZ	125 x 1 x 22.23 Cutting Disc INOX plastic tub	125	1	SS	50
DT20599-QZ	115 x 1 x 22.23 Cutting Disc INOX plastic tub	115	1	SS	100
DT20540-QZ	125 x 1 x 22.23 Cutting Disc INOX plastic tub	125	1	SS	100

76MM BONDED ABRASIVE CUTTING WHEELS



FEATURES

- Make fast cuts with a thin wheel design and heavy-duty, aluminum oxide grain for long life.
- Built with two sheets of fibreglass for wheel strength. Designed to reduce wheel breakage.

APPLICATIONS

Efficiently cut a wide range of metals including carbon steel, stainless and nickel-based alloys.

FOR USE WITH

DCS438 Cut Off Tool.



Cat. No.	Description	Diameter mm	Thickness mm	Material	Pack Qty
DWA8060SIA-AE	100 x 1.0 x 16 inox cutting wheel t1	100	1	SS	25
DT43970-QZ	Thin fast cut 100 x 1 x 16mm (10pcs tin) brown master pack	100	1	SS	10
DT43973-QZ	Thin cut 100 x 1.2 x 16mm (10pcs tin) brown master pack	100	1.2	SS	10
DWA4520IA-AE	100 x 3 x 16 metal cutting t27	100	3	Metal	25
DWA4520SIA-AE	100 x 3 x 16 inox cutting wheel t27	100	3	SS	25
DWA4500IA-AE	100 x 6 x 16 metal grinding wheel t27	100	6	Metal	10
DWA4500SIA-AE	100 x 6 x 16 inox grinding wheel t27	100	6	SS	10
DT3506-QZ	115x1mm cutdisk 10pcs tin (10x tin wide merch)	115	1	SS	10
DT43971-QZ	Thin fast cut 115x1x22.23mm (10pcs tin) brown master pack	115	1	SS	10
DWA8062SIA-AE	115 x 1.2 x 22.23 inox cutting wheel t1	115	1.2	SS	25
DT42335TZ-QZ	115 x 1.2mm thin cut inox 10pcs tin (10x tin cut case)	115	1.2	SS	10
DT43921-QZ	Thin cut 115 x 1.2mm inox 10/tin (10x tin + hang tag bown master pack)	115	1.2	SS	10
DWA8434IA-AE	115 x 3 x 22.23 metal cutting wheel t27	115	3	Metal	25
DWA8434SIA-AE	115 x 3 x 22.23 inox cutting wheel t27	115	3	SS	25
DWA4515IA-AE	115 x 4 x 22.23 grinding wheel t27	115	4	Metal	25
DWA4515SIA-AE	115 x 4 x 22.23 inox cutting wheel t27	115	4	SS	25
DWA4514IA-AE	115 x 6 x 22.23 metal grinding wheel t27	115	6	Metal	25
DWA4514SIA-AE	115 x 6 x 22.23 inox grinding wheel t27	115	6	SS	25
DT3507-QZ	125x1mm cutdisk 10/tin (10tin wide merch)	125	1	SS	10
DT43972-QZ	Thin fast cut 125x1x22.23mm (10pcs tin) brown master pack	125	1	SS	10
DT42340Z-QZ	125 x 1.2 x 22.23mm thin cut inox	125	1.2	SS	25
DT42340TZ-QZ	125 x 1.2mm thin cut inox 10pcs tin (10x tin cut case)	125	1.2	SS	10
DT43922-QZ	Thin cut 125 x 1.2mm inox (10x tin + hang tag bown master pack)	125	1.2	SS	10
DWA4522IA-AE	125 x 3 x 22 metal cutting wheel t27	125	3	Metal	25
DWA4522SIA-AE	125 x 3 x 22 inox cutting wheel t27	125	3	SS	25
DWA4543IA-AE	125 x 6 x 22 metal grinding wheel t27	125	6	Metal	10
DWA4543SIA-AE	125 x 6 x 22 inox grinding wheel t27	125	6	SS	10
DT42380Z-QZ	180 x 1.2 x 22.23mm thin cut inox	180	1.2	SS	25
DWA4524IA-AE	180 x 3 x 22 metal cutting wheel t27	180	3	Metal	10
DWA4524SIA-AE	180 x 3 x 22 inox cutting wheel t27	180	3	SS	10
DWA4547IA-AE	180 x 6 x 22 metal grinding wheel t27	180	6	Metal	10
DWA4547SIA-AE	180 x 6.3 x 22 inox grinding wheel t27	180	6	SS	10
DWA4525IA-AE	230 x 3 x 22 metal cutting wheel t27	230	3	Metal	10
DWA4525SIA-AE	230 x 3 x 22 inox cutting wheel t27	230	3	SS	10
DWA4549IA-AE	230 x 6 x 22 metal grinding wheel t27	230	6	Metal	10
DWA4549SIA-AE	230 x 6 x 22 inox grinding wheel t27	230	6	SS	10
DWA8011RIA-AE	355 x 3 x 25.4 metal cutting wheel t1	355	3	Metal	10
DWA8012RIA-AE	400 x 3 x 25.4 metal cutting wheel t1	400	3	Metal	10



Cat. No.	Description	Bore mm	Diameter mm	Thickness mm	Material	Pack Qty
DT20592-QZ	76mm Bonded Abrasive Cutting Wheels	10	76	1.6	Metal	3

CHOP SAW DISC

APPLICATION
Cutting metal sections.



SINGLE PACK

Cat. No.	Description	Diameter mm	Thickness mm	Bore mm	Pack Qty
DT3450-QZ	Chop saw disc	355	3.0	25.4	1



GRINDING AND HONING WHEELS

FOR USE WITH
DeWALT® bench grinders.



PACKS

Cat. No.	Description	Diameter mm	Thickness mm	Bore mm	Pack Qty
DT3380-QZ	Silicon carbide	125	25	20	1
DT3385-QZ	White aluminium oxide	125	25	20	1



LOCKING GRINDER NUT



LOCKING GRINDER NUT

Cat. No.	Description
DT3559-QZ	M14 Locking Grinder Nut



WIRE BRUSHES



FEATURES

- Highly specified wire grades for optimum material removal.
- High wire content for extra brush durability.



APPLICATIONS
Aggressive twist knot wire wheel and cup brushes for heavy duty cleaning work.
Crimped wire wheel and cup brushes for medium duty cleaning.
Wire wheel and cup brushes for multi purpose cleaning applications in hard to reach areas.

FOR USE WITH
Corded and cordless angle grinders.



TWIST KNOT WIRE WHEELS



For the toughest applications:
To remove stubborn paint, heavy rust, cleaning of welds, etc.



SINGLE PACKS

Cat. No.	Wire length mm	Diameter mm	Bore mm	Pack Qty.
DT3466-QZ	22	115	M14 (22.2)	1
DT3502-QZ	22	115	M14 (22.2)	1

CRIMPED WIRE CUP BRUSHES



For medium applications:
To remove paint, rust, deposits, surface remediation, deburring, etc.



SINGLE PACKS

Cat. No.	Wire length mm	Diameter mm	Bore mm	Pack Qty.
DT3480-QZ	19	65	M14 (22.2)	1
DT3488-QZ	23	75	M14 (22.2)	1
DT3489-QZ	26	100	M14 (22.2)	1

TWIST KNOT WIRE CUP BRUSHES



For the toughest cleaning work.



SINGLE PACKS

Cat. No.	Wire length mm	Diameter mm	Bore mm	Pack Qty.
DT3500-QZ	18	65	M14 (22.2)	1
DT3492-QZ	22	75	M14 (22.2)	1
DT3501-QZ	24	100	M14 (22.2)	1



DIAMOND CUTTING, GRINDING AND DRILLING ACCESSORIES

Engineered to match the DEWALT® standard of cutting and grinding tools, our range of accessories offers versatility, high performance and reliability.

EXTREME®

Metal

For fast cutting of metals with extended blade life.



EXTREME®

Diamond Edge®

For metal cutting.



**Professional
Cutting Discs**

For specific concrete, masonry and tile cutting applications.




Diamond Cups

For finishing and preparation of concrete surfaces.



**High
Performance**

For general cutting of masonry, concrete and tiles.

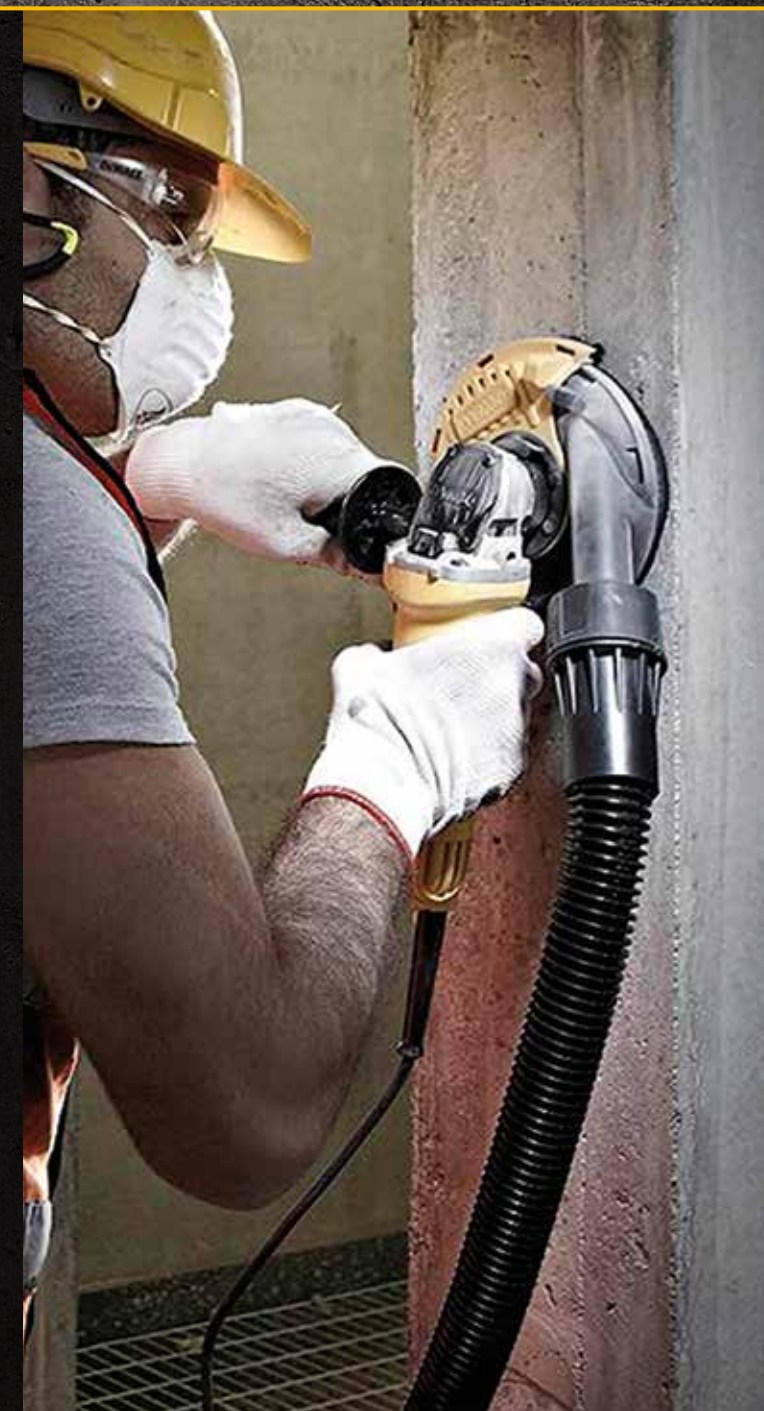

ELITE SERIES

DIAMOND WHEELS

DT20462-QZ

DeWALT ELITE SERIES SEGMENTED

230mm (9")

22.23mm

MAX RPM 6,600

MAX 80m/s

EN12236

HA065718

UP TO 5X LONGER LIFE*

Laser welded segments with more diamonds and a stronger bond for longer life cutting hard materials

*Vs DeWalt HP Diamonds cutting C35 concrete

INCREASED DURABILITY

Laser welded drop segments deliver undercut* protection

*Cutting asphalt and green concrete produces a highly abrasive slurry that wears the steel core faster than the segments. This undercutting could cause the segments to break.

FAST AND EFFICIENT CUTTING

A patented arrow blade design for a quick cut in hard concrete

HIGH QUALITY STRAIGHT DEEP CUTS

Cut deep with aerodynamic vents that keep the high-alloy steel core cool



APPLICATIONS

Designed for fast cutting in the toughest of applications including hard concrete and asphalt.

FOR USE WITH

Cordless cut off saws



BUILT TO LAST™

*Vs DeWalt HP Diamonds cutting C35 concrete

SINGLE PACKS

Cat. No.	Ø mm	Description
DT20462-QZ	230	Segmented Elite ALL PURPOSE
DT20463-QZ	300	Segmented Elite ALL PURPOSE
DT20464-QZ	350	Segmented Elite ALL PURPOSE
DT20465-QZ	350	Segmented Elite REBAR CONCRETE
DT20466-QZ	230	Segmented Elite ASPHALT
DT20467-QZ	350	Segmented Elite ASPHALT



XR EXTREME RUNTIME

CONCRETE AND ALL PURPOSE DIAMOND WHEELS



APPLICATIONS

For cutting construction materials including concrete slabs and curb stones.

FOR USE WITH

54V cut off saws.



SINGLE PACKS

Cat. No.	Ø mm	Description
DT90294-QZ	125	Segmented Extreme Run Time CONCRETE CUTTING
DT40260-QZ	230	Segmented Extreme Run Time CONCRETE CUTTING
DT20468-QZ	180	Segmented Extreme RunTime ALL PURPOSE
DT20460-QZ	300	Segmented Extreme RunTime ALL PURPOSE
DT20461-QZ	350	Segmented Extreme RunTime ALL PURPOSE

EXTREME METAL CUTTING DISCS

DeWALT

EXTREME METAL

COMPLIES WITH AUSTRALIAN STANDARD AS 1788.1-1987 FLANGES MUST BE FITTED AS ILLUSTRATED BELOW

DT40250

100 x 1.3 x 16mm

EN13236

11779

Warning: Cutting wheels must be mounted correctly. Metal guards must be used on all machines. Danger: Do not exceed maximum safe speed. Flanges must be Min. 1/3 diameter of wheel.

1000+ CUTS

30X LONGER WHEEL LIFE

15,300 RPM MAX 80m/s

NS21130

BORDE DE DIAMANT

DIAMOND EDGE

POINTE DE DIAMANT

EXTREME DURABILITY

Up to 1000+ cuts per blade. 30X longer wheel life compared to bonded cut-off wheels*.

BREAKTHROUGH DIAMOND TECHNOLOGY

Robust diamond edge segments prevents wear - the cutting depth of the blade is maintained providing better control and precision.

SAFETY

Strong, solid steel body greatly reduces the risk of breakage.

LESS DUST RESIDUE

Less wear compared to bonded abrasives ensures less dust residue and odour.




APPLICATIONS

For a range of metals including steel, stainless steel, cast iron, rebar, sheet metal, aluminium and non-ferrous metals.

FOR USE WITH

Corded and cordless angle grinders and chop saws.

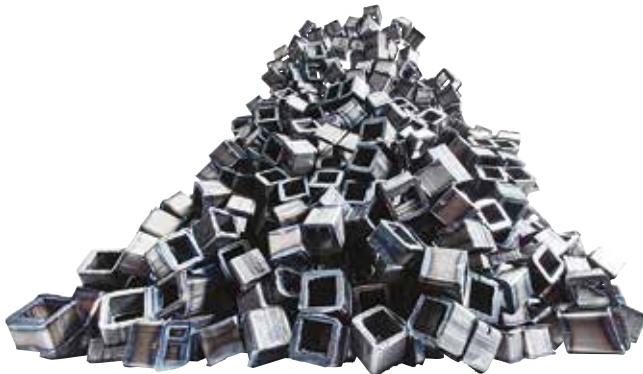

*Average performance of EXTREME® Metal versus 115 x 1mm (Aluminium Oxide) Bonded Abrasive Cutting Disc in 25mm Carbon Steel Tube

SINGLE PACKS

Cat. No.	Ø mm	Bore mm	Segment thickness mm	Pack Qty.
DT40250-QZ	100	16	1.3mm	1
DT40251-QZ	115	22.23	1.3mm	1
DT40252-QZ	125	22.23	1.3mm	1
DT40253-QZ	150	22.23	1.3mm	1
DT40254-QZ	180	22.23	1.5mm	1
DT40255-QZ	230	22.23	1.5mm	1
DT40256-QZ	305	25.4	3.3mm	1
DT40257-QZ	355	25.4	3.3mm	1
DT40258-QZ	305	25.4	3.8mm	1
DT40259-QZ	355	25.4	3.8mm	1



76MM DIAMOND MULTI-MATERIAL DISC



FEATURES

- Long Life: 1,000+ CUTS***
- Diamond[†] technology provides extreme durability in metal cutting applications, leading to fewer wheel changes, compared to thin bonded cut-off wheels.
- Designed to maintain a consistent cutting depth through the duration of its life, unlike a bonded abrasive wheel, the blade offers improved precision and reach.

APPLICATIONS

Recommended for multiple types of materials including metal, drywall, fibre cement, plastic and fibreglass.

FOR USE WITH

DCS438 Cut Off Tool.

[†]This blade uses manufactured diamonds engineered for cutting.
*** average Performance in 1" carbon steel square tube

SINGLE PACK

Cat No.	Description	Diameter mm	Thickness mm	Bore mm	Pack Qty.
DT20590-QZ	76mm Diamond Wheel Metal Cutting	76	1	10	1



EXTREME[®] DIAMOND EDGE[®] CHOP SAW BLADE FOR METAL



FEATURES

- Innovative diamond technology with a 100 times longer service life than conventional cutting discs.
- Very robust, laser-welded diamond cutting blades with a balanced ratio of cutting speed and durability.
- 100 times longer durability than conventionally bonded cutting discs.
- Optimal working at 4,000 rpm.

APPLICATIONS

Can be used in place of conventionally bonded cutting blades. Can be used on all conventional machines that work with bonded cutting blades. Ideal for cutting metal pipe/profile bundles.

FOR USE WITH

Metal cutting abrasive disc chop saws.

SINGLE PACK

Cat No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3752-QZ	355	25.4	3	1.6	1



DIAMOND JOINTING DISCS FOR MASONRY



FEATURES

- Fast removal of mortar and masonry due to the twin wheel construction. Laser welded to disc body for tougher applications.

APPLICATIONS

For mortar raking and wall chasing.

FOR USE WITH

Corded and cordless 125mm angle grinders.

SINGLE PACK

Cat No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3758-QZ	125	22.2	10	6.3	1
DT3757-QZ	125	22.2	10	6.3	1



LASER-WELDED DIAMOND CUTTING DISCS

PROFESSIONAL 1 UNIVERSAL BUILDING MATERIALS AND CONCRETE



FEATURES

- The best choice of diamond blade for fast, aggressive cuts in most standard construction materials.
- Segments laser welded to the core for use in tougher applications.

APPLICATIONS

For use in standard construction materials including concrete, brick, tiles and paving slabs.

FOR USE WITH

Corded and cordless angle grinders.
Diameter 115 - 230mm only for dry cutting.

SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3740-XJ	115	22.2	7.5	2	1
DT3741-XJ	125	22.2	7.5	2	1
DT3743-XJ	230	22.2	8.5	2.4	1



PROFESSIONAL 2 - ABRASIVE MATERIALS AND CONCRETE



FEATURES

- High performance diamond blade providing a balanced combination of cut speed and durability in abrasive materials.
- Segments laser welded to the core for use in tougher applications.

APPLICATIONS

For use in abrasive materials including sandstone, concrete, concrete roof tiles, brick and breeze blocks.

FOR USE WITH

Corded and cordless angle grinders.
Diameter 230mm only for dry cutting.

SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3773-XJ	230	22.2	7.5	2.4	1





LASER-WELDED DIAMOND CUTTING DISCS

PROFESSIONAL 3 - HARD CONCRETE AND GRANITE



FEATURES

- Manufactured using 'Advanced Bond Technology' which increases blade productivity and operating life.
- A layer of pre-alloyed metal encloses the diamond creating.

APPLICATIONS

These blades achieve optimum speed of cut in granite, reinforced concrete and most construction materials.

FOR USE WITH

Corded and cordless angle grinders.



VERY HARD MATERIALS - SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3761-XJ	125	22.2	7.5	2	1
DT3763-XJ	230	22.2	8.5	2.8	1



HIGH PERFORMANCE DIAMOND CUTTING DISCS

HIGH PERFORMANCE 2 - TURBO DISC UNIVERSAL CONCRETE



FEATURES

- "Turbo" cutting edge for fast clean cuts.

APPLICATIONS

For clean cuts in all masonry, concrete and tile materials.

FOR USE WITH

Corded and cordless angle grinders.



TURBO - SINGLE PACKS

Cat. No.*	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3702-QZ	115	22.2	7	2.1	1
DT3712-QZ	125	22.2	7	2.2	1
DT3722-QZ	180	22.2	7	2.4	1
DT3732-QZ	230	22.2	7	2.4	1



SINTERED DIAMOND CUTTING DISCS

PROFESSIONAL 4 - TILE & CERAMICS



FEATURES

- Diamond blade containing a high concentration of top quality diamonds with excellent cutting performance in extremely hard materials.
- Continuous rim sintered blade for fine finish and minimal chipping in tiles and ceramics.

APPLICATIONS

For porcelain tiles, floor and wall tiles, slate, concrete tiles, bricks, terracotta etc.

Not recommended for use on wet tile saws.

FOR USE WITH

Corded and cordless angle grinders.



SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3735-XJ	115	22.2	7	1.6	1
DT3736-XJ	125	22.2	7	1.6	1
DT3738-XJ	230	22.2	7	2.1	1



APPLICATIONS

Clean cuts in tiles and ceramics materials.

FOR USE WITH

Corded and cordless angle grinders.



TURBO - SINGLE PACKS

Cat. No.*	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3703-QZ	115	22.2	5	1.6	1
DT3713-QZ	125	22.2	5	1.6	1
DT40206-QZ	180	22.2	5	?	1
DT40207-QZ	230	22.2	5	?	1





HIGH PERFORMANCE DIAMOND CUTTING DISCS

HIGH PERFORMANCE 1 - SEGMENTED DISC UNIVERSAL CONCRETE



FEATURES

- Fast cutting, segmented disc.

APPLICATIONS

General construction material such as building blocks, paving blocks and concrete.

FOR USE WITH

Corded and cordless angle grinders.



SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3701-QZ	115	22.2	7	2.1	1
DT3711-QZ	125	22.2	7	2.2	1
DT3721-QZ	180	22.2	7	2.4	1
DT3731-QZ	230	22.2	7	2.4	1



HIGH PERFORMANCE 1 - SEGMENTED WET OR DRY CUTTING DISCS



FEATURES

- Fast cutting segment diamond disc.

APPLICATIONS

For cutting concrete slabs and curb stones.

FOR USE WITH

Petrol disc cutters.



SINGLE PACKS

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT40212-QZ	300	25.4 / 20	10	?	1
DT40213-QZ	350	25.4 / 20	10	?	1



76MM DIAMOND CONTINUOUS TILE BLADE



FEATURES

- Continuous diamond rim design[†] minimises tile chipping for fast clean cuts
- A high-strength steel core ensure smooth straight cuts.

APPLICATIONS

Engineered to last long in a variety of tiles including ceramic and porcelain.

FOR USE WITH

DCS438 Cut Off Tool.

[†]This blade uses manufactured diamonds engineered for cutting.

SINGLE PACK

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT20591-QZ	76	10	7	1	1



DIAMOND TILE CUTTING DISC



FEATURES

- Continuous rim for chip free cuts in tiles and ceramic tiles.

APPLICATIONS

For wet and dry cuts in hard materials such as ceramic tiles, stoneware, granite and marble.

FOR USE WITH

Portable tile saw DWC410.



SINGLE PACK

Cat. No.	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3715-QZ	110	20	8	1.6	1
DT3714-QZ	110	20	5	1.6	1



DIAMOND TILE CUTTING DISCS - STATIONARY SAWS

PROFESSIONAL 4 - STATIONARY



FEATURES

- Continuous rim for chip free cuts in tiles and ceramic tiles.

APPLICATIONS

For wet and dry cuts in hard materials such as ceramic tiles, stoneware, granite and marble.

FOR USE WITH

D24000 and other stationary saws.



TURBO - SINGLE PACK

Cat. No.*	Diameter mm	Bore mm	Segment height mm	Segment thickness mm	Pack Qty.
DT3734-XJ	250	25.4	5	1.6	1
DT3733-XJ	250	25.4	8	1.6	1







Corded and cordless angle grinders and
associate dust extraction guard.



Cat. No.	Diameter mm	Shank	Segment height mm	Cup	Pack Qty
DT3796-QZ	125	M14	6	Double	1
DT3797-QZ	125	M14	6	Turbo	1
DT3795-QZ	125	M14	5	Single	1



HIGH PERFORMANCE

Universal Construction materials Concrete	Abrasive materials Abrasive materials Concrete	Extreme hard materials Granite Concrete	Tiles Hard ceramics
1	2	3	4
			
			

Universal Construction material Concrete	Turbo Construction material Concrete	Tiling Hard ceramics
1	2	4
		
		

Asphalt				
Fresh concrete				
Light bricks (Poroton®, Unipor®, Porotherm®, Argex®, Syporex®)	●	●		
Firebricks	●	●		
Slag stone	●	●		

Terrazzo, granite	●	●		●
Cement fibre boards	●	●		●
Lightweight concrete	●	●		●
Clay brick (brick, tile)	●	●		●
Plasterboard	●	●		●
Natural stone, soft	●	●		●
Handform brick	●	●	●	●
Concrete roof tile	●	●	●	●
Sand-lime brick	●	●	●	

Concrete with soft aggregates (industrial flooring)	●	●	●	
Medium hard sandstone	●	●	●	
Abrasive marble (crystalline)	●	●		
Hard-ceramics (clinker, bricks)	●		●	
Clay pipe, stoneware pipe	●	●		

Natural slate	●	●	●	
Concrete (board and edging stones, blocks)	●		●	
Lightweight concrete (reinforced)			●	
Concrete with medium hard aggregates (industrial flooringwe)	●		●	
Treated concrete with medium-hard aggregates	●		●	
Hard sandstone	●		●	

Hard marble	●		●	
Reinforced concrete (window sills)	●		●	
Treated concrete with hard aggregates (pebbles)	●		●	
Clinker, bricks brick	●		●	
Quartzite			●	
Hardbrand ceramics (clinker brick, brick), medium hard concrete			●	
Soft granite (black)			●	

Light, reinforced concrete (with pebbles)			●	
Colorful granite			●	
Clinker			●	

Soft tiles, terracotta					●
Hard tiles					●
Stoneware, porcelain					●
Mortar Joints (Facade Restoration)					

● Especially suitable ● Suitable



MULTI-TOOL ACCESSORIES

From multicutter accessories to rotary tool accessories, find the right one to match the application with our range of multi-tool accessories.

Saw Packs

For fast cutting of metal, wood, wood with nails, plastics and plasterboard.



Cut/Fill/Scrape

For a wide variety of work tasks.



Tile and Joints Processing

For a wide variety of work tasks.



Sanding

For all of your sanding needs.





MULTI-TOOL

SAW PACKS

Cat. No.	Description	Application	Pack Qty.
DT20701-QZ	BiM saw blade 43 x 30mm	Wood, wood with nails, plastics and plasterboard	1
DT20702-QZ	BiM-Titan Saw Blade 55 x 44mm	Wood, wood with nails, plastics and plasterboard	1
DT20703-QZ	BiM saw blade 67x 30mm	Hardwood. Suitable for plastics and plasterboard	1
DT20704-QZ	BiM saw blade 43 x 30mm	Fast cuts in wood, plastics and plasterboard. High cutting speed	1
DT20705-QZ	BiM saw blade 43 x 65mm	Fast cuts in wood, plastics and plasterboard. High cutting speed	1
DT20706-QZ	BiM detail saw blade 43 x 10mm	Cut-outs and recesses in wood, plastic and plasterboard	1
DT20707-QZ	Titanium metal saw blade 43x 30mm	Metal, wood, wood with nails, plastics and plasterboard	1
DT20708-QZ	BiM segment saw blade 100mm	Wood, wood with nails, plastics and plasterboard	1
DT20709-QZ	Titanium segment saw blade 100mm	Wood, wood with nails, plastics and plasterboard	1
DT20710-QZ	BiM segment saw blade 100mm, cranked	Flush cuts in wood, wood with nails, plastics and plasterboard	1
DT20711-QZ	Titanium segment saw blade 100mm, cranked	Wood, wood with nails, plastics and plasterboard	1
DT20740-QZ	Japanese saw blade 32mm HCS cut surfaces	Hardwood	1
DT20741-QZ	Japanese saw blade 64mm - HCS surfaces	Hardwood	1
DT20742-QZ	35mm (1-3/8") Carbide Blade	Longer lasting for better results in wood, cutting nails, light gauge metals, grout, plaster etc.	2
DT20743-QZ	35mm (1-3/8") Carbide Blade	Longer lasting for better results in wood, cutting nails, light gauge metals, grout, plaster etc.	1
DT20747-QZ	64mm (2-1/2") Bi Metal Wood w/Nails TiN	Wood, wood with nails, drywall, PVC. The titanium blade has longer life in wood and nails than the non-titanium version.	1
DT20748-QZ	64mm (2-1/2") Bi Metal Wood w/Nails	Wood, wood with nails, drywall, PVC	1

MULTI-TOOL

CUT/FILL/SCRAPE - SINGLE PACKS

Cat. No.	Description	Application	Pack Qty.
DT20712-QZ	Multi-material cutting blade 100mm	Cutting roof shingles, plastic, foam, rubber, cardboard, leather, carpet floor etc.	1
DT20714-QZ	Solid filler 52mm	Removing adhesive residues, carpeting, tile adhesive, mortar, concrete residues	1
DT20716-QZ	Flexible Scraper Blade 35mm	To remove silicone joints, soft carpet adhesive residues, paint residues	1
DT20749-QZ	Caulk Removing (Wide)	Caulk removal	1
DT20750-QZ	Rectangular Scraping (Flush)	Caulk removal in expansion joints	1
DT20751-QZ	Carbide Flush Cut Finger	Coarse sanding of fillers, tile adhesive, concrete, stone and wood.	1

TILE AND JOINTS PROCESSING - SINGLE PACKS

Cat. No.	Description	Application	Pack Qty.
DT20717-QZ	Hard metal Segment saw blade 95mm, 3mm cutting width	Milling fine tile joints and slits in plaster or similar materials.	1
DT20718-QZ	Carbide segment saw blade 95mm, 5mm cutting width	Cutting tile joints and cracks in plaster or similar materials. Carbide edged for extra toughness and durability in harder materials. Faster joint separating.	1
DT20719-QZ	Carbide rasp	Coarse grinding of tile adhesives, concrete, and wood. Optimised carbide grain size for effective material removal.	1
DT20739-QZ	Diamond saw blade 7 5x 60 mm, cutting width 2.4 mm	Tile joints and cracks in plaster or similar materials. Diamond edged for additional blade life and durability.	1
DT20745-QZ	Diamond Half Moon	Tile grout, cutting grooves in plaster, lightweight concrete, and similar construction materials	1
DT20746-QZ	Diamond Flush Cut	Tile grout, cutting grooves in plaster, lightweight concrete, and similar construction materials	1

SANDING PACKS

Cat. No.	Description	Application	Pack Qty.
DT20700-QZ	Sanding plate with suction	Sanding	1
DT3090-QZ	Triangular abrasive paper 93 x 93mm, K40	Sanding	10
DT3091-QZ	Triangular abrasive paper 93 x 93mm, K60	Sanding	10
DT3092-QZ	Triangular abrasive paper 93 x 93mm, K80	Sanding	10
DT3093-QZ	Triangular abrasive paper 93 x 93mm, K120	Sanding	10
DT3094-QZ	Triangular abrasive paper 93 x 93mm, K180	Sanding	10
DT3095-QZ	Triangular abrasive paper 93 x 93mm, K240	Sanding	10
DTM3092-QZ	EXTREME® triangle abrasive mesh 93 x 93mm, K80	Sanding	5
DTM3093-QZ	EXTREME® triangle abrasive mesh 93 x 93mm K120	Sanding	5
DTM3095-QZ	EXTREME® triangle abrasive mesh 93 x 93mm K240	Sanding	5

MULTI-TOOL ACCESSORIES



5 PIECE PACKS

Cat. No.	Description	Application	Pack Qty.
DT20723-QZ	DT20701 x5 Wood with Nails Blade 30 x 43mm	For use in wood, wood with nails, plastics and plasterboard	5
DT20724-QZ	DT20703 x5 Hardwood Blade 30 x 67mm	For use in hardwood. Suitable for plastics and plasterboard	5
DT20725-QZ	DT20704 x5 Fastcut Wood Blade 30 x 43mm	For fast cuts in wood, plastics and plasterboard. High cutting speed	5
DT20726-QZ	DT20706 x5 Wood Detail Blade 10 x 43mm	For cut-outs and recesses in wood, plastic and plasterboard	5
DT20727-QZ	DT20707-QZ x5 Titanium Metal Blade 30 x 43mm	For use in metal, wood, wood with nails, plastics and plasterboard	5
DT20728-QZ	DT20708-QZ x5 Semicircle Blade 100mm	For use in wood, wood with nails, plastics and plasterboard	5
DT20729-QZ	DT20710-QZ x5 Flush Cut Blade 100mm	Suitable for flush cuts in wood, wood with nails, plastics and plasterboard	5

BULK PACKS X25

Cat. No.	Description	Pack Qty.
DT20733-QZ	Fast Cut Wood Blade 30mm x 43mm	25
DT20734-QZ	Wide Fast Cut Wood Blade 65mm x 43mm	25
DT20735-QZ	Wood with Nails Blade 30mm x 43mm	25
DT20736-QZ	Titanium Wood/Metal Blade 44mm x 55mm	25
DT20737-QZ	Titanium Metal Blade 30mm x 43mm	25

SETS

Cat. No.	Description	Application	Pack Qty.
DT20713-QZ	3 Piece Multi-Tool Accessory Set DT20701 x1 / DT20706 x1 / DT20704 x1	Mixed applications	3
DT20715-QZ	5 Piece Multi-Tool Accessory Set DT20701 x2 / DT20704 x1 / DT20714 x1 / DT20711 x1	Mixed applications	5
DT20731-QZ	8 Piece Multi-Tool Accessory & Sanding Set DT20700 x1 / DT20701 x1 / DT20704 x1 / DT20705 x1 / DT20710 x1 Detail Sanding Paper x3 (60G, 80G, 120G)	Mixed applications	8
DT20732-QZ	6pc Oscillating Blade Set: Wood + Nails - DT20701-QZ 30mm 20TPI (2) Wood + Fast Cut - DT20704-QZ 30mm 18TPI (1) Wood + Wide Blade - DT20705-QZ 65mm 15TPI (1) Wood + Detail Blade - DT20706-QZ 10mm 18TPI (1) Universal Adapter (1)	Mixed applications	6
DT20760-QZ	3pc Oscillating Blade Set: Wood + Nails - DT20701-QZ 30mm 20TPI (1) Wood + Nails - DT20702-QZ 44mm 20TPI (1) Wood - Wide Blade - DT20705-QZ 65mm 15TPI (1)	Mixed applications	3

OSCILLATING BLADES - QUICK REFERENCE GUIDE



Cat No.	Wood	Wood with Nails	Drywall	PVC	Metal	Asphalt Roofing Shingles	Carpet	Cardboard	Vinyl Flooring	Foam Insulation	Tile	Adhesives Lacquers Sealants	Brick
DT20700	●		●	●									
DT20701	●	●	●	●									
DT20702	●	●	●	●									
DT20703	●		●	●									
DT20704	●		●	●									
DT20705	●		●	●									
DT20706	●		●	●									
DT20707					●								
DT20708	●	●	●	●									
DT20709	●	●	●	●									
DT20710	●	●	●	●									
DT20711	●	●	●	●									
DT20712						●	●	●	●	●			
DT20713	●	●	●	●									
DT20714												●	
DT20715	●	●	●	●								●	
DT20716												●	
DT20717											●		
DT20718											●		
DT20719												●	
DT20723	●	●	●	●									
DT20724	●		●	●									
DT20725	●		●	●									
DT20726	●		●	●									
DT20727					●								
DT20728	●	●	●	●									
DT20729	●	●	●	●									
DT20731	●	●	●	●								●	
DT20732	●	●	●	●								●	
DT20733	●		●	●									
DT20734	●		●	●									
DT20735	●	●	●	●									
DT20736	●	●	●	●									
DT20737					●								
DT20739	●	●	●	●							●		
DT20740	●		●	●									
DT20741	●		●	●									
DT20742	●	●	●	●	●							●	
DT20743	●	●	●	●	●							●	
DT20745			●								●		●
DT20746			●								●		
DT20747	●	●	●	●									
DT20748	●	●	●	●									
DT20749												●	
DT20750												●	
DT20751	●											●	●

SETS AND STORAGE

From recip blades and screwdriver bits to router bits and hole saws, DEWALT offers a wide range of accessory sets, to ensure you always have everything you need, when you need it.



WITH OVER 40 NEW PRODUCTS THAT ALLOW YOU TO BUILD THE ACCESSORIES SET, YOU NEED.

1. CHOOSE YOUR CASE



2. CHOOSE YOUR ACCESSORIES




3. CONSTRUCT YOUR KIT



BUILT BY YOU. BUILT TOUGH.

BUILD YOUR OWN TOUGHCASE



MASONRY DRILLING SETS



XLR SDS-plus - FULL HEAD CARBIDE

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT8976-QZ	7pc XLR SDS-plus Drilling Set Full Head Carbide	XLR SDS-plus FULL HEAD CARBIDE	XLR SDS-plus FHC masonry drill bits: 5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 8mm x 110mm, 8mm x 160mm, 10mm x 160mm, 12mm x 160mm	110 160	10
DT70752-QZ	10pc Set XLR SDS Plus Full Head Carbide	XLR SDS-plus FULL HEAD CARBIDE	SDS-plus Full Head Carbide masonry drill bits: 5mm x 110mm, 6mm x 110mm x2, 6mm x 160mm x2, 6.5mm x 160mm, 8mm x 160mm x2, 10mm x 160mm, 12mm x 160mm.	110 160	10

EXTREME® 2 SDS-plus

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT70753-QZ	10pc SDS-plus EXTREME® 2 Set	SDS-plus EXTREME® 2	SDS-plus EXTREME® DeWALT 2 masonry drill bits: 5mm x 110mm, 6mm x 110mm x2, 6mm x 160mm x2, 7mm x 160mm, 8mm x 160mm, 9mm x 160mm, 10mm x 160mm, 12mm x 160mm	110 160	4
DT9700-QZ	4pc SDS-plus EXTREME® 2 Drilling Set	SDS-plus EXTREME® 2		110 160	7
DT9701-QZ	7pc SDS-plus EXTREME® 2 Drilling Set	SDS-plus EXTREME® 2	SDS-plus EXTREME® 2 masonry drill bits: 5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 8mm x 110mm, 8mm x 160mm, 10mm x 160mm, 12mm x 160mm	110 160	4
DT9702-QZ	4pc SDS-plus EXTREME® 2 Drilling Set	SDS-plus EXTREME® 2	SDS-plus EXTREME® 2 masonry drill bits: 5.5mm x 160mm, 7mm x 160mm, 8mm x 160mm, 10mm x 160mm	160	5
DT9740-QZ	10pc SDS-plus EXTREME® Drilling Set	SDS-plus EXTREME®	SDS-plus EXTREME® masonry drill bits mm: 5mm x 160mm, 5.5mm x 160mm x3, 7mm x 160mm x3, 8mm x 160mm, 10mm x 160mm, 12mm x 160mm	160	8

SDS-plus DRILLING SETS

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT60300-QZ	8pc SDS-plus Drilling Set	SDS-plus	SDS-plus drill bits: 6mm x2, 7mm x2, 8mm x2, 10mm x2	160	5
DT60301-QZ	5pc SDS-plus Drilling Set	SDS-plus	SDS-plus drill bits: 5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 8mm x 160mm, 10mm x 160mm	110 160	6
DT60302-QZ	6pc SDS-plus Drilling Set	SDS-plus	SDS-plus drill bits: 6mm x 160mm x2, 8mm x 160mm x2, 10mm x 160mm x2	160	3
DT9396-QZ	5pc SDS-plus Drilling Set (12 Set Counter Top Display)	SDS-plus	SDS-plus masonry drill bits: 5mm, 6mm x2, 8mm x2, 160mm	160	5
DT9397-QZ	5pc SDS-plus Drilling Set (12 Set Counter Top Display)	SDS-plus	SDS-plus masonry drill bits: 5.5mm x3, 7mm x2, 160mm	160	5
DT9398-QZ	5pc SDS-plus Drilling Set (12 Set Counter Top Display)	SDS-plus	SDS-plus masonry drill bits: 5.5mm x3, 7mm x2	110	5
DT9399-QZ	5pc SDS-plus Drilling Set (12 Set Counter Top Display)	SDS-plus	SDS-plus masonry drill bits: 5mm, 6mm x2, 8mm x2.	110	5

SDS PLUS MASONRY DRILLING AND CHISELLING SETS



SDS-plus DRILLING AND CHISELLING SETS

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT60300-QZ	8pc SDS-plus Drilling Set	SDS-plus	SDS-plus drill bits: 6mm x2, 7mm x2, 8mm x2, 10mm x2	160	5
DT9670-QZ	15pc SDS-plus Drill & Chisel Set in ALU case	SDS-plus	11 x SDS-plus masonry drill bits: 4mm x 110mm, 5mm x 110mm, 5.5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 7mm x 110mm, 7mm x 160mm x 2, 10mm x 160mm, 12 x 160mm, 14mm x 210mm 4 x SDS-plus masonry chisels: Point Chisel 250mm Flat Chisel 20mm x 250mm Flat Chisel 40mm x 250mm	110 160 210 250	15
DT9679-QZ	15pc SDS-plus Drill & Chisel Set in ALU case	SDS-plus	11 x SDS-plus masonry drill bits: 5mm x110mm, 5.5mm x 110mm, 6mm x 110mm, 6mm x 160mm, 7mm x 110mm, 8mm x 110mm, 8mm x 160mm, 10mm x 110mm, 10mm x 160mm, 12 x 160mm, 14mm x 210mm 4 x SDS-plus masonry chisels: Point Chisel 250mm Flat Chisel 20mm x 250mm Flat Chisel 40mm x 250mm	110 160 210 250	15
DT60331-QZ	6pc SDS-plus Drill and Chisel Set	SDS-plus	SDS-plus drill bits: 5.5mm x 160mm, 6mm x 160mm, 7mm x 160mm. Point Chisel 250mm Flat Chisel 250mm x 20mm Flat Chisel 250mm x 40mm	110 160 210 250	15

EXTREME® MASONRY DRILLING SET

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT6956-QZ	5pc Drilling Set	EXTREME®	Masonry drill bits: 4mm x 75mm, 5mm x 85mm, 6mm x 100mm, 8mm x 120mm, 10mm x 120mm	75 85 100 120	-

HEX SHANK - MULTI MATERIAL / STRAIGHT SHANK - MASONRY

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT60099-QZ	5pc Multi-Material Drilling Set	Hex Shank	Multi-Material drill bits: 4, 5, 5.5, 6, 8mm	152	5
DT6952-QZ	5pc Drilling Set	Straight Shank	Masonry drill bits: 4mm x 75mm, 5mm x 85mm, 6mm x 100mm, 8mm x 120mm, 10mm x 120mm	75 85 100 120	5
DT9288-QZ	8pc Drilling Set	Straight Shank	Masonry drill bits: 3mm x 60mm, 4mm x 75mm, 5mm x 85mm, 6mm x 100mm, 7mm x 100mm, 8mm x 120mm, 9mm x 120mm, 10mm x 120mm	60 75 85 100 120	8

SDS-max CHISEL SET / SDS-plus CHISEL SET

Cat. No.	Description	Type	Contents	Length (mm)	Pack Quantity
DT9000-QZ	2pc SDS-max Flat & Pointed Chisel Set	SDS-max	Point Chisel Flat Chisel	400	2
DT60330-QZ	3pc SDS-plus Chisel Set	SDS-plus	Point Chisel Flat Chisel 20mm x 250mm Flat Chisel 40mm x 250mm	250	7

METAL DRILLING SETS



BLACK & GOLD HSS-G DRILL BITS

Cat. No.	Description	Ø mm
DT70727-QZ	14 pc	1 (x1) / 1.5 (x2) / 2 (x2) / 2.5 (x1) / 3 (x2) / 3.5 (x1) / 4 (x2) / 5 (x1) / 6 (x1) / 8 (x1)
DT70728-QZ	19pc	1 (x1) / 1.5 (x1) / 2 (x2) / 2.5 (x2) / 3 (x2) / 3.5 (x2) / 4 (x2) / 5 (x2) / 5.5 (x1) / 6 (x1) / 7 (x1) / 8 (x1) / 10 (x1)
DT70729-QZ	23pc	1 (x2) / 1.5 (x2) / 2 (x2) / 2.5 (x2) / 3 (x2) / 3.5 (x2) / 4 (x2) / 4.5 (x1) / 5 (x2) / 6 (x1) / 7 (x1) / 8 (x1) / 9 (x1) / 10 (x1) / 12 (x1)
DT70755-QZ	21pc	1 / 1.5 / 2 / 2.5 / 3 / 3.2 / 3.3 / 3.5 / 4 / 4.2 / 4.5 / 4.8 / 5 / 5.5 / 6 / 6.5 / 7 / 7.5 / 8 / 10 / 12

COBALT

Cat. No.	Description	Type	Contents	Pack Quantity
DT4956-QZ	6pc Cobalt Set	Cobalt	Cobalt metal drill bits: 2, 3, 4, 5, 6, 8mm	6
DT4957-QZ	29pc Cobalt Drilling Set	Cobalt	Cobalt metal drill bits: 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm	29
DT5935-QZ	10pc Cobalt Drilling Set	Cobalt	Cobalt metal drill bits: 1, 2, 3, 4, 5mm x 86mm, 6mm x 93mm, 7mm x 109mm, 8mm x 117mm, 9mm x 125mm, 10mm x 133mm	10
DT5936-QZ	19pc Cobalt Drilling Set	Cobalt	Cobalt metal drill bits: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5mm x 86mm, 5.5mm x 93mm, 6mm x 93mm, 6.5mm x 101mm, 7mm x 109mm, 7.5mm x 109mm, 8mm x 117mm, 8.5mm x 117mm, 9mm x 125mm, 9.5mm x 125mm, 10mm x 133mm	19
DT4968-QZ	13pc Industrial Cobalt Set	Cobalt	Industrial Cobalt metal drill bits: 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm	13

TITANIUM

Cat. No.	Description	Type	Contents	Pack Quantity
DT71916-QZ	29pc Titanium Drill Set in Tough Case (Imperial drill bit sizes)	Titanium	1/16" (1.6mm), 5/64" (2.0mm), 3/32" (2.4mm), 7/64" (2.8mm), 1/8" (3.2mm), 9/64" (3.6mm), 5/32" (4.0mm), 11/64" (4.4mm), 3/16" (4.8mm), 13/64" (5.2mm), 7/32" (5.6mm), 15/64" (6.0mm), 1/4" (6.4mm), 17/64" (6.7mm), 9/32" (7.1mm), 19/64" (7.5mm), 5/16" (7.9mm), 21/64" (8.3mm), 11/32" (8.7mm), 23/64" (9.1mm), 3/8" (9.5mm), 25/64" (9.9mm), 13/32" (10.3mm), 27/64" (10.7mm), 7/16" (11.1mm), 29/64" (11.5mm), 15/32" (11.9mm), 31/64" (12.3mm), 1/2" (12.7mm)	29
DT7914-QZ	14pc Titanium Drilling Set (Imperial Sizes)	Titanium	Titanium Metal drill bits: 1/16" (1.6mm) x2, 5/64" (2mm), 3/32" (2.4mm), 7/64" (2.8mm), 1/8" (3.2mm) x2, 9/64" (3.6mm), 5/32" (4mm), 3/16" (4.8mm), 1/4" (6.4mm), 5/16" (8mm), 3/8" (9.5mm), 1/2" (12.7)	14

EXTREME® 2

Cat. No.	Description	Type	Contents	Pack Quantity
DT7926-XJ	29pc EXTREME® 2 Drilling Set	EXTREME® 2	EXTREME® 2 Metal drill bits: 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm	29

HSS-G

Cat. No.	Description	Type	Contents	Pack Quantity
DT5920-QZ	19pc HSS-G Drilling Set	HSS-G	HSS-G Metal drill bits: 1mm x2, 1.5mm x3, 2mm x3, 2.5 x2, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 8mm	19
DT5921-QZ	10pc HSS-G Drilling Set	HSS-G	HSS-G Metal drill bits: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10mm	10
DT5922-QZ	13pc HSS-G Drilling Set	HSS-G	HSS-G Metal drill bits: 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5 x2, 5.5, 6, 6.5mm	13
DT5923-QZ	19pc HSS-G Drilling Set	HSS-G	HSS-G Metal drill bits: 1mm x 34mm, 1.5mm x 40mm, 2mm x 49mm, 2.5mm x 57mm, 3mm x 61mm, 3.5mm x 70mm, 4mm x 75mm, 4.5mm x 80mm, 5mm x 86mm, 5.5mm x 93mm, 6mm x 93mm, 6.5mm x 101mm, 7mm x 109mm 7.5mm x 109mm, 8mm x 117mm, 8.5mm x 117mm, 9mm x 125mm, 9.5mm x 125mm, 10mm x 133mm	19
DT5929-QZ	29pc HSS-G Drilling Set	HSS-G	HSS-G Metal drill bits: 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm	29

HSS-R

Cat. No.	Description	Type	Contents	Pack Quantity
DT5911-QZ	10pc HSS-R Drilling Set	HSS-R	HSS-R Metal drill bits: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10mm.	10
DT5912-QZ	13pc HSS-R Drilling Set	HSS-R	HSS-R Metal drill bits: 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5x2, 5.5, 6, 6.5mm	13
DT5913-QZ	19pc HSS-R Drilling Set	HSS-R	HSS-R Metal drill bits: 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10mm	19
DT5930-QZ	29pc HSS-R Drilling Set	HSS-R	HSS-R Metal drill bits: 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm	29

WOOD DRILL BIT SETS



EXTREME® IMPACT FLATWOOD SET

Cat. No.	Description	Contents	Pack Quantity
DT70751-QZ	9pc EXTREME Impact Flatwood Set	EXTREME Flatwood drill bits mm: 12, 14, 16, 18, 20, 22, 25, 28, 32. Hex shank	9

EXTREME® TRI-FLUTE BIT SETS

Cat. No.	Description	Ø mm	Total Legnth mm	Pack Quantity
DT90237-QZ	3 piece tri-flute bit set	16 / 20 / 25mm	152	3
DT90238-QZ	6 piece tri-flute bit set	13 / 16 / 20 / 22 / 25 / 32mm	152	6

HIGH PERFORMANCE

Cat. No.	Description	Length (mm)	Contents	Pack Quantity
DT70750-QZ	8pc Flat Wood Set	152mm	Hex shank flat wood drill bits: 12, 16, 18, 20, 22, 5, 28, 32mm	8
DT4535-QZ	5pc Brad Point Set		Brad Point drill bits: 4, 5, 6, 8, 10mm	5

EXTREME BI-METAL HOLE SAW SETS



SINGLE PACKS

Cat. No.	Diameter mm
DT90350-QZ	BIM Hole Saw General 13pc
DT90351-QZ	BIM Hole Saw Elec. 11pc
DT90352-QZ	BIM Hole Saw Elec. 11pc
DT90353-QZ	BIM Hole Saw General 11pc
DT90354-QZ	BIM Hole Saw Elec. 11pc
DT90355-QZ	BIM Hole Saw Plumber 11pc
DT90356-QZ	BIM Hole Saw Elec. 11pc
DT90357-QZ	BIM Hole Saw General 10pc
DT90358-QZ	BIM Hole Saw General 10pc
DT90359-QZ	BIM Hole Saw General 11pc
DT90360-QZ	BIM Hole Saw General 12pc
DT90361-QZ	BIM Hole Saw General 13pc

Each set includes: 2x Mandrels and 2x Pilot Bits

HIGH PERFORMANCE

Cat. No.	Description	Contents	Pack Quantity
DT90350-QZ	BIM HoleSaw General 13pc Extreme Set	16, 19, 25, 32, 38, 44, 48, 51, 64mm (DT83001-QZ)	13
DT90351-QZ	BIM HoleSaw Elec. 11pc Extreme Set	16, 20, 25, 32, 40, 51, 64mm (DT83003-QZ)	11
DT90352-QZ	BIM HoleSaw Elec. 11pc Extreme Set	20, 25, 32, 35, 44, 51, 64mm (DT83004-QZ)	11
DT90353-QZ	BIM HoleSaw General 11pc Extreme Set	22, 29, 35, 44, 51, 64, 68mm (DT8270L-QZ)	11
DT90354-QZ	BIM HoleSaw Elec. 11pc Extreme Set	16, 20, 25, 32, 35, 51, 64mm (DT8273L-QZ)	11
DT90355-QZ	BIM HoleSaw Plumber 11pc Extreme Set	19, 22, 29, 38, 44, 51, 57mm (DT8269L-QZ)	11
DT90356-QZ	BIM HoleSaw Elec. 11pc Extreme Set	16, 19, 22, 25, 29, 32, 35, 44, 51mm (ANZ new)	11
DT90357-QZ	BIM HoleSaw General 10pc Extreme Set	16, 20, 25, 32, 40, 51mm (ANZ new)	10
DT90358-QZ	BIM HoleSaw General 10pc Extreme Set	20, 25, 32, 38, 51, 64 (UK new)	10
DT90359-QZ	BIM HoleSaw General 11pc Extreme Set	19, 25, 32, 35, 51, 64 (EU new)	11
DT90360-QZ	BIM HoleSaw General 12pc Extreme Set	20, 22, 25, 32, 35, 44, 51, 64mm (UK new)	12
DT90361-QZ	BIM HoleSaw General 13pc Extreme Set	20, 22, 25, 32, 35, 38, 44, 51, 64mm (EU new)	13

SCREWDRIVER BIT SETS

TSTAK®

FLEX
TORQ®

TOUGH
CASE+



FLEX
TORQ®



TOUGH
CASE+



EXTREME® FLEXTORQ 25MM BITS - SMALL BULK STORAGE SETS

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT70555T-QZ	PH2	25	PH2 x25	25
DT70556T-QZ	PZ2	25	PZ2 x25	25
DT70557T-QZ	T20	25	T20 x25	25
DT70558T-QZ	T25	25	T25 x25	25
DT70559T-QZ	T40	25	T40 x25	25
DT70618T-QZ	PZ2	25	PZ2 x15 Compact Magnetic Drive Guide	16
DT70621T-QZ	PZ2	25	PZ2 x25 Compact Magnetic Drive Guide	25
DT70522T-QZ	PZ2, T15, T20, T25	25	PZ2 x6, T15 x3, T20 x3, T25 x3 Compact Magnetic Drive Guide	16
DT70564T-QZ	PZ2	25	PZ2 x25 Compact Magnetic Drive Guide	26
DT70577T-QZ	PH2, PZ2, T10, T15, T20, T25	25	PH2 x3, PZ2 x3, T10 x2, T15, T20 x3, T25 x3 Compact Magnetic Drive Guide	16
DT70586T-QZ	PH2	25	PH2 x25	25
DT71910-QZ	PH2	25	PH2 x25 Compact Magnetic Drive Guide	26
DT71911-QZ	SQ2	25	SQ2 x25 Compact Magnetic Drive Guide	26
DT70588T-QZ	PZ2	25	PZ2 x 25, Impact Ready Drive Guide	26
DT70589T-QZ	PZ2	25, 57	PZ2 25mm x25, PZ2 57mm x5, Impact Ready Drive Guide	31

57MM FLEXTORQ BITS - KEYRING SETS/MERCHANDISERS

Cat. No.	Description	Contents
DT7275-QZ	10-Piece TORX FlexTorq Bits Keyring (50 Set Cookie Jar Merchandiser)	T20 x3, T25 x4, T30 x6
DT7276-QZ	10-Piece POZI FlexTorq Bits Keyring (50 Set Cookie Jar Merchandiser)	PZ1 x 2, PZ2 x6, PZ3 x2

HIGH PERFORMANCE BITS - SMALL BULK STORAGE SETS

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DP42-QZ	T20	25mm	T20 x25	25
DP43-QZ	T25	25mm	T25 x25	25
DP44-QZ	T30	25mm	T30 x25	25
DP73-QZ	PZ2	50mm	PZ2 x15	15
DT71521-QZ	PZ2	25mm	PZ2 x25	25
DT71522-QZ	PH2	25mm	PH2 x25	25
DT71706-QZ	PZ2	25mm	PZ2 x25	25
DT71560-QZ	PZ2	25mm	PZ2 x25	26
DT71511-QZ	PH2, PZ2, PZ3, T20, T25	25mm	PH2 x2, PZ2 x6, PZ3 x3, T20 x2, T25 x2 Compact Magnetic Drive Guide	16
DT71573-QZ	PH2, PZ2, PZ3, T20, T25	25mm	PH2 x2, PZ2 x2, PZ3, T20 x6, T25 x4 Compact Magnetic Drive Guide	16
DT71910-QZ	PH2	25mm	PH2	25
			Compact Magnetic Drive Guide	

25MM BITS FOR DRYWALL APPLICATIONS - SMALL BULK STORAGE SETS

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT7300-QZ	PR2	25mm	PR2 x25	25

SCREWDRIVER BIT SETS

FLEX
TORQ®



EXTREME® IMPACT TORSION - 25MM BITS - SLIM POCKET CASE

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT70512T-QZ	14pc Set	25mm	25mm: PH1, PH2, PH3, PZ1, PZ2x3, PZ3, SL6, T20, T25, T30, Magnetic drive guides x2 (compact & longer version)	
DT70574T-QZ	14pc Set	25mm	25mm: PH1, PH2x2, T10, T15, T20x2, T25x2, T30, PZ1, PZ2, Magnetic drive guides x2 (compact & longer version)	

HIGH PERFORMANCE - 25MM BITS - SLIM POCKET CASE

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT7915-QZ	11pc Set	25mm	PZ1, PZ2, PZ3, PH1, PH2, PH3, SL4.5, SL5.5, SL6.5, SL8, Magnetic bit tip holder	11
DT7916-QZ	11pc Set	25mm	PZ1, PZ2, PZ3, PH1, PH2, PH3, T10, T15, T20, T25, Magnetic bit tip holder	11
DT7917-QZ	11pc Set - Torx	25mm	T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, Magnetic bit tip holder	11
DT71570-QZ	14pc Set	25mm	25mm: PH1, PH2 x2, PZ2, T10, T15 x2, T20 x2, T25 x2, T30, Magnetic drive guides x2 (compact & longer version)	14
DT71502-QZ	14pc Set	25mm	25mm: PH1, PH2, PH3, PZ2 x3, PZ3, SL6, T15, T20, T25, T30, Magnetic drive guides x2 (compact & longer version)	14
DT71908-QZ	14pc Set	25mm	25mm: PH2 x4, SQ2 x4, T15, T20, T25, SL6, Magnetic drive guides x2 (compact & longer version)	14
DT71905-QZ	14pc Set	25mm	25mm: PH2 x4, SQ2 x4, T15, T20, T25, SL6, Magnetic drive guides x2 (compact & longer version)	14

SCREWDRIVER BIT and SOCKET SETS

FLEX
TORQ®



EXTREME® FLEX TORQ IMPACT TORSION 25MM

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT70523T-QZ	32pc Set	25mm	PH1, PH2 x3, PH3, PZ1 x2, PZ2 x5, PZ3 x3, T10 x2, T15 x2, T20 x2, T25 x2, T27, T30, T40, SL6 x2, SL8, PR2 x2, Magnetic bit tip holder	32
DT70523TM-QZ	32pc Set	25mm	PH1, PH2 x3, PH3, PZ1 x2, PZ2 x5, PZ3 x3, T10 x2, T15 x2, T20 x2, T25 x2, T27, T30, T40, SL6 x2, SL8, PR2 x2, Magnetic bit tip holder	32
DT70560T-QZ	32pc Set	25mm	PH1, PH2 x5, PH3 x2, PZ1, PZ2 x10, PZ3 x3, T15, T20, T25 x2, T27, T30 x3, Adapter, Magnetic bit tip holder	32

SCREWDRIVER BIT and SOCKET SETS



HIGH PERFORMANCE 25mm

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT7969-QZ	32pc Set	25mm	PH1, PH2 x2, PH3, PZ1, PZ2 x2, PZ3, SL3, SL4, SL5, SL6.5, H3, H4, H5, H6, T10, T15, T20, T25, T27, T30, T40, T10H, T15H, T20H, T25H, T27H, T30H, T40H, Hex to 1/4" adapter, Magnetic bit tip holder	32
DT7969M-QZ	32pc Set	25mm	PH1, PH2 x2, PH3, PZ1, PZ2 x2, PZ3, SL3, SL4, SL5, SL6.5, H3, H4, H5, H6, T10, T15, T20, T25, T27, T30, T40, T10H, T15H, T20H, T25H, T27H, T30H, T40H, Hex to 1/4" adapter, Magnetic bit tip holder	32
DT71562-QZ	32pc Set	25mm	PZ1 x2, PZ2 x7, PZ3 x2, PH1, PH2 x6, PH3 x2, SL3, SL4, SL5, SL6.5, T15, T20, T25, T27, T30, T40, Hex to 1/4" adapter, Magnetic bit tip holder	32
DT7944TS-QZ	31pc Set	25mm	PZ1 x2, PZ2 x3, PZ3, PH1 x2, PH2 x2, PH3, SL4.5, SL5.5, SL6.5, T10 x2, T15 x2, T20 x2, T25 x2, T30 x2, T40 x2, Hex3, Hex4 x2, Hex5, Quick change magnetic bit tip holder	31
DT7944TS-QZ	31pc Set	25mm	PZ1 x2, PZ2 x3, PZ3, PH1 x2, PH2 x2, PH3, SL4.5, SL5.5, SL6.5, T10 x2, T15 x2, T20 x2, T25 x2, T30 x2, T40 x2, Hex3, Hex4 x2, Hex5, Quick change magnetic bit tip holder	31

HIGH PERFORMANCE 25mm

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT71516-QZ	24pc Set	25mm	Sockets: 6, 7, 8, 10, 11, 13mm Ratchet 25mm: PZ1, PZ2, PZ3, PH1, PH2, PH3, T10, T15, T20, T25, T30, T40, Hex 4, Hex 5, Hex 6, adapter, Magnetic bit tip holder	24
DT71516M-QZ	24pc Set	25mm	Sockets: 6, 7, 8, 10, 11, 13mm Ratchet 25mm: PZ1, PZ2, PZ3, PH1, PH2, PH3, T10, T15, T20, T25, T30, T40, Hex 4, Hex 5, Hex 6, adapter, Magnetic bit tip holder	24

MIXED DRILL DRIVE SETS



HIGH PERFORMANCE

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT71565-QZ	36pc Drill Drive Set Double Sided Case	25mm 50mm	25mm: PZ0, PZ1, PZ2, PZ3, PH1, PH2, PH3, SL4, SL6. 50mm: PH0 x2, PH1 x2, PH2, PH3, PZ1 x2, PZ2 x2, PZ3, T10, T15, T20, SL4, SL6 x2, SL7.2 Masonry Drill Bit: 6mm HSS TIN drill bits: 2, 2.5, 3, 3.5, 4, 4.5, 5mm Bit tip holder	36
DT71567-QZ	16pc Drill Drive Set	25mm	Masonry drill bits: 5, 6, 8mm Titanium metal drill bits: 2, 3, 4, 5, 6mm 25mm screwdriving bits: PZ1 x2, PZ2 x3, PZ3 x2 Bit tip holder	16

BIT TIP HOLDER and SCREWDRIVING BIT SETS



EXTREME® IMPACT TORSION

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT70518T-QZ	10pc with Pivoting Bit Tip Holder	25mm	25mm: PH2 x2, PZ2 x2, PZ3 x2, T15, T30, SL6 Pivoting bit tip holder	10
DT70578T-QZ	10pc with Pivoting Bit Tip Holder	25mm	25mm: PH2 x2, PZ2, T10, T15, T20 x2, T25, T30 Pivoting bit tip holder	10

HIGH PERFORMANCE

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT71514-QZ	6pc Set with Compact Rapid Load	25mm	25mm: PZ2, PZ3, T25 50mm: PZ2, T20 Compact rapid load bit holder	6

FLIP 'N' DRIVE QUICK CHANGE SYSTEM



QUICK-CHANGE SET

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT7612-XJ	10pc Countersink Flip & Drive Set	25mm	Countersink No 6, 8, 10, 12 countersink and pilot bits 25mm: PZ2 x2, PH2 x2 Allen Key	10

EXTREME® MODULAR RIGHT ANGLE ATTACHMENT



FEATURES

- 1/4" hexagonal shank
- Max. torque: 40 Nm
- Integrated magnet ring holds screw
- Includes 9 EXTREME® FlexTorq bits.

APPLICATIONS

For screwing and drilling in tight spaces and difficult to access areas.

FOR USE WITH

Impact drivers and cordless drills.

Cat. No.	Description	Pack Qty.
DT20500-QZ	Impact Right Angle Attachment	1
DT20501-QZ	Impact Flexi Attachment	1
DT20502-QZ	Impact Right Angle & Flexi Attachment	1
DT20503-QZ	Ultra Compact Impact Right Angle Attachment	1



SETS

Cat. No.	Description
DT70775-QZ	80pc Set with Modular Right Angle Attachment in Medium Tough Case 25mm Screwdriver bits: PH2, PH3, PZ1, PZ2 x25, PZ3, T15, T20 x25, T25, T30. 57mm Screwdriver bits: PH2 x2, PZ1, PZ2 x4, PZ3, T10, T15, T20 x3, T25 x3, T30. Modular Right-Angle Attachment Stubby Nut Drivers: 8mm, 10mm, 13mm Bit Holder with Torsion Zone ALU Magnetic Sleeve
DT70776-QZ	85pc Set with Modular Right Angle Attachment in Large Tough Case 25mm Screwdriver bits: PH1, PH2 x2, PH3, PZ1, PZ2 x27, PZ3, T10, T15 x2, T20 x26, T25 x2, T30 x2, T40. 57mm Screwdriver bits: PZ2, T25. Extreme Flatwood: 18mm, 20mm, 22mm, 25mm, 32mm. Black & Gold Metal drill bits: 2mm, 3mm, 4mm, 5mm, 6mm, 8mm. Cleanable Nut Drivers: 8mm, 10mm Drive Guide with Torsion Zone Modular Right-Angle Attachment Flex Handle
DT70777-QZ	85pc Set with Modular Right Angle Attachment in Large Tough Case 25mm Screwdriver bits: PH1, PH2 x2, PH3, PZ1, PZ2 x28, PZ3, T10, T15 x2, T20 x26, T25 x2, T30 x2, T40. 57mm screwdriver bits: PZ2, T25. Extreme Flatwood: 18mm, 20mm, 22mm, 25mm, 32mm. Impact Titanium Metal drill bits: 4mm, 5mm, 6mm, 8mm, 10mm. Cleanable Nut Drivers: 8mm, 10mm Drive Guide with Torsion Zone Modular Right-Angle Attachment Flex Handle



IMPACT SHEET SHEAR ATTACHMENT



FEATURES

- Extremely powerful: easily cuts up to 1.3mm in metal.
- Faster in straight and curved sections vs. conventional hand-held sheet metal shears.
- 500m cutting capacity in sheet metal, 360° rotating head.

APPLICATIONS

For use in sheet metal (steel, stainless steel, titanium, zinc) panel sections, precision cuts, notches, sheet metal coverings and spiral pipes.

SINGLE PACK

Cat. No.	Description
DT70620-QZ	18ga Cutting Shear Attachment for Impact Drivers



MAGBOXES



EXTREME® IMPACT TORSION

Cat. No.	Description	Bit Length (mm)	Contents	Pack Quantity
DT7919T-QZ	15pc Set in Magnetic Box	25mm 50mm	25mm: PH1, PH2, PH3, PZ1, PZ2x2, PZ3, T20, T25 50mm: PH2, PH3 Socket Drivers mm: 7, 8, 10 Magnetic bit tip holder	15
DT7965T-QZ	20pc Set in Magnetic Box	25mm 50mm	25mm: PH1, PH2, PH3, PZ1, PZ2x2, PZ3, T20, T25 50mm: PH3 EXTREME® Impact Hex Shank Metal Drill Bits: 3mm, 4mm Socket Drivers mm: 7, 8, 10 Magnetic Bit Tip Holder	20

EXTREME® FLEXTORQ SMALL TOUGHCASE™



Cat. No.		Description			Contents		
DT70730T-QZ		25pc FLEXTORQ Screwdriving Set			Compact magnetic drive guide with torsion zone, Cleanable socket driver 8mm		
	PH2	PZ2	PZ3	SL6	T20	T25	T30
25mm		7	1	1	2	2	2
57mm	2	2	1				
89mm	1	1			1		

Cat. No.		Description			Contents					
DT70731T-QZ		37pc FLEXTORQ Screwdriving Set			Compact magnetic drive guide with torsion zone, Aluminium magnetic sleeve					
	PH1	PH2	PH3	PZ1	PZ2	PZ3	SL4-6	T20	T25	T25 Security
25mm	1	3	1	2	8	3	1	1	1	1
57mm		2		1	5	1		1	1	
85mm		1			1					

Cat. No.			Description			Contents						
DT70732T-QZ			37pc FLEXTORQ Screwdriving Set Tx			Compact magnetic drive guide with torsion zone, Aluminium magnetic sleeve						
	PH1	PH2	PZ1	PZ2	T10	T15	T20	T25	T27	T30	T20 Security	T25 Security
25mm	1	1	1	1	2	3	5	4	1	1	1	1
57mm		1		1	1	2	3	3				
85mm							1	1				

Cat. No.			Description			Contents				
DT70733T-QZ			38pc FLEXTORQ Set+Safety Glasses			Bit tip holder, 1/4" hex to 1/4" square adapter, 1/4" hex to 3/8" square adapter, Cleanable socket driver 8mm, Tinted safety glasses				
	PH2	PH3	PZ2	PZ3	T10	T15	T20	T25	T30	T40
25mm	1	1	1	1	3	4	8	6	2	1
57mm	1		1			1	1	1		
85mm							1			

Cat. No.		Description				Contents				
DT70734T-QZ		29pc FLEXTORQ Screwdriving Set				Aluminium magnetic sleeve				
	PH2	PZ2	PZ3	T10	T15	T20	T25	T30	T20 Security	T25 Security
25mm				1	1	1	1	1	1	1
57mm	1	1	1	2	3	7	5	1		

Cat. No.		Description			Contents				
DT70735T-QZ		25pc FLEXTORQ Drill Drive Set			Socket Drivers: 8mm, 10mm, Magnetic bit tip holder				
	PH1	PH2	PH3	PZ2	T10	T15	T20	T25	T30
25mm	1	1	1	1	1	1	5	3	1
57mm		1					1		
Metal Drill Bits		3mm	4mm	5mm	6mm	8mm			
Hex shank		1	1	1	1	1			



EXTREME® FLEXTORQ SMALL TOUGHCASE™



Cat. No.		Description				Contents				
DT70736T-QZ		32pc FLEXTORQ Set+Mug				Cleanable socket driver 8mm, Compact rapid load bit holder and drinking mug				
	PH2	PZ1	PZ2	PZ3	SL6	T15	T20	T25	T30	
25mm	1	2	8	2	1	1	2	3	2	
57mm	1		2					1		
89mm	1		2				1			




Cat. No.		Description				Contents				
DT70737T-QZ		31pc FLEXTORQ Screwdriving Set				Magnetic bit tip holder with torsion zone				
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20	T25		
25mm	1	2	1	1	6	1	1	1		
57mm	1	3		1	6	2	2			



Cat. No.		Description				Contents				
DT70738T-QZ		31pc FLEXTORQ Screwdriving Set				Magnetic bit tip holder with torsion zone				
	PH2	PZ2	T10	T15	T20	T25	T30	T20 Security	T25 Security	
25mm	1	1	1	1	4	3	1	1	1	
57mm	1	1	2	2	6	4				



Cat. No.		Description				Contents				
DT70739T-QZ		31pc FLEXTORQ Screwdriving Set				Magnetic bit tip holder with torsion zone				
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20	T25	T30	
25mm		2	1	1	7	1	1	1		
57mm	1	3		1	7	1	1	1	1	



Cat. No.		Description				Contents							
DT70740T-QZ		38pc FLEXTORQ Set+Safety Glasses				Compact magnetic drive guide with torsion zone, 1/4" hex to 1/4" square adapter, 1/4" hex to 3/8" square adapter, Cleanable socket driver 8mm, Tinted safety glasses							
	PH2	PH3	PZ1	PZ2	PZ3	SL6	SL8-10	T10	T15	T20	T25	T30	
25mm	3	2	1	11	3	1	1	1	1	1	1	2	
57mm	1			3	1								
85mm				1									



Cat. No.		Description				Contents					
DT70741T-QZ		32pc FLEXTORQ Drill Drive Set				Magnetic bit tip holder with torsion zone, Cleanable socket driver 8mm					
	PH2	PH3	PZ1	PZ2	PZ3	SL6	T15	T20	T25	T30	
25mm	1	1	1	8	3	1	1	2	2	2	
57mm				2	1						
85mm	1			1							
Metal Drill Bits		5mm	6mm	8mm							
Hex shank		1	1	1							



Cat. No.		Description				Contents					
DT70742T-QZ		33pc FLEXTORQ Screwdriving Set				Socket Drivers: 8mm, 10mm, Compact magnetic drive guide with torsion zone					
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T10	T15	T20	T25	T30
25mm	1	5	1	2	8	2	2	1	3	2	1
57mm		1			1						

EXTREME® FLEXTORQ SMALL TOUGHCASE™



Cat. No.		Description				Contents				
DT70743T-QZ		32pc FLEXTORQ Screwdriving Set				Cleanable socket driver 8mm, Magnetic bit tip holder with torsion zone				
	PH2	PZ1	PZ2	PZ3	SL6	T15	T20	T25	T30	
25mm	2	1	7	2	1	2	2	3	2	
57mm	1		1	1			1		1	
85mm	1		1					1		



Cat. No.		Description				Contents				
DT70744T-QZ		25pc FLEXTORQ Screwdriving Set				Compact magnetic drive guide with torsion zone, Cleanable socket driver 8mm				
	PH2	PZ2	PZ3	T10	T15	T20	T25	T30		
25mm	2	2	1	1		2	5	2		
57mm	1	1			1	2	1			
85mm						1	1			



Cat. No.		Description				Contents				
DT70745T-QZ		31pc FLEXTORQ Screwdriving Set Tx				Magnetic bit tip holder with torsion zone				
	PH2	PZ2	T10	T15	T20	T25	T30	T20 Security	T25 Security	
25mm	1	1	1	2	4	2	1	1	1	
57mm	1	1	2	3	5	4				



Cat. No.		Description				Contents				
DT70746T-QZ		34pc FLEXTORQ Screwdriving Set				Aluminium magnetic sleeve				
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20	T25		
25mm	1	2	1	1	5	2	1	1		
57mm	1	2		1	10	2	2	1		



Cat. No.		Description				Contents				
DT70747T-QZ		32pc FLEXTORQ Screwdriving Set				Magnetic bit tip holder with torsion zone, Cleanable socket driver 10mm				
	PH2	PZ1	PZ2	PZ3	T10	T15	T20	T25	T30	
25mm	1	1	2	1		2	8	5	2	
57mm	1		1		1		2	1	1	
85mm							1			



Cat. No.		Description				Contents					
DT70748T-QZ		24pc FLEXTORQ Drill Drive Set									
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20	T25	T30		
25mm	1	2	1	1	4	1	2	1	1		
Metal Drill Bits		3mm	3.2mm	3.5mm	4mm	5mm	5.5mm	6mm	7mm	8mm	10mm
Hex shank		1	1	1	1	1	1	1	1	1	1



Cat. No.		Description				Contents					
DT70749T-QZ		25pc FLEXTORQ Drill Drive Set				Compact magnetic drive guide with torsion zone					
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20				
25mm	1	5	1	1	6	1					
57mm		1			2				1		
Metal Drill Bits		3mm	4mm	5mm	6mm	8mm					
Hex shank		1	1	1	1	1					

EXTREME® MIXED SCREWDRIVING SET



SMALL TOUGHCASE™ SET

Cat. No.	Description		Contents				
DT70712-QZ	19pc Extreme Masonry Drill Drive Set		Compact magnetic drive guide, Magnetic bit holder				
	PH2		PZ2		T25		
25mm		3			4	1	
50mm		1			1	1	
Masonry drill bits	4mm	5mm	5.5mm	6mm	7mm	8mm	
Extreme Masonry	1	1	1	1	1	1	

HIGH PERFORMANCE - MIXED SCREWDRIVING SETS



Cat. No.	Description		Contents							
DT70702-QZ	40pc Screwdriving Set		Socket Drivers: 8mm, 10mm, Compact magnetic drive guide							
	PH1	PH2	PH3	PZ2	PZ3	T10	T15	T20	T25	T30
25mm	1	2	2	6	3	1	2		2	2
50mm	1	2		4	1		1	1	2	2
89mm		2								



Cat. No.	Description		Contents													
DT70703-QZ	47pc Screwdriving Set+Safety Glasses		Bit tip holder, Tinted Safety Glasses													
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T20	T25	T30	SL6	T10 Security	T15 Security	T20 Security	T25 Security	T30 Security	T40 Security
25mm	1	5	2	3	14	5	1	2	2	1	1	1	1	1	1	1
50mm		1			1	1		1								



Cat. No.	Description		Contents													
DT70704-QZ	47pc Screwdriving Set+Safety Glasses Tx		1/4" hex to 1/4" square adapter, 1/4" hex to 3/8" square adapter, Bit tip holder, Tinted Safety Glasses													
	PH1	PH2	PZ1	PZ2	T10	T15	T20	T25	T30	T40	T10 Security	T15 Security	T20 Security	T25 Security	T30 Security	
25mm	1	1	1	1	4	4	8	8	3	3	1	1	2	2	2	
50mm							1	1								



Cat. No.	Description		Contents										
DT70705-QZ	40pc Screwdriving Set Tx		Socket Drivers: 8mm, 10mm, Compact magnetic drive guide, 5 pack IR Drill Taps: M4, M5, M6, M8, M10 (DT50060-QZ)										
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T10	T15	T20	T25	T30	SL6	
25mm	1	2	1		2	2	2	2	3	3	2	1	
50mm	1	2		1	2		1	1	3	3	2		

HIGH PERFORMANCE - MIXED SCREWDRIVING SETS



SMALL TOUGHCASE™ SETS

Cat. No.	Description		Contents						
DT70706M-QZ	25pc Drill Drive Set+Mug		Socket Driver 10mm, Compact magnetic drive guide, Drinking mug						
	PH2	PZ2	PZ3	T10	T15	T20	T25	T30	
25mm	2	5	2	1	1	1	2	1	
50mm	1	1	1				1		
Metal Drill Bits	3mm	4mm	5mm	6mm					
Hex shank	1	1	1	1					



Cat. No.	Description		Contents						
DT70707-QZ	25pc Drill Drive Set+Mug		Socket Driver 10mm, Compact magnetic drive guide, Drinking mug						
	PH2	PZ2	PZ3	T10	T15	T20	T25	T30	
25mm	2	5	2	1	1	1	2	1	
50mm	1	1	1				1		
Metal Drill Bits	3mm	4mm	5mm	6mm					
Hex shank	1	1	1	1					



Cat. No.	Description		Contents						
DT70708-QZ	25pc Drill Drive Set		Compact rapid load bit holder, Compact magnetic drive guide						
	PH2	PZ2	PZ3	T10	T15	T20	T25	T30	
25mm	2	5	2	1	1	1	2	1	
50mm	1	1					1	1	
Metal Drill Bits	3mm	4mm	5mm	6mm					
Hex shank	1	1	1	1					



Cat. No.	Description		Contents													
DT70709-QZ	33pc Screwdriving Set		Compact magnetic drive guide, Magnetic bit holder													
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T10	T15	T20	T25	T30	T40	SL6	SL8		
25mm	1	4	1	1	6	3	1	1	1	4	2	1	1	1		
50mm		1			1					1						



Cat. No.	Description		Contents				
DT70713-QZ	67pc Drill Drive Set (ANZ)		Compact magnetic drive guide, Pocket case, 2 x small bulk storage cases				
	PH2	SQ2	SL6	H5	T15	T20	T25
25mm	24	22	2	2	2	2	2
50mm	2	1					1
Metal drill bits	4.5mm	5mm	5.5mm	6mm	6.5mm	7mm	
HSS-G Metal	1	1	1	1	1	1	



Cat. No.	Description		Contents										
DT70714-QZ	40pc Screwdriving Set (ANZ)		Socket Driver 3/8", Socket Driver 5/16", Compact magnetic drive guide										
	PH1	PH2	PH3	SQ2	SL6	SL8	H4	H5	T10	T15	T20	T25	
25mm	1	6	1	3	1	1	2	2	1	1	1	1	
50mm		5		4				1	1		1	2	
89mm		1		1									



Cat. No.	Description		Contents				
DT70715-QZ	40pc Screwdriving Set (ANZ)		Socket Driver 3/8", Socket Driver 5/16", Compact magnetic drive guide				
	PH2	SQ2	SL6	H5	T15	T20	T25
25mm	6	6	1	3	1	2	2
50mm	6	6		1		1	2
89mm							

Cat. No.	Description		Contents								
DT50050-QZ	10pc Impact Titanium Drill Bit Set										
Metal drill bits	3mm	3.2mm	3.5mm	4mm	4.5mm	5mm	6mm	8mm	10mm	12mm	
Impact Titanium	1	1	1	1	1	1	1	1	1	1	

EXTREME® 2 MIXED SCREWDRIVING SET



SMALL TOUGHCASE™ SET

Cat. No.	Description													Contents
DT70710-QZ	13pc Extreme 2 Metal Drilling Set													Bit tip holder, Tinted Safety Glasses
Metal Drill Bits	1.5mm	2mm	2.5mm	3mm	3.2mm	3.5mm	4mm	4.5mm	5mm	5.5mm	6mm	6.5mm	7mm	
Extreme 2 Metal	1	1	1	1	1	1	1	1	1	1	1	1	1	

Cat. No.	Description													Contents
DT70711-QZ	19pc Extreme 2 Metal Drill Drive Set													Bit tip holder, Compact Magnetic Drive Guide
	PH2				PZ2				PZ3					
25mm	3				4				1					
50mm	1				2									
Metal Drill Bits	2mm			3mm		4mm		5mm		6mm		8mm		
Extreme 2 Metal	1			1		1		1		1		1		

EXTREME® MEDIUM MIXED SETS



EXTREME® MEDIUM TOUGHCASE™

Cat. No.	Description						Contents						
DT70756-QZ	57pc Drill Drive Set with Brad Point and EXTREME® Flatwood drill bits						1 x Magnetic bit tip holder, 1 x Magnetic drive guide						
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40		
25mm	1	3	1	1	3	1	1	22	4	1	1		
50mm		1			1			1					
		3mm	4mm	5mm	6mm	8mm	10mm	12mm	14mm	16mm	20mm	22mm	25mm
Brad Point bits		1	1	1	1	1	1	1					
EXTREME® Flatwood bits							1	1	1	1	1	1	

Cat. No.	Description						Contents						
DT70758-QZ	57pc Drill Drive Set with Brad Point and EXTREME® Flatwood drill bits						1 x Magnetic bit tip holder, 1 x Magnetic drive guide						
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40		
25mm	1	3	1	1	3	1	1	22	4	1	1		
50mm		1			1			1					
		3mm	4mm	5mm	6mm	8mm	10mm	12mm	14mm	16mm	20mm	22mm	25mm
Brad Point bits		1	1	1	1	1	1	1					
EXTREME® Flatwood bits							1	1	1	1	1	1	1

Cat. No.	Description											Contents
DT70768-QZ	57pc Drill Drive Set with Brad Point and EXTREME® Flatwood drill bits											1 x Magnetic bit tip holder, 1 x Magnetic drive guide
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40	
25mm	1	3	1	1	22	1	1	4	3	1	1	
50mm		1			1			1				

	3mm	4mm	5mm	6mm	8mm	10mm	12mm	14mm	16mm	20mm	22mm	25mm
Brad Point bits	1	1	1	1	1	1	1					
EXTREME® Flatwood bits							1	1	1	1	1	1

Cat. No.	Description											Contents
DT70759-QZ	63pc Drill Drive Set with EXTREME® Masonry and EXTREME® 2 HSS-G Metal drill bits											1 x Magnetic bit tip holder, 1 x Magnetic drive guide
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40	
25mm	1	3	1	1	23	1	1	3	3	1	1	
50mm		1			1			1				
	4mm x 75mm			5mm x 85mm			6mm x 100mm			7mm x 100mm		8mm x 120mm
EXTREME® Masonry bits	1			1			2			1		2
	9.11 mm	2mm	2.5mm	3mm	3.5mm	4mm	4.5mm	5mm	5.5mm	6mm	6.5mm	7mm
EXTREME® 2 HSS-G bits	1	1	1	1	1	1	1	1	1	1	1	1

Cat. No.	Description											Contents
DT70761-QZ	72pc Drill Drive Set with EXTREME® Masonry drill bits and HSS-G Metal drill bits											1 x Magnetic bit tip holder, 1 x Magnetic drive guide
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40	
25mm	1	3	1	1	3	1	1	22	4	1	1	
50mm		1			1			1				
	4mm x 75mm			5mm x 85mm			6mm x 100mm			7mm x 100mm		8mm x 120mm
EXTREME® Masonry bits	1			1			2			1		2
	1mm	1.5mm	2mm	2.5mm	3mm	3.2mm	3.3mm	3.5mm	4mm	4.2mm	4.5mm	4.8mm
HSS-G bits	1	1	1	1	1	1	1	1	1	1	1	1

MEDIUM MIXED SETS



EXTREME® 2 MEDIUM TOUGHCASE™

Cat. No.	Description						Contents
DT70754-QZ	19pc SDS Plus EXTREME® Drill Drive Set						
	PH1	PH2	PH3	PZ1	PZ2	PZ3	
25mm	1	1	1	1	2	1	
	5mm x 160mm		6mm x 160mm		6.5mm x 160mm		7mm x 160mm
SDS Plus EXTREME® 2 Masonry drill bits	1		1		1		1
	4mm x 75mm		5mm x 85mm		6mm x 100mm		7mm x 100mm
EXTREME® Masonry bits	1		1		2		1

Cat. No.	Description											Contents
DT70760-QZ	68pc Drill Drive Set with SDS Plus EXTREME®, EXTREME® 2 Metal, and EXTREME® Masonry drill bits											1 x Magnetic bit tip holder 1 x Magnetic drive guide
	PH1	PH2	PH3	PZ1	PZ2	PZ3	T15	T20	T25	T30	T40	
25mm	1	3	1	1	3	1	1	22	4	1	1	
50mm		1			1			1				
	1.5mm	2mm	2.5mm	3mm	3.5mm	4mm	4.5mm	5mm	5.5mm	6mm	6.5mm	7mm
EXTREME® 2 HSS-G bits	1	1	1	1	1	1	1	1	1	1	1	1
	4mm x 75mm			5mm x 85mm			6mm x 100mm			7mm x 100mm		8mm x 120mm
EXTREME® Masonry bits	1			1			2			1		2
	6mm x 110mm				6mm x 160mm			8mm x 160mm			10mm x 160mm	
SDS Plus EXTREME® 2 Masonry drill bits	1				2			1			1	

EXTREME® MODULAR RIGHT ANGLE ATTACHMENT SET



SETS

Cat. No.	Description
DT70775-QZ	80pc Set with Modular Right Angle Attachment in Medium Tough Case 25mm screwdriver bits: ph2, ph3, pz1, pz2 x25, pz3, t15, t20 x25, t25, t30. 57mm screwdriver bits: ph2 x2, pz1, pz2 x4, pz3, t10, t15, t20 x3, t25 x3, t30. Modular right-angle attachment Stubby nut drivers: 8mm, 10mm, 13mm Bit holder with torsion zone ALU magnetic sleeve

HIGH PERFORMANCE

Cat. No.	Description											Contents
DT70757-QZ	55pc Drill Drive Set with PZ2 Small Bulk Storage											Socket Driver: 8mm
	1/4" to 1/4" square						1/4" to 3/8" squar					
50mm Adapters	1						1					
	PH1	PH2	SL6	SL8	PZ2	PZ3	T15	T20	T25	T30		
25mm	2	2	1	1	25	2	3	3	2	2		
	3mm	4mm	5mm	6mm	8mm	10mm	12mm	14mm	20mm			
HSS-G metal drill bits	1	1	1	1	1	1	1	1				
Flatwood drill bits									1	1		

LARGE MIXED TOUGHCASE™ SETS



Cat. No.	Description	Application	Contents	Pack Quantity
DT70762-QZ	85pc Drill Drive Set	Wood drilling Metal drilling Masonry drilling Screw Driving Screw driving Screw driving Screw driving	Flatwood Bits: 18, 20, 22, 25, 32mm Black & Gold Bits: 2, 3, 4, 5, 6, 8mm SDS Plus Bits: 5.5x160, 6x160, 7x160, 8x160, 10x160mm X2 Small Bulk Storage Sets: 25mm: PH1, PH2 x4, PH3, PZ1 x4, PZ2 x 40, PZ3 x4, T10, T15, T20 x4, T25 x2, T30, T40 50mm: PZ2 x2 8mm nut setter, 10mm nut setter, compact drive guide	85
DT70763-QZ	85pc Drill Drive Set	Wood Drilling Metal Drilling Masonry Drilling Screw Driving Screw Driving Screw Driving Screw Driving	Flatwood Bits: 14, 18, 20, 22, 25mm Black & Gold Bits: 2, 3, 4, 5, 6, 8mm SDS Plus Bits: 5x160, 6x160, 8x160, 10x160, 12x160mm X2 Small Bulk Storage Sets: 25MM: PH2, PZ1, PZ2, PZ3, T10 X2, T15 X6, T20 X 40, T25 X8, T30 X2, T40 X2 50mm: T20, T25 8mm nut setter, 10mm nut setter, compact drive guide	85
DT70767-QZ	80pc Drill Drive Set	Wood Drilling Metal Drilling Screw Driving Screw Driving Screw Driving Screw Driving	Flatwood Bits: 18, 20, 22, 25, 32mm Black & Gold Bits: 2, 3, 4, 5, 6, 8mm x2 Small Bulk Storage Sets 25mm: PZ2 x2, T10 x2, T15 x6, T20 x36, T25 x8, T30 x2, T40 x8 50mm: T20, T25 8mm nut setter, 10mm nut setter, Compact Drive Guide	80

EXTREME® MODULAR RIGHT ANGLE ATTACHMENT SETS



SETS			
Cat. No.	Description	Contents	
DT70776-QZ	85pc Set with Modular Right Angle Attachment in Large Tough Case	25mm screwdriver bits: PH1, PH2 x2, PH3, PZ1, PZ2 x27, PZ3, T10, T15 x2, T20 X26, T25 x2, T30 x2, T40. 57mm screwdriver bits: PZ2, T25. Extreme flatwood: 18mm, 20mm, 22mm, 25mm, 32mm. Black & gold metal drill bits: 2mm, 3mm, 4mm, 5mm, 6mm, 8mm. Cleanable nut drivers: 8mm, 10mm Drive guide with torsion zone Modular right-angle attachment Flex handle	
DT70777-QZ	85pc Set with Modular Right Angle Attachment in Large Tough Case	25mm screwdriver bits: PH1, PH2 x2, PH3, PZ1, PZ2 x28, PZ3, T10, T15 x2, T20 x26, T25 x2, T30 x2, T40. 57mm screwdriver bits: PZ2, T25. Extreme flatwood: 18mm, 20mm, 22mm, 25mm, 32mm. Impact titanium metal drill bits: 4mm, 5mm, 6mm, 8mm, 10mm. Cleanable nut drivers: 8mm, 10mm Drive guide with torsion zone Modular Right-angle attachment Flex handle	



TSTAK CADDY
Securely stores small bulk storage sets and small Toughcases™. Works as a carry case and compatible with the TSTAK® storage system for easy in-van and workshop storage.

DT70716-QZ

LARGE MIXED SETS



Cat. No.	Description	Application	Contents	Pack Quantity
DT71563-QZ	100pc Drill Drive set	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Brad point drill bits: 3 x2, 3.5, 4, 4.5, 5 x2, 5.5, 6, 6.5, 7, 7.5, 8mm Metal drill bits: 1.5, 2, 2.5, 3x2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5mm Masonry drill bits: 6, 7, 8mm 25mm: PH1x2, PH2x2, PH3x2, PZ1, PZ2x28, PZ3 x2, SL4, SL5, SL7.2, T15, T20, T25, T30, T40, H4, H5, H6, H7 50mm: PH1, PH2x2, PH3, PZ1, PZ2x2, PZ3, SL5, SL6, SL7.2 Socket Drivers 5, 6, 8, 10, 11, 12, 13mm Hole Saws 32, 44mm Hole Saw Mandrel and Pilot Drill Bit Magnetic bit tip holder Countersink	100
DT71566-QZ	100pc Drill Drive set	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Brad point drill bits: 3, 4, 5, 6, 8mm Metal drill bits: 1.5, 2, 2.5, 3 x2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5mm Masonry drill bits: 5, 5.5, 6, 7, 8, 10, 12mm 25mm: PH1 x2, PH2 x2, PH3 x2, PZ1, PZ2 x33, PZ3, SL4, SL5, SL7.2, T15, T20, T25, T30, T40, H4, H5, H6, H7 50mm screwdriver bits PH1, PH2x2, PH3, PZ1, PZ2x6, PZ3, SL5, SL6, SL7.2 Socket Drivers 6, 8, 10mm Hole Saws: 32, 44mm Hole Saw Mandrel and Pilot Drill Bit Magnetic bit tip holder Countersink	100
DT7981-QZ	98pc Drill Drive Set - Roll Mat	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Brad point drill bits: 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8mm Masonry drill bits: 3, 5.5, 6, 7, 8, 10mm HSS Tin drill bits: 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5mm 25mm: PH0 x2, PH1 x2, PH2 x3, PH3 x2, PZ0 x2, PZ1 x3, PZ2 x4, PZ3 x2, SL4, SL5 x2, SL6, SL7.2, SQ1, SQ2, SQ3, Hex 3, Hex4 x2, Hex5 x2, Hex6, T10, T15, T20, T25, T27, T30 50mm: PH0, PH1, PH2, PH3, PZ1, PZ2 x2, PZ3, T10, T15, T20, SL4, SL6, SL7.2 Socket Drivers: 5, 6, 7, 8, 9, 10, 11, 12, 13mm Magnetic bit tip holder Countersink	98

EXTREME® LARGE MIXED SETS



EXTREME® IMPACT TORSION - FIT TSTAK IV DRAWER

Cat. No.	Description	Application	Contents	Pack Quantity
DT70620T-QZ	100pc Drill Drive set Compatible with TSTAK IV drawer	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Masonry drill bits: 4, 5, 6 x2, 7, 8 x2mm Metal drill bits: 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm 25mm: PZ1, PZ2 x30, PZ3, PH1 x2, PH2 x27, PH3, T15, T20 x2, T25, T30, SL4/6 x2, SL6/8 x2. Socket Drivers: 6, 8, 10mm Cleanable Socket Driver: 8mm Hole Saws: 32, 38, 44, 54mm Hole Saw Mandrel and Pilot Drill Bit Pivoting Bit Tip Holder	100

HIGH PERFORMANCE - FIT TSTAK IV DRAWER

Cat. No.	Description	Application	Contents	Pack Quantity
DT71583-QZ	102pc Drill Drive Set Compatible with TSTAK IV drawer	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Masonry drill bits: 5.5 x2, 6 x2, 7 x2, 8 x2, 10 x2mm HSS black metal drill bits: 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm 25mm: PZ1 x2, PZ2 x23, PZ3 x2, PH1 x2, PH2 x23, PH3, SL4, SL5, SL6, SL7.2, T10 x2, T15 x2, T20 x2, T25 x2, T27 x2, T30 x2 Socket Drivers: 5, 6, 7, 8, 10mm Hole Saws: 32, 38, 44, 54mm Hole Saw Mandrel and Pilot Drill Bit Magnetic bit tip holder	102
DT71569-QZ	100pc Drill Drive set Compatible with TSTAK IV drawer	Screwdriving Masonry Drilling Metal Drilling Wood Drilling Socket / Nut Driving	Masonry drill bits: 4, 5, 5.5, 6 x2, 8 x2, 10mm. HSS black metal drill bits: 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm. 25mm: PZ1 x2, PZ2 x29, PZ3 x2, PH1 x2, PH2 x2, PH3, SL4, SL5, SL6, SL7.2, T10 x2, T15 x2, T20 x2, T25 x2, T27 x2, T30 x2. Socket Drivers: 5, 6, 7, 8, 10mm Hole Saws: 32, 38, 44, 54mm Hole Saw Mandrel and Pilot Drill Bit Magnetic bit tip holder	100

JIGSAW BLADE SETS



JIGSAW BLADES

Cat. No.	Description	Application	Contents	Pack Quantity
DT2290-QZ	10pc Wood Cutting Set	Wood Cutting	DT2050, DT2165 x2, DT2168, DT2166 x2, DT2075 x2, DT2177 x2 (Bosch equivalent T101B, T119B0, T101A0, T111C, T144D, T144DP)	10
DT2292-QZ	10pc Metal Cutting Set	Metal Cutting	DT2054, DT2160 x3, DT2161 x2, DT2163 x2, DT2172 x2 (Bosch equivalent T118A, T118G, T118E0F, T118B, T127D)	10
DT2294-QZ	10pc Wood / Metal Cutting Set	Wood / Metal Cutting	DT2050 x2, DT2160 x2, DT2163 x2, DT2165 x2, DT2177 x2 (Bosch equivalent T101B, T119B0, T127D, T111C, T118A)	10
DT2296-QZ	10pc Wood Cutting Set	Wood Cutting	DT2205 x2, DT2209 x2, DT2213 x2, DT2216, DT2217, DT2218, DT2220	10
DT2298-QZ	14pc Wood Cutting Set	Wood Cutting	DT2205 x3, DT2209 x3, DT2213 x3, DT2216 x2, DT2217, DT2218, DT2220	14

RECIPROCATING SAW BLADE SETS



EXTREME® RUNTIME OPTIMISED FOR FLEXVOLT TOOLS

Cat. No.	Description	Application	Contents	Pack Quantity
DT99551-QZ	8pc XR Flexvolt Set + storage case	Mixed applications Wood Metal	DT99552-QZ (203mm) DT99553-QZ x3 (152mm) DT99554-QZ x3 (152mm) DT99555-QZ (230mm)	8
DT99550-QZ	13pc XR Flexvolt Set + storage case	Mixed applications Wood Metal	DT99552-QZ x2 (203mm) DT99553-QZ x4 (152mm) DT99554-QZ x5 (152mm) DT99555-QZ x2 (230mm)	13

EXTREME® 2X LIFE TOOLS

Cat. No.	Description	Application	Contents	Pack Quantity
DT2440L-QZ	6pc Set + storage case	Mixed applications Wood Metal	DT2300L-QZ (152mm) DT2307L-QZ (228mm) DT2315L-QZ (100mm) DT2301L-QZ (152mm) DT2308L-QZ (228mm) DT2407L-QZ (152mm)	6
DT2443L-QZ	8pc Set + storage case	Mixed applications Wood Metal	DT2300L-QZ x3 (152mm) DT2308L-QZ (228mm) DT2407L-QZ x3 (152mm) DT2408L-QZ (203mm)	8
DT2441L-QZ	12pc Set + storage case	Mixed applications Wood Metal	DT2300L-QZ x2 (152mm) DT2307L-QZ x2 (228mm) DT2315L-QZ x2 (100mm) DT2301L-QZ x2 (152mm) DT2308L-QZ x2 (228mm) DT2407L-QZ (152mm) DT2408L-QZ (203mm)	12

BREAK-AWAY RECIP BLADES

Cat. No.	Description	Application	Contents	Pack Quantity
DT2446-QZ	8pc Break-Away Recip Blade Set + storage case	Metal Cutting	DT2416-QZ x2 (228mm) DT2417-QZ x6 (152mm)	8

HIGH PERFORMANCE

Cat. No.	Description	Application	Contents	Pack Quantity
DT2442-QZ	8pc Set + storage case	Mixed applications	DT2301-QZ x2 (152mm) DT2303-QZ x2 (152mm) DT2349-QZ x2 (228mm) DT2353-QZ x2 (203mm)	8
DT2444-QZ	6pc Set + storage case	Mixed applications	DT2345-QZ x2 (152mm) DT2349-QZ x2 (228mm) DT2353-QZ x2 (203mm)	6
DT2445-QZ	12pc Set + storage case	Mixed applications	DT2345-QZ x1 (152mm) DT2349-QZ x3 (228mm) DT2359-QZ x2 (152mm) DT2353-QZ x3 (203mm) DT2361-QZ x3 (152mm)	12

SOCKET SETS



EXTREME® IMPACT

Cat. No.	Description	Contents	Pack Quantity
DT7506-QZ	17pc Socket Set	MM: 6, 8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 20, 21, 22, 24, 27 & 1/4" to 1/2" adapter)	17
DT7507-QZ	9pc Socket Set	MM: 10, 13, 15, 17, 19, 22, 24, 27 & 1/4" to 1/2" dadapter)	9
DT7512-QZ	1/4" to 1/2" Impact Driver Adapter	1/4" to 1/2" Impact Driver Adapter	1

ROUTER SETS



WOOD ROUTER SETS WITH 8mm SHAFT

Cat. No.	Description	Application	Contents	Pack Quantity
DT90016-QZ	12pc Router Bit Set	8mm	Round, V-Groove, Dovetail, Cove, Roman Ogee, Chamfer, Straight x3, Trim, Round Over x2	12
DT90017-QZ	22pc Router Bit Set	8mm	Straight x6, Trim, Roman Ogee, Chamfer, Round Over x2, V-Groove x2, Round x2, Dovetail, Cove x2, Guided Trimmer, Guided Rebater, Ogee Panel, Traditional Torus Fits T-STAK drawer	22

OSCILLATING BLADE SETS



OSCILLATING BLADE SETS

Cat. No.	Description	Application	Contents	Pack Quantity
DT20713-QZ	3pc Set	Wood + Nails Wood - Fast Cut Wood - Detail	DT20701-QZ, DT20704-QZ, DT20706-QZ	3
DT20715-QZ	5pc Set	Wood + Nails Wood - Fast Cut Sealants / Adhesives	DT20701-QZ x2 DT20704-QZ DT20711-QZ DT20714-QZ	5
DT20731-QZ	8pc Set with Sanding paper	Wood Wood + Nails	DT20700-QZ, DT20701, DT20704, DT20705, DT20710 Detail Sanding Paper x 3 (60G, 80G, 120G)	8
DT20732-QZ	6pc Set	Wood + Nails Wood - Fast Cut Wood - Wide Fast Cut Wood - Detail	DT20701-QZ 30mm 20TPI (2) DT20704-QZ 30mm 18TPI (1) DT20705-QZ Blade 65mm 15TPI (1) DT20706-QZ Detail Wood Blade 10mm 18TPI (1) Universal Adapter (1)	6
DT20761-QZ	5pc Set	Wood + Nails Wood - Fast Cut Sealants / Adhesives	DT20701-QZ x2 DT20704-QZ DT20711-QZ DT20714-QZ	5
DT20762-QZ	8pc Set with Sanding Paper	Wood Wood + Nails	DT20700-QZ, DT20701, DT20704, DT20705, DT20710 Detail Sanding Paper x 3 (60G, 80G, 120G)	8

SETS TOWERS



SETS TOWERS

Cat. No.	Description	Contents
----------	-------------	----------

DT70730TPOS-QZ	25pc FLEXTORQ Screwdriving Set - Tower x20	PZ2 25mm (7) PZ3 25mm (1) SL6 25mm (1) T20 25mm (2) T25 25mm (2) T30 25mm (2) PH2 57mm (2) PZ2 57mm (2) PZ3 57mm (1) PH2 89mm (1) PZ2 89mm (1) T20 89mm (1) 8mm Cleanable Nut Driver (1) Compact Magnetic Drive Guide with Torsion Zone (1)
----------------	--	--

DT70709POS-QZ	33pc Screwdriving Set - Tower x40	PH1 25mm (1) PH2 25mm (4) PH3 25mm (1) PZ1 25mm (1) PZ2 25mm (6) PZ3 25mm (3) T10 25mm (1) T15 25mm (1) T20 25mm (1) T25 25mm (4) T30 25mm (2) T40 25mm (1) SL6 25mm (1) SL8 25mm (1) PH2 50mm (1) PZ2 50mm (1) T25 50mm (1) Magnetic Bit Holder (1) Compact Magnetic Drive Guide (1)
---------------	-----------------------------------	---

DT70738TPOS-QZ	31pc FLEXTORQ Screwdriving Set - Tower x40	PH2 25mm (1) PZ2 25mm (1) T10 25mm (1) T15 25mm (1) T20 25mm (4) T25 25mm (3) T30 25mm (1) T20 Security 25mm (1) T25 Security 25mm (1) PH2 57mm (1) PZ2 57mm (1) T10 57mm (2) T15 57mm (2) T20 57mm (6) T25 57mm (4) Magnetic Bit Holder with Torsion Zone (1)
----------------	--	---

SETS TOWERS



SETS TOWERS

Cat. No.	Description	Contents
----------	-------------	----------

DT70717POS-QZ	40pc Screwdriving Set - Tower x40	PH1 25mm (1) PH2 25mm (2) PH3 25mm (1) PZ2 25mm (2) PZ3 25mm (2) T10 25mm (2) T15 25mm (2) T20 25mm (3) T25 25mm (3) T30 25mm (2) SL6 25mm (1) PH1 50mm (1) PH2 50mm (2) PZ1 50mm (1) PZ2 50mm (2) T10 50mm (1) T15 50mm (1) T20 50mm (3) T25 50mm (3) T30 50mm (2) 8mm Nut Driver (1) 10mm Nut Driver (1) Compact Magnetic Drive Guide (1)
---------------	-----------------------------------	---

DT70728POS-QZ	19pc Black and Gold Metal Drilling Set - Tower x40	Black & Gold HSS-G Metal Drill Bits (19) 1mm (1) 1.5mm (1) 2mm (2) 2.5mm (2) 3mm (2) 3.5mm (2) 4mm (2) 5mm (2) 5.5mm (1) 6mm (1) 7mm (1) 8mm (1) 10mm (1)
---------------	--	--


FLATPACK MERCHANDISERS

Cat. No.	Description
----------	-------------

MA00838-QZ	PTA Merchandiser Empty Flatpack
------------	---------------------------------

MA00881-XJ	PTA Large Merchandiser Empty Flatpack
------------	---------------------------------------

BUILD YOUR OWN TOUGHCASE

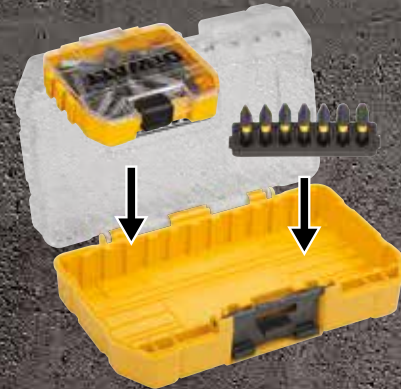

1 CHOOSE YOUR CASE

SMALL BULK STORAGE

- Ideal for screwdriver bits. (25mm and 57mm bits fit inside)
- Fits inside small, medium, and large cases and the TSTAK caddy



SMALL TOUGH CASES

- To hold your accessories
- Holds SMALL BULK STORAGE cases
- Adjustable storage rows in base and lid
- Also fits in the TSTAK caddy



MEDIUM TOUGH CASES

- To hold your accessories
- Holds SMALL BULK STORAGE cases
- Holds SMALL TOUGH CASES locked onto lid



LARGE TOUGH CASES

- Holds SMALL BULK STORAGE cases
- To hold a wide range of accessories
- Contains removable dividers for customisable storage compartments and space optimisation
- Stacking design with secure locking clips
- TSTAK compatible



2

CHOOSE YOUR ACCESSORIES


BIT BARS & DIVIDERS

- Customise your own accessory set with movable bit bars and dividers. Bit bars are designed for easy bit removal, and bits lock into place when not in use.



25mm SCREWDRIVER BITS

- Choose from Pozidriv, Phillips, Torx head or mixed bits

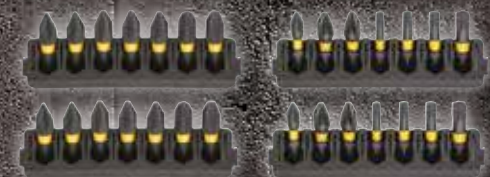

57mm SCREWDRIVER BITS

- Choose from a range of bit types, including; Pozidriv, Phillips, Torx head and mixed bits



DRILLING & NUT SETTING

- Wood drill bits
- Metal drill bits
- Multi-material drill bits
- SDS Plus masonry drill bits
- Cleanable and compact nut drivers



3

CONSTRUCT YOUR KIT



1. CHOOSE YOUR CASE




DT70800-QZ



DT70801-QZ



DT70802-QZ



DT70803-QZ



DT70804-QZ



DT70839-QZ



DT70805-QZ

2. CHOOSE YOUR ACCESSORIES



DT70806-QZ



DT70807-QZ



DT70808-QZ



DT70809-QZ



DT70810-QZ



DT70811-QZ



DT70812-QZ



DT70813-QZ



DT70814-QZ



DT70815-QZ



DT70816-QZ



Cat. No.	Description	Contents
DT70800-QZ	Small Bulk Storage Case (Empty) x2	Small Bulk Storage Case (x2)
DT70801-QZ	Small Tough Case (Empty) + Small Bulk Storage Case (Empty) + Screwdriver Bit Bars	Small Tough Case + Small Bulk Storage Case (x1) + SD 25mm 7pc Bit Bar (x2) + SD 57mm 7pc Bit Bar (x2)
DT70802-QZ	Medium Tough Case (Empty) + Small Bulk Storage Case (Empty) + Dividers + Screwdriver Bit Bars	Medium Tough Case Version + Small Bulk Storage Case (x1) + Dividers (x6) + SD 25mm 7pc Bit Bar (x2) + SD 57mm 7pc Bit Bar (x2)
DT70803-QZ	Medium Tough Case Thick (Empty) + Small Bulk Storage Case (Empty) x2 + Screwdriver Bit Bars	Medium Tough Case Thick + Small Bulk Storage Case (x2) + SD 25mm 7pc Bit Bar (x3) + SD 57mm 7pc Bit Bar (x3)
DT70804-QZ	Large Tough Case (Empty) + Small Bulk Storage Case (Empty) x3 + Dividers + Screwdriver Bit Bars	Large Tough Case + Small Bulk Storage Case (x3) + Dividers (x6) + SD 25mm 7pc Bit Bar (x4) + SD 57mm 7pc Bit Bar (x4)
DT70839-QZ	Large Tough Case (Empty) + Dividers	Large Tough Case (Empty) + Dividers (x6)
DT70805-QZ	Insert Bundle Pack for Tough Case	SD 25mm 7pc Bit Bar (x3) + SD 57mm 7pc Bit Bar (x3) + Dividers (x4)



Cat. No.	Description	Contents
DT70806-QZ	7pc 25mm HEX Mix Bar FLEXTORQ	Bit Bar (1) + HEX 3 25mm (1) + HEX 4 25mm (3) + HEX 5 25mm (2) + HEX 6 25mm (1)" 5-QZ
DT70807-QZ	7pc 25mm PH2 Bar FLEXTORQ	Bit Bar (1) + PH2 25mm (7)
DT70808-QZ	7pc 25mm PHILLIPS Mix Bar FLEXTORQ	Bit Bar (1) + PH1 25mm (2) + PH2 25mm (3) + PH3 25mm (2)
DT70809-QZ	7pc 25mm PH PZ Mix Bar FLEXTORQ	Bit Bar (1) + PH1 25mm (1) + PH2 25mm (2) + PZ1 25mm (1) + PZ2 25mm (2) + PZ3 25mm (1)
DT70810-QZ	7pc 25mm PH PZ TX Mix Bar FLEXTORQ	Bit Bar (1) + PH2 25mm (1) + PZ2 25mm (1) + T20 25mm (2) + T25 25mm (2) + T30 25mm (1)
DT70811-QZ	7pc 25mm PZ2 Bar FLEXTORQ	Bit Bar (1) + PZ2 25mm (7)
DT70812-QZ	7pc 25mm POZI Mix Bar FLEXTORQ	Bit Bar (1) + PZ1 25mm (2) + PZ2 25mm (3) + PZ3 25mm (2)
DT70813-QZ	7pc 25mm PH PZ TX Mix Bar FLEXTORQ	Bit Bar (1) + PZ1 25mm (1) + PZ2 25mm (2) + T15 25mm (1) + T20 25mm (1) + T25 25mm (1) + T30 25mm (1)
DT70814-QZ	7pc 25mm SLOTTED Mix Bar FLEXTORQ	Bit Bar (1) + SL3 25mm (1) + SL4 25mm (1) + SL4.5 25mm (1) + SL5 25mm (1) + SL6 25mm (1) + SL7 25mm (1) + SL8 25mm (1)
DT70815-QZ	7pc 25mm SQUARE Mix Bar FLEXTORQ	Bit Bar (1) + SQ1 25mm (2) + SQ2 25mm (3) + SQ3 25mm (2)
DT70816-QZ	7pc 25mm TORX Mix Bar FLEXTORQ	Bit Bar (1) + T15 25mm (1) + T20 25mm (2) + T25 25mm (2) + T30 25mm (1) + T40 25mm (1)

2. CHOOSE YOUR ACCESSORIES



DT70817-QZ



DT70818-QZ



DT70819-QZ



DT70820-QZ



DT70821-QZ



DT70822-QZ



DT70823-QZ



DT70824-QZ



DT70825-QZ

2. CHOOSE YOUR ACCESSORIES



DT70826-QZ



DT70827-QZ



DT70840-QZ



DT70841-QZ



Cat. No.	Description	Contents
DT70817-QZ	7pc 57mm PH2 Bar FLEXTORQ	Bit Bar (1) + PH2 57mm (7)
DT70818-QZ	7pc 57mm PHILLIPS Mix Bar FLEXTORQ	Bit Bar (1) + PH1 57mm (2) + PH2 57mm (3) + PH3 57mm (2)
DT70819-QZ	7pc 57mm PH PZ Mix Bar FLEXTORQ	Bit Bar (1) + PH1 57mm (1) + PH2 57mm (2) + PZ1 57mm (1) + PZ2 57mm (2) + PZ3 57mm (1)
DT70820-QZ	7pc 57mm PH TX Mix Bar FLEXTORQ	Bit Bar (1) + PH2 57mm (1) + PZ2 57mm (1) + T20 57mm (2) + T25 57mm (2) + T30 57mm (1)
DT70821-QZ	7pc 57mm PZ2 Bar FLEXTORQ	Bit Bar (1) + PZ2 57mm (7)
DT70822-QZ	7pc 57mm POZI Mix Bar FLEXTORQ	Bit Bar (1) + PZ1 57mm (2) + PZ2 57mm (3) + PZ3 57mm (2)
DT70823-QZ	7pc 57mm PZ TX Mix Bar FLEXTORQ	Bit Bar (1) + PZ1 57mm (1) + PZ2 57mm (2) + T15 57mm (1) + T20 57mm (1) + T25 57mm (1) + T30 57mm (1)
DT70824-QZ	7pc 57mm SQUARE Mix Bar FLEXTORQ	Bit Bar (1) + SQ1 57mm (2) + SQ2 57mm (3) + SQ3 57mm (2)
DT70825-QZ	7pc 57mm TORX Mix Bar FLEXTORQ	Bit Bar (1) + T15 57mm (1) + T20 57mm (2) + T25 57mm (2) + T30 57mm (1) + T40 57mm (1)

Cat. No.	Description	Contents
DT70826-QZ	4pc Stubby Nut Driver & Bit Holder	Bit Bar (1) + 8mm Compact Nutsetter (1) + 10mm Compact Nutsetter (1) + 13mm Compact Nutsetter (1) + Magnetic Bit Holder with Torsion Zone (1)
DT70827-QZ	4pc Cleanable Nut Driver & Bit Holder	Bit Bar (1) + 8mm Cleanable Nutsetter (1) + 10mm Cleanable Nutsetter (1) + 13mm Cleanable Nutsetter (1) + Magnetic Bit Holder with Torsion Zone (1)
DT70840-QZ	4pc Stubby Nut Driver & Bit Holder (Imperial size)	Bit Bar (1) + 3/8" Compact Nutsetter (1) + 5/16" Compact Nutsetter (1) + 1/4" Compact Nutsetter (1) + Magnetic Bit Holder with Torsion Zone (1)
DT70841-QZ	4pc Cleanable Nut Driver & Bit Holder (Imperial size)	Bit Bar (1) + 3/8" Cleanable Nutsetter (1) + 5/16" Cleanable Nutsetter (1) + 1/4" Cleanable Nutsetter (1) + Magnetic Bit Holder with Torsion Zone (1)

2. CHOOSE YOUR ACCESSORIES



DT70828-QZ



DT70829-QZ



DT70831-QZ



DT70832-QZ



DT70833-QZ



DT70834-QZ

2. CHOOSE YOUR ACCESSORIES



DT70830-QZ



DT70835-QZ



DT70836-QZ



DT70837-QZ



DT70838-QZ

Cat. No.	Description	Contents
DT70828-QZ	6pc Black & Gold Drill Bit Mix Bar	Bit Bar (1) + Black & Gold Round Shank Drill Bits (6) + 2mm (1) + 3mm (1) + 4mm (1) + 5mm (1) + 6mm (1) + 8mm (1)
DT70829-QZ	7pc Black & Gold Drill Bit Mix Bar	Bit Bar (1) + Black & Gold Round Shank Drill Bits (7) + 3mm (1) + 4mm (1) + 5mm (1) + 6mm (1) + 8mm (1) + 10mm (1) + 12mm (1)
DT70831-QZ	7pc Hex Black & Gold Drill Bit Mix Bar	Bit Bar (1) + Black & Gold Drill Bits - Hex Shank (7) + 2mm (1) + 3mm (1) + 4mm (1) + 5mm (1) + 6mm (1) + 8mm (1) + 10mm (1)
DT70832-QZ	5pc Extreme Flatwood Mix Bar	Bit Bar (1) + Extreme Flatwood Bits (5) + 18mm (1) + 20mm (1) + 22mm (1) + 25mm (1) + 32mm (1)
DT70833-QZ	5pc Extreme Flatwood Mix Bar	Bit Bar (1) + Extreme Flatwood Bits (5) + 14mm (1) + 18mm (1) + 20mm (1) + 22mm (1) + 25mm (1)
DT70834-QZ	5pc Extreme Flatwood Mix Bar	Bit Bar (1) + Extreme Flatwood Bits (5) + 16mm (1) + 18mm (1) + 20mm (1) + 25mm (1) + 32mm (1)

Cat. No.	Description	Contents
DT70830-QZ	5pc Hex Multi-Material Drill Bit Mix Bar	Bit Bar (1) + Multi-Material Drill Bits - Hex Shank (5) + 4mm (1) + 5mm (1) + 5.5mm (1) + 6mm (1) + 8mm (1)
DT70835-QZ	5pc SDS PLUS Mix Bar	Bit Bar (1) + SDS Plus Masonry Drill Bits (5) + 5.5mm x 160mm (1) + 6mm x 160mm (1) + 7mm x 160mm (1) + 8mm x 160mm (1) + 10mm x 160mm (1)"
DT70836-QZ	5pc SDS PLUS Mix Bar	Bit Bar (1) + SDS Plus Masonry Drill Bits (5) + 6mm x 160mm (2) + 8mm x 160mm (1) + 10mm x 160mm (1) + 12mm x 160mm (1)
DT70837-QZ	5pc SDS PLUS Mix Bar	Bit Bar (1) + SDS Plus Masonry Drill Bits (5) + 5mm x 160mm (1) + 6mm x 160mm (1) + 8mm x 160mm (1) + 10mm x 160mm (1) + 12mm x 160mm (1)
DT70838-QZ	5pc SDS PLUS Mix Bar	Bit Bar (1) + SDS Plus Masonry Drill Bits (5) + 5mm x 160mm (1) + 5.5mm x 160mm (1) + 6mm x 160mm (1) + 6.5mm x 160mm (1) + 7mm x 160mm (1)



DISCLAIMER FOR RECOMMENDATIONS, INFORMATION AND USE OF DATA.

The recommendations, information and data contained in this catalogue are put together with great care based on the principles, equations and safety factors set out in the DeWALT® Technical Manual or given in the relevant European Technical Assessment (ETA) available at www.DeWALT.co.uk/DOP. DeWALT® cannot however be responsible for printing errors or omissions and the information and data is subject to change. The data is valid as of as of July 1st 2020. DeWALT® reserves the right to change the designs, materials and specifications of the products without notice.

It is the responsibility of the specifying professional or installer to ensure that a suitable product is specified, selected and used in the intended application. This includes that the selected product and its use is compliant with applicable building codes, regulations and other legal requirements and will satisfy durability and performance criteria and margins

of safety which they determine are applicable. The products must be used, handled and installed strictly in accordance with all current instructions published by DeWALT® or in the European Technical Assessments.

The performance data given in this catalogue are the result of the evaluation of tests conducted under laboratory conditions. It is the responsibility of the specifier and installer to consider conditions in the field to ensure the performance data is applicable to the actual conditions. In particular the base material and environmental conditions have to be checked prior to installation. Load values indicated assume single anchor use without the influence of surface edges, spacing or material thickness.

In case of doubt please contact DeWALT® technical support via www.DeWALT.com.

Stanley Black & Decker UK Limited
270 Bath Road, SL1 4DX Slough
United Kingdom
Tel: +441753500517

www.DeWALT.com

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT reserves the right to change any deal at any time without notice. Deals available while stocks last.

Your DeWALT Dealer: