

Car & Truck Care
GC
Nederland



strands[®]
-lighting division

YOUR FIRST CHOICE IN
VEHICLE LIGHTING

EDITION 1 - 2024


- ✓ VIBRATION AND SHOCKPROOF
- ✓ SPECIAL COATING FOR HARSH CONDITIONS
- ✓ XPERIENCE MODE

SIBERIA


SKYLORD



Xperience mode



E-mode



Part No. 2607270949

SIBERIA SKYLRD DRIVING LIGHT WHITE 9'' LED


€ 325,00 excl. VAT / € 393,25 incl. VAT

Voltage	10-38V DC
Consumption, E-mode	21,5 W
Consumption, Xperience mode	124 W
Theoretical lumen	11 000
Actual lumen, E-mode	1565
Actual lumen, Xperience mode	8860
1 lux @ E-mode	329 m
1 lux @ Xperience mode	751 m
IP-class	IP68, IP69K
Beam pattern	Combo
Position light	Amber and white
Color temperature	5700K


Connection	DT4
Cable length	500 mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	228 mm
Depth	80,65 mm
Height including bracket	232,85 mm
Operating temperature	-30°C ~ +65°C
E-approved	ECE R149, R148
Ref	25
EMC-certificate	ECE R10, CISPR25 Class 3



Xperience mode



E-mode



Part No. 2607270948

SIBERIA SKYLRD DRIVING LIGHT 9'' LED

€ 295,00 excl. VAT / € 356,95 incl. VAT

Voltage	10-38V DC
Consumption, E-mode	20,6 W
Consumption, Xperience mode	121 W
Theoretical lumen	11 000 W
Actual lumen, E-mode	1213
Actual lumen, Xperience mode	7025
1 lux @ E-mode	324 m
1 lux @ Xperience mode	768 m
IP-class	IP68, IP69K
Beam pattern	Combo
Position light	Amber and white
Color temperature	5700K

Connection	DT4
Cable length	500 mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	228 mm
Depth	80,65 mm
Height including bracket	232,85 mm
Operating temperature	-30°C ~ +65°C
E-approved	ECE R149, R148
Ref	25
EMC-certificate	ECE R10 CISPR25 Class 3


FIREFLY

- ✓ NO COMPROMISES—
MAXIMUM PERFORMANCE
- ✓ A HALO OF LIGHT
- ✓ INVISIBLE DESIGN



Use the QR code to
check out the products.






Part No. 2607270955

FIREFLY DRIVING LIGHT 9'' LED

€ 279,00 excl. VAT / € 337,59 incl. VAT

Voltage	10-48V DC
Consumption light	145 W
Theoretical lumen	16800 lm
Actual lumen	12076 lm
1 lux @	455 m
IP-class	IP67
Beam pattern	combo
Color Temperature	6000K
Position light	Amber and white
Connection	DT-4

Cable length	1000 mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	220 mm
Depth	85 mm
Height including bracket	239 mm
Operating temperature	-40°C +65°C
E-approved	R149, R148
Ref	50
EMC-certificate	ECE R10



Part No. 2607270957

FIREFLY PROFESSIONAL WHITE DRIVING LIGHT 9'' LED

€ 289,00 excl. VAT / € 349,69 incl. VAT

Voltage	10-48V DC
Consumption	145 W
Consumption Warning light	21 W
Theoretical lumen	16800 lm
Actual lumen	12076 lm
1 lux @	455 m
IP-class	IP67
Beam pattern	Combo
Color Temperature	6000 K
Position light	Amber and white / warning light (Day/Night)
Connection	DT-6

Cable length	1000 mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	220 mm
Depth	85 mm
Height including bracket	239 mm
Operating temperature	-40°C +65°C
E-approved	R65 (XA2), R149, R148
Ref	50
EMC-certificate	ECE R10

DARK KNIGHT INSANE





- ✓ ONE LAMP - THREE FUNCTIONS
- ✓ HIGH PERFORMANCE
- ✓ DARK KNIGHT DESIGN


Part No. 2607270698

DARK KNIGHT INSANE DRIVING LIGHT/WARNING LIGHT LED

€ 249,00 excl. VAT / € 301,29 incl. VAT

Voltage	9-36V DC
Consumption	112W
Theoretical lumen	12 000
Actual lumen	10 500
1 lux @	439m
IP-class	IP68/IP69K
Beam pattern	Combo
Position light	White and amber
Color temperature	6000K
Connection	Cable
Cable length	2500 mm

Material housing	Aluminium
Material lens	Polycarbonate
Length	247 mm
Depth	70,7 mm
Height	141 mm
Height including bracket	170,5 mm
Operating temperature	-40°C - +60°C
E-approved	ECE R7, R65, R112
Ref	45
EMC-certificate	ECE R10



Use the QR code to check out the product.



- ✓ WELL BALANCED LIGHT BEAM
- ✓ UNIQUE POSITION LIGHT
- ✓ DARK KNIGHT LOOK


Part No. 2607270928

DARK KNIGHT INTENSE 9" DRIVING LIGHT LED

€ 245,00 excl. VAT / € 296,45 incl. VAT

Voltage	9-36V DC
Consumption	125W
Theoretical lumen	16 100
Actual lumen	13 500
1 lux @	480 m
Color temperature	5000Kv
IP-class	IP68/IP69K
Beam pattern	Combo
Position light	White and amber
Connection	DT-4
Cable length	500 mm

Material housing	Aluminium
Material lens	Polycarbonate
Diameter	218 mm
Depth	70 mm
Height including bracket	233,5 mm
Diameter	218 mm
Operating temperature	-40°C - +60°C
E-approved	ECE R7
Ref	45
EMC-certificate	ECE R10



Use the QR code to check out the product.






SIBERIA

NIGHT RANGER



- ✓ WHITE COLOR DESIGN
- ✓ LEGENDARY LIGHT OUTPUT
- ✓ DUAL POSITION LIGHT
- ✓ DURABLE MATERIALS

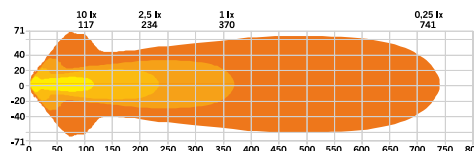

Part No. 2607809208



SIBERIA NIGHT RANGER WHITE DRIVING LIGHT 9'' LED

€ 239,00 excl. VAT / € 289,19 incl. VAT

Voltage	9-32V DC
Consumption	99W
Theoretical lumen	20 400
Actual lumen	11 722
1 lux @	370 m
IP-class	IP69K
Beam pattern	Flood
Position light	White and amber
Connection	DT4
Cable length	500 mm
Color temperature	5700K

Material bracket	Stainless steel
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	228,6mm
Depth	86,7mm
Height including bracket	249,3mm
Operating temperature	-20°C ~ +45°C
E-approved	ECE R112, R7
Ref	30
EMC-certificate	ECE R10

Use the QR code to
check out the product.



SIBERIA NIGHT RANGER DRIVING LIGHT 9'' LED

Part No. 2607809188

€ 209,00 excl. VAT / € 252,89 incl. VAT

Voltage	9-35V DC
Consumption	145W
Theoretical lumen	20 400
Actual lumen	13 377
1 lux @	465m
IP-class	IP67/IP69K
Beam pattern	Combo
Position light	White and amber
Connection	DT-4
Cable length	500mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	228,6mm
Depth	86,7mm
Height including bracket	249,3mm
Operating temperature	-30°C - +65°C
E-approved	ECE R112, R7
Ref	30
EMC-certificate	ECE R10

Part No. 2607809200 (Spot)

€ 209,00 excl. VAT / € 252,89 incl. VAT

Voltage	9-35V DC
Consumption	145W
Theoretical lumen	14 280
Actual lumen	10 485
1 lux @	900m
IP-class	IP67/IP69K
Beam pattern	Spot
Position light	White and amber
Connection	DT-4
Cable length	500mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	228,6mm
Depth	86,7mm
Height including bracket	249,3mm
Operating temperature	-30°C - +65°C
E-approved	No
EMC-certificate	ECE R10



- ✓ EXPRESS YOUR PERSONALITY
- ✓ RESISTANT TO MOISTURE
- ✓ WHITE AND AMBER POSITION LIGHT

Part No. 2607270922


AMBASSADOR 9'' DRIVING LIGHT LED

€ 329,00 excl. VAT / € 398,09 incl. VAT

The professional driver's first choice. Ambassadors' light beam exceeds everything you see and literally turns night into day in a long distance, pushing out 1 lux at 1007 meters. Designed in Sweden and manufactured in Europe. All the components are unique, specifically designed for Ambassador. It comes with exciting features – dual position light and a Nitto Denko breathing function that keeps the moisture away. The lens is made of unbreakable polycarbonate that has been sent for treatment in Germany to be highly durable against stone shoots and scratches.

Voltage	10-32V DC
Consumption	70W
Theoretical lumen	5535
Actual lumen	4040
1 lux @	1007m
IP-class	IP68
Beam pattern	Spot
Position light	White and amber
Connection	Cable

Cable length	3000mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	230,5mm
Depth	132mm
Height including bracket	245mm
Operating temperature	-40°C - +40°C
E-approved	No
EMC-certificate	ECE R10



- ✓ DARK IMPRESSION
- ✓ EXPRESS YOUR PERSONALITY
- ✓ PASSION IN EVERY DETAIL
- ✓ RESISTANT TO MOISTURE

Part No. 2607270925

DARK EDITION


AMBASSADOR DRIVING LIGHT 9'' LED

€ 365,00 excl. VAT / € 441,65 incl. VAT

Refuse to be average with Ambassador Dark Edition. A driving light that ensures high quality with unique components. Ambassador Dark Edition has a dark reflector, which gives a dark impression, and two different colors on the trim/ring. Choose between black and chrome. Both colors are included. Choose the one that suits you and your vehicle best.

Voltage	12-24V DC
Consumption	67W
Theoretical lumen	5535
Actual lumen	1948
1 lux @	381m
IP-class	IP66/IP68
Beam pattern	Spot
Position light	White and amber
Connection	Cable

Cable length	3000mm
Material housing	Aluminium
Material lens	Polycarbonate
Diameter	230,5mm
Depth	132mm
Height including bracket	245mm
Operating temperature	-40°C - +40°C
E-approved	No
EMC-certificate	ECE R10





AMBASSADOR

SIBERIA SINGLE ROW LED BAR

PART NO.	2607809170	2607809171	2607809172	2607809173	2607809174
	€ 149,00 excl. VAT € 180,29 incl. VAT	€ 179,00 excl. VAT € 216,59 incl. VAT	€ 219,00 excl. VAT € 264,99 incl. VAT	€ 259,00 excl. VAT € 313,39 incl. VAT	€ 329,00 excl. VAT € 398,09 incl. VAT

VOLTAGE	10-40V DC	10-40V DC	10-40V DC	10-40V DC	10-40V DC
CONSUMPTION	32W	59W	95W	130W	155W
THEORETICAL LUMEN	4000	8000	12000	16000	19200
ACTUAL LUMEN	2200	4254	5641	7434	8570
1 LUX @	368m	447m	444m	464m	443m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Spot	Combo	Combo	Combo	Combo
POSITION LIGHT	Amber and white	Amber and white	Amber and white	Amber and white	Amber and white
CONNECTION	DT-4	DT-4	DT-4	Cable	Cable
CABLE LENGTH	500mm	500mm	500mm	2500mm	2500mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	300,6mm	555,6mm	813,6mm	1065,6mm	1269,6mm
DEPTH	55,5mm	55,5mm	55,5mm	55,5mm	55,5mm
HEIGHT	45mm	45mm	45mm	45mm	45mm
HEIGHT INCLUDING BRACKET	65mm	65mm	65mm	65mm	65mm
OPERATING TEMPERATURE	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C
E-APPROVED	ECE R112, R7	ECE R112, R7	ECE R112, R7	ECE R112, R7	ECE R112, R7
REF	30	50	50	50	50
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10



SIBERIA DOUBLE ROW LED BAR

PART NO.	2607809179 € 149,00 excl. VAT € 180,29 incl. VAT	2607809180 € 179,00 excl. VAT € 216,59 incl. VAT	2607809181 € 249,00 excl. VAT € 301,29 incl. VAT	2607809182 € 329,00 excl. VAT € 398,09 incl. VAT	2607809183 € 429,00 excl. VAT € 519,09 incl. VAT	2607809184 € 529,00 excl. VAT € 640,09 incl. VAT
VOLTAGE	10-40V DC	10-40V DC	10-40V DC	10-40V DC	10-40V DC	10-40V DC
CONSUMPTION	28W	45W	91W	143W	196W	239W
THEORETICAL LUMEN	4800	8000	16000	24000	32000	38400
ACTUAL LUMEN	2002	3294	6316	8792	10823	11280
1 LUX @	447m	437m	450m	446m	450m	464m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Spot	Combo	Combo	Combo	Combo	Combo
POSITION LIGHT	Amber and white	Amber and white	Amber and white	Amber and white	Amber and white	Amber and white
CONNECTION	DT-4	DT-4	DT-4	Cable	Cable	Cable
CABLE LENGTH	500mm	500mm	500mm	2500mm	2500mm	2500mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	205mm	307mm	562mm	817mm	1072mm	1276mm
DEPTH	71,6mm	71,6mm	71,6mm	71,6mm	71,6mm	71,6mm
HEIGHT	76mm	76mm	76mm	76mm	76mm	76mm
HEIGHT INCLUDING BRACKET	89mm	89mm	89mm	89mm	89mm	89mm
OPERATING TEMPERATURE	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C
E-APPROVED	ECE R112, R7	ECE R112, R7	ECE R112, R7	ECE R112, R7	ECE R112, R7	ECE R112
REF	45	45	45	50	50	50
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10

- ✓ HIGHEST POSSIBLE PERFORMANCE
- ✓ OPTIMIZED LIGHT BEAM
- ✓ DUAL POSITION LIGHT

FIREFLY SUMMER GLOW

Step into the future of safety and style to witness a warning light like never before. This is Firefly Summer Glow. Designed to catch your attention with a new, incredibly slim design. Here to guide you forward.



- ✓ FLOATING TECHNOLOGY
- ✓ INCREDIBLE SLIM DESIGN
- ✓ 3-5 WARNING LIGHT PATTERNS

PART NO.	2607850960 € 84,95 excl. VAT € 102,79 incl. VAT	2607850961 € 89,95 excl. VAT € 108,84 incl. VAT	2607850962 € 115,00 excl. VAT € 139,15 incl. VAT	2607850963 € 99,95 excl. VAT € 120,94 incl. VAT	2607850964 € 109,95 excl. VAT € 133,04 incl. VAT	2607850965 € 140,00 excl. VAT € 169,40 incl. VAT
VOLTAGE	10-48V DC	10-48V DC	10-48V DC	10-48V DC	10-48V DC	10-48V DC
CONSUMPTION	36W	36W	36W	67 W	67 W	67 W
IP-CLASS	IP67	IP67	IP67	IP67	IP67	IP67
PATTERNS	3	3	3	5	5	5
CONNECTION	Cable	DIN	Cig plug	Cable	DIN	Cig plug
CABLE LENGTH	500 mm	–	2500 mm	500 mm	–	2500 mm
COLOR LENS	Clear	Clear	Clear	Clear	Clear	Clear
COLOR LED	Amber	Amber	Amber	Amber	Amber	Amber
HEIGHT	37 mm	111 mm	42 mm	37 mm	112 mm	41 mm
CC	60 mm	–	–	50 mm	–	–
DIAMETER	110 mm	110 mm	110 mm	140 mm	140 mm	140 mm
ADR-APPROVED	No	No	No	No	No	No
E-APPROVED	ECE R65	ECE R65	ECE R65	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10

DARK KNIGHT HARDCORE



- ✓ BUILT FOR THE MOST CHALLENGING ENVIRONMENTS
- ✓ ONE WORK LIGHT FOR ALL NEEDS
- ✓ OUTSTANDING PERFORMANCE

Part No. 2607809248

DARK KNIGHT Hardcore WORK LIGHT LED

€ 79,00 excl. VAT / € 95,59 incl. VAT

Voltage	9-36V DC
Consumption	32W
Theoretical lumen	4560
Actual lumen	3645
Kelvin	5000K
IP-class	IP68/IP69K
Connection	Built in DT-2 with included DT-2 cable
Cable length	330 mm
Material housing	Aluminium

Material lens	Polycarbonate
Material bracket	Satinless steel with lock nut
Length	92,1 mm
Depth	37,2 / 43,2 mm
Height	92,1 mm
Height including bracket	110,5/124,5 mm
Operating temperature	-30°C - +65°C
ADR-approved	No
E-approved	No
EMC-certificate	CISPR25 Class 3

DARK KNIGHT FORTEX



Use the QR code to
check out the product.

REVOLUTIONIZE YOUR WORKSPACE

Revolutionize your workspace like never before. Dark Knight Fortex is your powerful lighting solution. The work light you have always dreamed of. Ready to release your dark side with style and unique features.



- ✓ A WIDE, SMOOTH, AND POWERFUL BEAM PATTERN
- ✓ REMARKABLE RED POSITION LIGHT
- ✓ ADJUST THE COLOR TEMPERATURE TO YOUR SPECIFIC NEED

Part No. 2607809255

€ 95,00 excl. VAT / € 114,95 incl. VAT

Voltage	9-36V DC
Consumption	39W
Theoretical lumen	3900
Actual lumen	2500 lm / 3200 lm / 2740 lm
1 lux @	42/45/51
IP-class	IP68/IP69K
Beam pattern	Flood
Color temperature	4000K / 5000K / 6000K
Position light	Red
Connection	DT-4

Cable length	500 mm
Material housing	Aluminium
Material lens	Polycarbonate
Length	85 mm
Depth	64,4 mm
Height	80 mm
Height including bracket	90 mm
Operating temperature	-40°C - +60°C
E-approved	No
EMC-certificate	ECE R10

SIBERIA

NEXT LEVEL

SIBERIA SINGLE ROW LED BAR

PART NO.	2607809219 (6")	2607809220 (11")	2607809223 (38")
	€ 145,00 excl. VAT € 180,29 incl. VAT	€ 185,00 excl. VAT € 240,79 incl. VAT	€ 499,00 excl. VAT € 603,79 incl. VAT

VOLTAGE	9-32V DC	9-32V DC	9-32V DC
CONSUMPTION	31,5 W	75 W	75 W
THEORETICAL LUMEN	4800	14 400	57 600
ACTUAL LUMEN	3465	9200	32 000
1 LUX @	47 m	78 m	158 m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Flood	Flood	Flood
COLOR TEMPERATURE	5700K	6000K	6000K
POSITION LIGHT	Amber, white and red	Amber and white	Amber and white
CONNECTION	Cable	Cable	Cable
CABLE LENGTH	500 mm	2500 mm	2500 mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	167 mm	286 mm	952 mm
DEPTH	54,2 mm	54,2 mm	54,2 mm
HEIGHT	76 mm	76 mm	76 mm
HEIGHT INCLUDING BRACKET	96,6 mm	89 mm	89 mm
OPERATING TEMPERATURE	-30°C - +65°C	-30°C - +65°C	-30°C - +65°C
EMC-CERTIFICATE	ECE R10, CISPR 23 Class 3	ECE R10, CISPR 25 Class 3	ECE R10, CISPR 25 Class 3

- ✓ *ENDLESS MOUNTING POSSIBILITIES*
- ✓ *NEXT LEVEL OF WORK LIGHT*
- ✓ *TRIPLE POSITION LIGHT*

NEXT LEVEL OF WORK LIGHTS

A powerful work light you haven't experienced before that provides a constant flow of light. Designed as an LED bar. Available in 6", 11" and 38".

ONE WORK LIGHT REPLACES SEVERAL

One work light, created to provide the same power as 4-15 standard 2000 lumen LED work lights. Which simplify your work considerably.




DUAL POSITION LIGHT



Part No. 2607809186

SIBERIA QUBE WORK LIGHT LED

€ 75,00 excl. VAT / € 90,75 incl. VAT




DUAL POSITION LIGHT



Part No. 2607809206

SIBERIA RED PANDA WORK LIGHT LED

€ 95,00 excl. VAT / € 114,95 incl. VAT




DUAL POSITION LIGHT



Part No. 5809125

SIBERIA RED FOX WORK LIGHT-/STROBE LIGHT LED

€ 109,00 excl. VAT / € 131,89 incl. VAT



Part No.

2607809186

2607809206

2607809125

VOLTAGE	9-35V DC	9-35V DC	9-32V DC
CONSUMPTION	37W	37W	41W
THEORETICAL LUMEN	4800	4800	8400
ACTUAL LUMEN	2949	2949	3583
1 LUX @	—	—	160m
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K
BEAM PATTERN	Combo	Combo	Flood
POSITION LIGHT	White and amber	Red and amber	Red and amber
CONNECTION	DT-4	DT-4	DT-6
CABLE LENGTH	500mm	500mm	500mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	72mm	72mm	92,93mm
HEIGHT	72mm	72mm	74,1mm
DEPTH	72mm	72mm	74,57mm
HEIGHT INCLUDING BRACKET	81,5mm	81,5mm	87,56mm
OPERATING TEMPERATURE	-20°C · +45°C	-20°C · +45°C	-20°C · +45°C
E-APPROVED	No	No	No
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10

MONITUM

FULLY E-APPROVED

The entire series is fully E-approved according to ECE R65 class 2, which means the warning light bar can be switched from day to night mode.

EXTREMELY SLIM

Unlike traditional alternatives on the market, Monitum comes with a height of only 33,5 mm, which will give you less wind noise and reduce fuel consumption.

POSITION LIGHT

Comes with eleven different warning light patterns. The Cruise Light feature – the position light – provides an appealing styling effect and increases your visibility on the roads.

PART NO.	2607850140	2607850139	2607850141	2607850142	2607850145	2607850143	2607850144
	€ 699,00 excl. VAT € 845,79 incl. VAT	€ 799,00 excl. VAT € 986,79 incl. VAT	€ 899,00 excl. VAT € 1087,79 incl. VAT	€ 999,00 excl. VAT € 1208,79 incl. VAT	€ 1199,00 excl. VAT € 1450,79 incl. VAT	€ 1299,00 excl. VAT € 1571,79 incl. VAT	€ 1399,00 excl. VAT € 1692,79 incl. VAT
VOLTAGE	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC
CONSUMPTION	84W	95W	100W	110W	115,5W	121W	159W
PATTERNS	11	11	11	11	11	11	11
IP-CLASS	IP67	IP67	IP67	IP67	IP67	IP67	IP67
COLOR LENS	Clear	Clear	Clear	Clear	Clear	Clear	Clear
COLOR LED	Amber	Amber	Amber	Amber	Amber	Amber	Amber
PCS OF LEDS	120	168	192	240	264	288	312
CABLE LENGTH	4000 mm	4000 mm	4000 mm	4000 mm	4000 mm	4000 mm	4000 mm
LENGTH	474 mm	780 mm	932,7 mm	1238,5 mm	1391,4 mm	1544,3 mm	1850,1 mm
WIDTH	199,8 mm	199,8 mm	199,8 mm	199,8 mm	199,8 mm	199,8 mm	199,8 mm
HEIGHT	33,5 mm	33,5 mm	33,5 mm	33,5 mm	33,5 mm	33,5 mm	33,5 mm
HEIGHT INCLUDING FEET	74,5 mm	74,5 mm	74,5 mm	74,5 mm	74,5 mm	74,5 mm	74,5 mm
E-APPROVED	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10



Part No. 2607809234
UNITY WORK LIGHT 10W LED
€ 22,95 excl. VAT / € 27,77 incl. VAT



Part No. 2607809236
UNITY WORK LIGHT 19W LED
€ 49,00 excl. VAT / € 59,29 incl. VAT



Part No. 2607809237
UNITY WORK LIGHT 31W LED
€ 39,00 excl. VAT / € 47,19 incl. VAT



Part No. 2607809238
UNITY WORK LIGHT 64W LED
€ 79,00 excl. VAT / € 95,59 incl. VAT



Part No. 2607809240
UNITY WORK LIGHT 92W LED
€ 119,00 excl. VAT / € 143,99 incl. VAT



Part No. 2607809239
UNITY WORK LIGHT 149W LED
€ 199,00 excl. VAT / € 240,79 incl. VAT

PART NO.	2607809234	2607809236	2607809237	2607809238	2607809240	2607809239
VOLTAGE	10-32V DC	10-32V DC	10-40V DC	10-40V DC	10-40V DC	10-40V DC
CONSUMPTION	10W	19W	31W	64W	92W	149W
THEORETICAL LUMEN	1520	3040	2750	6187	15000	21600
ACTUAL LUMEN	931	1942	2200	5200	7366	13000
IP-CLASS	IP68	IP68	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
CONNECTION	DT	DT	DT	DT	DT	DT
CABLE LENGTH	500mm	250mm	520mm	520mm	500mm	200mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	52,11mm	-	70,4mm	101mm	110,27mm	135mm
DIAMETER	-	84,4mm	-	-	-	-
DEPTH	26,13mm	54,72mm	41mm	45mm	57,6mm	90,4mm
HEIGHT	67,03mm	-	85,2mm	114,4mm	110,26mm	118mm
HEIGHT INCLUDING BRACKET	112,2mm	112,2mm	95,5mm	120mm	144,13mm	152,2mm
OPERATING TEMPERATURE	-30°C · +65°C	-30°C · +80°C	-30°C · +65°C	-30°C · +65°C	-30°C · 65°C	-30°C · +65°C
E-APPROVED	ECE R23	No	No	No	No	No
EMC-CERTIFICATES	ECE R10	ECE R10, CISPR Class 2	ECE R10	ECE R10	ECE R10	ECE R10

- ✓ *ENDLESS MOUNTING POSSIBILITIES*
- ✓ *FIRST ON THE MARKET TO BE MOUNTED ON BARS*
- ✓ *CLICK-ON FRAME*

ENDLESS MOUNTING POSSIBILITIES

The tail light series delivers horizontal and vertical mounting opportunities. The unique, slim design and the multivolt make it perfect for vehicles like ATVs, trailers, trucks, and construction machinery.

BLACK FRAME

Part No. 2607850396,
2607850397, 2607850398

€ 7,95 excl. VAT
€ 9,62 incl. VAT

CHROME FRAME

Part No. 2607850399

€ 7,95 excl. VAT
€ 9,62 incl. VAT

RUBBER GASKET

Part No. 2607850409

€ 2,95 excl. VAT
€ 3,57 incl. VAT

DARK KNIGHT STROBE LIGHT LED

Use the QR code to
check out the product.



PART NO.	2607850400 € 29,59 excl. VAT € 36,24 incl. VAT	2607850401 € 32,95 excl. VAT € 39,87 incl. VAT	2607850402 € 32,95 excl. VAT € 39,87 incl. VAT	2607850403 € 34,95 excl. VAT € 42,29 incl. VAT	2607850404 € 34,95 excl. VAT € 42,29 incl. VAT
VOLTAGE	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC	12-24 V DC
CONSUMPTION	7 W	10 W	10 W	10 W	10 W
PATTERNS	21	21	21	21	21
IP-CLASS	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K	IP67/IP69K
COLOR LENS	Clear	Clear	Dark tinted	Clear	Dark tinted
COLOR LED	Amber	Amber	Amber	Amber	Amber
CONNECTION	Cable	Cable	Cable	Cable	Cable
CABLE LENGTH	400 mm	400 mm	400 mm	400 mm	400 mm
LENGTH	79,2 mm	95,2 mm	95,2 mm	129,2 mm	129,2 mm
DEPTH	31,2 mm	31,2 mm	31,2 mm	33,2 mm	33,2 mm
HEIGHT	14,8 mm	14,8 mm	14,8 mm	14,8 mm	14,8 mm
CC	68 mm	84 mm	84 mm	118 mm	118 mm
E-APPROVED	ECE R65 Class 1	ECE R65 Class 2	ECE R65 Class 1	ECE R65 Class 2	ECE R65 Class 1
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10

WHEN YOU ARE IN CHARGE

Welcome to the new frontline of beacon warning lights. This is the Cruise Light series with an eye-catching amber glow from Cruise Light. The series is all about when you are in charge. Always ready to make your passion visible and to become one with the amber flow. With Cruise Light, you will be seen in an entirely new way.



Part No. 2607850950
CRUISE LIGHT WARNING LIGHT LED
SURFACE MOUNTING
€ 99,00 excl. VAT / € 119,79 incl. VAT



Part No. 2607809051
SLIM BEACON AMBER LED
POLE MOUNTING
€ 65,00 excl. VAT / € 78,65 incl. VAT



Part No. 2607850953
CRUISE LIGHT WARNING LIGHT LED
DIN/POLE MOUNTING
€ 125,00 excl. VAT / € 151,25 incl. VAT



Part No. 2607850954
CRUISE LIGHT WARNING LIGHT LED
SURFACE MOUNTING
€ 99,00 excl. VAT / € 119,79 incl. VAT



Part No. 2607850955
CRUISE LIGHT WARNING LIGHT LED
DIN/POLE MOUNTING
€ 125,00 excl. VAT / € 151,89 incl. VAT



Part No. 2607809060
SLIM BEACON AMBER WARNING LIGHT LED
€ 59,00 excl. VAT / € 71,39 incl. VAT

CRUISE LIGHT WARNING LIGHT LED

PART NO.	2607850950	2607809051	2607850953	2607850954	2607850955	2607809060
VOLTAGE	10-48 V DC	12-24V DC	10-48 V DC	10-48 V DC	10-48 V DC	12-24 V DC
CONSUMPTION	52 W	27W	52 W	52 W	52 W	27 W
PATTERNS	12	10	12	12	12	10
IP-CLASS	IP67	IP67	IP67	IP67	IP67	IP67
COLOR LENS	Clear smoked	Amber	Clear	Amber	Amber	Amber
COLOR LED	Amber	White	Amber	Amber	Amber	White
CONNECTION	Cable	DIN	DIN	Cable	DIN	Cable
CABLE LENGTH	500 mm	–	–	500 mm	–	500 mm
HEIGHT	52,5 mm	139 mm	131 mm	52,5 mm	131 mm	48 mm
DIAMETER	165 mm	92 mm	140 mm	165 mm	140 mm	112 mm
CC	130 mm	–	–	130 mm	–	89,2 / 77,3
ADR-APPROVED	No	Yes	No	No	No	Yes
E-APPROVED	ECE R65	ECE R65	ECE R65	ECE R65	ECE R65	ECE R65
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10



Part No. 2607850930
AMBRA WARNING LIGHT LED
SURFACE MOUNTING
€ 65,00 excl. VAT / € 78,65 incl. VAT



Part No. 2607850957
CRUISE LIGHT BEACON WARNING LIGHT LED
POLE MOUNTING
€ 79,00 excl. VAT / € 95,59 incl. VAT



Part No. 2607850932
AMBRA WARNING LIGHT LED
MAGNET/CIG PLUG
€ 89,00 excl. VAT / € 107,69 incl. VAT



Part No. 2607850933
CRUISE LIGHT BEACON LED
SURFACE MOUNTING
€ 89,00 excl. VAT / € 107,69 incl. VAT

CRUISE LIGHT WARNING LIGHT LED

PART NO.	2607850930	2607850957	2607850932	2607850933
VOLTAGE	10-48 V DC	10-48V DC	10-48 V DC	10-48 V DC
CONSUMPTION	40 W	37W	40 W	37 W
PATTERNS	11	11	11	11
IP-CLASS	IP67	IP67	IP67	IP67
COLOR LENS	Amber	Amber	Amber	Clear
COLOR LED	Amber	Amber	Amber	Amber
CONNECTION	Cable	DIN	Cable	Cable
CABLE LENGTH	500 mm	500 mm	500 mm	500 mm
HEIGHT	51 mm	123,5 mm	54 mm	51 mm
DIAMETER	110 mm	90 mm	110 mm	110 mm
CC	87,5 mm	-	87,5 mm	-
ADR-APPROVED	Yes	Yes	No	No
E-APPROVED	ECE R65	ECE R65	ECE R65	ECE R65
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10

WORLD-UNIQUE DESIGN

A tail light in a shape of a LED bar. The unique design and features allow you to mount it for different purposes.

E-APPROVED AND THREE-YEAR FUNCTION WARRANTY

Every function is E-approved and comes with our unique three-year function warranty.



FOUR FUNCTIONS

Get all your lighting needs in one product – reverse light, brake light, indicator, and red position light approved as a tail light.

Part No. 2607809226

SIBERIA TAIL LIGHT 12'' LED

€ 159,00 excl. VAT / € 192,39 incl. VAT

Voltage: 10-32 V DC, Consumption: 35 W, Function: Tail, brake, indicator, reversing light, Theoretical lumen: Reversing light 1900, Actual lumen: Reversing light 323, 1 lux @: Reversing light 13 m, IP-class: IP67/IP69K, Beam pattern: Reversing light flood, Position light: Red, Connection: Cable, Cable length: 2500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 300,6 mm, Depth: 55,5 mm, Height: 45 mm, Height including bracket: 65 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R148, EMC-certificate: ECE R10

FULLY E-APPROVED

All functions are fully E-approved, and the warning light function is fully E-approved according to ECE R65. Standing behind Strands Lighting Division's market-leading three-year function warranty.

REVOLUTIONARY MOUNTING POSSIBILITIES

Mount either by a flush mounting, giving you a seamless and stylish montage. Or by the angle bracket behind the lamp that can be adjusted 180 degrees to mount at the angle that best suits your vehicle.

MULTIPLE OPTIONS

Delivers all the features you want where every function is equally essential – brake light, reversing light, red position light approved as a tail light, and indicator (part. no. 2607809224), or warning light (part. no. 2607809225)



Part No. 2607809224

SIBERIA MULTIPLE OPTIONS TAIL LIGHT WITH INDICATOR LED

€ 89,00 excl. VAT / € 107,69 incl. VAT

Part No. 2607809225

SIBERIA MULTIPLE OPTIONS TAIL LIGHT WITH WARNING LIGHT LED

€ 89,00 excl. VAT / € 107,69 incl. VAT

Voltage: 10-32 VDC, Consumption: 35 W, Function: Tail, brake, indicator, reversing light, Theoretical lumen: Reversing light 546, Actual lumen: Reversing light 322, 1 lux @: Reversing light 14 m, IP-class: IP67/IP69K, Beam pattern: Reversing light flood, Position light: Red, Connection: Cable, Cable length: 2500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 172/214 mm, Depth: 77/71,5 mm, Height: 50/77 mm, Height including bracket: 53,8 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R148, EMC-certificate: ECE R10

Voltage: 10-32 VDC, Consumption: 30 W, Function: Tail, brake, indicator, reversing light, Theoretical lumen: Reversing light 546, Actual lumen: Reversing light 322, 1 lux @: Reversing light 14 m, IP-class: IP67/IP69K, Beam pattern: Reversing light flood, Position light: Red, Connection: Cable, Cable length: 2500 mm, Material housing: Aluminium, Material lens: Polycarbonate, Length: 172/214 mm, Depth: 77/71,5 mm, Height: 50/77 mm, Height including bracket: 53,8 mm, Operating temperature: -30°C - +65°C, E-approved: ECE R148, R65, EMC-certificate: ECE R10



Part No. 2607800630
**DARK KNIGHT IZE LED
TAIL-/BRAKE-/INDICATOR LIGHT** LED
€ 79,00 excl. VAT / € 95,59 incl. VAT



Part No. 2607800631
**DARK KNIGHT IZE LED
TAIL-/BRAKE LIGHT** LED
€ 69,00 excl. VAT / € 83,49 incl. VAT



Part No. 2607800632
**DARK KNIGHT IZE LED
INDICATOR** LED
€ 69,00 excl. VAT / € 83,49 incl. VAT



Part No. 2607800633
**DARK KNIGHT IZE LED
FOG LIGHT** LED
€ 95,00 excl. VAT / € 114,95 incl. VAT



Part No. 2607800634
**DARK KNIGHT IZE LED
REVERSING LIGHT** LED
€ 95,00 excl. VAT / € 114,95 incl. VAT

Part No.	2607800630	2607800631	2607800632	2607800633	2607800634
VOLTAGE	24V DC	24V DC	24V DC	24V DC	24V DC
FUNCTIONS	Tail-,brake light, indicator	Tail-. Brake light	Indicator	Fog light	Reversing light
IP-CLASS	IP66	IP66	IP66	IP66	IP66
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm	2500 mm
LENGTH	110 mm	110 mm	110 mm	110 mm	110 mm
DEPTH	45 mm	45 mm	45 mm	45 mm	45 mm
HEIGHT	130 mm	130 mm	130 mm	130 mm	130 mm
CC	115 mm	115 mm	115 mm	115 mm	115 mm
E-APPROVED	ECE R6, R7	ECE R7	ECE R6	ECE R6	ECE R23
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10




DARK LENS

An all-black armor with a dark, tinted lens.
Appealing from all angles. Perfection in every detail.
Nothing less than a revolution.

EASY TO MOUNT

Dark Knight IZE LED is easy to mount and is best mounted in a rubber housing. Combine as you like, single or double. Provides a high quality regardless of year and mileage.

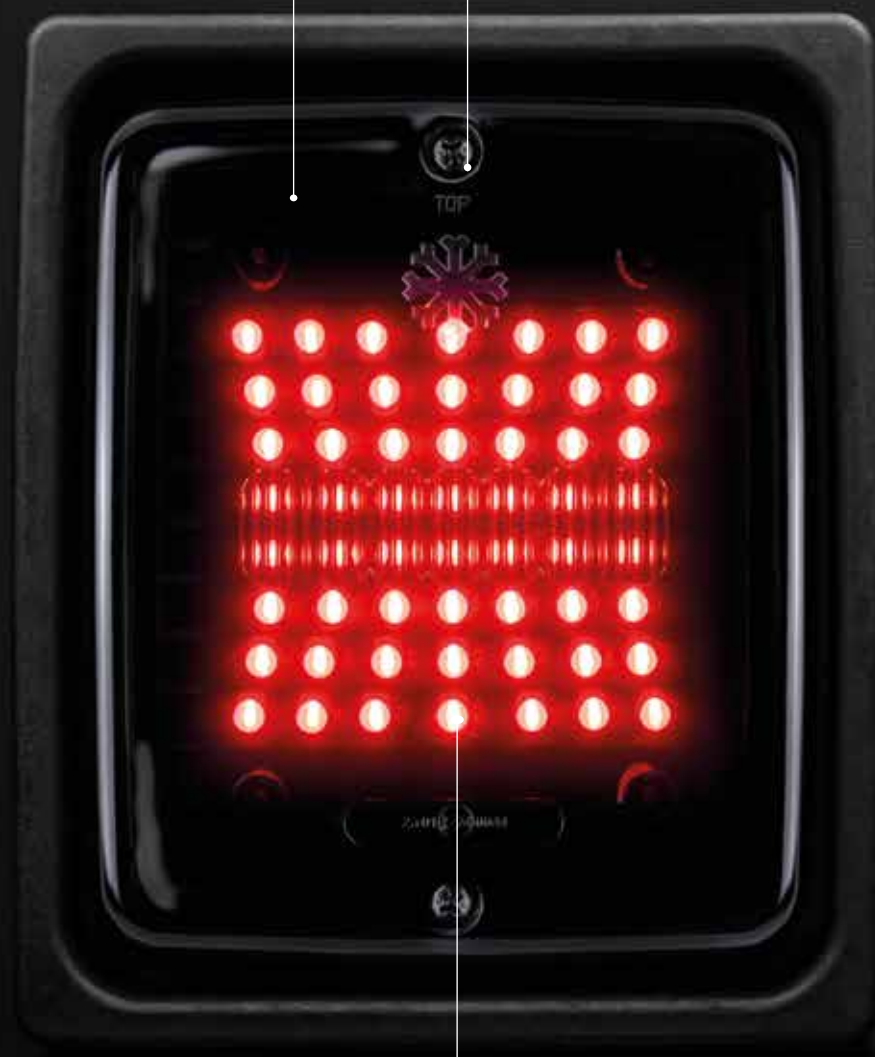

GLOW UP

Comes in a rich, deep, and powerful red tone
designed to make you stand out from the crowd.
An obvious choice for you who want to live out your passion.

A CLASSIC IN A NEW ARMOR

IZE LED is in your DNA. Now, in a new, black, and confident armor.
Dark Knight IZE LED attracts attention and allows you to bring out
your armor. A new way to lift your passion and express your power.

Use the QR code to check
out the product video.





Part No. 2607800108
TAIL/BRAKE/INDICATOR LED
€ 69,00 excl. VAT / € 83,49 incl. VAT



Part No. 2607800109
TAIL LIGHT LED
€ 59,00 excl. VAT / € 71,39 incl. VAT



Part No. 2607800110
TAIL- BRAKE LIGHT LED
€ 49,00 excl. VAT / € 59,29 incl. VAT



Part No. 2607800111
INDICATOR LED
€ 49,00 excl. VAT / € 59,29 incl. VAT



Part No. 2607800114
FOG LIGHT LED
€ 79,00 excl. VAT / € 95,59 incl. VAT



Part No. 2607800115
WARNING LIGHT LED
€ 125,00 excl. VAT / € 151,25 incl. VAT

PART NO.	2607800108	2607800109	2607800110	2607800111	2607800114	2607800115
VOLTAGE	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
FUNCTIONS	Tail, brake, indicator	Tail	Tail, brake	Indicator	Fog	Warning light
IP-CLASS	IP66	IP66	IP66	IP66	IP66	IP66
LENGTH	110 mm	110 mm	110 mm	110 mm	110 mm	110 mm
DEPTH	45 mm	45 mm	45 mm	45 mm	45 mm	45 mm
HEIGHT	130 mm	130 mm	130 mm	130 mm	130 mm	130 mm
CC	115 mm	115 mm	115 mm	115 mm	115 mm	115 mm
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm	2500 mm	2500 mm
E-APPROVED	ECE R6 D, R7 Y	ECE R7	ECE R7	ECE R6	ECE R38	No
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10





Part No. 2607800116
REVERSING LIGHT LED
€ 79,00 excl. VAT / € 95,59 incl. VAT



Part No. 2607800123
TAIL LIGHT LED
€ 69,00 excl. VAT / € 83,49 incl. VAT



Part No. 2607800126
TAIL- BRAKE LIGHT LED
€ 55,00 excl. VAT / € 66,55 incl. VAT



Part No. 2607800127
INDICATOR LED
€ 55,00 excl. VAT / € 66,55 incl. VAT



Part No. 2607800128
FOG LIGHT LED
€ 79,00 excl. VAT / € 95,59 incl. VAT



HOUSING
Part No. 2607800112 Single housing
€ 30,00 excl. VAT / € 36,30 incl. VAT
Part No. 2607800113 Double housing
€ 40,00 excl. VAT / € 48,40 incl. VAT
Part No. 2607800112-P Rubber gasket
€ 6,95 excl. VAT / € 8,41 incl. VAT

PART NO.	2607800116	2607800123	2607800126	2607800127	2607800128
VOLTAGE	24V DC	24V DC	24V DC	24V DC	24V DC
FUNCTIONS	Reverse	Tail	Tail/brake	Indicator	Fog
IP-CLASS	IP66	IP66	IP66	IP66	IP66
LENGTH	110 mm	110 mm	110 mm	110 mm	110 mm
DEPTH	45 mm	45 mm	45 mm	45 mm	45 mm
HEIGHT	130 mm	130 mm	130 mm	130 mm	130 mm
CC	115 mm	115 mm	115 mm	115 mm	115 mm
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm	2500 mm
E-APPROVED	ECE R23	ECE R7	ECE R7	ECE R6	ECE R38
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10





**DYNAMIC START UP
AND DYNAMIC INDICATOR**



Part No. 2607800621

TAIL LIGHT 3 FUNCTIONS

LED / LEFT

€ 85,00 excl. VAT / € 102,85 incl. VAT



**DYNAMIC START UP
AND DYNAMIC INDICATOR**



Part No. 2607800622

TAIL LIGHT 3 FUNCTIONS

LED / RIGHT

€ 85,00 excl. VAT / € 102,85 incl. VAT



iZELED



Part No. 2607800623

INDICATOR LED

€ 65,00 excl. VAT / € 78,65 incl. VAT



iZELED

BRAKE / TAIL LIGHT



Part No. 2607800620

TAIL LIGHT 2 FUNCTIONS LED

€ 65,00 excl. VAT / € 78,65 incl. VAT



iZELED

FOG / REVERSE LIGHT



Part No. 2607800624

TAIL LIGHT 2 FUNCTIONS LED

€ 75,00 excl. VAT / € 90,75 incl. VAT



iZELED



Part No. 2607800612

RUBBER GASKET

€ 8,50 excl. VAT / € 10,29 incl. VAT

DARK KNIGHT IZE LED

The revolutionary IZE LED series is now being expanded. Dark Knight is an exclusive interpretation of your most confident night drive. An exclusive, all-black version. Dark-tinted lens, dark chrome ring. A sophisticated look, day and night. Comes with all the IZE LED functions – such as dynamic indicator and dynamic startup light. All models are fully E-approved. The model with three functions (2607800621 + 2607800622) has a D-class certification that enables you to mount them as a unit on the vehicle, with two lamps per side.

Use the QR code to check
out the product video.



PART NO.	2607800621/2607800622	2607800623	2607800620	2607800624
VOLTAGE	10-30V DC	10-30V DC	10-30V DC	10-30V DC
FUNCTIONS	Tail with dynamic start up, brake, dynamic indicator	Indicator	Tail, brake	Reverse, fog
IP-CLASS	IP67	IP67	IP67	IP67
COLOR LENS	Clear smoked	Clear smoked	Clear smoked	Clear smoked
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm
DEPTH	15,31/44/49 mm	15,31/44/49 mm	15,31/44/49 mm	15,31/44/49 mm
DIAMETER	155/162,3mm	155/162,3 mm	155/162,3 mm	155/162,3 mm
E-APPROVED	ECE R6, R7, R48 type D	ECE R6	ECE R7	ECE R23, R38
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10

DARK KNIGHT IZE LED

FIVE MODELS

Comes in five different models (1 to 3 functions), all with top modern features for different needs.

DYNAMIC INNOVATION

The series contains models with dynamic indicator and dynamic start-up light. The dynamic feature means that the diodes come on, one after the other, which gives an eye-catching appearance to your vehicle.



E-APPROVED

The series is fully E-approved, ideal for trucks, trailers, pickup trucks, construction equipment and other similar vehicles.

ALL BLACK

Release your dark side. Dark Knight IZE LED comes with a dark-tinted lens and a dark chrome ring.

DYNAMIC START UP



DYNAMIC INDICATOR



- ✓ AUTOMATIC HEATED LENS
- ✓ INDICATOR IN THE FRONT AND BACK
- ✓ HIGH BEAM / LOW BEAM
- ✓ LEFT AND RIGHT MODEL



Part No. 2607270717



Part No. 2607270716

Part No. 2607270716 (right), 2607270717 (left)

HI-LO SNOW PLOW DRIVING LIGHT LED


€ 245,00 excl. VAT / € 296,45 incl. VAT

Use the QR code to check out the product video.



Voltage	10-32V DC
Consumption	60W
Theoretical lumen	5000 (high beam), 2000 (low beam)
Actual lumen	2273 (high beam), 876 (low beam)
1 lux @	275m (high beam), 171m (low beam)
IP-class	IP68/IP69K
Beam pattern	Combo
Functions	High beam, low beam, indicator, amber position light, white

Position light	position light
Connection	White and amber
Material housing	DT-6
Material lens	Aluminium
Length	Tempered glass
Depth	220mm
Height	80,5mm
Height including bracket	152mm
Operating temperature	197,2mm
E-approved	-30°C - +65°C
Ref	ECE R148, R149
EMC-certificate	17,5
	ECE R10



CRUISE LIGHT ROOF BAR

SLIM DESIGN

The series comes in a super slim design and a height of only 36 mm and a width of 120 mm. Made to fit all types of commercial vehicles.

CRUISE LIGHT EFFECT

Increase your visibility and get an appealing styling effect with 13 different warning light patterns - where Cruise Light is one of them.

COVERS ALL NEEDS

The warning light bars contain 8 sizes from 30 cm to 180 cm. Usable together or separately.

PART NO.	2607850211	2607850214	2607850215	2607850216	2607850217	2607850218	2607850219	2607850221
	€ 299,00 excl. VAT € 361,79 incl. VAT	€ 449,00 excl. VAT € 543,29 incl. VAT	€ 499,00 excl. VAT € 603,79 incl. VAT	€ 519,00 excl. VAT € 627,99 incl. VAT	€ 549,00 excl. VAT € 664,29 incl. VAT	€ 619,00 excl. VAT € 748,99 incl. VAT	€ 679,00 excl. VAT € 821,59 incl. VAT	€ 739,00 excl. VAT € 894,19 incl. VAT
VOLTAGE	10-30V DC	10-30V DC	10-30V DC	10-30V DC	10-30V DC	10-30V DC	10-30V DC	10-30V DC
CONSUMPTION	80W	91W	97W	103W	108W	114W	120W	131W
PATTERNS	13	13	13	13	13	13	13	13
IP-CLASS	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
COLOR LENS	Clear	Clear	Clear	Clear	Clear	Clear	Clear	Clear
COLOR LED	Amber	Amber	Amber	Amber	Amber	Amber	Amber	Amber
CONNECTION	Cig plug + magnet	Cable	Cable	Cable	Cable	Cable	Cable	Cable
CABLE LENGTH	2500 mm	5000 mm	5000 mm	5000 mm	5000 mm	5000 mm	5000 mm	5000 mm
LENGTH	314,8 mm	772 mm	924,4 mm	1076,8 mm	1229,2 mm	1381,6 mm	1534 mm	1838,8 mm
WIDTH	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm
HEIGHT	36 mm	36 mm	36 mm	36 mm	36 mm	36 mm	36 mm	36 mm
HEIGHT INCLUDING BRACKETS	66 mm	66 mm	66 mm	66 mm	66 mm	66 mm	66 mm	66 mm
ADR-APPROVED	No	No	No	No	No	No	No	No
E-APPROVED	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2	ECE R65 Class 2
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10

FREEDOM VIKING

FREEDOM VIKING POSITION LIGHT

Part No. 2607830401

€ 39,00 excl. VAT / € 47,19 incl. VAT



FREEDOM VIKING POSITION LIGHT

Part No. 2607830402

€ 39,00 excl. VAT / € 47,19 incl. VAT



FREEDOM VIKING SIDE MARKER

Part No. 2607830403

€ 39,00 excl. VAT / € 47,19 incl. VAT



TWO
IN ONE

FREEDOM VIKING SIDE MARKER / INDICATOR

Part No. 2607830404

€ 39,00 excl. VAT / € 47,19 incl. VAT



Use the QR code to
check out the product.

Freedom Viking comes with position lights, a side marker, and a side marker with an indicator. Depending on the light, you get dark-smoked outer lenses and an inner red-colored, white-colored, or amber-colored lens. The combination creates an exclusive and dark impression. The lenses are made of unbreakable polycarbonate, and the lights are waterproof according to IP68 and withstand harsh treatment according to IP69K.

FREEDOM VIKING POSITION LIGHTS AND SIDE MARKERS

PART NO.	2607830401	2607830402	2607830403	2607830404
VOLTAGE	12-24V DC	12-24V DC	12-24V DC	12-24V DC
FUNCTIONS	Position light	Position light	Side marker	Side marker, indicator
PCS OF LEDS	12	12	12	12
CONSUMPTION	2W	1W	2W	2W
IP-CLASS	IP68/IP69K	IP68/IP69K	IP68/IP69K	IP68/IP69K
COLOR LENS	Dark smoked / red	Dark smoked / white	Dark smoked / amber	Dark smoked / amber
COLOR LED	Red	White	White	White
CONNECTION	Cable	Cable	Cable	Cable
CABLE LENGTH	5000 mm	5000 mm	5000 mm	5000 mm
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
HEIGHT	32 mm	32 mm	32 mm	32 mm
DIAMETER	70,2 mm	70,2 mm	70,2 mm	70,2 mm
OPERATING TEMPERATURE	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C
E-APPROVED	ECE R148	ECE R148	ECE R148	ECE R148
ADR-APPROVED	No	No	No	No
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10

FREEDOM GROUNDLINE

FREEDOM GROUND LINE POSITION LIGHT RED

Part No. 2607900031
€ 24,00 excl. VAT / € 29,04 incl. VAT

FREEDOM GROUND LINE POSITION LIGHT AMBER

Part No. 2607900033
€ 24,00 excl. VAT / € 29,04 incl. VAT

FREEDOM GROUND LINE POSITION LIGHT WHITE

Part No. 2607900032
€ 24,00 excl. VAT / € 29,04 incl. VAT

FREEDOM GROUND LINE SIDEMARKERS AND INDICATOR AMBER

Part No. 2607900034
€ 28,00 excl. VAT / € 33,88 incl. VAT

TWO
IN ONE

Use the QR code to
check out the products.



PART NO.	2607900031	2607900032	2607900033	2607900034
VOLTAGE	12-24V DC	12-24V DC	12-24V DC	12-24V DC
CONSUMPTION	2,2W	2,2W	2,2W	2,2W
FUNCTION	Rear position light	Front position light	side position light	Side position and side direction indicator
IP-CLASS	IP6K9K	IP6K9K	IP6K9K	IP6K9K
CONNECTION	Cable	Cable	Cable	Cable
CABLE LENGTH	500 mm	500 mm	500 mm	500 mm
MATERIAL HOUSING	PP	PP	PP	PP
MATERIAL LENS	PMMA	PMMA	PMMA	PMMA
COLOR LENS	Red	White tinted	Amber tinted	Amber tinted
COLOR LED	Warm white	Cool white	Warm white	Warm white
LENGTH	133,8 mm	133,8 mm	133,8 mm	133,8 mm
HEIGHT	53 mm	53 mm	53 mm	53 mm
DEPTH	47 mm	47 mm	47 mm	47 mm
HEIGHT INCLUDING BRACKET	70,7 mm	70,7 mm	70,7 mm	70,7 mm
CC	75 mm	75 mm	75 mm	75 mm
CC FOR BRACKET	30 mm or 50 mm	30 mm or 50 mm	30 mm or 50 mm	30 mm or 50 mm
OPERATING TEMPERATURE	-40°C..+40°C	-40°C..+40°C	-40°C..+40°C	-40°C..+40°C
ADR-APPROVED	No	No	No	No
E-APPROVED	ECE R148, ECE R150	ECE R148, ECE R150	ECE R148, ECE R150	ECE R148, ECE R150
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10

✓ MAXIMIZE YOUR OWN PERSONALITY

✓ EXCLUSIVE DESIGN

✓ BUILD TO LAST

FREEDOM LIGHT GUIDE

PART NO.	2607900001 (left) € 39,00 excl. VAT € 47,19 incl. VAT	2607900002 (right) € 39,00 excl. VAT € 47,19 incl. VAT	2607900003 (left) € 46,00 excl. VAT € 55,66 incl. VAT	2607900004 (right) € 46,00 excl. VAT € 55,66 incl. VAT	2607900005 (left) € 48,00 excl. VAT € 59,08 incl. VAT	2607900006 (right) € 48,00 excl. VAT € 59,08 incl. VAT	2607900007 (left) € 49,00 excl. VAT € 59,29 incl. VAT	2607900008 (right) € 49,00 excl. VAT € 59,29 incl. VAT
VOLTAGE	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC	12-24V DC
CONSUMPTION	3,3W	3,3W	3,3W	3,3W	3,3W	3,3W	3,3W	3,3W
FUNCTION	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position	Front position, Rear position, Side position
IP-CLASS	IP6K9K	IP6K9K	IP6K9K	IP6K9K	IP6K9K	IP6K9K	IP6K9K	IP6K9K
CONNECTION	Cable	Cable	Cable	Cable	Cable	Cable	Cable	Cable
CABLE LENGTH	1000 mm	1000 mm	1000 mm	1000 mm	1000 mm	1000 mm	1000 mm	1000 mm
MATERIAL HOUSING	Rubber	Rubber	Rubber	Rubber	Rubber	Rubber	Rubber	Rubber
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
COLOR LED	White, Red, Amber	White, Red, Amber	White, Red, Amber	White, Red, Amber	White, Red, Amber	White, Red, Amber	White, Red, Amber	White, Red, Amber
COLOR LENS	Dark clear	Dark clear	Dark clear	Dark clear	Dark clear	Dark clear	Dark clear	Dark clear
LENGTH	89 mm	89 mm	136 mm	136 mm	190 mm	190 mm	259 mm	259 mm
DEPTH	46 mm	46 mm	46 mm	46 mm	46 mm	46 mm	46 mm	46 mm
HEIGHT	104 mm	104 mm	116,9 mm	116,9 mm	160,5 mm	160,5 mm	207,5 mm	207,5 mm
CC	80 mm	80 mm	80 mm	80 mm	80 mm	80 mm	80 mm	80 mm
OPERATING TEMPERATURE	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C	-40°C · +40°C
ADR APPROVED	No	No	No	No	No	No	No	No
E-APPROVED	ECE R148	ECE R148	ECE R148	ECE R148	ECE R148	ECE R148	ECE R148	ECE R148
EMC-CERTIFICATES	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10



CAR & TRUCK CARE NEDERLAND B.V.

Industrieterrein 27 | 5981 NK Panningen | The Netherlands

Tel.: +31 (0)77 307 36 90

info@ctcnl.nl | www.ctcnl.nl

*With reservation for misprints and possible changes.
Possible truck brand logo's shown are purely indicative, they are not original and
do not indicate that the product has been made/inspected by the brand owner.
They only indicate that the product is suitable for a particular brand/vehicle.*