

EASY-KLEEN

PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

EQUIPMENT, OPTIONS, & ACCESSORIES CATALOG



MANUFACTURED IN NORTH AMERICA

1-800-315-5533
easykleen.com



sales@easykleen.com



WHY CHOOSE EASY-KLEEN?



Since my father, Fred Howland, started Easy-Kleen in 1982, our equipment has become the premier choice for companies that depend on pressure-cleaning equipment in their everyday business. To this day, Easy-Kleen applies the same principles and builds high-quality, rugged equipment that lasts and is easy to service.

Easy-Kleen does things differently. We have a hands-on approach to ensure that the equipment our in-house engineering and design team builds has the best components from industry-leading manufacturers that offering worldwide support for those components. Easy-Kleen frames are engineered and designed with SolidWorks 3-D software. Our steel fabrication and powder coating are performed in-house under a strict quality control program.

We offer over 400 models of pressure washers to meet your needs, from small units used in meat shops to continuous-duty systems used 24/7 in major manufacturing and processing plants.

This company is more than a factory that takes steel and components to make products. Easy-Kleen is a problem-solving company with vast experience in thousands of applications. If you cannot find a machine to suit your needs, we also offer custom machines. All our design work is done in-house, allowing us to take on custom projects that other manufacturers do not have the capabilities and flexibility to complete. We have a policy — We never say no to a customer's request. We are willing to take on any project and develop a solution that will work for the customer's application. When dealing with our company you can be confident that we will give you the correct advice on the equipment and ensure that it will perform most efficiently for your application now and for years to come.

Our equipment will perform your toughest cleaning jobs quickly and efficiently for years to come. Your Easy-Kleen team will be here if you need us, whether you are down the street or around the world.

Give us a call today! We look forward to finding the right pressure system for you.

Yours truly,

Brad Howland
Owner



HISTORY

Easy-Kleen has been family owned and operated for over 40 years.

Easy-Kleen comes from humble beginnings. Fred Howland, a born salesman and entrepreneur, felt the brand of pressure washers he was selling in the 80's was substandard to what he could build himself. He believed that providing his customers with high-quality well-built, serviceable equipment was crucial for both his customer and his own business. In 1982, Fred received his first contract from the Canadian Military and manufactured the first Easy-Kleen Cold Water Pressure Washer out of his home in Kars, New Brunswick. The business started to grow and pretty soon it had outgrown the garage and the cows were kicked out of the barn to make room.


Now, over 40 years later, with Fred's grandchildren involved in the company, Easy-Kleen has grown into an international brand, housed in a state-of-the-art 120,000 square feet manufacturing facility, shipping equipment worldwide. Easy-Kleen now has over 180 employees with 8 different locations across Canada: Annapolis Valley, Montreal, Cambridge, Toronto, Ottawa, Edmonton, Red Deer, and the head office with the manufacturing facility is based in Sussex, New Brunswick.

"If you need it, we can build it." Brad Howland, Fred's son and the company's owner, is never one to shy away from a challenge. All of the companies design work is done in house which allows Easy-Kleen to take on custom projects that other manufacturers do not have the capabilities and flexibility to complete.

Easy-Kleen does things differently. We have a very hands on approach to ensure that the equipment meets the customer's needs and also takes future growth into account. There are Easy-Kleen units that have given 30 years of service to their owners and continue to keep on washing. It is very important to us that the initial purchase sustain the customer now and in the future. Serviceability is key to ensure proper maintenance can be carried out easily.

To this day the same principles apply. Easy-Kleen builds high-quality, rugged equipment that lasts and is easy to service.

***"We are building a company that will last for generations to come.
The world is a very big place and everyone needs a pressure washer."***
~ Brad Howland

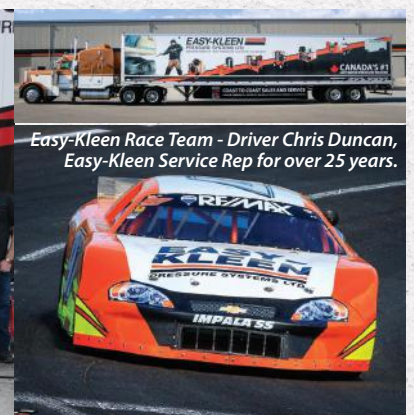


Our coil is the heart of our equipment.

It all starts with the care and attention that is put into each and every coil. Every step of the manufacturing process takes place in our state-of-the-art 120,000 square foot factory. Each piece of steel and stainless steel is fabricated in-house utilizing the most advanced CNC computer controlled equipment in the world. Our coil machinery is state-of-the-art, with 11 axis pipe maneuvering capability, providing our customers a coil with no pipe bend restrictions. 100% pipe penetration is achieved during our fusion welding process versus the competitors stick welding process, which only yields 60 to 70% pipe penetration.

Ordering our coil pipe directly from the mill has also allowed us to purchase pipe in lengths up to twice as long as the competition therefore eliminating butt welds. Each pancake is structurally braced with steel rods to eliminate vibration and friction that causes pipe wear over time. In addition, each layer of pipe is welded to the next for additional strength. Our coils are bolted down to the base for security over the harshest conditions. We are so confident in our coils that most carry a lifetime warranty. Each coil has been matched with the ideal burner system to maximize efficiency. Every unit is tested in our lab for efficiency, CO2 levels, and heat rise prior to leaving the factory.



Pipe Fusing Process

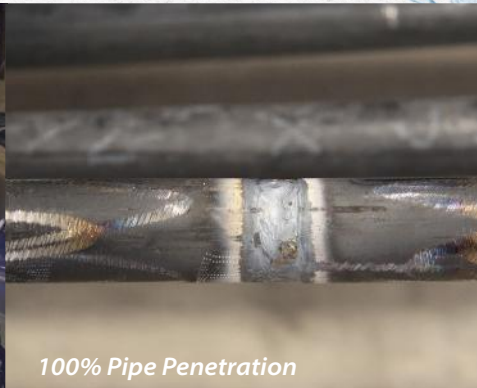

100% Pipe Penetration



Rolling Stainless Steel Housing



*Compressing & Welding
Pancake Bracing*



We are equipment people.

We have a history of building the best frames in the industry. While our competitors are reducing the weight of steel in frames, we continue to build a frame to the highest standards that can withstand the test of time in function, structure, and finish.

Our flat steel frame assemblies are cut with a state-of-the-art Fiber Laser. The machine cuts out all of the details from the sheet in one process. The material is then bent on a high-performance PLC controlled speed brake. All square tubing is cut on the computerized band saw for precise edges and angles. It is bent on a PLC controlled, automated tube bender. This whole process ensures that all our steel components are made exactly the same each time to fit the welding jigs.

After the welding process is complete, mounting bolt heads are welded in place. The frame is drilled and tapped to allow for serviceability in the future. We make it easy to perform preventative maintenance on our equipment, therefore extending the life of the equipment and leading to a lower cost of ownership.

Metal preparation before painting is taken very seriously. We understand that metal has to be perfectly clean and etched in order for the paint to adhere to the surface. We have a five-stage wash cycle for every frame to ensure our finish stands the test of time. The metal is de-greased, pressure washed, dipped in phosphate, rinsed and then dipped in corrosion inhibitor. The frames go into the oven for a dry cycle to ensure they are completely dry. A heavy 3mm powder coat finish is applied and then baked in our PLC controlled powder oven.

The final product is a machine built with the highest quality components in the world, best coils, and the highest quality frame which is all backed by people who will be there for you now, and in the future.



COMMERCIAL COLD WATER ELECTRIC / ACTION SERIES	8	VAC TRUCK HOT WATER HEATERS / WILDCAT SERIES - OIL FIRED	34
FIREHOUSE & CAR DETAILING SERIES	9	FULLY ENCLOSED HOT WATER HEATERS / PLUG & PLAY CABINETS	35
INDUSTRIAL COLD WATER ELECTRIC	10	HYDRAULIC SYSTEMS - TRUCK & MARINE	36
EXPLOSION PROOF - COLD WATER	11	MARINE MOUNT SERIES - HYDRAULIC DRIVE, ELECTRIC, & ELECTRIC CLUTCH	37
COMMERCIAL SOFT WASH	12	DRY STEAM GENERATORS / WOLVERINE SERIES	38
COMMERCIAL COLD WATER GAS / ACTION SERIES	13	DRY STEAM GENERATOR OPTIONS	39
INDUSTRIAL COLD WATER GAS & DIESEL	14	JETTERS / GROUNDHOG JETTER	40
COMMERCIAL HOT WATER ELECTRIC - OIL FIRED	15	JETTER TRAILERS & OPTIONS	41
COMMERCIAL HOT WATER ELECTRIC / SHOP DOG - OIL, PROPANE, OR NATURAL GAS FIRED	16	DUST SUPPRESSION TRAILER / WATER OTTER SERIES	42
INDUSTRIAL HOT WATER ELECTRIC / ALPHA SERIES - OIL FIRED	17	RV & CAR LOT WASH TRAILER	43
INDUSTRIAL HOT WATER ELECTRIC / BUFFALO SERIES - NATURAL GAS & PROPANE FIRED	18	OPEN TRAILER UNITS	44
INDUSTRIAL HOT WATER FULLY ELECTRICALLY HEATED / CARIBOU SERIES	20	OPEN TRAILER UNIT OPTIONS	45
EXPLOSION PROOF - HOT WATER	21	ENCLOSED TRAILER UNITS	46
ROCKET SERIES - INDUSTRIAL HOT WATER ELECTRICALLY HEATED	22	ENCLOSED TRAILER UNIT OPTIONS	47
ON DEMAND ELECTRICALLY HEATED	23	IN-PLANT SYSTEMS	48
COMMERCIAL HOT WATER GAS & DIESEL - OIL FIRED	24	CUSTOM IN-PLANT SYSTEMS	49
PORTABLE PICKUP TRUCK SKID	25	PARTS WASHER	50
INDUSTRIAL HOT WATER GAS WET STEAM / STEAM OPTIONS - OIL FIRED	26	TOTE-BOX WASHER	51
INDUSTRIAL HOT WATER DIESEL / BULL MOOSE SERIES - OIL FIRED	27	HYDROSTATIC TESTERS	52
INDUSTRIAL HOT WATER GAS / GRIZZLY SERIES - OIL FIRED	28	COIN OPERATED CAR WASH	53
FILL & PLAY EQUIPMENT SERIES / GRIZZLY & BULL MOOSE SERIES - DIESEL & GAS UNITS	30	CUSTOMIZED UNITS & FRAME OPTIONS	54
FILL & PLAY EQUIPMENT SERIES OPTIONS	31	EK DEMUCKER	56
MODULAR HOT WATER HEATERS / WILDCAT SERIES - GAS FIRED OR ELECTRIC	32	ALUMINUM/STAINLESS STEEL OPTIONS	56
OPEN MODULAR HOT WATER HEATERS / WILDCAT SERIES - OIL FIRED	33	MOBILE & ON-SITE SERVICE REPAIR	57
		NOZZLE CHART	79
		THANK YOU FOR CHOOSING EASY-KLEEN	80
		INDEX	81
		NOTES	87

OPTIONS & ACCESSORIES

TABLE OF CONTENTS

ACCESSORIES

NOZZLES

- ROTARY NOZZLES • MEG NOZZLE • QUICK COUPLER NOZZLES
- SEWER / CULVERT NOZZLES • ROTARY SEWER / CULVERT NOZZLES
- ROTARY TIP FILTER • BARRACUDA ROTARY NOZZLE

NOZZLES & WAND ACCESSORIES

- STEAM NOZZLES • HYDRO EXCAVATION NOZZLE • GUTTER CLEANER
- WET SANDBLAST KIT • SURFACE CLEANER • FOAM CANNONS • PIT BOSS
- WATER BROOM • UNDERCARRIAGE CLEANER

GUN & WAND ASSEMBLIES

- TRIGGER GUNS • WANDS • QUICK COUPLERS • QUICK COUPLER NIPPLES
- FITTINGS • O-RINGS • EXTENSION WANDS • GUN & WAND ASSEMBLIES
- GUN/WAND/QUICK COUPLER ASSEMBLY • DUAL LANCE WANDS
- HARNESS

HOSES

- JOINER HOSE • STANDARD HOSE • STEAM HOSE
- CUSTOM ORDER HOSES • BLUE NON-MARKING HOSE
- MEGA-FLEX DRAIN CLEANING KIT • LOW PRESSURE HOSE
- CLEAR CHEMICAL HOSE

HOSE REELS

- U-FRAME HOSE REEL • MANUAL HOSE REEL • BALL VALVES
- A-FRAME HOSE REEL • INDUSTRIAL • 360° PIVOT HOSE REEL
- JOINER HOSE • 12V OR 120V HOSE REEL • SPRING DRIVEN HOSE REEL
- GREASEABLE SUPER SWIVELS • HOSE REEL STANDS (ONLY)
- HOSE REEL - ROLLER BRACKET GUIDE • HOSE REEL TROLLEY KITS
- HYDRAULIC HOSE REEL • PIVOTING HOSE GUARDS

CHEMICAL CONTROL & INJECTION KITS

- DEMA INLINE HIGH PRESSURE CHEMICAL INJECTOR
- HIGH VOLUME FOAMER • CHEMICAL MIXER • SOLENOID CONTROLS
- CHEMICAL SPRAYER • ACID PUMP

OIL & GAS FIRED OPTIONS

- DRAFT HOOD • POWER DAMPER - 120 VOLT
- OIL FIRED DRAFT INDUCERS
- HIGH LOW GAS VALVES WITH DUAL TEMPERATURE CONTROLS
- RAIN CAP • POWER DAMPERS - 24 VOLT - LP/NG • POWER VENTER

ELECTRIC MOTOR CONTROLS

- HEAVY-DUTY AUTO STOP START • NEMA BOX • EMERGENCY SHUT-OFFS
- VFD FOR ELECTRIC MOTOR CONTROLS • 50HZ ELECTRIC MOTORS
- GROUND-FAULT CIRCUIT INTERRUPTERS • ELECTRICALLY HEATED TIMER

FRAME OPTIONS & WHEEL KITS

COLD WATER UNITS

- LEG FRAME • CASTERS • PUMP FRAME • FIREHOUSE DISPLAY BASE
- COLD WATER CART • STAINLESS STEEL ROLL CAGES
- WALL MOUNT FOR DIRECT DRIVE • FLAT BASE FRAME
- STATIONARY FRAME

INDUSTRIAL HOT WATER ELECTRIC DRIVE

- RAIN CAP • WHEEL KITS • BRACKET OPTIONS • PROPANE TANK BRACKET
- CHEMICAL BUCKET BRACKET • LEG FRAME • STAINLESS STEEL FRAMES

COMMERCIAL & INDUSTRIAL GAS & DIESEL

- RENTAL ROLL CAGE • COMMERCIAL ROLL CAGE FRAME
- COMMERCIAL WHEEL KIT • FOAM FILLED TIRES
- INDUSTRIAL WHEEL KIT • RAIN CAP

INDUSTRIAL FULLY ELECTRICALLY HEATED

- STAINLESS STEEL EXTERIOR OPTIONS • STAINLESS STEEL TANK
- WHEEL KIT

DRY STEAM GENERATORS

- HORIZONTAL DRY STEAM SKID • WHEEL KITS
- VERTICAL DRY STEAM SKID

PICKUP SKID & FILL & PLAY FRAME OPTIONS

- PICKUP SKID • PROPANE PICKUP SKID • LIGHT KIT
- GRIZZLY FILL & PLAY FRAME OPTIONS WITH 225, 325, & 525 GALLON TANKS
- BULL MOOSE FILL & PLAY FRAME OPTIONS WITH 225, 325, & 525 GALLON TANKS • CUSTOM ORDERS

TRAILER & JETTER OPTIONS

OPEN TRAILERS & OPTIONS

- 8' OPEN TRAILER PACKAGE • 14' OPEN TRAILER PACKAGE
- INDUSTRIAL HOT WATER GASOLINE - OIL FIRED BOLT ON TRAILER PACKAGE
- PICKUP SKID BOLT ON TRAILER PACKAGE • RAIN CAP

ENCLOSED TRAILERS & OPTIONS

- 8' ENCLOSED TRAILER PACKAGE 225G
- 14' ENCLOSED TRAILER PACKAGE 525G
- 16' ENCLOSED TRAILER PACKAGE 525G & 740G
- BURNER SAFETY SWITCH AND EXHAUST VENT

JETTER TRAILERS & ACCESSORIES

- JETTER BOX • JETTER NOZZLE KITS
- ROTARY SEWER / CULVERT NOZZLES • HYDRO EXCAVATION NOZZLE
- FOOT PEDAL INLINE • SEWER / CULVERT NOZZLES • JETTER HOSES
- HOT PACK • HOSE REEL TROLLEY KITS • JETTER HOSE KIT
- JOINER HOSES • WINTERIZATION KIT

MACHINE OPTIONS & ACCESSORIES

TANKS

- WINTERIZATION KIT • FUEL TANK OPTION • FLOAT TANK
- LARGE POLY WATER TANKS • FUEL TANKS, GAS CAPS, & TANK BRACKET
- SMALL POLY WATER TANKS

STEAM OPTIONS

- STEAM HOSE - 3/8" • STEAM HOSE - 1/2" • STEAM OPTION KITS
- STANDARD KIT • STEAM OPTION KITS - DOUBLE UNLOADER TYPE
- DRY STEAM KIT • STEAM NOZZLE • STEAM WAND
- PID CONTROL OPTION FOR ALL INDUSTRIAL STEAM MODELS

WASH BAY ACCESSORIES

- SOAP SWITCH CONTROL PANEL • STAINLESS STEEL VACUUM
- WAND HOLDER • MAT CLAMPS • FESTOON SYSTEM
- REMOTE WASH BAY CONTROL PANEL • TRUCK WASH BRUSH
- COMPLETE FOAM BRUSH ASSEMBLY • OVERHEAD BOOM

STAINLESS STEEL COILS

- STAINLESS STEEL COILS - OIL FIRED
- STAINLESS STEEL COILS - GAS FIRED
- CERTIFIED CRN COILS - OIL OR GAS FIRED

UPGRADES & ADDITIONS

- EMPEROR PUMP UPGRADE • GENERAL PUMP UPGRADE • PUMP UPGRADE
- HOUR METER • OUTLET TEMPERATURE GAUGE • PUMP KITS • VOLT METER
- HOT WATER PACKING VALVE KIT • GENERAL PUMP • PRESSURE GAUGE • INLINE FILTERS
- SUCTION KIT • UNLOADER - FLOW ACTIVATED • ELECTRIC CLUTCH UPGRADE
- HYDROSTATIC VALVE AND ASSEMBLY KIT • GENERATORS • SPARK ARRESTOR
- ELECTRIC START UPGRADE KITS FUEL FILTERS • FITTINGS • STEEL
- REMOTE SWITCH - ELECTRIC DRIVEN ONLY • BATTERY • PRIMARY CONTROL
- COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNITS • BURNER PARTS
- DIESEL ENGINE SHUTDOWN SYSTEM • 12 VOLT BURNER • PRIMARY CONTROL
- THERMAL RELIEF VALVES • THERMOSTAT • HIGH LIMITS • FLOW SWITCH
- BRASS FLOW SWITCH • DELAY TIMER • PRESSURE SWITCH

"HOW TO" ON SELECTING YOUR UNIT FRAME OPTIONS

CUSTOM ORDERS

Ask about CAT, GIANT & PRAT Optional Pumps!

Pumps

- Commercial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves

Brass Manifold

- Direct Drive
- Thermo Pump Protector

Electric Motors (2, 5 & 7.5 HP)

- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

Electrical Control Panel

- Nema 4
- Water Tight
- Easy Access
- Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

Frame

- Adjustable Pull Up Handle
- One Piece Bent Steel Base
- Portable Cart Frame
- 13" Pneumatic Tires
- All Powder Coated
- Wall Mount and Hand Carry Units Available

Includes

- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with Quick Coupler System (27" on 2 HP Units)
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Soap Injection System
- 50' of High Pressure Hose

Options & Accessories

- Auto Stop/Start
- Hose Reel
- Rotary Nozzle
- Drain Cleaning/Jetter Kit

ACTION SERIES

AS152E/HC
Hand Carry
Frame



AS152E/WM-A-HZ
with Wall Mount Frame,
Auto Stop/Start, and
Horizontal Option



AS152E/WM
with Wall
Mount Frame



Removable
Handle



AS253E-GP



**SCAN FOR
VIDEO!**



MODEL	GPM	PSI	DRIVE RPM	HP	VOLTAGE
AS152E	2.2	1500	1750	2	110/1PH
Alternate Spec		1000		15 AMPS	
AS2436E	3.6	2400	1750	5	220/1PH
AS253E-GP	3.5	2400	1750	5	220/1PH
AS304E	4	3000	1750	7.5	220/1PH
AS3636E	3.6	3600	1750	7.5	220/1PH
AS3035E-GP	3.5	3000	1750	7.5	220/1PH

FIREHOUSE & CAR DETAILING SERIES

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

This stationary unit is always hooked up and ready to use. With a squeeze of the trigger gun you're ready to clean. It's easy, safe, and exactly what your fire station or detailing shop needs.

Pumps

- Commercial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

Electric Motors

- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

Electrical Control Panel

- Nema 4
- Water Tight
- Easy Access
- Trigger Gun Controlled Auto Stop/Start with Time Delay

Frame

- Square Tubing
- Compact
- Ready to Install Against a Wall

Includes

- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly With Quick Coupler System
- High Pressure Chemical Injection
- Hose Reel
- 100' of Non-Marking High Pressure Hose

Options & Accessories

- Rotary Nozzle
- Water Broom (Ideal for Washing Floors & Fire Hose)
- Foam Cannon
- Undercarriage Cleaner



"We had a portable pressure washer and it was hard to set up and it just did not get used. With this Easy-Kleen system our equipment is always clean because it's easy to use and there is no set up."
- Jody Price, Oromoncto Fire Chief



Foam Cannon (NOZ-FMR4830T)
Allows full chemical cover and activation!



Undercarriage Cleaner (ACC-UCC)
Ideal for cleaning under trucks!



Water Broom (ACC-WTRBRM4)
Great for washing floors & fire hose!



FD2435E-GP



SCAN FOR VIDEO!



MODEL	GPM	PSI	HP	VOLTAGE	ELECTRIC DRIVE
FD152E	2.2	1500	2	110V-1PH	1750 RPM
FD2040E	4	2000	5	220V-1PH	1750 RPM
FD2435E-GP	3.5	2400	5	220V-1PH	1750 RPM
FD3035E-GP	3.5	3000	7.5	220V-1PH	1750 RPM

Pumps

- Industrial Heavy-Duty Triplex Plunger Pump
- Oil Bath Crankcase • Stainless Valves
- Brass Manifold • Thermo Pump Protector

Electric Motors

- Heavy-Duty • 1750 RPM • TEFC • Full Frame
- 1.15 and 1.25 Service Factors
- Thermal Overload Protection
- Continuous Duty • High Efficiency
- Continuous Duty V-Belt Drive System with 11 Gauge Belt Guard or Flange & Coupling Drive

Electrical Control Panel

- Nema 4 • Water Tight • Easy Access
- Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

Frame

- All Welded • Powder Coated
- 1-1/2" Bent Steel Roll Cage
- Lifting Bar • 1/4" Motor and Pump Mounting Plate
- Mounted on Large 8" Casters
- Capacity for Two 400' Hose Reels (Optional)
- Stationary Units also Available

Includes

- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator
- Gun and Wand Assembly with Quick Coupler System for Machines Under 5000 PSI
- 0°/15°/25°/40° Nozzles • 1 Soap Nozzle
- Downstream Chemical Injection System on Machines Up To 7.5 HP
- 50' of High Pressure Hose

Options

- VFD • PLC • Pressure Transducer • **Auto Stop/Start - Add (/A)**
- **Stainless Steel - Add (/SS)** • Order either flat base or portable frames

Ideal for use in processing plants, mills and factories for everyday reliable cleaning. Stationary frame options are available for facilities that require a piped in system for multiple location cleaning and/or multiple gun use.



IS3606E-3-208/A-FB
with **Flat Base Frame Option - Add (-FB)**
(15 & 20 HP) & Optional Auto Stop/Start



IS505E-3-575
with Optional Auto Stop/Start
(This unit comes standard with a Wheel Kit)



**SCAN FOR
VIDEO!**



IS505E-3-575
with **Flat Base Frame with Shroud Option - Add (-FBWS)** (5/7.5/10 HP),
Optional Leg Frame & Auto Stop/Start



Up to 8000 PSI

MODEL	GPM	PSI	DRIVE	HP	VOLTAGE
IS204FE-1	4	2000	FLANGE/COUPLING	5	220V-1PH
IS204FE-3	4	2000	FLANGE/COUPLING	5	208/230/460/575 V-3PH
IS204E-1	4	2000	V-BELT	5	220V-1PH
IS204E-3	4	2000	V-BELT	5	208/230/460/575 V-3PH
IS304FE-1	4	3000	FLANGE/COUPLING	7.5	220V-1PH
IS304FE-3	4	3000	FLANGE/COUPLING	7.5	208/230/460/575 V-3PH
IS304E-1	4	3000	V-BELT	7.5	220V-1PH
IS304E-3	4	3000	V-BELT	7.5	208/230/460/575 V-3PH
IS255FE-3	5	2500	FLANGE/COUPLING	7.5	208/230/460/575 V-3PH
IS208E-3	8	2000	V-BELT	10	208/230/460/575 V-3PH
IS306E-1	5.5	3000	V-BELT	10	220V-1PH
IS306E-3	5.5	3000	V-BELT	10	208/230/460/575 V-3PH
IS404FE-1	4	4000	FLANGE/COUPLING	10	220V-1PH
IS404FE-3	4	4000	FLANGE/COUPLING	10	208/230/460/575 V-3PH
IS1212E-3	12	1200	V-BELT	10	208/230/460/575 V-3PH
IS3606E-3	6	3600	V-BELT	15	208/230/460/575 V-3PH
IS465E-3	6.5	4000	V-BELT	20	208/230/460/575 V-3PH
IS505E-3	5	5000	V-BELT	20	208/230/460/575 V-3PH
IS310E-3	10	3000	V-BELT	20	208/230/460/575 V-3PH
IS2512E-3	12	2500	V-BELT	20	208/230/460/575 V-3PH
IS3685E-3	8.5	3600	V-BELT	20	208/230/460/575 V-3PH
IS654E-3	4.3	6500	V-BELT	20	208/230/460/575 V-3PH
IS704E-3	4	7000	V-BELT	20	208/230/460/575 V-3PH
IS808E-3	8	8000	V-BELT	50	208/230/460/575 V-3PH
IS1156E-3	6	11,500	V-BELT	50	208/230/460/575 V-3PH
IS150045E-3	4.5	15,000	V-BELT	50	208/230/460/575 V-3PH

EXPLOSION PROOF - COLD WATER

- STANDARD & OFF-SHORE SERIES

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Heavy-Duty Triplex Plunger Pumps
- Belt Driven • Oil Bath Plunger Pump
- Pressure Regulator

Electric Motors (5, 7.5, 10, & 15 Hp)

- 1800 RPM • TEFC • Continuous Duty
- CSA Approved/ UI Listed Explosion-Proof Motor
- IP55 Minimum Ingress Protection Rating
- 1.15 Service Factor • High Efficiency
- Automatic High Temperature Shut Down (Thermal Probe) for Pump Protection
- **Off-Shore** - Fully Automatic Start/Stop Circuit with Solid State Time Delay Shut Down - Controlled by Trigger Gun Activation

Frame

- Steel Roll Cage Construction (with Drip-Proof Pump Base on the **Off-Shore** units)
- Mounting Feet • Lifting Eyes
- **Standard** - Powder Coat Painted
- **Off-Shore** - Galvanized to ASTM123 and CSA G164-M1981 Specifications

Includes

- 50' High Pressure Hose Assembly, Complete with Trigger Gun, and Wand
- CSA Approved/UI Listed Control Box, Flexible Coupling, Conduit, and Seals

Options & Accessories

- CAT Plunger or Piston Pump
- SA Nitrogen Charged Pulsation Dampener
- SRA Surge Relief Assembly (For Flows of 6 GPM and Greater) • PG Liquid-Filled Pressure Gauge
- CSA Inspected & Certified for use In Class 1, Division 1, Group C & D Hazardous Location Environments
- LWPP Low Inlet Water Pressure Protection with Reset
- ETM-EXA (D) Integrated Analog (Digital) Hour Meter
- USC Upstream (High Pressure) Chemical Injection
- PCA-EX Portability Feature With Casters and

All Industrial Electric Series

Units (model numbers starting with "IS") are available in Explosion Proof.

XPI5505E-3-230
Featuring our Stainless Steel Option



- Push/Pull Handle
- HRA 13 (16) High Pressure Hose Reel Assembly with 13" (16") Drum.
- EGR-50 Enclosed Grounding Reel with 50' Grounding Wire And Clamp
- PCO Water Feed Tank



XPI5505E-3-230



XPI5505E-3-230
Featuring our Stainless Steel Option

DIVISIONS / ZONES

ATMOSPHERE	CLASS*	DIVISION*	ZONE**	AREA CLASSIFICATION
GAS	CLASS I	DIV. 1	ZONE 0	CONTINUOUS HAZARD
			ZONE 1	INTERMITTENT HAZARD
		DIV. 2	ZONE 2	ABNORMAL CONDITIONS HAZARD
DUST	CLASS II	DIV. 1	ZONE 20	CONTINUOUS HAZARD
			ZONE 21	INTERMITTENT HAZARD
		DIV. 2	ZONE 21	ABNORMAL CONDITIONS HAZARD
FIBER	CLASS III	DIV. 1	ZONE 20	CONTINUOUS HAZARD
			ZONE 21	INTERMITTENT HAZARD
		DIV. 2	ZONE 22	ABNORMAL CONDITIONS HAZARD

* ACCORDING TO NEC 5000 / CEC ANNEX J; ** ACCORDING TO IEC / NEC 5050 / CEC 18

GROUPS

ATMOSPHERE	CLASS*	GROUP*	GROUP**	REPRESENTATIVE ELEMENT
GAS	CLASS I	-	GROUP I	METHANE
		GROUP D	GROUP IIA	PROPANE
		GROUP C	GROUP IIB	ETHYLENE
		GROUP B	GROUP IIC (EXCEPT C ₂ H ₂)	HYDROGEN
		GROUP A	GROUP IIC	ACTYLENE
DUST	CLASS II	GROUP G	GROUP IIIB	NON-CONDUCTIVE DUSTS
		GROUP F	GROUP IIIB	CARBONACEOUS DUSTS
		GROUP E	GROUP IIIC	METAL DUST
FIBER	CLASS III	-	GROUP IIIA	FIBERS OR FLYINGS

* ACCORDING TO NEC 5000 / CEC ANNEX J; ** ACCORDING TO IEC / NEC 5050 / CEC 18

Pump

- AR 45 Commercial Duty Triplex Plunger Pump

Engine

- Gasoline Driven
- Recoil Start 6.5 Honda GX200 Engine
- Efficient
- Serviceable


Frame

- Flat Base Frame

Options & Accessories

- Adjustable Nozzles
- Fixed Nozzles
- JRODS
- Hose - Outlet and Bypass
- Inlet Hose
- Hose Reels
- Fittings and Quick Connects
- Hose Clamps
- Trigger Guns
- Lances
- Filters

Our Soft Wash unit uses a mixture of low-pressure and high-volume water. Combined with specific detergents, it's the perfect option for a gentler clean. It is ideal for delicate surfaces such as roofs and wood structures.

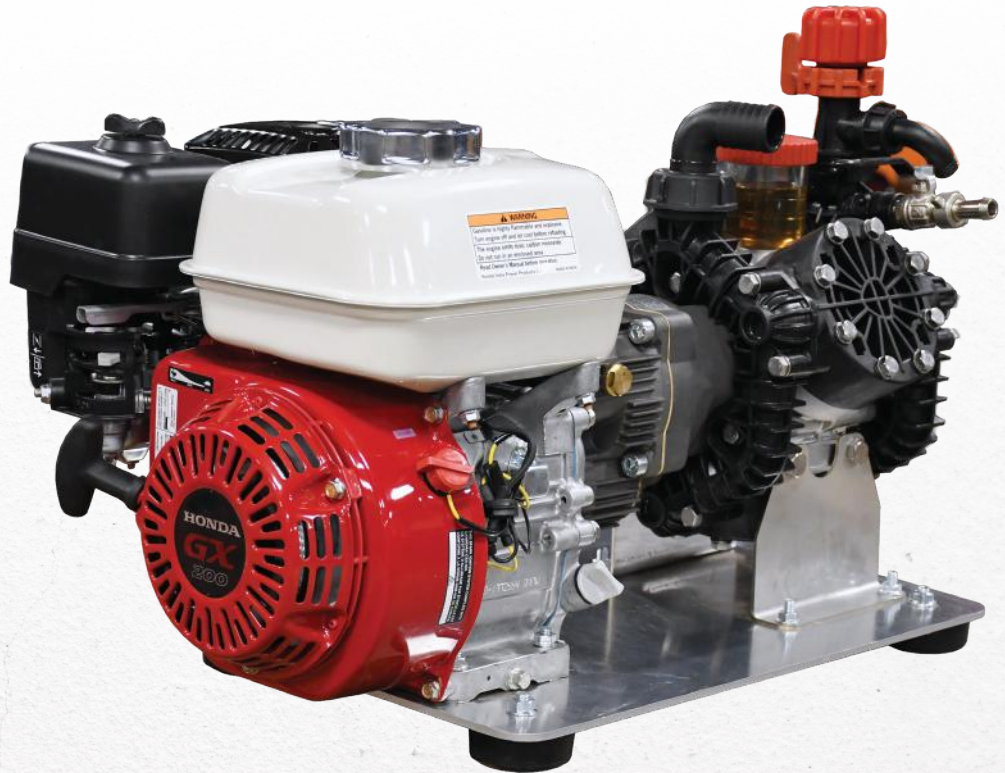

Suggested Accessories:



EASY-KLEEN STAINLESS STEEL HOSE REEL

Capacity: 150' or 300'
HOS-HR150HP-A-SS-IH
HOS-HR300HR-A-SS-IH



FIXED NOZZLE

1/4 Meg Spray, 0° Spray Angle
(other sizes available)
NOZ-1/4MEG0030WJ



JROD NOZZLE HOLDER

1/4 Meg X 4, Stainless Steel
NOZ-NH-4MEG-SS



SOFT WASH TRIGGER GUN

122° F, 18 GPM @ 362 PSI,
1/2" Inlet
x 1/2" Outlet
GUN-SW3618-12



ADJUSTABLE NOZZLE

X-Jet Twist Nozzle, C/W Filter
& QC Plug, 7-12 GPM
NOZ-XJTM5DS-K7-12

Used below on a residential roof:

AFTER



BEFORE



MODEL	GPM	PSI	DRIVE	ENGINE
EKSW30011/AR-H	11	300	DIRECT	6.5 HONDA GX200

Pumps

- Commercial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

Engines (Kohler, Lifan & Honda)

- Gasoline Driven
- Recoil Start (Electric Start Optional)
- Efficient
- Serviceable

Frame

- Adjustable Pull Up Handle
- One Piece Bent Steel Base
- Portable Cart Frame
- 13" Pneumatic Tires
- All Powder Coated

Includes

- 36" Gun and Wand Assembly with Quick Coupler System (27" on 6.5 HP Units)
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Chemical Injection System
- 50' of High Pressure Hose

Options & Accessories

- Hose Reel
- Rotary Nozzle
- Drain Cleaning/Jetter Kit
- Foamer
- Sandblast Kit
- Foam Filled Tires
- Drain Cleaning Kit

**Cut Your Cleaning Time
In Half With A Rotary Nozzle!**

See page 58




The Commercial Cold Water Gas driven series was designed for everyday commercial cleaning jobs.



**SCAN FOR
VIDEO!**



AS327GK

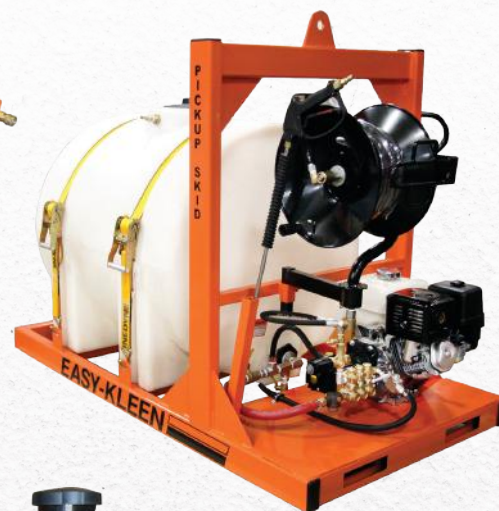

AS440GHGP/ES-SKID-225
with Pickup Skid and
225 Gallon Water Tank

Removable Handle



AS440GKGP



Intertek

MODEL	GPM	PSI	DRIVE	ENGINE
AS327GL	3	2700	DIRECT	6.5 LIFAN
AS327GK	3	2700	DIRECT	6.5 KOHLER
AS327GH	3	2700	DIRECT	6.5 HONDA
AS440GL	3.5	4000	DIRECT	15 LIFAN
AS440GK	3.5	4000	DIRECT	14 KOHLER
AS440GH	3.5	4000	DIRECT	13 HONDA
AS440GHGP	4	4000	DIRECT	13 HONDA
AS440GKGP	4	4000	DIRECT	14 KOHLER

Pumps

- Industrial Duty Triplex Plunger Pumps
- Oil Bath Crankcase • Stainless Valves
- Brass Manifold
- Thermo Pump Protector

Gas Engines

- Gasoline Driven • Efficient • Serviceable

Diesel Engines

- Diesel Driven • Efficient • Serviceable

Drive (Power Band Belt or Gearbox)

- Continuous Duty Power Band Belt Drive System with 11 Gauge Belt Guard or Gearbox Drive

Frame

- All Welded • Powder Coated
- 1-1/2" Bent Steel Roll Cage
- Lifting Bar
- 1/4" Motor and Pump Mounting Plate
- 13" Foam Filled Rubber Tires
- 10 Gallon Poly Fuel Tank
- Geared for a 400' Hose Reel (Optional)
- IS3504G have Two Wheeled Carts
- Stationary Units also Available

Includes

- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with Quick Coupler System for Machines Under 5000 PSI • 0°/15°/25°/40° Nozzles
- 50' of High Pressure Hose
- Units over 24 HP come standard with Foam Filled Tires

Options & Accessories

- Hose Reel • Rotary Nozzle
- Drain Cleaning Kit • Wet Sandblast Kit
- Stationary Frame • Casters • Forklift Slots
- Low Emission Exhaust • Battery
- **Stainless Steel - Add (/SS)**

* Stationary Units Built with **Skid Style Frame -Add (/SKID)**

The Industrial Cold Water Gas & Diesel driven units feature the toughest frames and components in the industry. These units are utilized by surface preparation and heavy-duty blasting/cleaning contractors.



IS15004D/SKID*
Skid frame with forklift slots and lifting eyes.



SCAN FOR VIDEO!



IS3504G-H/BD-ES-FB
with Optional Flat Base Frame



IS7004D/CAS
with Optional Hose Reel, Casters, & Forklift Slots



IS7040G/H-FF
with Optional Hose Reel & Fork Lift Slots

INDUSTRIAL COLD WATER GASOLINE				
MODELS	GPM	PSI	DRIVE	ENGINE
IS3504G	4	3500	GEARBOX / BELT	14 HP KOHLER / 13 HP HONDA
IS3506G	6	3500	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
IS3607G	7	3600	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
IS3508G	8	3500	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
IS3675G-JB	7.5	3600	GEARBOX JABSCO PUMP	25 HP KOHLER / 24 HP HONDA
IS2512G	12	2500	POWER BAND BELT	35 HP VANGUARD
IS3010G	10	3000	POWER BAND BELT	35 HP VANGUARD
IS5005G	5	5000	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
IS5070G	7	5000	POWER BAND BELT	35 HP VANGUARD
IS6045G	4.5	6000	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
IS7040G	4	7000	POWER BAND BELT	25 HP KOHLER / 24 HP HONDA
INDUSTRIAL COLD WATER DIESEL				
MODELS	GPM	PSI	DRIVE	ENGINE
IS3204D	4	3200	POWER BAND BELT	9.8 HP KOHLER
IS5005D	5	5000	POWER BAND BELT	26 HP KOHLER
IS7004D	4	7000	POWER BAND BELT	26 HP KOHLER
IS8008D/SKID *	8	8000	POWER BAND BELT	65 HP KUBOTA
IS11506D/SKID *	6	11,500	POWER BAND BELT	65 HP KUBOTA
IS15004D/SKID *	4.5	15,000	POWER BAND BELT	65 HP KUBOTA

COMMERCIAL HOT WATER ELECTRIC - OIL FIRED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Commercial Duty Triplex Plunger Pumps • Direct Drive
- Oil Bath Crankcase
- Stainless Steel Valves Brass Manifold
- Thermo Pump Protector

Electric Motors (2, 5 & 7.5 HP)

- 1750 RPM • TEFC • Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

Electrical Control Panel

- Nema 4 • Water Tight • Easy Access
- Heavy-Duty On/Off Cam Switch or Optional Auto Stop/Start with Time Delay

Heating Coil

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing

Burners

- Oil Fired • Adjustable Thermostat
- On/Off Switch • North American Made
- Dependable • Serviceable

Frame

- All Welded • Powder Coated
- 12 Gauge Bent Steel Roll Cage
- Lifting Bar
- 3/4" Threaded Axles Welded to Frame
- 13" Pneumatic Wheels Attached with Lock Nuts
- 10 Gallon Poly Fuel Tank
- Hose Reel Mounting Plate

Includes

- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzle
- Downstream Chemical Injection System
- 50' of High Pressure Hose

Options & Accessories

- Auto Stop/Start
- Hose Reel
- Rotary Nozzle
- Wet Sandblast Kit
- Water Broom
- Drain Cleaning/Jetter Kit

Dependable, long lasting machines built for a multitude of applications. Heats water faster and hotter than our competitors.



SCAN FOR VIDEO!



EZ03035E-GP
with Manual Stop/Start



EZ02435E-GP/A
with Optional Auto Stop
Start & Hose Reel



EZ01520E/A
with Optional
Auto Stop/Start



MODEL	GPM	PSI	BTU	ELECTRIC DRIVE	HP/VOLTAGE
EZ01520E	2	1500	200,000	1750 RPM	2/110V/1PH
EZ02434E	3.4	2400	350,000	1750 RPM	5/220V/1PH
EZ02435E-GP	3.5	2400	350,000	1750 RPM	5/220V/1PH
EZ03636E	3.6	3600	350,000	1750 RPM	7.5/220V/1PH
EZ03035E-GP	3.5	3000	350,000	1750 RPM	7.5/220V/1PH

Pump

- Commercial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector

Electric Motors

- 5 HP Electric Motor
- 1750 RPM
- TEFC
- Full Frame
- 1.15 Service Factor
- Thermal Overload Protection
- Continuous Duty

Electrical Control Panel

- Nema 4
- Water Tight
- Easy Access
- Heavy-Duty On/Off Cam Switch
- Trigger Gun Controlled Auto Stop/Start with Time Delay

Heating Coil

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing

Burners

- Choice of Oil, Propane, or Natural Gas Fired
- Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable
- Serviceable

Frame

- All Welded • Powder Coated
- 12 Gauge Bent Steel Enclosure

Includes

- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- High Pressure Chemical Injection System
- Hose Reel
- 50' of High Pressure Hose

Options & Accessories

- Rotary Nozzle
- Surface Cleaner
- Water Broom
- Foam Cannon

The Shop Dog Pressure Washer is ideal for the garage or shop enthusiast for washing cars, trucks, or boats. Dependable, long lasting and built for a multitude of applications. Heats water faster and hotter than our competitors.



SCAN FOR VIDEO!



EZO2435E-GP-SD



EZP2435E-GP-SD



Surface Cleaner

ACC-SRFCLNR24
See Page 59



Intertek

MODEL	GPM	PSI	BTU	FUEL	ELECTRIC DRIVE	HP/VOLTAGE
EZO2435E-GP-SD	3.5	2400	350,000	OIL	1750 RPM	5/220V/1PH
EZP2435E-GP-SD	3.5	2400	290,000	PROPANE	1750 RPM	5/220V/1PH
EZN2435E-GP-SD	3.5	2400	290,000	NATURAL GAS	1750 RPM	5/220V/1PH

INDUSTRIAL HOT WATER ELECTRIC - OIL FIRED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Duty Triplex Plunger Pumps • Oil Bath Crankcase
- Stainless Steel Valves • Brass Manifold • Thermal Pump Protector

Electric Motors (5, 7.5, 10, 15, 20 & 50 HP)

- 1750 RPM • TEFC • Full Frame • 1.15 Service Factor (Single Phase)
- 1.25 Service Factor (3 Phase - High Efficiency)
- Thermo Overload Protection • Continuous Duty

Electrical Control Panel

- Nema 4 • Water Tight • Easy Access
- Heavy-Duty On/Off Cam Switch Or Optional Auto Stop/Start With Time Delay

Heating Coil

- Schedule 80 or 160 Pipe • Elliptically Wound & Stretched
- No Seam Welds • Thermostat Controlled
- Structurally Braced To Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket • Stainless Steel Housing

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils Burners

Burners

- Oil Fired • Adjustable Thermostat • On/Off Switch
- Cleanable Fuel Filters • North American Made
- Dependable • Serviceable

Frame

- All Welded • Powder Coated • Heavy gauge bent one piece plate
- Tip Ahead Shroud with built-in Belt Guard designed to fully expose all components for Ease of Maintenance • Hose Reel Compatible
- Fuel Tank Optional (* 800,000 - 1,200,000 BTUs)
- Optional portable units are mounted on Two 13" Foam Filled Rubber Tires and Two 8" Heavy-Duty Casters

Stationary Units Built with Skid Style Frame - Add (/SKID)

Includes

- Liquid Filled Pressure Gauge • Adjustable Pressure Regulator
- 48" Gun And Wand Assembly with Quick Coupler System for machines under 5000 PSI • Chemical Injection System
- 0°/15°/25°/40° Nozzles • 1 Soap Nozzle
- 50' Of High Pressure Hose

Options & Accessories

- **Auto Stop/Start - Add (/A)** • Hose Reel • **Wheel Kit - Add (/WK)**
- Remote • VFD • PLC • Pressure Transducer • **Stainless Steel - Add (/SS)**



**THE
ALPHA**



**SCAN FOR
VIDEO!**




EZO3004-1/A-WK
with Optional Auto
Stop/Start, Hose Reel
& Wheel Kit



MODEL	GPM	PSI	BTU	DRIVE	HP	VOLTAGE	L" X W" X H"
EZO2004F-1	4	2000	400,000	FLANGE/COUPLING	5	220V-1PH	48 X 26 X 43
EZO2004-1	4	2000	400,000	BELT	5	220V-1PH	48 X 26 X 48
EZO2004F-3	4	2000	400,000	FLANGE/COUPLING	5	208/230/460/575 V-3PH	48 X 26 X 43
EZO2004-3	4	2000	400,000	BELT	5	208/230/460/575 V-3PH	48 X 26 X 48
EZO3004F-1	4	3000	400,000	FLANGE/COUPLING	7.5	220V-1PH	48 X 26 X 43
EZO3004-1	4	3000	400,000	BELT	7.5	220V-1PH	48 X 26 X 48
EZO3004F-3	4	3000	400,000	FLANGE/COUPLING	7.5	208/230/460/575 V-3PH	48 X 26 X 43
EZO3004-3	4	3000	400,000	BELT	7.5	208/230/460/575 V-3PH	48 X 26 X 48
EZO3005-1	5	3000	500,000	BELT	10	220V-1PH	48 X 26 X 48
EZO3005-3	5	3000	500,000	BELT	10	208/230/460/575 V-3PH	48 X 26 X 48
EZO4004F-1	4	4000	400,000	FLANGE/COUPLING	10	220V-1PH	48 X 26 X 43
EZO4004-3	4	4000	400,000	BELT	10	208/230/460/575 V-3PH	48 X 26 X 48
EZO2008-1	8	2000	800,000	BELT	10	220V-1PH	48 X 26 X 48
EZO3606-3	6	3600	600,000	BELT	15	208/230/460/575 V-3PH	60 X 31 X 50
EZO3008-3	8	3000	800,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 54
EZO3608-3	8	3600	800,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 65
EZO3010-3	10	3000	1,000,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 65
EZO2512-3	12	2500	1,200,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 65
EZO5005-3	5	5000	500,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 50
EZO6004-3	4	6000	400,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 50
EZO7004-3	4	7000	400,000	BELT	20	208/230/460/575 V-3PH	60 X 31 X 50
EZO8008-3	8	8000	800,000	BELT	50	208/230/460/575 V-3PH	64 X 38 X 59

Options & Accessories

- Auto Stop Start
- Hose Reel
- Rotary Nozzle
- Draft Hoods
- Wheel Kits
- Stainless Steel Coils
- VFD • PLC Control
- Second Pumping Systems
- Soap Solenoid & Switch
- Remote Station
- Steam Kit • Dual Gun Kit
- Leg Stands
- Remote Control
- **Stainless Steel and Wheel Kits Available**
- **Propane Fired Units start with (EZF)**



BUFFALO SERIES



Unit Shown with Shroud Tipped Ahead



EZN3010-3-575/A
with Optional Auto Stop/Start



**SCAN FOR
VIDEO!**



10 GPM @ 3000 PSI
Double Pump
Wash Bay Systems
with Leg Stand



Direct Drive Propane Fired
Units Are Portable with 30lb
Tank Brackets.

◀ EZP1502-1/-WK
EZP2435E-1/A-WK ▶



Direct Drive
Natural Gas Units
Are Stationary
Without A Shroud
EZP2435-1/A ▶



MODEL	GPM	PSI	BTU	HP	DRIVE	VOLTAGE	L" X W" X H"
EZN1502-1	2	1500	195,000	2	DIRECT	120V-1PH	43 X 30 X 45
EZN2435E-1	3.5	2400	290,000	5	DIRECT	220V-1PH	37 X 30 X 40
EZN3035E-1	3.5	3000	290,000	7.5	DIRECT	220V-1PH	37 X 30 X 40
EZN2004F-1-A	4	2000	390,000	5	FLANGE/COUPLING	220V-1PH	48 X 26 X 44
EZN2004-1-A	4	2000	390,000	5	BELT	220V-1PH	48 X 26 X 44
EZN2004F-3	4	2000	390,000	5	FLANGE/COUPLING	208/230/460/575 V-3PH	48 X 26 X 44
EZN2004-3	4	2000	390,000	5	BELT	208/230/460/575 V-3PH	48 X 26 X 44
EZN3004F-1-A	4	3000	390,000	7.5	FLANGE/COUPLING	220V-1PH	48 X 26 X 44
EZN3004-1-A	4	3000	390,000	7.5	BELT	220V-1PH	48 X 26 X 44
EZN3004F-3	4	3000	390,000	7.5	FLANGE/COUPLING	208/230/460/575 V-3PH	48 X 26 X 44
EZN3004-3	4	3000	390,000	7.5	BELT	208/230/460/575 V-3PH	48 X 26 X 44
EZN3005-1-A	5	3000	390,000	10	BELT	220V-1PH	48 X 26 X 44
EZN3005-3	5	3000	390,000	10	BELT	208/230/460/575 V-3PH	48 X 26 X 44
EZN3005-HT-1-A	5	3000	510,000	10	BELT	220V-1PH	61 X 31 X 51
EZN3005-HT-3	5	3000	510,000	10	BELT	208/230/460/575 V-3PH	61 X 31 X 51
EZN4004F-1-A	4	4000	390,000	10	FLANGE/COUPLING	220V-1PH	48 X 26 X 44
EZN4004-3	4	4000	390,000	10	BELT	208/230/460/575 V-3PH	48 X 26 X 44
EZN2008-1-A	8	2000	720,000	10	BELT	220V-1PH	61 X 31 X 51
EZN3606-3	6	3600	560,000	15	BELT	208/230/460/575 V-3PH	61 X 31 X 51
EZN3008-3	8	3000	720,000	20	BELT	208/230/460/575 V-3PH	61 X 31 X 51
EZN3608-3	8	3600	720,000	20	BELT	208/230/460/575 V-3PH	61 X 31 X 51
EZN3010-3	10	3000	940,000	20	BELT	208/230/460/575 V-3PH	66 X 35 X 62
EZN2512-3	12	2500	940,000	20	BELT	208/230/460/575 V-3PH	66 X 35 X 62
EZN5005-3	5	5000	510,000	20	BELT	208/230/460/575 V-3PH	66 X 35 X 62
EZN6004-3	4	6000	390,000	20	BELT	208/230/460/575 V-3PH	57 X 31 X 47
EZN7004-3	4	7000	390,000	20	BELT	208/230/460/575 V-3PH	57 X 31 X 47
EZN8008-3	8	8000	720,000	50	BELT	208/230/460/575 V-3PH	81 X 38 X 51

INDUSTRIAL HOT WATER ELECTRIC

- NATURAL GAS & PROPANE FIRED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Lotia Sons Pvt Ltd. Testimonial

"We bought our machine in August 2015 to clean surfaces to prepare for powder coating. We bought this unit because of its superior cleaning which makes the whole process more efficient and cost effective. The best part about this machine is the fact that you don't need to use chemicals to get amazing results which is very important to us because that ensures there is no negative impact on the environment."

This purchase lived up to our expectations and I would definitely recommend Easy Klean."

- Zahra Nadeem Ahmed (Islamabad, Pakistan)



Innovative Features

Quick Klean Burner System

Each model in this series is equipped with a Quick Klean Burner System. Your burner orifices should be cleaned every 6 months and this system makes it easy to do so. You simply disconnect the wiring harness, remove 2 bolts and your burner will slide out with ease. Once you have cleaned your burner, the apparatus will easily slide back into place with a little push. Quick and Easy Maintenance.



Quick Adjust Air Flow Vents

The Quick Adjust Air Flow Vents allow you to adjust the amount of air that is flowing into the burner chamber. This adjustment allows you to maximize the efficiency of the burner by fine tuning the CO levels to optimize emission levels at different altitudes. This allows you to adjust your air flow quickly and simply.



Tip Ahead Shroud with Integrated Belt Guard

The Tip Ahead Shroud allows you to easily access all of your motor and pump components in seconds. You simply loosen the T-Nuts on both sides of the unit and pull the shroud forward. The belt guard is integrated into the design of the shroud for maximum serviceability and safety. This ensures that your belt and pulley system will never be exposed.



Nema 4 Water Tight Control Panel

Electrical Nema 4 water tight control panels complete with hinged covers are utilized for easy service access. No unnecessary electronics are used when designing these units, making service and diagnostics simple. Available with standard on/off switch or optional autostart/stop timer shutdown. Standard on 4 - 12 GPM models.



Standard Features

Electric Motors

Totally enclosed fan cooled full frame 1750 RPM electric motors. Single phase equipped with a 1.15 service factor, 3 phase equipped with a 1.25 service factor, both are high efficiency.

General Pumps

Italian made industrial heavy-duty triplex plunger pump with oil bath crankcases, stainless steel valves and brass manifolds. General Pumps are the most widely used pumps in the world.

(Other Pumps Also Available)

Drive Systems

Belt Drive - large diameter pulleys are used to reduce belt wear.

Flange and Coupling Drive - Available for those who do not prefer belt drives.

Heating Coil

Elliptically wound cold process of stretched reduced full body normalized ASTM A53/APIPSL schedule 80 or 160 pipe. The coil is structurally braced to minimize pipe wear and vibration. It is sealed with a ceramic blanket in a stainless steel housing.

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burners

Quality North American made natural gas or propane fired burners and controls with adjustable thermostats are used for efficiency, dependability and serviceability. Units are equipped with quick klean burner apparatuses. Burner jets have 6 oxygen orifice inlets to ensure maximum burn and minimize CO results.

Frame

Rugged 11 gauge and 1/4" bent one piece plate steel frame is fully welded with a powder coat finish. Frames are equipped with 11 gauge steel shrouds with integrated belt guards for maximum serviceability.

Also Includes

These units include: gun and wand assembly, 50' of high pressure hose, high pressure chemical injection, 5 nozzles and poly float tanks on 4 - 12 GPM units.

Pumps

- Industrial Heavy-Duty Triplex Plunger Pumps • Oil Bath Crankcase
- Stainless Valves • Brass Manifold • Thermo Pump Protector
- Belt Or Flange & Coupling Driven

Electric Motors (3, 5, 7.5, 10 & 20 HP)

- 1750 RPM • TEFC • Full Frame • 1.25 Service Factor
- High Efficiency Thermal Overload Protection • Continuous Duty

Heater

- 316 Stainless Steel Heat Exchanger Coil • Designed for Continuous Use • Large 70 Gallon (Single Coil Models) & 120 Gallon (Dual Coil Models) Heater Storage Tanks
- Allows for Continuous Recovery Even When Trigger Gun(s) Not In Use • No Open Flame • Compact Foot Print • Cut-Off Switch
- Standard and Explosion Proof Models
- Heater Exchanger Coils Do Not Require De-calcification
- Require Less KW Than Input • Direct-Immersion Type Electrically Heated Models • Low Heat Exchanger Solution
- Adjustable Temperature Controller
- Pin-Type Calrod Heating Elements With Incoloy Sleeves

Frame

- All Welded - Powder Coated
- 11 Gauge Bent Steel Tip Ahead Shroud Designed to Expose All Components for Ease Of Service

Includes

- Liquid Filled Pressure Gauge • Adjustable Pressure Regulator
- 48" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 50' of High Pressure Wash Hoses (8 - 10 GPM Units Come with 2 Gun & Wand Assemblies & 50' of High Pressure Hose)

Options & Accessories

- Full Range of Portable Frames • Stainless Steel Covers and Heater Skins • 50HZ Models • VFD • PLC Control • Remote Control
- Wheel Kit • ASME B31.1 2004 (Power Piping) Code Compliant Models Available And Explosion Proof Unit

* Units with Double Coils (Larger Heating Capacity)

Utilized by: Mines, Mills, Refineries, Service Shops, and Food Processing Plants. Can be installed in virtually any location with no exhaust venting required.



**SCAN FOR
VIDEO!**



EH430E448A-575



EH430E472A-460
Double Coil
Larger Heating
Capacity

MODEL	GPM	PSI	HEATER INPUT	MOTOR HP	TOTAL AMP 3PH			DIMENSIONS L" X W" X H"
					208	460	575	
EH411E24A	4	1200	24 KW	5	72.5	33.3	26.6	32 X 28 X 52
EH411E48A	4	1200	48 KW	5	134.8	62.2	49.7	32 X 28 X 52
EH420E24A	4	2000	24 KW	5	77.1	35.5	28.4	32 X 28 X 52
EH420E448A	4	2000	48 KW	5	139.6	64.4	51.8	32 X 28 X 52
EH420E472A*	4	2000	72 KW	5	N/A	93.3	74.4	48 X 28 X 52
EH430E424A	4	3000	24 KW	7.5	85	39.1	31.3	32 X 28 X 52
EH430E448A	4	3000	48 KW	7.5	147.5	68	54.4	32 X 28 X 52
EH430E472A*	4	3000	72 KW	7.5	N/A	96.5	76.9	48 X 28 X 52
EH440E448A	4	4000	48 KW	10	154	70.9	56.7	32 X 28 X 52
EH440E472A*	4	4000	72 KW	10	N/A	99.8	79.9	48 X 28 X 52
EH450E448A	4	5000	48 KW	15	N/A	75.9	60.7	36 X 54 X 36
EH450E472A*	4	5000	72 KW	15	N/A	104.8	83.9	48 X 54 X 36
EH550E448A	5	5000	48 KW	20	N/A	82.8	66.5	36 X 54 X 36
EH550E472A*	5	5000	72 KW	20	N/A	112.2	89.8	48 X 54 X 36
EH535E448A	5	3500	48 KW	10	154	70.9	56.7	32 X 28 X 52
EH535E472A*	5	3500	72 KW	10	N/A	99.8	79.9	48 X 28 X 52
EH562E448A	5.6	2000	48 KW	7.5	147.5	68	54.4	32 X 28 X 52
EH562E472A*	5.6	2000	72 KW	7.5	N/A	96.9	77.6	48 X 28 X 52
EH612E448A	6	1200	48 KW	5	139.6	64.4	51.8	32 X 28 X 52
EH620E448A	6	2000	48 KW	10	147.5	68	54.4	32 X 28 X 52
EH620E472A*	6	2000	72 KW	10	N/A	96.9	77.6	48 X 28 X 52
EH812E2448A*	8	1200	48 KW	7.5	147.5	68	54.4	32 X 28 X 52
EH812E2472A*	8	1200	72 KW	7.5	N/A	96.9	77.6	48 X 28 X 52
EH820E2448A*	8	2000	48 KW	10	154	70.9	56.7	32 X 28 X 52
EH820E2472A*	8	2000	72 KW	10	N/A	99.8	79.9	48 X 28 X 52
EH830E2448A*	8	3000	48 KW	15	165	75.9	60.7	36 X 54 X 36
EH830E2472A*	8	3000	72 KW	15	N/A	104.8	83.9	48 X 54 X 36
EH1030E2472A*	10	3000	72 KW	20	N/A	112.2	89.8	48 X 54 X 36
EH1030E2496A*	10	3000	96 KW	20	N/A	141.3	113.1	48 X 54 X 36
EH1030E24115A*	10	3000	115 KW	20	N/A	164.3	131.4	48 X 54 X 36

EXPLOSION PROOF - HOT WATER

- STANDARD & OFF-SHORE SERIES

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Heavy-Duty Triplex Plunger Pumps
- Belt Driven • Oil Bath Plunger Pump • Pressure Regulator
- **Standard** - Powder Coated Pump Cover with Louvered End Covers.
- **Off-Shore** - Stainless Steel Pump Cover with Mesh/ Louvered End Covers • **Off-Shore** - Low Inlet Water Pressure Protection

Electric Motors

- 1800 RPM • TEFC • 1.15 Service Factor • High Efficiency
- Continuous Duty • CSA Approved/ UI Listed Explosion-Proof Motor • IP55 Minimum Ingress Protection Rating
- **Standard** - Automatic High Temperature Shut Down (Thermal Probe) for Pump Protection
- **Off-Shore** - Fully Automatic Start/Stop Circuit with Solid State Time Delay Shut Down - Controlled by Trigger Gun Activation

Heater

- Non-Direct Immersion Heat Exchanger with #316 Stainless Steel Heat Exchange Coil
- Low Water (Heat Exchanger Fluid) Level Switch
- Adjustable Temperature Controller
- Calrod Elements with Incoloy Sleeves
- Fully Automatic Start/Stop Circuit with Solid State Time Delay Shutdown - Controlled by Trigger Gun Activation

Frame

- Steel Cage Construction (with Drip-Proof Pump Base on the **Off-Shore** Units) • Mounting Feet • Lifting Eyes
- **Standard** - Powder Coat Painted • **Off-Shore** - Galvanized to ASTM123 and CSA G164-M1981 Specifications

Includes

- 50' High Pressure Hose Assembly, Complete with Trigger Gun, and Wand
- CSA Approved/ UI Listed Control Box, Flexible Coupling, Conduit, and Seals
- CSA Inspected & Certified for use in Class 1, Division 1, Group C & D Hazardous Location Environments

All Electrically Heated Units (model numbers starting with "EH") **are available in Explosion Proof.**



XPEH440E448A-460



XPEH440E448A-460

Options & Accessories

- CAT Plunger or Piston Pump
- SA Nitrogen Charged Pulsation Dampener
- SRA Surge Relief Assembly (for Flows of 6 GPM and Greater)
- PG Liquid-Filled Pressure Gauge
- LWPP Low Inlet Water Pressure Protection with Reset
- ETM-EXA (D) Integrated Analog (Digital) Hour Meter
- USC Upstream (High Pressure) Chemical Injection
- PCA-EX Portability Feature with Casters and Push/Pull Handle
- HRA 13 (16) High Pressure Hose Reel Assembly with 13" (16") Drum
- EGR-50 Enclosed Grounding Reel with 50' Grounding Wire and Clamp

DIVISIONS / ZONES

ATMOSPHERE	CLASS*	DIVISION*	ZONE**	AREA CLASSIFICATION
GAS	CLASS I	DIV. 1	ZONE 0	CONTINUOUS HAZARD
			ZONE 1	INTERMITTENT HAZARD
		DIV. 2	ZONE 2	ABNORMAL CONDITIONS HAZARD
DUST	CLASS II	DIV. 1	ZONE 20	CONTINUOUS HAZARD
			ZONE 21	INTERMITTENT HAZARD
		DIV. 2	ZONE 21	ABNORMAL CONDITIONS HAZARD
FIBER	CLASS III	DIV. 1	ZONE 20	CONTINUOUS HAZARD
			ZONE 21	INTERMITTENT HAZARD
		DIV. 2	ZONE 22	ABNORMAL CONDITIONS HAZARD

* ACCORDING TO NEC 5000 / CEC ANNEX J; ** ACCORDING TO IEC / NEC 5050 / CEC 18

GROUPS

ATMOSPHERE	CLASS*	GROUP*	GROUP**	REPRESENTATIVE ELEMENT
GAS	CLASS I	-	GROUP I	METHANE
		GROUP D	GROUP IIA	PROPANE
		GROUP C	GROUP IIB	ETHYLENE
		GROUP B	GROUP IIC (EXCEPT C ₂ H ₂)	HYDROGEN
		GROUP A	GROUP IIC	ACTYLENE
DUST	CLASS II	GROUP G	GROUP IIIB	NON-CONDUCTIVE DUSTS
		GROUP F	GROUP IIIB	CARBONACEOUS DUSTS
		GROUP E	GROUP IIIC	METAL DUST
FIBER	CLASS III	-	GROUP IIIA	FIBERS OR FLYINGS

* ACCORDING TO NEC 5000 / CEC ANNEX J; ** ACCORDING TO IEC / NEC 5050 / CEC 18

Pumps

- GIANT™ Industrial-Duty Plunger Pump
- Adjustable Pressure Regulator
- Pilot-Activated Flow Switch
- Factory-Set Pressure Relief Valve
- Liquid Filled Pressure Gauge

Electric Motors (5, 7.5, 10 & 15 HP)

- 1750 RPM • TEFC • Full Frame
- 1.25 Service Factor • High Efficiency
- Thermal Overload Protection
- Continuous Duty

Heater

- 316 Stainless Steel Heat Exchanger Coil
- Single And Dual Heavy Wall (Stainless Steel) Heat Exchanger Coils
- Allows For Continuous Recovery Even When Trigger Gun(s) Not in Use
- No Open Flame • Can Be Installed In Virtually Any Location
- Compact Foot Print • No Venting
- Required Heater Exchanger Coils Do Not Require De-calcification
- Require Less KW Than Input Direct-Immersion Type Electrically Heated Models
- Low Heat Exchanger Solution Cut-Off Switch
- Adjustable Temperature Controller

Frame

- Powder Coat Painted Frame With Optional Aluminum Checker Plate Panels
- Optional Automatic Refill
- Dual Low Water Level Switches With Indicator Lights
- Factory Set Temperature Controller

Options & Accessories

- Full Range of Portable Frames
- VFD • PLC Control
- Remote Control
- Wheel Kit

(*) - Most Popular Models

The Rocket Series of Electrically Heated pressure washing systems are designed and built for the toughest of applications, and are available for single and multi-user operation. These units include oversized (de-rated) industrial-duty pumps, motors and components, and heavy wall stainless steel heat exchange coils and tanks provide for consistent reliability, safety, performance, and maximum productivity.



MODEL	GPM	PSI	HEATER INPUT	MOTOR HP	TOTAL AMP 3PH		L" X W" X H"
					480	575	
ROCKET42-A4	3.5	2000	45 KW	7.5	67	53	36 X 20 X 54
ROCKET43-A4 *	3.5	3000	45 KW	7.5	67	53	36 X 20 X 54
ROCKET43-A6	3.5	3000	60 KW	7.5	86	68	36 X 20 X 54
ROCKET44-A4	4	4000	45 KW	10	71	56	36 X 20 X 54
ROCKET53-A4 *	4.7	3000	45 KW	10	71	56	36 X 20 X 54
ROCKET53-A6	4.7	3000	60 KW	10	90	71	36 X 20 X 54
ROCKET612-A6	6	1200	60 KW	5	83	65	36 X 20 X 54
ROCKET612-A8	6	1200	80 KW	5	108	85	36 X 20 X 54
ROCKET62-A6	6	2000	60 KW	10	90	71	36 X 20 X 54
ROCKET62-A8	6	2000	80 KW	10	115	91	36 X 20 X 54
ROCKET63-A6	6	3000	60 KW	15	94	74	36 X 20 X 54
ROCKET63-A8	6	3000	80 KW	15	119	95	36 X 20 X 54
ROCKET812-A8	8	1200	80 KW	7.5	111	88	36 X 26 X 54
ROCKET82-A8	8	2000	80 KW	15	119	95	36 X 26 X 54
ROCKET83-A8 *	8	3000	80 KW	15	119	95	36 X 26 X 54

ON DEMAND ELECTRICALLY HEATED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Pump
- Belt Driven or Direct Drive
- Adjustable Pressure Regulator
- Pilot-Activated Flow Switch
- Factory-Set Pressure Relief Valve
- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator

Electric Motors

- 1750 RPM • TEFC
- Full Frame
- 1.25 Service Factor
- High Efficiency
- Thermal Overload Protection
- Continuous Duty

Heater

- Electric Water Heater
- Automatic Heating - On Demand
- Low Heat Exchanger Solution
- Cut-Off Switch
- Adjustable Temperature Controller
- Automatic Stop/Start switch with delay

Frame

- Powder Coat Painted Frame


Includes

- 50' Hose
- Adjustable Thermostat
- Pressure Relief Valve
- Thermal Valves
- Lance with Trigger Gun
- Pressure gauge
- Chemical Injection

Options & Accessories

- Wheels
- Hose Reel With Support
- Stainless Steel Frame

Easy-Kleen's On-Demand-Electrically-Heated is ready for a job at a moment's notice. Not only does this machine heat water instantly, but it is lightweight, 50% quieter than other non-electric washers, and uses less electricity. No fuel mess or spillage.

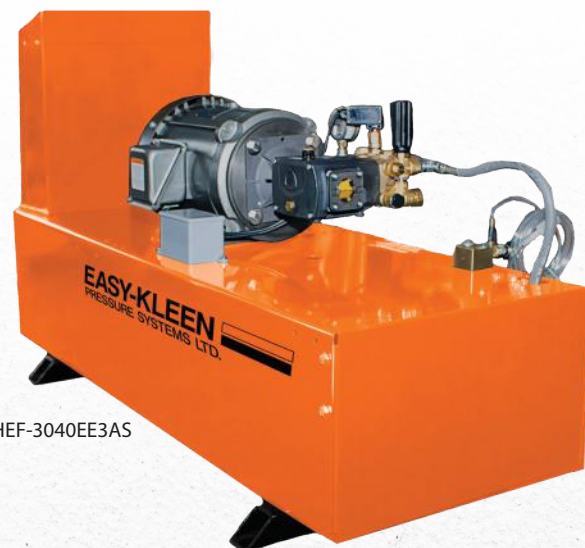

ARHEF-3040EE3AS



ARHEF-3040EE3ACS

MODEL	PSI	GPM	HP	RPM	DRIVE	VOLTAGE	AMP	KW
ARHEF-2040EE3AS	2000	4	5	1750	DIRECT	575V-3 PH	65	60
ARHEF-2535EE3AS	2500	3.5	5	1750	DIRECT	575V-3 PH	50	45
ARHEF-3030EE3AS	3000	3	5	1750	DIRECT	575V-3 PH	50	45
ARHEF-3035EE3AS	3000	3.5	7.5	1750	DIRECT	575V-3 PH	53	45
ARHEF-3040EE3AS	3000	4	7.5	1750	DIRECT	575V-3 PH	53	45
ARHEF-3040EE3AS	3000	4	7.5	1750	BELT	575V-3 PH	68	60
ARHEF-3050EE3ACS	3000	5	10	1750	BELT	575V-3 PH	82	72
ARHEF-4040EE3ACS	4000	4	10	1750	BELT	575V-3 PH	70	60
ARHEF-4050EE3ACS	4000	5	15	1750	BELT	575V-3 PH	87	72
ARHEF-4060EE3ACS	4000	6	20	1750	BELT	575V-3 PH	110	90

Pumps

- Commercial Duty Triplex Plunger Pump
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold • Direct Drive
- Thermo Pump Protector

Engines (Kohler, Lifan & Honda)

- Gasoline or Diesel Driven
- Efficient • Serviceable

Heating Coil

- Schedule 80 Pipe • No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

Burners (Wayne - 120 & 12 Volt)

- Oil Fired • Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable • Serviceable

Frame

- All Welded • Powder Coated
- 12 Gauge Bent Steel Roll Cage
- 3/4" Threaded Axles Welded to the Frame • Lifting Bar
- 13" Pneumatic Wheels Attached with Lock Nuts • 10 Gallon Poly Fuel Tank
- Hose Reel Mounting Plate
- Stationary Skid Frame also Available

Includes

- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles • 1 Soap Nozzle
- Downstream Chemical Injection System
- 50' of High Pressure Hose

Options & Accessories

- Rain Cap • Hose Reel • Rotary Nozzle
- Drain Cleaning/Jetter Kit
- Battery

Our most popular and versatile units. Utilized by a multitude of businesses for a wide variety of cleaning needs. From a simple oil field application to daily construction and farm use. Our customers continuously comment on the heat and speed of cleaning with these machines.



"We've had our machine for 4 years and it's never skipped a beat. It makes life so much easier to work on clean equipment versus dirty equipment."
- John March, J.E. March Trucking



SCAN FOR VIDEO!




EZ04035G-K-GP-12/RTL
Rental Frame Option with Grab Bar Surround for easy loading and total protection



EZ03504G-H/ST
With Optional Hose Reel



EZ02703G

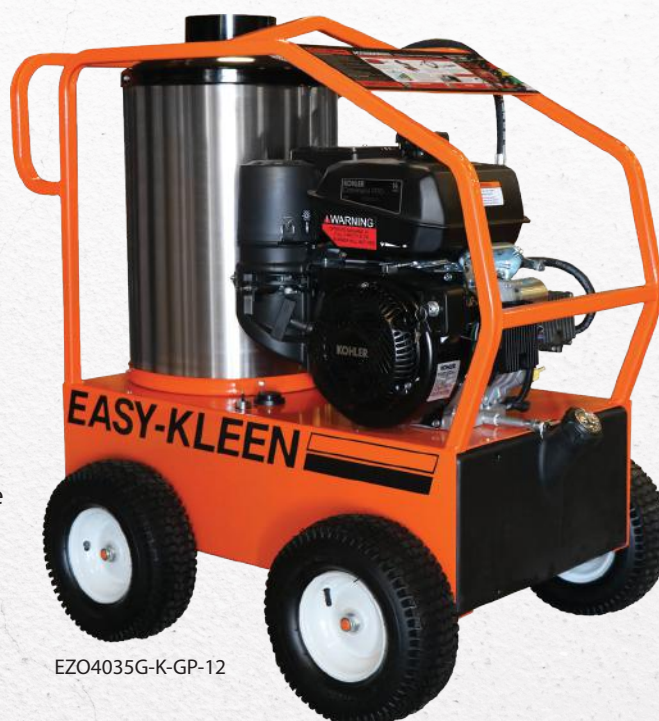

EZ04035G-K-GP-12



Intertek

COMMERCIAL HOT WATER GAS - OIL FIRED

MODEL	GPM	PSI	BTU	HP/ ENGINE	DRIVE	ELECTRIC START	BURNER
EZ02703G	3	2700	300,000	6.5 KOHLER	DIRECT	NO	120V
EZ04035G-K-GP-R	3.5	4000	350,000	14 KOHLER	DIRECT	NO	120V
EZ04035G-H-GP-R	3.5	4000	350,000	13 HONDA	DIRECT	NO	120V
EZ04035G-K-GP-120	3.5	4000	350,000	14 KOHLER	DIRECT	YES	120V
EZ04035G-H-GP-120	3.5	4000	350,000	13 HONDA	DIRECT	YES	120V
EZ04035G-L-GP-12	3.5	4000	350,000	15 LIFAN	DIRECT	YES	12V
EZ04035G-K-GP-12	3.5	4000	350,000	14 KOHLER	DIRECT	YES	12V
EZ04035G-H-GP-12	3.5	4000	350,000	13 HONDA	DIRECT	YES	12V
EZ03504G-K	4	3500	400,000	14 KOHLER	GEARBOX	YES	12V
EZ03504G-H	4	3500	400,000	13 HONDA	GEARBOX	YES	12V

COMMERCIAL HOT WATER DIESEL - OIL FIRED

MODEL	GPM	PSI	BTU	HP/ ENGINE	DRIVE	ELECTRIC START	BURNER
EZ04032D-K-GP-12	4	3200	350,000	9.8 KOHLER	DIRECT	YES	12V
EZ03204D-K	4	3200	400,000	9.8 KOHLER	GEARBOX	YES	12V

PORTABLE PICKUP TRUCK SKID

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Heavy-Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold
- Gearbox Drive
- Thermo Pump Protector

Engines

- 14 HP Kohler / 13 HP Honda Gasoline Engine or 9.8 HP Diesel Engine
- Efficient
- Serviceable

Heating Coil

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

Burners (Wayne - 12 Volt)

- Oil Fired
- Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable
- Serviceable

Frame

- 2 x 4 Tube Fully Welded Steel
- Powder Coated
- Lifting Eye
- Forklift Slots
- 225 Gallon Poly Water Tank
- 10 Gallon Winterization System
- Rain Cap on Boiler

Includes

- Hose Reel
- 36" Gun and Wand Assembly with Quick Coupler System
- 0°/15°/25°/40° Nozzles
- 1 Soap Nozzles
- 100' of High Pressure Hose
- Downstream Soap Injection System

Options & Accessories

- Drain Cleaning/Jetter Kit
- Rotary Nozzle
- Wet Sandblast Kit
- Battery

Propane Fired Units Are Available for Food Warehouse Applications (Modified for Two 100 Pound Tanks)

The Easy Klean Portable Skid Unit is a totally self contained system that allows for 100% portable cleaning. These units have been designed to fit perfectly into the 6' 6" box of a pickup truck. Forklift slots and a lifting eye make loading this unit easy and efficient. There is also a built in winterization system which makes year round cleaning and transportation possible.



SCAN FOR VIDEO!



"We purchased a pickup skid for our harvesting operation and so far it working out really well! The reliability has been excellent! Having the pressure washer and water tank together just makes it so easy to load up with the forklift and take it out to the equipment to keep it clean and running cool."

- Joe Blaney, Blaney Logging



EZO3504G-K-PSR



DOT Bolt On Trailer Package



EZO3504G-H-PSR
13 HP Honda Engine



Intertek

MODEL	GPM	PSI	BTU	HP/ ENGINE	FUEL	DRIVE	ELECTRIC START	BURNER
EZO3504G-K-PSR	4	3500	400,000	14 KOHLER	GASOLINE	GEARBOX	YES	12V
EZO3504G-H-PSR	4	3500	400,000	13 HONDA	GASOLINE	GEARBOX	YES	12V
EZO3204D-K-PSR	4	3200	400,000	9.8 KOHLER	DIESEL	GEARBOX	YES	12V
TKIT-PU1BS	BOLT ON TRAILER PACKAGE - 3500 LB. AXLE - NOT ROAD LEGAL							
TKIT-PU1BS-DOT	DOT APPROVED BOLT ON TRAILER PACKAGE 3500LB SINGLE AXLE, FENDERS, AND TONGUE WITH LIGHTS.							

Pumps

- Triplex Plunger Pump
- Oil Bath Crankcase
- Stainless Steel Valves
- Brass Manifold • Belt Driven
- Thermo Pump Protector

Engine (Kohler)

- 14 HP Kohler Gasoline Engine
- Electric Start • Efficient
- Serviceable

Heating Coil

- Schedule 80 Pipe • No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing

Burners (Wayne 12 Volt)

- Diesel Fired • On/Off Switch
- Adjustable Thermostat
- North American Made
- Dependable • Serviceable

Compact Frame

- All Welded • Powder Coated
- 1-1/2" Bent Steel Cage with 3/16" Mounting Plate • Lifting Bar
- All Mounting Bolts are Welded to the Frame for ease of Service
- 10 Gallon Diesel Tank
- Portable Wheeled Frame

Includes

- Temperature Gauge on the Outlet of the Boiler, 500° F Rated
- 50' Steam Hose with Steam Lance and Steam Tip Nozzle
- Flow Switch Control with High Limit Switch

Options & Accessories

- Extra Hose • Hose Insulation Wrap
- Steam Head for Weeds
- Burner: 120V (Electric) or 12V (Gas)
- Skid Unit with Tank • Hose Reel
- Stainless Steel Coil • Battery
- Larger Boiler (with greater BTU)
- Honda Motor Option
- Diesel Motor Option
- **Dry Steam Option - Add (/DS)**

These units are ideal for:

- Organic Weed Killing for Municipalities
- Restaurant Hood Cleaning
- Ice Dam & Snow Melting
- Sanitizing: Playgrounds, Nurseries, Farm Soil, Furniture
- Pipe Thawing • Graffiti Removal
- Engine Cleaning & Metal De-greasing
- Cleaning Air Conditioners & H-Vac Mold
- Completely eliminates oily residue from surfaces
- **~ Great for paint preparation!**
- Reduces the volume of chemical needed
- Gentle on delicate masonry stone work
- Reduced water consumption
i.e. less clean up/run off

These Hot Water Steamers were designed to be portable or trailer mounted for mobile steam purposes. These units can also be mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system.



EZO3015GSTM-K



STEAM OPTIONS

Wet Steam Kits*

- All of our **Industrial Hot Water** units are available with Wet Steam capabilities.
***Must Be Purchased with Unit and Factory Installed**
- A combo wet steam/high pressure unit is extremely versatile. It allows you to switch from high pressure to wet steam in minutes.



Dry Steam Options Available - Add (/DS)

Dry steam (350°F+) is vapor with no moisture content. This is required for applications in the pipe relining industry and degassing tanks.



EZO304GSTM-K-G



MODEL	GPM	PSI	BTU	HP	DRIVE	L" X W" X H"
EZO3015GSTM-K	1.5	300	400,000	14 KOHLER	BELT	43 X 31 X 45
EZO304GSTM-K-G	4	300	800,000	14 KOHLER	BELT	40 x 40 x 54

INDUSTRIAL HOT WATER DIESEL

- OIL FIRED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Heavy-Duty Triplex Plunger Pumps • Stainless Steel Valves
- Oil Bath Crankcase • Brass Manifold
- Thermo Pump Protector
- Belt or Gearbox Driven

Engines

- Diesel Driven • Efficient • Serviceable

Heating Coil

- Schedule 80 & 160 Pipe
- Elliptically Wound & Stretched
- Structurally Braced to reduce Vibration & Pipe Wear • No Seam Welds
- Sealed with a Ceramic Blanket
- Stainless Steel Housing

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burners (Wayne 120 Volt & 12 Volt)

- Oil Fired • Adjustable Thermostat
- On/Off Switch • North American Made
- Dependable • Serviceable

Frame

- Extremely Heavy-Duty 2" Square Tubing & 1/4" Mounting Plates
- All Welded • Powder Coated
- All Mounting Bolts are Welded to the Frame for Ease of Service
- Lifting Eye • Fork Lift Slots
- Convenient Control Panel
- 2 x 20 Gallon Diesel Engine Tanks - 26 HP Units (100 Gallon Optional on 60 HP Units)
- 60 HP Units (2" x 4" Steel Tubing with 1/2" Mounting Plate)

Includes

- Adjustable Pressure Regulator
- 48" Gun And Wand Assembly With Quick Coupler System for Machines Under 5000 PSI
- 0°/15°/25°/40° Nozzles
- 50' Of High Pressure Hose

Options & Accessories

- Steam Kit • Hose Reel • Electric Clutch
- All In One Skid & Water Tank Frames
- Open and Enclosed Trailer Packages
- Certified Lift Cages
- Drain Cleaning/Jetter Kit

Add (/STM) for Steam Kit

Add (/G) for Generator & 120 Volt Burner

This series of Hot Water Pressure Washers was designed to be truck or trailer mounted for mobile washing purposes. These units are ideal for use within municipal, mining, oil field, forestry and industrial cleaning operations. These units can also be mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system.



SCAN FOR VIDEO!



Paint Stripping
11,500 PSI
200°F



EZO3010D/STM
with Optional Steam Kit

EZO8008D



MODEL	GPM	PSI	BTU	HP	DRIVE	L" X W" X H"
EZO3204D	4	3200	400,000	9.8 KOHLER	BELT	54 X 26 X 51
EZO3506D	6	3500	600,000	26 KOHLER	BELT	68 X 39 X 52
EZO3508D	8	3500	800,000	26 KOHLER	BELT	68 X 39 X 53
EZO3010D	10	3000	1,000,000	26 KOHLER	BELT	73 X 39 X 68
EZO5005D	5	5000	500,000	26 KOHLER	BELT	68 X 39 X 52
EZO5010D	10	5000	1,000,000	60 KUBOTA	BELT	100 X 36 X 67
EZO6004D	4	6000	400,000	26 KOHLER	BELT	68 X 39 X 52
EZO7004D	4	7000	400,000	26 KOHLER	BELT	68 X 39 X 52
EZO8008D	8	8000	1,000,000	60 KUBOTA	BELT	100 X 36 X 67
EZO11506D	6	11,500	800,000	60 KUBOTA	BELT	100 X 36 X 67
EZO4020D	20	4000	1,800,000	60 KUBOTA	BELT	100 X 36 X 67

Pump

- Industrial Heavy-Duty Triplex Plunger Pumps • Oil Bath Crank Case
- Stainless Steel Valves • Brass Manifold
- Thermo Pump Protector
- Belt or Gearbox Driven

Engines

- Gasoline Driven • Efficient • Serviceable

Heating Coil

- Schedule 80 & 160 Pipe • No Seam Welds
- Elliptically Wound & Stretched
- Structurally Braced to Reduce Vibration & Pipe Wear • Sealed With Ceramic Blanket
- Stainless Steel Housing

Burners (Wayne 120 & 12 Volt)

- Oil Fired • Adjustable Thermostat
- On/Off Switch • North American Made
- Cleanable Fuel Filter • Dependable
- Serviceable

Compact Frame

- All Welded • Powder Coated
- 1-1/2" Bent Steel Cage with 3/16" Mounting Plate
- All Mounting Bolts are Welded to the Frame for Ease of Service
- 10 Gallon Gas Tank
- 20 Gallon Diesel Tank • Lifting Bar
- Designed to be Truck or Trailer Mounted
- Skid Frame Design • Hose Reel Compatible
- 38 HP Units are Equipped with a 1/4" Mounting Plate and Roll Cage is Optional

Includes

- Adjustable Pressure Regulator
- 48" Gun & Wand Assembly With Quick Coupler System for Machines under 5000 PSI • 0°/15°/25°/40° Nozzles
- Chemical Injector up to 5 GPM
- 50' of High Pressure Hose

Options & Accessories

- 3000 Watt Generator • Steam Kit
- Hose Reel • Drain Cleaning/Jetter Kit
- All In One Skid & Water Tank Frames
- Open and Enclosed Trailer Packages
- Certified Lift Cages • Electric Clutch
- Battery



**GRIZZLY
SERIES**



**SCAN FOR
VIDEO!**



EZO3010G-H
Standard 35 HP Frame

EZO5005G-H



MODEL	GPM	PSI	BTU	HP	DRIVE	L" X W" X H"
EZO3004G	4	3000	400,000	13 HONDA	BELT	54 X 26 X 48
EZO3504BG	4	3500	400,000	14 KOHLER	GEARBOX	54 X 26 X 48
EZO3505.5G	5.5	3500	400,000	18 VANGUARD	BELT	54 X 26 X 48
EZO3504G	4	3500	400,000	14 KOHLER	BELT	54 X 26 X 48
EZO3505G	5	3500	500,000	25 KOHLER/24 HONDA	BELT	54 X 26 X 48
EZO3506G	6	3500	600,000	25 KOHLER/24 HONDA	BELT	54 X 26 X 48
EZO3008G	8	3500	800,000	25 KOHLER/24 HONDA	BELT	54 X 26 X 51
EZO3010G	10	3000	1,000,000	35 VANGUARD	BELT	66 X 31 X 65
EZO3708G	8	3700	800,000	35 VANGUARD	BELT	66 X 31 X 55
EZO5005G	5	5000	500,000	25 KOHLER/24 HONDA	BELT	54 X 26 X 51
EZO6006G	6	6000	600,000	35 VANGUARD	BELT	66 X 31 X 55
EZO7004G	4	7000	400,000	25 KOHLER/24 HONDA	BELT	54 X 26 X 51

STANDARD UNITS ARE VERTICALLY FIRED = 5% - 10% HIGHER HEAT

FOR MODEL CHOICES ADD: KOHLER (-K), HONDA (-H), WHEEL KIT (-WK), STEAM (-STM), GENERATOR & 120 VOLT BURNER (-G)

INDUSTRIAL HOT WATER GAS

- OIL FIRED - CONTINUED

EASY-KLEEN 
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

These units can also be upgraded to a horizontal frame, or mounted on a skid frame in combination with 225, 525, or 740 gallon water tanks and a variety of hose reel and accessory options to create a totally customizable self contained system. The footprint of this unit can be adjusted to suit your needs.



CUSTOM
EZO3506G-H/HZ
Narrow Frame,
Horizontal Coil Option
13 to 24 HP
45" L x 35" W x 58" H



CUSTOM
EZO3506G-H/HZ
Wide Frame,
Horizontal Coil Option
13 to 24 HP
44" L x 49" W x 49" H



EZO3505G/G-K-TLR
with Generator,
Open Trailer Option,
and two Hose Reels



Enclosed Trailer
Packages Available

GRIZZLY & BULL MOOSE FILL & PLAY SERIES




SCAN FOR
VIDEO!



EZO3010D ▶

The City of Red Deer and the City of Prince George have each purchased two of these units. Geared to transport in the back of a flatbed truck.

A Bull Moose Series Pressure Washer with 10 GPM at 3000 PSI, 740 gallon water tank, steam, and high pressure 12 volt hose reels with hose guides and light kit. Used for thawing, cleaning road signs, graffiti, sidewalks, and equipment.

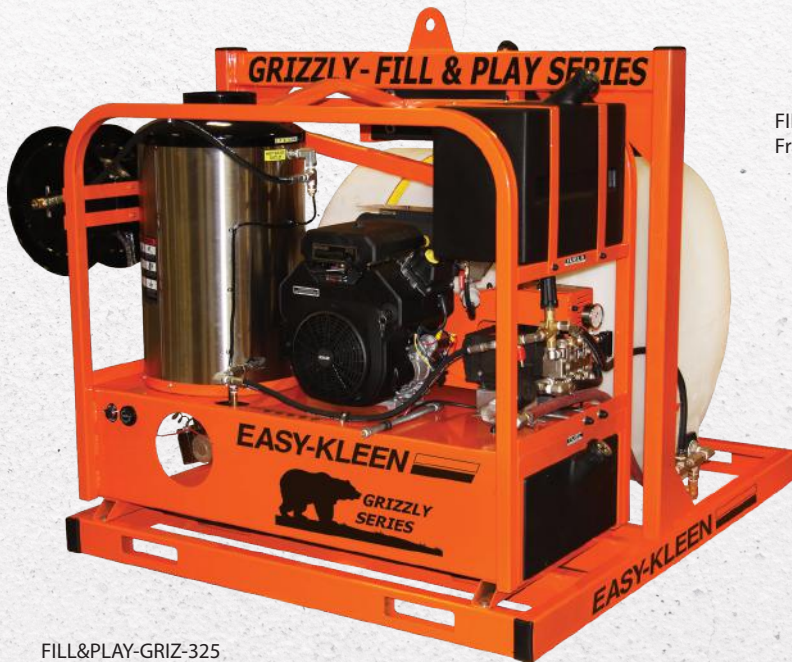

FILL&PLAY-GRIZ-325
Frame Option, pg. 70

Many of Easy-Kleen's customers have come to realize the pressure washer is only one part of the cleaning package. Now you can design a hassle free system that you simply fill with fuel, water and chemical to put on your truck, trailer, train or barge, or simply move around the site with a forklift to get the job done. Easy-Kleen believes in solving problems and the Fill & Play Series has been the solution for hundreds of customers.



FILL&PLAY-BM3-740
Frame Option, pg. 71

▶ EZO3508G

Using our **Grizzly Series Pressure Washer**, this unit was designed to be transported in an 8' box truck for shopping mall cleaning and property maintenance. **8 GPM at 3500 PSI** unit complete with 225 Gallon water tank, 2 high pressure reels, and 1 low pressure tank feed reel mounted curbside.

TALK TO YOUR EASY-KLEEN REPRESENTATIVE TODAY!
Design a totally self contained Fill & Play System that will fit your needs.

FILL & PLAY EQUIPMENT SERIES OPTIONS

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

GRIZZLY & BULL MOOSE FILL & PLAY SERIES OPTIONS


EZO5005G ▶

Using a **Grizzly Series Pressure Washer**, this unit was designed for construction and forestry applications for cleaning equipment and thawing culverts.

5 GPM at 5000 PSI unit with 225 gallon tank and three 250' hose reels.



FILL&PLAY-GRIZ-225SF
Frame Option, pg. 70

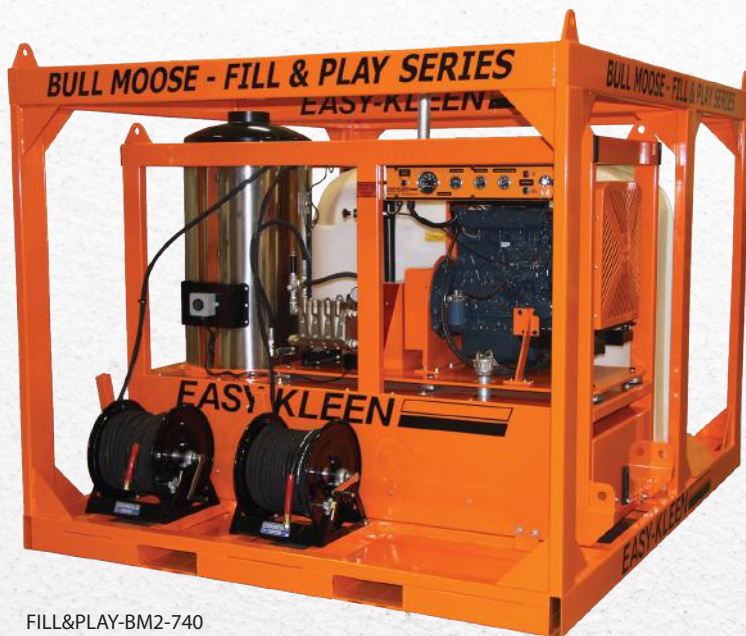

FILL&PLAY-BM2-740
Frame Option, pg. 71

◀ EZO5010D

Designed for Detour Gold Mine. This unit uses a **Bull Moose Series Pressure Washer** and is transported around the mine and the mill with an industrial forklift. Used for cleaning equipment, belts, conveyors, screens, thawing and flushing pipelines. **10 GPM at 5000 PSI** unit with 740 gallon water tank and 2 high pressure manual rewind hose reels.

EZO3010D-12 & KIT-TRAILER-14-2-630 ▶

Using a **Bull Moose Series Pressure Washer**, this unit was designed for Baffinland Canada, one of the largest iron ore mines in Canada. It is used to provide portability while clean heavy mining equipment on the job site, such as articulating rock trucks, conveyors, screens, and thawing pipes. **10 GPM at 3000 PSI** unit with 630 gallon water tank, and two 300' hose reels for the use of two wands at once.



Don't quite see what you are looking for? We have the ability to CUSTOM DESIGN & MANUFACTURE all types of high pressure cleaning equipment. If you have a need we will meet it.

Natural Gas (EZN) or Propane Fired (EZN)

Heating Coil

- Schedule 80 or optional 160 Pipe (up to 11,500 PSI)
- Elliptically Wound & Stretched • No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing • Thermostat Controlled
- Optional Stainless Steel Coil

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burners

- Natural Gas or Propane Fired
- Natural Aspirated Ring Cast Burner
- Six Oxygen Port Brass Burner Nozzles for Lower Emissions Controlled by 24 Volt Gas Valves
- Quick Clean Burner System
- Quick Adjust Air Flow Vents (Enclosed Design to Allow for Optimum Air Flow to Maximize Efficiency)

Safety Features

- Flow switch • Rupture Disc • High Limit
- Adjustable Thermostat • Gas Pressure Gauge

Frame

- 11 gauge to 1/4" steel • All Welded
- Fully Powder Coated

Electrically Heated Heater

- Must know HP of Paired Unit • 316 Stainless Steel Heat Exchanger Coil • Designed for Continuous Use
- Large 70 Gallon (Single Coil Models) & 120 Gallon (Dual Coil Models) Heater Storage Tanks
- Allows for Continuous Recovery Even When Trigger Gun(s) Not in Use • No Venting Required
- No Open Flame • Compact Foot Print
- Can be Installed in Virtually Any Location
- Stand and Explosion Proof Models
- Heater Exchanger Coils Do Not Require De-calcification • Require Less KW Than Input Direct-Immersion Type Electrically Heated Models
- Low Heat Exchanger Solution Cut-Off Switch
- Adjustable Temperature Controller
- Pin-Type Calrod Heating Elements With Incoloy Sleeves

Our Modular Hot Water Heaters are designed for heating high pressure water efficiently.



**WILDCAT
HEATERS**



EHE48
Electrically Heated



EZN940
Propane Fired



EZN940
Gas Fired

Electrically Heated

Gas Fired

Intertek

NATURAL GAS (EZN) & PROPANE (EZN) FIRED HEATERS

MODEL	PSI	BTU	VOLTAGE	BASE MEASUREMENTS L" X W" X H"
EZN195	5000	195,000 BTU	24V	18 X 24 X 39
EZN295	5000	295,000 BTU	24V	22 X 26 X 40
EZN390	5000	390,000 BTU	24V	22 X 26 X 44
EZN510	5000	510,000 BTU	24V	24 X 31 X 49.75
EZN560	5000	560,000 BTU	24V	24 X 31 X 49.75
EZN720	4000	720,000 BTU	24V	24 X 31 X 49.75
EZN940	4000	940,000 BTU	24V	31 X 35 X 61.25

ELECTRICALLY HEATED

MODEL	PSI	VOLTAGE	L" X W" X H"
EHE24	4000	24 KW	32 X 24 X 36
EHE48	4000	48 KW	32 X 24 X 36
EHE72	4000	72 KW	32 X 24 X 36
EHE48-2	4000	48 KW	48 X 24 X 36
EHE72-2	4000	72 KW	48 X 24 X 36
EHE99-2	4000	99 KW	48 X 24 X 36

OPEN MODULAR HOT WATER HEATERS - OIL FIRED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Heating Coil

Elliptically wound cold process of stretched reduced fully body normalized ASTM A53/ API5L schedule 80 or optional 160 pipe is structurally braced to minimize pipe wear and vibration. The coil is sealed with a ceramic blanket and enclosed in a stainless steel housing for heating efficiency. These coils have been specially designed to be paired with the burners for maximum heating and fuel efficiency. The coils are securely mounted to the frames to reduce vibration and enhance ease of maintenance. Wet/dry steam option available. (Optional 11,500 PSI Coils)

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burners (Wayne)

Quality North American made oil fired burners with adjustable thermostats are used due to their efficiency and durability. Safety features include: flow switch, pressure switch, rupture disc, high limit and adjustable thermostat.

Control Panel

Nema 4 water tight control panels are utilized.

Frames

Industrial grade frames are fully welded and powder coated for longevity. Install ready.

Options

Hydraulic, electric, gasoline, and diesel driven pump systems are available to pair with these units, as well as Long Body Frame options.

Redundancy packages, various types of thermostats, flow switches, and safety features are also available to meet your specifications.

Our Stand-Alone Open Modular Hot Water Heaters are designed for heating high pressure water efficiently.



**WILDCAT
HEATERS**



EZO440



EZO350/WK



EZO1800

Electrically
Heated



Intertek

MODEL	BTU	VOLTAGE	SCHEDULE 80 PSI	SCHEDULE 160 PSI	DIMENSIONS L" X W" X H"
EZO200	200,000	120 OR 12	5000	10,000	16 X 16 X 37
EZO350	350,000	120 OR 12	5000	10,000	18 X 18 X 42
EZO400	400,000	120 OR 12	5000	10,000	18 X 18 X 42
EZO350/WK	350,000	120 OR 12	5000	10,000	18 X 18 X 42
EZO440	440,000	120 OR 12	5000	10,000	19 X 19 X 51
EZO600	600,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZO700-(1/2)	700,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZO800-(1/2)	800,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZO800-(3/4)	800,000	120 OR 12	4000	8000	26.5 X 26.5 X 58
EZO900-(3/4)	900,000	120 OR 12	4000	8000	26.5 X 26.5 X 58
EZO1000-(3/4)	1,000,000	120 OR 12	4000	8000	26.5 X 26.5 X 64
EZO1200-(3/4)	1,200,000	120	4000	8000	31 X 31 X 62
EZO1800-(1)	1,800,000	120	3200	6000	31 X 31 X 70
EZO2000-(1-1/4)	2,000,000	120	3000	5000	36 X 36 X 70

Heating Coil

Elliptically wound cold process of stretched reduced fully body normalized ASTM A53/ API5L schedule 80 or optional 160 pipe is structurally braced to minimize pipe wear and vibration. The coil is sealed with a ceramic blanket and enclosed in a stainless steel housing for heating efficiency. These coils have been specially designed to be paired with the burners for maximum heating and fuel efficiency. The coils are securely mounted to the frames to reduce vibration and enhance ease of maintenance. Wet/dry steam option available. (Optional 11,500 PSI Coils)

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burners (Wayne)

Quality North American made oil fired burners with adjustable thermostats are used due to their efficiency and durability. Safety features include: flow switch, pressure switch, rupture disc, high limit and adjustable thermostat.

Control Panel

Nema 4 water tight control panels are utilized.

Frames

Industrial grade frames are fully welded and powder coated for longevity. Install ready.

Options

Hydraulic, electric, gasoline, and diesel driven pump systems are available to pair with these units, as well as Long Body Frame options.

Redundancy packages, various types of thermostats, flow switches and safety features are also available to meet your specifications.

Install ready for vacuum and hydro-vac trucks. These rugged, heavy-gauge frames offer durability even in severe road and weather conditions.



**WILDCAT
HEATERS**



**SCAN FOR
VIDEO!**



EZ0440/VAC



EZ0700-(3/4)/120-VAC



MODEL	BTU	VOLTAGE	SCHEDULE 80 PSI	SCHEDULE 160 PSI	VAC DIMENSIONS L" X W" X H"
EZ0200/VAC	200,000	120 OR 12	5000	10,000	16 X 16 X 37
EZ0350/VAC	350,000	120 OR 12	5000	10,000	18 X 18 X 42
EZ0400/VAC	400,000	120 OR 12	5000	10,000	18 X 18 X 42
EZ0440/VAC	440,000	120 OR 12	5000	10,000	19 X 19 X 51
EZ0600/VAC	600,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZ0700-(1/2)/VAC	700,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZ0800-(1/2)/VAC	800,000	120 OR 12	5000	10,000	22.5 X 22.5 X 50
EZ0800-(3/4)/VAC	800,000	120 OR 12	4000	8000	26.5 X 26.5 X 58
EZ0900-(3/4)/VAC	900,000	120 OR 12	4000	8000	26.5 X 26.5 X 58
EZ01000-(3/4)/VAC	1,000,000	120 OR 12	4000	8000	26.5 X 26.5 X 64
EZ01200-(3/4)/VAC	1,200,000	120	4000	8000	31 X 31 X 62
EZ01800-(1)/VAC	1,800,000	120	3200	6000	31 X 31 X 70
EZ02000-(1-1/4)/VAC	2,000,000	120	3000	5000	36 X 36 X 70

FULLY ENCLOSED HOT WATER HEATERS - PLUG & PLAY CABINETS

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Cabinets (VCB Models)

These frames are constructed with one piece of 11 gauge steel that is box bent with a 1/4" steel coil base (Fully welded and powder coated).

These units are equipped with two service panels at the base of the unit and a removable top for quick and easy coil removal. Stainless steel hinges and fasteners are also utilized.

Install ready for Vacuum and Hydro Vac Trucks

Our Plug & Play Fully Enclosed Modular Hot Water Heater Cabinets are designed for heating high pressure water efficiently, well protected, and ready to roll.



"Reliable and Rugged... Easy-Kleen reaches a quality standard unmatched by any competitor in the industry. Easy to install and easy to maintain, the details have been thought out to improve efficiency and usability. I have been using Easy-Kleen equipment for 30 years in Industrial Service companies. I would highly recommend purchasing Easy-Kleen equipment to anyone in the industry or anyone in need of high pressure cleaning equipment."

- Troy Canning, Clean Earth Industrial Services



EZO440/-12-VCB



EZO440/-12-VCB-20
20 GPM @ 4000 PSI, Pump Pack



EZJ4020HD

VAC Truck Heater/Jetting Combo Unit
Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs



MODEL	BTU	VOLTAGE	SCHEDULE 80 PSI	SCHEDULE 160 PSI	VCB DIMENSIONS L" X W" X H"
EZO200/VCB	200,000	120 OR 12	5000	10,000	CALL
EZO350/VCB	350,000	120 OR 12	5000	10,000	CALL
EZO400/VCB	400,000	120 OR 12	5000	10,000	CALL
EZO440/VCB	440,000	120 OR 12	5000	10,000	24 X 24 X 62.5
EZO600/VCB	600,000	120 OR 12	5000	10,000	26 X 24 X 64
EZO700-(1/2)/VCB	700,000	120 OR 12	5000	10,000	26 X 24 X 64
EZO800-(1/2)/VCB	800,000	120 OR 12	5000	10,000	26 X 24 X 64
EZO800-(3/4)/VCB	800,000	120 OR 12	4000	8000	27 X 29 X 77
EZO900-(3/4)/VCB	900,000	120 OR 12	4000	8000	27 X 29 X 77
EZO1000-(3/4)/VCB	1,000,000	120 OR 12	4000	8000	27 X 29 X 77
EZO1200-(3/4)/VCB	1,200,000	120	4000	8000	CALL
EZO1800-(1)/VCB	1,800,000	120	3200	6000	CALL
EZO2000-(1-1/4)/VCB	2,000,000	120	3000	5000	CALL

COMPLETE WITH PUMP PACKS

MODEL	BTU	VOLTAGE	PSI	GPM
EZO440/-12-VCB-13	440,000	12	3000	13.7
EZO440/-12-VCB-20	440,000	12	4000	20
EZJ4020HD	1,000,000	12	4000	20

These units are designed to be mounted on trucks or fishing/work-boats. Utilized by industry professionals that need high pressure on location.

Pumps

- Industrial Duty Triplex Plunger Pumps
- Oil Bath Crankcase • Stainless Steel Valves
- Brass Manifold
- Stainless Steel Manifold Option Available
- Direct Drive
- Thermo Pump Protector


Hydraulic Drive

- Industrial Continuous Duty Serviceable Gear Motors Direct or Belt Driven, to be Mounted in Compact Space Where Hydraulic Power Fluid is Available

VAC Truck Heater/Jetting Combo Unit

Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs

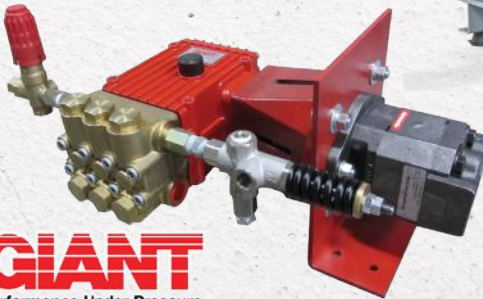

HYDRAULIC - MARINE & TRUCK

MODEL	GPM	PSI	DRIVE	HYDRAULIC FLUID POWER REQUIREMENT		
				(-20)	(-30)	(-40)
HD303	3	3000	COUPLING	N/A	5 GPM @ 2550 PSI	N/A
HDGEN354	4	3500	COUPLING	11 GPM @ 1850 PSI	9 GPM @ 2332 PSI	N/A
HDGEN356	6	3500	COUPLING	13 GPM @ 2184 PSI	11 GPM @ 2612 PSI	9 GPM @ 3289 PSI
HDGEN310	10	3000	COUPLING	17 GPM @ 2338 PSI	19 GPM @ 2914 PSI	N/A
HDGEN408	8	4000	COUPLING	21 GPM @ 2255 PSI	17 GPM @ 2914 PSI	14 GPM @ 3385 PSI
HDGEN505	5	5000	COUPLING	17 GPM @ 2090 PSI	13 GPM @ 2770 PSI	11 GPM @ 3314 PSI
HDGEN4020	20	4000	COUPLING	50 GPM @ 2317 PSI	45 GPM @ 2573 PSI	40 GPM @ 2896 PSI
HDCAT4020	20	4000	COUPLING	50 GPM @ 2317 PSI	45 GPM @ 2573 PSI	40 GPM @ 2896 PSI

CAT/GIANT/GENERAL PUMP/PRATISSOLI/AR PUMPS AVAILABLE

PLEASE ADD (-20), (-30) OR (-40) TO THE MODEL NUMBER TO SPECIFY HYDRAULIC FLUID POWER REQUIREMENT (EX: HD303-30)

MARINE MOUNT SERIES

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Industrial Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves
- Brass Manifold
- Stainless Steel Manifold Option Available
- Direct Drive
- Thermo Pump Protector

Electric Motors

- 1750 RPM • TEFC • Full Frame
- 1.15 Service Factor (Single Phase)
- 1.25 Service Factor (3 Phase)
- Thermal Overload Protection
- Continuous Duty

Hydraulic Drive

- Industrial Continuous Duty Serviceable Gear Motors Direct or Belt Driven, to be Mounted in Compact Space Where Hydraulic Power Fluid is Available

Electric Clutch

- Heavy-Duty Clutch Specifically Matched for Each Pump, Geared To Mount on Front of Diesel Engine for Every Day Washing on Barges, Work Boats and Fishing Boats

Frame

- Compact 12 Gauge and 1/4" Frame Assembly
- Powder Coated
- Optional: Stainless Steel

Includes

- Liquid Filled Pressure Gauge
- Adjustable Pressure Regulator
- 36" Gun and Wand Assembly with Quick Coupler System
- 4 Wash Nozzles
- 50' of High Pressure Hose

These units are designed to be mounted on fishing/work-boats. Utilized by industry professionals that need high pressure on location.



Electric Motor
ES304E-A



Electric Clutch
EC354



U.S. Coast Guard Testimonial

"We had our Easy Kleen 4000 PSI electric on board system installed on the Henry Blake over 15 years ago. Our crew uses this unit for cleaning buoys and our vessel daily. We are pleased with the serviceability and quality of Easy-Kleen's marine equipment. We will be returning to Easy-Kleen for our next marine high pressure system."

- USCGC, Henry Blake (WLM-563)



MARINE SERIES - ELECTRIC CLUTCH

MODEL	GPM	PSI	DRIVE	POWER	VOLTAGE
EC204	4	2000	V-BELT	5 BHP	12V
EC354	5	3500	V-BELT	10 BHP	12V
EC408	8	4000	V-BELT	20 BHP	12V

MARINE SERIES - ELECTRIC MOTOR

MODEL	GPM	PSI	DRIVE	POWER	VOLTAGE
ES204E-A	4	2000	FLANGE & COUPLING	5 HP	220V-1PH
ES204E-A-3	4	2000	FLANGE & COUPLING	5 HP	208/230/460/575 V-3PH
ES304E-A	4	3000	FLANGE & COUPLING	7.5 HP	220V-1PH
ES304E-A-3	4	3000	FLANGE & COUPLING	7.5 HP	208/230/460/575 V-3PH
ES404E-A	4	4000	FLANGE & COUPLING	10 HP	220V-1PH
ES404E-A-3	4	4000	FLANGE & COUPLING	10 HP	208/230/460/575 V-3PH

Electric Motor (2 HP)

- 1750 RPM • TEFC • Full Frame
- 1.15 Service Factor
- Thermo Overload Protection
- Continuous Duty

Pumps

- Heavy-Duty Triplex Plunger Pump
- Oil Bath Crankcase
- Stainless Valves • Brass Manifold
- Direct Drive • Thermal Pump Protector

Control Panel

- Nema 4 • Water Tight • Easy Access
- Heavy-Duty On/Off Cam Switch

Coil

- Schedule 80 Pipe
- Elliptically Wound & Stretched
- No Seam Welds
- Structurally Braced to Reduce Vibration & Pipe Wear
- Sealed with Ceramic Blanket
- Stainless Steel Housing (Vertical Units)

Optional CRN/ASME 30.1 Pressure Vessel Coded Coils

Burner

- Oil Fired
- Adjustable Thermostat
- On/Off Switch
- North American Made
- Dependable • Serviceable

Frame

- All Welded • Powder Coated
- Horizontal Units include a 40 Gallon Internal Fuel Tank
- Fuel Tanks are Optional For Vertical Units
- Forklift Slots and Lifting Eyes
- Optional Wheel Kit Available

Safety Features

- Electronic Thermostat with Deviation Control
- Safety Valve • Flow Control



Dry Steam is used for a wide variety of applications.

- **Curing** municipal pipe relining systems
- **Thawing** culverts, pipelines, drains for processing plants, railways, municipalities and highway departments
- **De-greasing** - High temperature raises the effectiveness of chemicals
- **Degassing** petroleum tanks before maintenance or repair
- **Melting** debris such as paraffin wax and grease from traps in wastewater treatment and refineries
- **Cleaning and Restoring** - Steam is less intrusive than high pressure cleaning for masonry restoration and monument cleaning etc.
- **Removing** gum from sidewalks and other like surfaces
- **Prepping** surfaces for paint
- **Purifying** soil, mulch, and compost
- **Weed Control** - Kills weeds without the use of chemicals
- **Decal Removal**



SCAN FOR VIDEO!



MODEL	BHP	PSI	BTU	HP	VOLTAGE	VERTICAL L" X W" X H"
EZO20ST-V	20	100	800,000	2	110V - 1PH	33 X 20 X 52
EZO30ST-V	30	100	1,200,000	2	110V - 1PH	37 X 25 X 63
EZO40ST-V	40	100	1,500,000	2	110V - 1PH	44 X 31 X 62
EZO50ST-V	50	100	2,000,000	2	110V - 1PH	44 X 31 X 72

DRY STEAM GENERATOR OPTIONS

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Options

- **Wheel Kits** - See pg. 69 for all options.
- **Horizontal Unit - Remove (-V)** - Horizontal Units include a 40 Gallon Internal Fuel Tank
- **Skid Frame Option** with 225 Gallon Water Tank, Forklift Slots & Lifting Eye
- **Complete Trailer Package** with 225 Gallon Water Tank
- **Fuel Tank** for Vertical Units



EZ050ST-V
with Optional
Skid Frame with
225 Gallon Water Tank
SKID-STEAM-PU-225-V
pg. 69

Our **Skid Frame** with Forklift Slots and Lifting eyes allows you to load and unload your complete dry steam package with ease.

Used for Installing Municipal Liners

BEFORE



AFTER



Add on **Wheeled Frame** for easy portability on smooth surfaces. Easy turn casters with two locking brakes.


EZ020ST-V
with Wheeled Frame
FRAME-STM20-WK-V
pg. 69



EZ050ST
with Horizontal Unit
Option

Our **Horizontal Unit** is an available option. What ever application you need our machines to fit, we can get you there.

Used for Curing Concrete on large Job Site

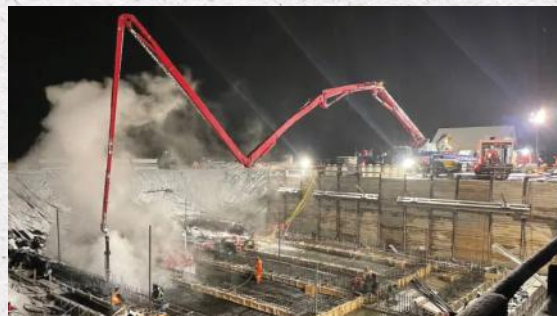

Sanivac, based out of Ontario and Quebec, is a Service and Sanitary Facility company using our heavy-duty dry steam generator to cure concrete on large job sites.

This machine quickly creates large amounts of steam while also being compact and portable, allowing them to do their job swiftly and efficiently.

GROUNDHOG JETTERS



Mr. Rooter "The Best Van Pack In The Business"
- Brad Sims, Mr. Rooter

EZJ3512G ▶

Designed to be transported in a pickup truck or the side or rear door of a van.

- 35 HP Vanguard Gasoline Engine
- Pump (Gearbox Driven)
- 12 GPM @ 3500
- 12 Volt Hose Reel Complete With Hose Guides, Super Swivel and Foot Pedal Control
- 300 Feet of 3/8" Jetter Hose
- 10 Gallon Poly Fuel Tank
- 200 Gallon Poly Water Tank

EZJ3512G-R
12 GPM @ 3500 PSI
with **Optional Remote - Add (-R)**



64" x 42" x 45"



144" x 72" x 60"

EZJ4020D-R
20 GPM @ 4000 PSI
with Optional Remote

EZJ4020D ▲

Designed to be truck or trailer mounted

- 60 HP Kubota Diesel Engine
- Pump (Belt Driven)
- 20 GPM @ 4000 PSI
- Hydraulic Driven Hose Reel
- 300 Feet of 1/2" Jetter Hose
- 525 Gallon Poly Water Tank

VAC Truck Heater/Jetting Combo Unit ▶

Bolt on cabinet unit for Septic and Jetting trucks.

- 20 GPM @ 4000 PSI
- 1,000,000 BTUs



**SCAN FOR
VIDEO!**



EZJ4020HD

MODEL	GPM	PSI	HP	DRIVE	WATER TANK	FUEL TANK	HOSE REEL
EZJ3512G	12	3500	35 HP VANGUARD	GEARBOX	200 GALLON	10 GALLON	12 VOLT - 300 FT
EZJ4020D/SKID	20	4000	60 HP KUBOTA	BELT	525 GALLON	10 GALLON	HYDRAULIC - 300 FT

JETTER TRAILERS & ACCESSORIES

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Optional Remote

- Hose Reel In
- Motor OFF and Speed Control
- Pressure ON/OFF

Other Options

- Cold or Hot Water
- Gas, Diesel, or Electric
- 225, 525, and 740 Gallon Water Tanks
- Fully Customizable Hose Reel Racks
- Winterization System
- Chemical Tank - 10 Gallon Poly Chemical Tank Mounted for High Pressure Soap Injection
- Complete Light Packages - Arrows & Work Lights
- Multi Reel & Multi Gun
- Twin Jetter Trailer
- Dual Pump System 20 GPM @ 4000 PSI
- **Exhaust Vent - For Enclosed Trailers**
- Fuel Tanks • Float Tanks

Open Trailer Option - Add (- MOBILE)

- 8' & 14' Trailer Options
- Multiple Engine/HP Options
- Single or Dual Axel

Enclosed Trailer Option


- 8', 225G Enclosed Trailer
- 14', 525G Enclosed Trailer
- 16', 525G & 740G Enclosed Trailer

Remote Option

- Add (-R) to model number for Remote



FOOT PEDAL INLINE



SWT-FTSW-SNP-Y



SWT-FV5012

When operating sewer or jetter machine, this allows hands to be free.

SWT-FTSW-SNP-Y	FOOT SWITCH, SNAP ACTION CONTACTS, 24-240 VOLT - YELLOW
SWT-FV5012-IH	FOOT VALVE, 12 GPM @ 5000 PSI , 300°F, 3/8" INLET FNPT, 1/4" FNPT OUTLET
SWT-FV808-IH	FOOT VALVE, 8 GPM @ 8000 PSI , 300 °F

JETTER HOSE REEL KIT




Electric Driven Hose Reel Kit. A great base set for your jetting needs. **Hose is not included.**

KIT-HR300HP-12V	JETTER HOSE REEL KIT, C/W 12V MOTOR, & ROLLER BRACKET - 300 FOOT CAPACITY
-----------------	---

JETTER NOZZLE KITS

Selection of 4, so you are covered for any jetting application.



NOZ-KIT-JTR1130-38	KIT, 11 GPM @ 3000 PSI , 3/8" NPT, 4-PACK
NOZ-KIT-JTR1230-38	KIT, 12 GPM @ 3000 PSI , 3/8", 4-PACK
NOZ-KIT-JTR2040-12	KIT, 20 GPM @ 4000 PSI , 1/2" NPT, 4-PACK

Find MORE Options & Accessories starting on page 72

TRAILER OPTION EXAMPLES



EZJ4020-TLR

14' Jetter Open Trailer

- 60 HP Kubota
- Belt Driven
- 20 GPM @ 4000 PSI
- 300 Gal Water Tank

EZJ3820G-2-TLR

14' Twin Jetter Open Trailer

- 2 x 35 HP Electric Start Vanguard
- 20 GPM @ 3850 PSI
- Triplex Pump
- Belt Driven
- 525 Gal Water Tank



HEATER PACK ▼

Add hot water to your Sewer Jetter System with a Modular Heater.

Increases speed and efficiency when cleaning out ice or grease.

- 440,000 BTUs
- Oil Fired Burner



EZO440

2" Honda Trash Pumps

- Heavy-duty 2" Construction Trash Pump
- Easy starting 5.5 HP Honda OHV Commercial Engine
- 185 GAL/min Capacity
- Solid Handling Capability up to 13/16"
- Heavy-duty, Deep-vane Impeller and extra-thick, Cast-Aluminum Pump Housing
- Cast Iron Conical Impeller
- Quick Clean Out Port

Frame

- Fully Welded Powder Coated Steel
- 3500 lb Tandem Axle 8' Deck
- Rear Mounted Spray Bar with 120° Spray Nozzles

Includes

- 525 Poly Water Tank with 2" Hydrant Tank Fill
- Electric Brakes
- Fender Mounted Hose Cage
- Fender Mounted Tool Box

Options & Accessories

- Diesel Engine Option
- Hydraulic Brakes

The Water Otter series is the ideal solution for all your dust suppression needs offering a rear mounted spray bar. This heavy-duty road ready trailer has an 8' deck with tandem 5200 lb axles and is equipped with a 525 gallon poly water tank with hydrant fill capabilities.



SCAN FOR VIDEO!



2" Honda Trash Pump



PWT525G



- ◀ **PWT525G & EZO3008G-H**
- Custom Water Otter Trailer with Grizzly Unit Mounted
 - 24 HP Electric Start Honda Engine
 - 8GPM @ 3000 PSI
 - 14' Dual Axle Water Trailer
 - 525 Gallon Water Tank
 - 2 Hose Reels
 - Tool Box and Hose Basket

MODEL	MAX PUMP OUTPUT	HP/ENGINE	FUEL	DRIVE	WATER TANK
PWT525G	185 GALLONS PER MINUTE	5.5 HP HONDA	GASOLINE	DIRECT	525 GALLON
PWT525D	185 GALLONS PER MINUTE	9.8 HP DIESEL	DIESEL	DIRECT	525 GALLON

RV & CAR LOT WASH TRAILER

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pumps

- Heavy-Duty Triplex Plunger Pumps
- Oil Bath Crankcase
- Stainless Valves • Brass Manifold
- Thermo Pump Protector
- Adjustable Pressure Regulator
- Ball Valve Control

Engines

- 6.5 or 14 HP Kohler Gasoline Engines
- Efficient • Serviceable

Frame

- Fully Welded Powder Coated Steel
- 16 Inch Wheels
- 100 Gallon Poly Water Tank

Includes

- 36" Gun and Wand Assembly with Quick Coupler System
- In-Line Water Filter • 1 Soap Nozzle
- 0°/15°/25°/40° Nozzles
- Downstream Chemical Injection System • Hose Reel
- 50' of High Pressure Hose

Options & Accessories

- Road Worthy Trailer
- Larger 225 Gallon Water Tank
- Honda Engines • Diesel Engines
- High Pressure Soap
- Extend-A-Wands • Rotary Nozzle
- Drain Cleaning/Jetter Kit
- Foamer • Water Broom
- Surface Cleaner

Ideal for RV dealerships, car lots, equipment rental shops, and RV parks. Designed to be pulled behind ATVs or small tractors, allowing you to bring your pressure washer to your lot inventory instead of hauling it to the pressure washer, saving both time and resources.



SCAN FOR VIDEO!



RVWASH100/14-K



RVWASH100/6.5-K-DOT

Removable Tongue

Add (-H) to model number for Honda Engine, (-K) for Kohler

MODEL	GPM	PSI	HP	DRIVE	WATER TANK
RVWASH100/6.5	3	2700	6.5 HP KOHLER	DIRECT	100 GALLON
RVWASH100/14	4	4000	14 HP KOHLER	DIRECT	100 GALLON

ADD (- DOT) TO MODEL NUMBER FOR THE DOT APPROVED BOLT ON TRAILER PACKAGE 2200LB SINGLE AXLE, FENDERS, AND TONGUE WITH LIGHTS.

Our open trailers are manufactured in-house.

Fully Welded • Powder Coated • Rugged • Built to Last

Customizable to meet any applications! Choose from a wide variety of water tanks, hose reels, jetting and wet steam accessories, and options to create a unit tailored to your specific specifications.



◀ **Industrial Hot Water Gasoline - Oil Fired**

EZ03008G

This unit was built to wash boats in order to prevent the spread of invasive mussels in British Columbia.



6 Hot Water Trailers



Industrial Hot Water Diesel - Oil Fired

EZ03010D

This unit was designed for a mine in Peru that was in need of a fully mobile unit for washing equipment and machinery in multiple locations.



EZ03010D
26 HP Kohler Diesel Engine
10 GPM @ 3000 PSI



Industrial Hot Water Gasoline - Oil Fired

EZ03008G

- Grizzly Series
- Skid Unit with 225 Gallon Water Tank & two Hose Reels
- Bolt-On-Trailer Package



OPEN TRAILER PACKAGES

Equipment ready to go! Great for mobile service with compact design.

KIT-FDTLR-8-225	8' SINGLE 3200LB. AXLE 225 GAL. WATER TANK
KIT-FDTLR-10-525	10' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK
KIT-FDTLR-12-525	12' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK
KIT-FDTLR-14-525	14' TANDEM 5200 LB. AXLES 525 GAL. WATER TANK
KIT-FDTLR-16-740	16' TANDEM 7000 LB. AXLES 740 GAL. WATER TANK

OPEN TRAILER OPTIONS

FLOAT TANK

For water supply to pump systems.
Garden hose connection.

KIT-FLOAT TANK (CHW)	1 GALLON FLOAT TANK KIT FOR COMMERCIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP
KIT-FLOAT TANK (IHW)	18 GALLON FLOAT TANK KIT FOR INDUSTRIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP

LARGE POLY WATER TANKS

Frames Not Included
Steel Pipe Straps



TAN-225GAL	225 GAL. DIMENSIONS, 49" L X 38"W X 41"H
TAN-325GAL	325 GAL. DIMENSIONS, 68" L X 38"W X 43"H
TAN-525GAL	525 GAL. DIMENSIONS, 72" L X 49"W X 54"H
STEEL TANK STRAPS ADDITIONAL COST FOR 225, 325 & 525 GAL. POLY WATER TANK	
TAN-740GAL	740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH STEEL TANK STRAPS

SMALL POLY WATER TANKS




TAN-35GAL	35 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED
TAN-100GAL	100 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED

FUEL TANKS, GAS CAPS, TANK BRACKET, & WINTERIZATION KIT



TAN-FUEL-10G	FUEL TANK - 10 GAL.
TAN-FUEL-20G	FUEL TANK - 20 GAL.
TAN-FC10G	GAS CAP WITHOUT GAUGE
TAN-FC10G-WG	GAS CAP WITH GAUGE
FRAME-TANKBRACKET-10G	TANK BRACKET
KIT-WTZ	WINTERIZATION KIT

A-FRAME HOSE REEL - INDUSTRIAL



HOS-HR300HP-A-BLK

Can be mounted on various units.
Rated at 5000 PSI

HOS-HR150HP-A-BLK	150' CAPACITY
HOS-HR300HP-A-BLK	300' CAPACITY
HOS-HR450HP-A-BLK	450' CAPACITY

12V OR 120V HOSE REEL - INDUSTRIAL



Capacity: 300' or 500',
Industrial 12 or 120 Volt
Hose Reel.

KIT-HR300HP-12V	ELECTRIC DRIVEN HOSE REEL KIT, C/W 12 VOLT MOTOR & ROLLER BRACKET, 300' CAPACITY
HOS-HR325HP-120V-B	120V, 300' CAPACITY
HOS-HR500HP-12V-BLK	12V, 500' CAPACITY
OTHER 120V MODELS AVAILABLE	

EASY-KLEEN - STAINLESS STEEL HOSE REEL




HOS-HR300HP-A-SS-IH

Constructed in-house. Ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining.
Rated at 5000 PSI

HOS-HR150HP-A-SS-IH	150' CAPACITY
HOS-HR300HP-A-SS-IH	300' CAPACITY

HOSE REEL - ROLLER BRACKET GUIDE

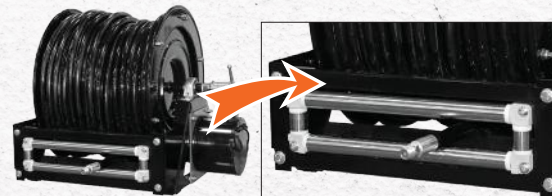

Easier to
roll up hose,
protecting and
extending it's
life span.

HOS-RB-BTM12-BLK	BOTTOM, 12" DRUM, BLACK
------------------	-------------------------

360° PIVOT HOSE REEL



HOS-PHR-MB

HOS-PHR100

Hose reel that
swivels to allow
directional change
while unrolling.
Rated at 5000 PSI
and 194° F

HOS-PHR100	HOSE REEL - 360° PIVOT, 3/8" X 100' CAPACITY
HOS-PHR-MB	MOUNTING BRACKET FOR PIVOT HOSE REEL (Needed to Mount above Hose Reel)

HYDRAULIC HOSE REEL - HIGH PRESSURE



HOS-HR500HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 500' OF 1/2" HP HOSE / 300' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED
HOS-HR1000HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 1000' OF 1/2" HP HOSE / 600' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED

Find MORE Options & Accessories starting on page 58

Paired with machines from the **Industrial Hot Water Gas** or the **Industrial Hot Water Diesel Series**.
4 to 10 GPM at 3000 to 11,500 PSI **Gasoline or Diesel Driven - Oil Fired**. (See Pages 26 and 29)

Choose from a wide variety of water tanks, hose reels, jetting and wet steam accessories, and options to create a unit tailored to your specific specifications.



16' ENCLOSED TRAILER



SCAN FOR VIDEO!



8' ENCLOSED TRAILER



Custom Hose Reel Racks & Light Kit



740 Gallon Water Tank



Wet Steam - Jetter &
2 x High Pressure Hose & Reels



EZO3010G
Grizzly Series Trailer

EZO5010D
58 HP, Bull Moose
Series coupled with
a Heater



8' ENCLOSED TRAILER PACKAGE 225G

KIT-CARTLR-8-225

8' ENCLOSED TRAILER WITH SINGLE 3500 LB AXLE, BARN STYLE REAR DOORS, 5' WIDE, 225 GAL. WATER TANK, 10 GAL. ANTIFREEZE TANK, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER. THE 8' TRAILER MOST COMMONLY PAIRS WITH COMMERCIAL HOT WATER & JETTER UNITS.

14' ENCLOSED TRAILER PACKAGE 525G

KIT-CARTLR-14-525

COMPLETE TURNKEY TRAILER KIT INCLUDES - 14' ENCLOSED CARGO TRAILER, TANDEM 5200 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 525 GAL. WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

16' ENCLOSED TRAILER PACKAGE 525G & 740G

KIT-CARTLR-16-525

COMPLETE TURNKEY TRAILER KIT INCLUDES - 16' ENCLOSED CARGO TRAILER, TANDEM 7000 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 525 GAL. WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

KIT-CARTLR-16-740

COMPLETE TURNKEY TRAILER KIT INCLUDES - 16' ENCLOSED CARGO TRAILER, TANDEM 7000 LB. AXLES, ELECTRIC BRAKES, REAR BARN STYLE DOORS, 1500 WATT TRAILER HEATER, ROOF VENT SAFETY SWITCH TO SHUT OFF THE BURNER, INSULATED INTERIOR-WALLS AND ROOF WHITE METAL LINE, INSULATED FLOOR 1-1/2 URETHANE FOAM, PAINTED FLOOR, 740 GAL. WATER TANK, 35 GAL. ANTIFREEZE KIT, 100' HIGH PRESSURE HOSE, 150' CAPACITY HOSE REEL, HOSE REEL RACK. PAIRS WITH ANY INDUSTRIAL OIL FIRED MACHINE.

ENCLOSED TRAILER OPTIONS

Our 14' & 16' Enclosed Trailers come standard with:

- Tandem Axle
- Electric Brakes
- Rear Barn Style Doors
- Insulated Interior - Wall and Roof, White Metal Lined
- Insulated & Painted floor (1-1/2" Urethane Foam)
- Burner Safety Switch and Exhaust Vent
- A-Frame Hose Reel - 150' Capacity, with 100' high pressure hose installed
- 35 Gallon Antifreeze Tank
- 1500 WATT Trailer Heater

They are then completed with your unit and water tank of choice.



Other Options available:

- 6" Square Lockable Hatch (curb side) to pull hose through
- Interior LED Light
- Cam Lock Fill
- Additional A-Frame Hose Reel
- Multiple Reels installed in rear of Trailer
- Chemical Tanks
- Low Water Cut Off

LIGHT KIT



ACC-TRAF-DIRECT-KIT	MUNICIPAL FLASHING LIGHT / ARROW / 3 WORK LIGHTS - KIT MOUNTED ON ANY SKID FRAME (FACTORY INSTALL)
ACC-TRAF-DIRECT-SUPPORT	MOTORIZED ARROW BOARD SUPPORT FOR TRAFFIC DIRECTOR KIT

A-FRAME HOSE REEL - INDUSTRIAL



HOS-HR300HP-A-BLK

Can be mounted on various units.
Rated at 5000 PSI

HOS-HR150HP-A-BLK	150' CAPACITY
HOS-HR300HP-A-BLK	300' CAPACITY
HOS-HR450HP-A-BLK	450' CAPACITY

LARGE POLY WATER TANKS



TAN-225GAL	225 GAL. DIMENSIONS, 49" L X 38"W X 41"H
TAN-325GAL	325 GAL. DIMENSIONS, 68" L X 38"W X 43"H
TAN-525GAL	525 GAL. DIMENSIONS, 72" L X 49"W X 54"H
STEEL TANK STRAPS ADDITIONAL COST FOR 225, 325, & 525 GAL. POLY WATER TANK	
TAN-740GAL	740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH STEEL TANK STRAPS

HOSE REEL STANDS (ONLY)

Elevates the hose reel, making it easier to use, store, and access.
Hose, hose reels, and tank not included.



FRAME-HRSX2

FRAME-HRSX1	1-HOSE REEL, ORANGE
FRAME-HRSX2	2-HOSE REELS, ORANGE
FRAME-HRSX3	3-HOSE REELS, ORANGE
TAN-35GAL	C/W 35 GAL TANK OPTIONAL

Find MORE Options & Accessories starting on page 58.

**FULLY CUSTOMIZABLE, INSULATED AND ENCLOSED TRAILER PACKAGES!
EVERYTHING HAS BEEN THOUGHT OF TO ENSURE YOUR SUCCESS**

Pumps

- Industrial Heavy-duty Triplex Plunger Slow Speed Pumps
- Oil Bath Crankcase
- Stainless Steel Valves
- Manifold Available in Brass, Nickel, Aluminum, Bronze or 316 Stainless Steel
- Belt Driven or Optional Gearbox Drive

Electric Motors

- 1750 RPM • TEFC • Full Frame
- 1.25 Service Factors
- Thermal Overload Protection
- Continuous Duty

Electrical Control Panel

- Nema 4 • Water Tight • Easy Access
- Auto Stop/Start With Time Delay

Frame

- All Welded • All Powder Coated
- Super Heavy-Duty Plate or Channel Iron Base Frame Assembled

Includes

- Liquid Filled Stainless Steel Pressure Gauge
- Adjustable Pressure Regulator


Options & Accessories

- Multi Pump and Multi Staging of Pumps
- High Temp Shut Down
- Pulsation Dampener
- Pressure Blow Off
- Tank Feed
- Steam/Hot Water Sensor Temp Controls
- Level Controls
- Wash Station Foamers
- Wash Station Control Systems
- Wash Station Valve Assemblies
- VFD • PLC • Pressure Transducer

Designed for industrial and food processing plants that require 24 hour on demand cleaning capabilities throughout their operation. Any requirement can be met — no matter how large or small the need!



IP2110E-1

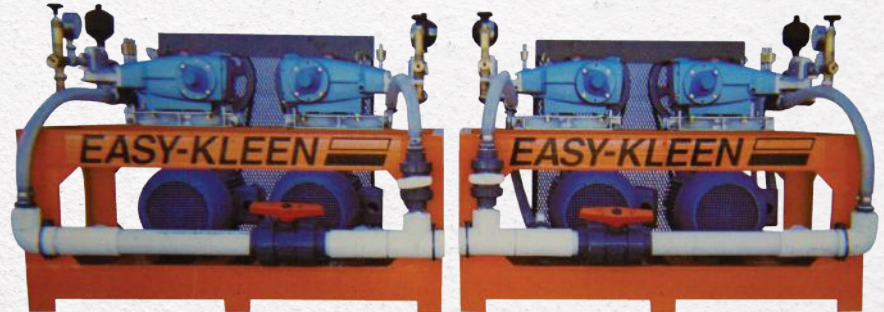

IP18010E-4
4 Pump Multi Stage



MODEL	GPM	PSI	HP	VOLTAGE
IP1010E-1	10	1000	7.5	208/230/460/575 V-3PH
IP1510E-1	15	1000	10	208/230/460/575 V-3PH
IP2110E-1	21	1000	15	208/230/460/575 V-3PH
IP1022E-1	10	2200	15	208/230/460/575 V-3PH
IP4210E-2	42	1000	2 X 15	208/230/460/575 V-3PH
IP3612E-1	36	1200	30	208/230/460/575 V-3PH
IP4510E-1	45	1000	30	208/230/460/575 V-3PH
IP7212E-2	72	1200	2 X 30	208/230/460/575 V-3PH
IP9010E-2	90	1000	2 X 30	208/230/460/575 V-3PH
IP13510E-3	135	1000	3 X 30	208/230/460/575 V-3PH
IP18010E-4	180	1000	4 X 30	208/230/460/575 V-3PH
IP2320E-1	23	2000	30	208/230/460/575 V-3PH
IP4620E-2	46	2000	2 X 30	208/230/460/575 V-3PH
IP6012E-1	60	1200	50	208/230/460/575 V-3PH
IP7010E-1	70	1000	50	208/230/460/575 V-3PH
IP6010E-1	60	1000	40	208/230/460/575 V-3PH
IP3025E-1	25	3000	50	208/230/460/575 V-3PH
IP4020E-1	20	4000	50	208/230/460/575 V-3PH

CUSTOM IN-PLANT SYSTEMS

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Our customer needed an effective and efficient way to clean their plant after processing lobster, with three pumps, which can all be run at once, ensuring very little down time, and a fully automatic stop/start system pull station dampener put on each pump to ensure smooth, constant flow and to increase pump life, meaning a station is always ready.

This custom, **In-Plant, Hot Water Cleaning System** is complete with three, **4 GPM @ 2000 PSI** pumps, leading to a total of **12 GPM @ 2000 PSI, tied into a 5 HP, 575 Volt, 3 Phase, Belt Driven, all electric Hot Water Heater with Industrial Duty General Pumps.** Modular stacking frame designed with three stainless steel lines going out to specific areas within the fish plant. The system was set up with a water supply tank to ensure proper pressure supplied to each pumping station. With the ability to use either hot or cold water and featuring automatic controls, open design for easy maintenance, and three pumps, ensuring that should one require any work, the machine is still operational.



IP2510E-1-575
with Optional Leg Frame



Double Stacked Pumping System
Flange & Coupling Drive



IP4510E-1-575
45 GPM @ 1000 PSI with 225 Gallon Water Tank



3 Pumps with a Stationary Horizontal
Stack Frame

Stop manually cleaning parts with pressure washers and scrub tubs. Our Parts Washer's heavy-duty cleaning power and relatively small footprint help you get the job done safely and more efficiently.

System Features

- Heavy-Duty, Roll-Door Design
- Load Capacity up to 1,500 lbs
- Sprocket-Driven Turntable Available in 25", 31", and 36"
- Auto Water Fill and Low Water Shut-Off
- Vertical, No-Seal Pump
- Built-in Disc-Style Oil Skimmer Extends the Life of Your Cleaning Solution
- 7-day Programmable Timer for Heat and Oil Skimmer
- 60-Minute Wash
- Two-Week Build Time
- 1+ Year Warranty

Additional Elements

- Stainless Steel: Stainless Steel Cabinet, Electromechanical 24 Hour Heat Times, Mid-Spray Bar
- Large: Chain Driven Turntable

Options & Accessories

- Parts Baskets
- Parts Tree
- Hydro Spray Hand-Held Detail Wand
- Steam Exhaust Fan
- Casters
- Bag Filter System



Extend the life of your parts with a machine that saves you time and money while providing a powerful clean!

MODEL	TURNTABLE DIAMETER	INSIDE HEIGHT	WEIGHT CAPACITY	PUMP (HP)	PUMP OUTPUT	SOLUTION CAPACITY	HEAT SOURCE (KW)	OVERALL DIMENSIONS
ORCA-2532	25"	32"	1000 LBS	3	45 PSI/50 GPM	60 GAL	6	36L X 51W X 68H
ORCA-3142	31"	42"	1000 LBS	3	45 PSI/50 GPM	80 GAL	6/1PH OR 12/3PH	42L X 56W X 78H
ORCA-3648	36"	48"	1500 LBS	5	58 PSI/85 GPM	110 GAL	12	47L X 65W X 85H

Design & Standard Features

Multi-Stage

- First Stage: Pre Rinse - Pumped From Third Stage Rinse Tank - Drained to Plant Drain
- Second Stage: Wash - Pressurized High Volume Hot Chemical. Wash-Recycled through Filter and Steam Heated Tank
- Third Stage: Clean Rinse - Pressurized High Volume Rinse - Recycled through Filter and Cold Water Tank
- Fourth Stage: Blower/Dryer

Conveyor System:

- Dual 2060 Stainless Steel Conveyor Chain Run in Nylon Grooves (Optional Third Length Chain System)
- Stainless Steel Drive Shafts and Sprockets
- Nylon Flanged Type Sealed Bearings
- Adjustable Chain Speed Controller
- Stainless Steel 304 Square Tubing and Angle Framework
- Stainless Steel 11 and 16 Gauge Shrouding, and Sheet Metal Work
- Poly Neoprene Curtains between Stages and on each end
- Tension Adjuster
- Adjustable Guild Rails for different size Tote and Tray

Nozzle Manifold System:

- All Stainless Steel Nozzles and Manifold Piping
- Stainless Steel adjustable Angle Ball-Joint
- High impact inner Tote Cleaning Nozzle
- Easily adjustable to height of container for Maximum Impact
- Rugged Access Doors for Easy Maintenance

Pumps Systems:

- Industrial Grade Continuous Duty
- Seal Less, Vertical Pump designed for no maintenance
- Proven in pumping High Volume High Temperature Chemicals and Dirty Fluids
- TEFC, 480 Volt, 3 Phase Motors
- Wash Stage Pump - 10 HP, 175 GPM, 70 PSI
- Clean Rinse Stage Pump - 7.5 HP, 125 GPM, 70 PSI

Options

- PH - Control System
- ORP - Control System
- Electrically Heated Package - 40KW
- Third Run of Conveyor Chain
- Recycling Sanitizing Pump & Tank System

Totes & Tray Sizes:

- From 7"W x 5"D x 12"L to 15"W x 7"D x 32"L

Dimensions:

- 5'W x 6'H x 30'L Approximately

Production:

- 250-400 Large Totes per Hour

Electrical Supply:

- 80 AMP, 480 Volt, 3 Phase

Water Supply:

- 30 GPM Main Pressure

Testing:

- 24 Hours Before Pickup

Tanks System

First Stage:

- Drip Tray catches all sprayer debris and drained fitting to connect to plant drains

Second Stage:

- 175 Gallon Stainless Steel Insulated Tank
- 40 KW 480 Volt Electrically Heated Tank
- Temperature Controller • Temperature Gauge
- Low Water Pump Cut Out
- Automatic Refill Float Valve
- Large Drain Valve and sloped for fast and easy wash out
- Large Rectangular Filter Basket to catch foreign material before being re-pumped to nozzles
- **(Optional)** PH Controller, Sensor and Chemical Pump to control and maintain chemical strength in Tank
- Oil Skimmer

Third System:

- 125 Gallon Stainless Steel Tank
- Large Drain Valve and sloped for fast and easy wash out
- Automatic Refill Float Valve
- Low Water Pump Cut Out
- Large Rectangular Basket Filter to catch foreign material before being pumped through nozzles

Forth Stage:

- Air/Blower - Knife Dryer

Control Panel:

- Control Panel mounted to system
- Stainless Steel Nema 4 water tight
- Pre-wired to all components on system
- Complete with all necessary Starters, Overloads, Fuses, Control Transformers, Indicator Lights and Controls as required



Ideal for contractors and rental shops for test pumps due to its rugged and dependable design.

Water/Sewer Main Testers

Pump

- Diaphragm Pump
- 550 RPM
- Gearbox Drive
- 10 GPM @ 600 PSI

Engine

- 6.5 HP Kohler or Honda Gasoline Engine
- Low Oil Alert System
- Recoil Start

Frame

- Fully Welded
- Powder Coated
- Roll Cage Cart
- 13" Foam Filled Tires

Includes

- Adjustable Heavy-Duty Aluminum Pressure Regulator with Water Dump Feature
- Liquid Filled Pressure Gauge
- 10 Feet of Suction/Bypass & Discharge Hose

Options

- Test Line Gauge Kit



Vessel & Pipeline Testers

With over 35 years of experience manufacturing and designing hydrostatic test equipment to heavy industry applications in refineries, mills, mines, oil and gas.

Each system is generally customized to meet the specific needs of the customers application.



EKHT-6.5-K



IS304EF-1-ST-HTP

COIN OPERATED CAR WASH

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Pump

- Heavy-Duty Triplex Plunger Pump
- Oil Bath Crankcase • Stainless Valves
- Brass Manifold
- Direct Drive
- Thermo Pump Protector
- Belt or Flange & Coupling Drive

Electric Motor (5 HP)

- 1750 RPM • TEFC • Full Frame
- 1.15 Service Factor (Single Phase)
- 1.25 Service Factor (3 Phase)
- Thermal Overload Protection
- Continuous Duty
- 220 Volt - 1 Phase or
208/230/460/575 Volt - 3 Phase

Control Panel

- Nema 4 • Water Tight • Easy Access
- Mounted to Pump Base
- Pre-wired, Just Requires a Power Source

Soap Controls

- Standard Soap and Wax Injection Valves with Fine Point Metering
- Complete with Hot Water Solenoid to Control Hot Soap and Wax
- Cold Water Rinse Solenoid to Save Money Heating Water
- Pump Suction is Controlled with 10 Gallon Poly Float Tank

Frame

- All Welded • Powder Coated • Bench Style
- Optional Stackable Pump System
Frames Available

Includes

- Adjustable Pressure Regulator
- Liquid Filled Pressure Gauge
- Heavy-Duty Fittings

Bay Equipment

- Stainless Steel Heavy-Duty Coin Box with 8 Position Switch for Optional Selections, Internal Heater and Extreme Duty Lock Box
- Multi Coin Acceptor with State Timer, Coin Acceptor (Quarters or Tokens) LED, Beeper (Specify Front or Rear Loading)
- Center Mounted Spring Loaded 360° Boom
- Flexible Wands
- High Pressure Swivels
- 4000 PSI Rated Weep Trigger Gun
- Stainless Steel Nozzle
- Bay Lines are Steel Braided and Non-Marking
- Stow-Away Wall Brackets
- Complete Instruction Signs are Included

Options

- Foaming Brush System
- Motor and Tire Cleaner
- Floor Mat Clamps
- Coin Operated Vacuums
- Vending Machines
- Stainless Bill Changer

We have taken pride in designing and manufacturing fool proof, easy to install and maintain, self-serve car wash systems that will provide savings from installation to maintenance for years to come.



EZ420CW-2
5 HP Electric Motor
4 GPM @ 2000 PSI
Flange & Coupling Drive

We have the ability to custom design and manufacture all types of high pressure cleaning equipment. If you have a need we will meet it.



◀ **In-Plant Systems**
Custom Triple-Stacked Frame.

Custom Grizzly for Truck Bed ▶

Grizzly Fill & Play with 225 Gallon Water Tank, Hose Reels, Steam Kit, Winterization and Chemical Tank.



▼ **Fully Custom Unit with Dual Heaters & Industrial Pump**

Two Oil Fired Modular Heaters, Industrial Series 25 GPM @ 800 PSI Pump System, Custom Skid and Frame, 160 Gallon Diesel Tank, 225 Gallon Water Tank, and a 35 Gallon Winterization Kit.



▲ **Groundhog Jetter on a Skid**

Cold Water Diesel 60 HP Kubota Engine, 20 GPM @ 4000 PSI, 525 Gallon Water Tank, 500' Hose & Hydraulic Reel.

◀ **Hot Water Heaters**

For Military Showers Complete with Stainless Steel Coils, (3 Portable Units)



TALK TO YOUR EASY-KLEEN REPRESENTATIVE TODAY!
Design a Custom System that will fit your needs.

CUSTOMIZED UNITS & FRAME OPTIONS - CONTINUED

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT




Fully Electrically Heated Unit

Customized with Wheel Kit and Cage Frame, allowing the unit to be transported between multiple washing locations without the use of a forklift.

Modular Hot Water Heater - Oil Fired

EZO700-(1/2)
with Redundancy Package.

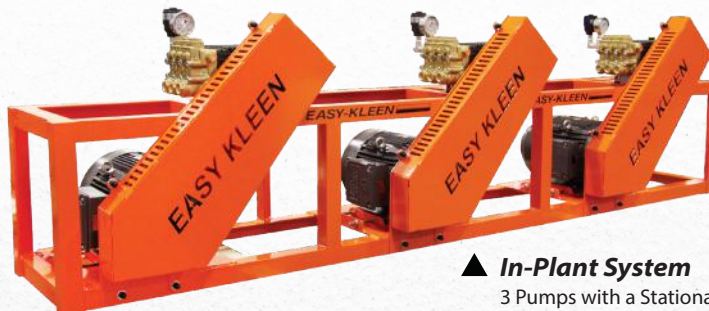

In-Plant System

3 Pumps with a Stationary Horizontal Stack Frame.




Vac Truck Heater/Jetting Combo Unit

20 GPM @ 4000 PSI
96" x 40" x 68"



PTO Custom Unit

Made as attachment
for a tractor.
30 GPM @ 3000PSI

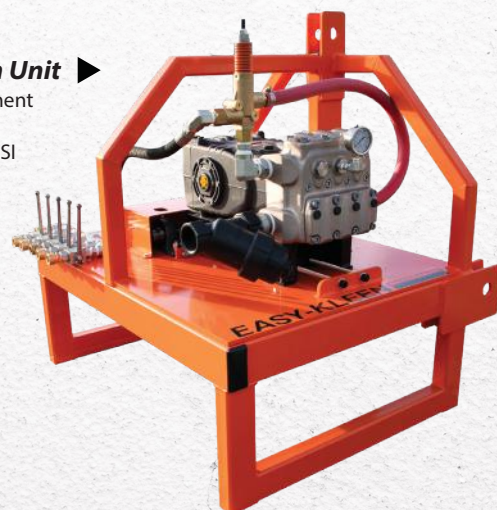

Custom Setup within Enclosed Trailer

Two Split Unit **Bull Mose Series Hot Water Pressure Cleaning Systems**, 26 HP, 5 GPM @ 5000 PSI and 4 GPM @ 7000 PSI
730 Gallon Water Tank, Exhaust Vent Kit with Flip Lid and Safety Control, Steam Option, Mega Flex Drain Cleaning Kit, two 300' A-Frame Hose Reels,
35 Gallon Antifreeze Kit.

Ideal for pre-washing heavy equipment, lumber and rental yards, mining operations, and tracked vehicles. This high volume unit delivers 100 gallons per minute which allows for easy removal of heavy mud in the pre-washing stage shorting the washing cycle.

Pump (Centrifugal Pump)

- Direct Drive

Electric Motor (7.5 HP)

- 1750 RPM • TEFC • 1.25 Service Factor
- High Efficiency • Continuous Duty

Electrical Control Panel

- Nema 4 • Water Tight • Easy Access
- Trigger Gun controlled Auto Stop/Start with Time Delay

Frame

- All Welded • Powder Coated

Options & Accessories

- Hose Reel



HVLP10060

MODEL	GPM	PSI	HP	DRIVE RPM	VOLTAGE	L" X W" X H"
HVLP10060-3-575	100	60	7.5	1,750	575 V-3PH	25.5" X 48.5" X 46.25

ALUMINUM & STAINLESS STEEL OPTIONS

Aluminum & Stainless Steel Options

- Coils, Frames, Pumps, Hose Reels, & Fittings

- Aluminum and stainless steel frames are ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining.
- All units can be ordered with Aluminum or Stainless Steel Frames.
- Stainless steel pumps, fittings, and coils are available for food grade usage.



**Built In-House!
Stainless Steel
A-Frame
Hose Reel**

Capacity: 150' or 300'
HOS-HR150HP-A-SS-IH
HOS-HR300HP-A-SS-IH



MOBILE & ON-SITE SERVICE REPAIR

EASY-KLEEN
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

Extend the Life of your Pressure Washer!

- Easy-Kleen branches have service technicians on-hand who are trained to perform in-house and on-the-road service.
- Service for All Makes & Models of High Pressure Cleaning Equipment
- An Experienced Pressure Washer Service Team - **Service Reps with 20 Plus Years of Experience Each**
- The Largest Parts Inventory In Canada
- Distributor for All Major Pump & Parts Brands General • Pratissoli • Cat • Giant • Comet • AR
- Preventative Maintenance Packages
- Engineering & Design Service
- Coast-To-Coast Mobile Service
- Fly Out Immediate Service
- 24-Hour Service
- Free Phone-In Help Line

Easy-Kleen branches have service technicians on-hand who are trained to perform in-house and on-the-road service.



MOBILE & ON-SITE SERVICE REPAIR!



Mobile Service: Our service team can help you maximize productivity by keeping your pressure system serviced and maintained, so you can clean faster and more efficiently!

On-Site & In-House Repair:

- Service Vans on call daily
- We perform repairs on all makes and models of pressure washers in the following locations:

Mobile Service: Nova Scotia, New Brunswick, PEI, Quebec, Ontario, & Alberta

In-House Service: Sussex, Montreal, Concord, Cambridge, Edmonton, & Red Deer

We have replacement pumps and parts for all your cleaning equipment.

Just Some Of The Services We Offer:

SERVICE MAINTENANCE PACKAGE

Not only will we survey your unit for leaks, scale buildup, and burner emissions, but we will also check oil levels, filters, belt tension, pulley alignment, hoses, and electrical switches.

OIL CHANGE


We will take care of everything "Oil!" Our service techs will change your pressure washer's oil while inspecting leaks, pump and engine oil levels, and your oil filter.

COMPLETE PUMP REBUILD

Our technicians have many years experience and will provide the highest quality pump & mechanical seal repairs, pump rebuilds, and pump service.

MONTHLY/QUARTERLY/ ANNUAL SERVICE

On-site inspections, preventative replacements, project planning, asset management, and service life calculations are utilized when our trained service techs evaluate your equipment.




Ask us! We stock all brands and models of rotary nozzles for your preference.

ROTARY NOZZLES - COMMERCIAL DUTY



Rotating nozzles increases the force in which you clean. It easily cuts through tough cleaning jobs in half the time. Rated at 212° F



NOZ-RN365##	UP TO 3600 PSI
NOZ-RN400##C	ECONOMICAL - UP TO 4000 PSI - 212° F 1/4 FNPT INLET BRASS
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

GIANT™ ROTARY NOZZLES



Giant's original Turbo Laser™ nozzles takes the power of a zero-degree nozzle and rotate it in either a circular or linear fashion. This allows the user to clean up to 70% faster than with a conventional zero-degree nozzle.

NOZ-RN360##G	3600 PSI , 195° F
NOZ-RN600##G	5800 PSI , 195° F
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

ROTARY SEWER / CULVERT NOZZLES



These rotating nozzles add extra agitation speeding up your work, as the reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4000 PSI

NOZ-SWR18-5.5R	1/8", 5.5 ORIFICE - 3 BACK
NOZ-SWR14-5.5R	1/4", 5.5 ORIFICE - 3 BACK
NOZ-SWR38-6R	3/8", 6.0 ORIFICE - 3 BACK

QUICK COUPLER NOZZLES



Contains complete set of 5 quick coupler nozzles for various spray patterns. Includes one black soap nozzle. Rated @ 4000 PSI max

KIT-NZPK0##	ORIFICE SIZE (5 PACK) - 0°/15°/25°/45°/SOAP
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

IDENTIFICATION KEY - REFER TO PAGE 1 FOR SIZING

°	DEGREE
##	ORIFICE SIZE

NOZZLES & WAND ACCESSORIES

PIT BOSS



Sludge sucker uses a high pressure water stream (1000-3000 PSI) to suck the sludge off the bottom of pits or tanks and ejects it through a 1-1/2" (15' long) hose to a disposal tank. The base unit attaches to the end of a pressure washer lance with a quick coupler for extension to the bottom of the pit. Uses a 0° tip for suction/power ejection.

ACC-PBSK	SLUDGE SUCKER KIT WITH NOZZLE, 5.5 NOZZLE 4000 PSI, 104°F
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

ROTARY NOZZLES - HEAVY-DUTY



The fully stainless steel model works at a higher pressure. Rated at 190° F

NOZ-RN510##	UP TO 5100 PSI
NOZ-RN870##	UP TO 8700 PSI
NOZ-RN110##	UP TO 11,000 PSI
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

MEG NOZZLE



Hardened stainless steel nozzle for high pressure washes. A great, standard, high pressure, high heat multi-job nozzle.

NOZ-1/4MEG##	5000 PSI RATED TO 7000 PSI MAX
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

SEWER / CULVERT NOZZLES



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4200 PSI

NOZ-SWR18-5.5	1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR14-5.5	1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR38-5.5	3/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK

ROTARY TIP FILTER



Protect your turbo nozzle from damage caused by debris in the water flow and prolongs the life of your tip.

NOZ-RNF5000-14	1/4" INLET/ OUTLET, 5000 PSI, 300°F
NOZ-RNF5000-14QC	1/4" QC PLUG X 1/4" MNPT - 5000 PSI

BARRACUDA ROTARY NOZZLE



Considered industry standard for speed controlled rotary shotgunning.

NOZ-AP4-##	ATTACK TIP, 1/4" MVPT
NOZ-RN-BC-K	4.4-11 GPM, 2000 TO 21,750 PSI, 1/4" PORT (REQUIRES ATTACK TIPS)
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

WET SANDBLAST KIT



Suction fed injection of sand and water to peel paint and rust from metal effortlessly with no dust. Leaves surface ready to prime. For 3 GPM up to 10 GPM flow.



ACC-SNDBLKT	FOR MACHINES 3000 PSI +, MUST SIZE NOZZLE. 0° UP TO 5500 PSI
-------------	--

NOZZLES & WAND ACCESSORIES

- CONTINUED

HYDRO EXCAVATION NOZZLE



Dig faster, save water! The Ripsaw Rotating Turbo nozzle is specifically designed and engineered for the rugged Hydro-Excavation industry. It's cone shaped flow pattern (18°) is ideal for potholing applications. 35% Faster than Regular Rotary Tips.



NOZ-RS32040	RIPSAW - 3200 PSI, 4.0, 180°F
-------------	-------------------------------

GUTTER CLEANER



This accessory allows you to clean your gutters from the ground. No more getting up and down the ladder with gloved hands!



ACC-GC12	12" GUTTER POLE, 4000 PSI, 200°F
----------	----------------------------------

WATER BROOM



Fits 1/4" wand
Ideal for cleaning floors, decks, driveway, and great for industrial flat surfaces.



ACC-WTRBRM4	4 NOZZLE 1/4" - 24" BROOM (MUST ADD NOZZLES) 4000 PSI RATED @ 140°F
-------------	---

SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES (Spray Nozzles Needed For Operation)

SURFACE CLEANER



Used for removing dirt and grime from brick, concrete, sidewalks, driveways, shop floors in a contained fashion. Rated at 194°F, 12 GPM
Two nozzles required

ACC-SRFLNR24	STAINLESS STEEL - 24" 4000 PSI RATED
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

STEAM NOZZLES



NOZ-STM38-1.6 NOZ-STM14-1.5F

For cleaning and thawing operations. Great for de-icing. For installation on steam wand WAN-STM see page 60.

NOZ-STM14-1.5F	FLAT, 1.5 MM, BRASS
NOZ-STM38-BLK	BRASS, BLANK STEAM

FOAM CANNONS



NOZ-FMR4830T



NOZ-FMR-COM



Allows full chemical coverage and activation. Ideal for vehicle and house washing.



NOZ-FMR4830

NOZ-FMR4830	C/W 1.5 MM INJECTOR, 4.8 GPM @ 3000 PSI, 1/4" FEMALE CONNECT
NOZ-FMR4830T	WITH INJECTOR C/W BOTTLE, 4.8 GPM @ 3000 PSI, 1/4" FEMALE CONNECT
NOZ-FMR-COM	COMPACT FOAMER, 1-5 GPM @ 2500 PSI, 1/4" FEMALE CONNECT

UNDERCARRIAGE CLEANER



Used for cleaning under cars, trucks and equipment. Ideal for detailing, rust check, vehicle repair centers, and firehouses. Rated at 194°F, 4000 PSI
5'5" Reach, Two nozzles required

ACC-UCC	UP TO 4000 PSI RATED
SPECIFY GPM & PSI TO ENSURE CORRECT NOZZLES	

GUN & WAND ASSEMBLIES

TRIGGER GUNS



GUN-TG5010



GUN-TG5012-RX



GUN-TG7221-12



GUN-TG4010W



GUN-HV1732



GUN-WG1635S



GUN-LG3216-12-HE

Easy-Kleen offers a variety of pressure washer trigger guns.

GUN-TG5010	GENERAL PUMP GUN, 300°F, 5000 PSI , 10 GPM, 3/8" INLET, 1/4" OUTLET
GUN-TG5010V	PA VEGA 250, 300°F, 5000 PSI , 10 GPM, 3/8" INLET, 1/4" OUTLET
GUN-TG5012RX	RELAXED TRIGGER GUN, 300°F, 5000 PSI , 12 GPM, EASY PULL, HEAVY-DUTY , 3/8" INLET, 1/4" OUTLET
GUN-TG5680RX	RELAXED TRIGGER GUN, 5600 PSI , 8 GPM, EASY PULL, RELOAD GUN , 3/8" INLET, 1/4" OUTLET
GUN-TG7221-12	PA BIG GUN, 210°F, 8100 PSI , 21 GPM, RELOAD GUN , 1/2" INLET/OUTLET
GUN-TG4010W	TRIGGER GUN, WEEPING, 300°F, 4000 PSI , 10 GPM, FOR COIN OPERATED CAR WASHES , 3/8" INLET, 1/4" OUTLET
GUN-HV1732	TRIGGER GUN, HIGH VOLUME, 300°F, 1950 PSI , 32 GPM, 1/2" INLET/OUTLET
GUN-WG1635S	WASH DOWN GUN, 16 GPM, 350 PSI , HIGH FLOW LOW PRESSURE
GUN-LG3216-12-HE	TRIGGER GUN, HYDRO EXCAVATION, 3200 PSI , 16 GPM, 1/2" INLET/OUTLET

WANDS



WAN-SLH


Zinc coated, molded grip.
1/4" Male pipe thread.
Also available in stainless steel.
Rated at 300°F

WAN-SL36



WAN-SLH	SIDE HANDLE GRIP FOR 1/4" PIPE WAND
WAN-SL12	12" INSULATED SINGLE LANCE
WAN-SL24	24" INSULATED SINGLE LANCE
WAN-SL36	36" INSULATED SINGLE LANCE
WAN-SL48	48" INSULATED SINGLE LANCE
WAN-SL36-SS	36" INSULATED SINGLE LANCE, STAINLESS STEEL
WAN-SL40SS-12	40" SINGLE LANCE, STAINLESS STEEL, 1/2" MNPT
WAN-SL59	59" INSULATED SINGLE LANCE
WAN-SL79	79" INSULATED SINGLE LANCE
WAN-SL48SS-SH-12	48" SINGLE LANCE C/W SIDE HANDLE, STAINLESS STEEL

GUN/WAND/QUICK COUPLER ASSEMBLY



KIT-GW36

Complete assembly for pressure washing. Quick attach for quick assembly with the GUN-TG5010 or GUN-TG5010V. Rated at 10 GPM @ 5000 PSI. (Add "V" to upgrade to Vega Gun)

KIT-GW12	KIT - 5000 PSI GUN, 12" WAND, QC & NIPPLE
KIT-GW24	KIT - 5000 PSI GUN, 24" WAND, QC & NIPPLE
GUN-GW36	KIT - 4000 PSI GUN, 36" WAND, QC & NIPPLE
KIT-GW36V	KIT - 5000 PSI VEGA GUN, 36" WAND, QC & NIPPLE
GUN-GW48	KIT - 5000 PSI GUN, 48" WAND, QC & NIPPLE
KIT-GW59	KIT - 5000 PSI GUN, 59" WAND, QC & NIPPLE
KIT-GW79	KIT - 5000 PSI GUN, 79" WAND, QC & NIPPLE

O-RINGS



1/4"

O-Rings for AP, Hansen, Foster, Parker, and other quick-coupler brands. Viton to 300°F

ORG-QC14HT	QC, 1/4", HIGH TEMP
ORG-QC38HT	QC, 3/8", HIGH TEMP
ORG-QC12HT	QC, 1/2", HIGH TEMP

HARNESS




Used with extension wands to help stabilize and support the wand for ease of use.

WAN-HRNS	SUPPORT BELT
----------	--------------

IT IS RECOMMENDED TO PAIR THIS ITEM WITH THE EXTENSION WANDS FOR SAFETY & CONTROL

STEAM WAND



WAN-STM

Must be used in steam application.
Safety guard around wand.

GUN-STM12-38SW

GUN-STM12-38 SW	STEAM TRIGGER GUN. 0 GPM @ 1500 PSI & 350°. INLET: 1/2" FPT OUTLET: 3/8" FPT DUE TO LIABILITY WE DO NOT INSTALL ON STEAM SYSTEMS
WAN-STM38	3/8" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM12	1/2" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM34	3/4" STEAM WAND WITH EXPANDED METAL GRIP
WAN-STM1	1" STEAM WAND WITH EXPANDED METAL GRIP

BRASS QUICK COUPLERS



For speedy and sturdy interchanging of tools and attachments.
Disconnect coupler band rated at 5000 PSI, 210°F

STANDARD QUICK COUPLER

FIT-QC14F/M	1/4" FNPT/MNPT, BRASS
FIT-QC38F/M	3/8" FNPT/MNPT, BRASS
FIT-QC12F/M	1/2" FNPT/MNPT, BRASS

STANDARD QUICK COUPLER NIPPLES

FIT-QCN14F/M	1/4" FNPT/MNPT, BRASS
FIT-QCN38F/M	3/8" FNPT/MNPT, BRASS
FIT-QCN12F/M	1/2" FNPT/MNPT, BRASS

STAINLESS STEEL QUICK COUPLERS



For speedy and sturdy interchanging of tools and attachments.
Disconnect coupler band rated at 5000 PSI, 210°F

STAINLESS STEEL QUICK COUPLER

FIT-QC14F/M-SS	1/4" FNPT/MNPT, STAINLESS STEEL
FIT-QC38F/M-SS	3/8" FNPT/MNPT, STAINLESS STEEL
FIT-QC12F/M-SS	1/2" FNPT/MNPT, STAINLESS STEEL
FIT-QC12F-SS-L	1/2" FNPT, STAINLESS STEEL, LOCKING TYPE

STAINLESS STEEL QUICK COUPLER NIPPLES


FIT-QCN14F/M-SS	1/4" FNPT/MNPT, STAINLESS STEEL
FIT-QCN38F/M-SS	3/8" FNPT/MNPT, STAINLESS STEEL
FIT-QCN12F/M-SS	1/2" FNPT/MNPT, STAINLESS STEEL
FIT-QCN12F-SS-L	1/2" FNPT, STAINLESS STEEL, LOCKING TYPE

FITTINGS



FIT-S1003-B	HEX COUPLING, 1/4", FNPT
FIT-S1022-C	HEX NIPPLE, 3/8", STEEL (WMM0003GS)
FIT-S1022-CB	HEX NIPPLE, REDUCING, 3/8" X 1/4", STEEL (WMM0302GS)
FIT-S1022-D	HEX NIPPLE, 1/2", STEEL (WMM0004GS)
FIT-S1022-DB	HEX NIPPLE, REDUCING, 1/2" X 1/4", STEEL (RCF0402SS)
FIT-S1022-DC	HEX NIPPLE, REDUCING, 1/2" X 3/8", STEEL (WMM0403GS)
FIT-S1022-EC	HEX NIPPLE, REDUCING, 3/4" X 3/8", STEEL

EXTENSION WANDS

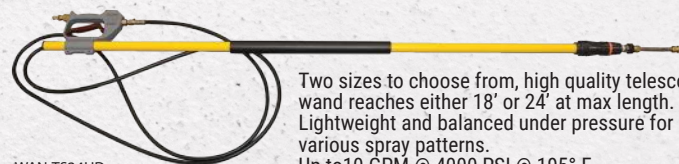

WAN-TS24HD

Two sizes to choose from, high quality telescoping wand reaches either 18' or 24' at max length. Lightweight and balanced under pressure for various spray patterns.
Up to 10 GPM @ 4000 PSI @ 195° F

WAN-TS18HD	18', EXTENSION WAND
WAN-TS24HD	24', EXTENSION WAND

DUAL LANCE WANDS



WAN-DL38SN

Controls soap at handle for low pressure application.

WAN-DL38SN	36", WITH KNOB & SOAP NOZZLE
WAN-DL38SN-SH	36", WITH SIDE HANDLE & SOAP NOZZLE
NOZZLE 1/4" TIP EXTRA - HIGH PRESSURE	
SPECIFY PSI & GPM	

GUN & WAND ASSEMBLIES

- CONTINUED

GUN & WAND COMBOS



GUN-GW30-HDI

GUN-GW36-XHP	PA VEGA, 7000 PSI (7207 - 38" GUN/WAND/QUICK COUPLER ASSEMBLY - 36" STAINLESS STEEL)
GUN-GW48HT-XHP	48" WAND, 7250 PSI , 21 GPM, 1/2", 210°F
GUN-GW30-HDI	GUN/WAND COMBO, 22,000 PSI , HEAVY-DUTY INDUSTRIAL, 10.6 GPM. W/ 30" WAND
NOZZLE EXTRA	

FLEX WANDS & PUSH PULL LANCE



Flexes for hard to clean areas. Ideal for car washes.

WAN-FLX18G2B	18", 2500 PSI , 1/4" MNPT INLET/OUTLET, 200°F (AVAILABLE IN BLUE, RED, & BLACK)
WAN-FLX90-5	90° FLEXIBILITY, 5000 PSI
WAN-PPL34SS	34" PUSH/PULL LANCE, STAINLESS STEEL, 3050 PSI

HOSES

JOINER HOSE - 4000 PSI



HOS-JNR6

Single Braid
Connects short distances.
Rated at 4500 PSI and 250° F

HOS-JNR2	3/8" X 2' (BETWEEN PUMP & COIL, COMMERCIAL UNITS)
HOS-JNR3	3/8" X 3' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR4	3/8" X 4' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR6	3/8" X 6' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
HOS-JNR10	1/2" X 10' SOLID X SWIVEL MALE ENDS, 4500 PSI - 250° F
AVAILABLE AT CUSTOM LENGTH - 3000 TO 6000 PSI	

HOSE - 1/2" 15,000 PSI



HOS-XXHP50-12

Double Braided
Rated at 15,000 PSI
250° F

HOS-XXHP50-12	1/2" X 50' C/W MALE ENDS, 15,000 PSI
HOS-XXHP100-12	1/2" X 100' C/W MALE ENDS, 15,000 PSI
HOS-XXHP250-12	1/2" X 250' C/W MALE ENDS, 15,000 PSI, 250°F

SWIVEL



FIT-HPS38MFSS



FIT-HPS38MF

Allows your hose to swivel under high pressure. No more tangled hose!

BRASS

FIT-HPS14MF	1/4", MALE X FEMALE, 10.5 GPM @ 4050 PSI , 194°F
FIT-HPS38MF	3/8", MALE X FEMALE, 10.5 GPM @ 4050 PSI , 194°F
FIT-HPS12MF	1/2", MALE X FEMALE, 10.5 GPM @ 4050 PSI , 325°F

STAINLESS STEEL

FIT-HPS14MFSS	1/4", MALE X FEMALE, 10.5 GPM @ 5600 PSI , 194°F
FIT-HPS38MFSS	3/8", MALE X FEMALE, 10.5 GPM @ 5600 PSI , 194°F
FIT-HPS12MFSS	1/2", MALE X FEMALE, 27 GPM @ 3500 PSI , 180°F

BLUE (B), GREY (G), & YELLOW (Y) NON-MARKING HOSE - 4500 PSI



Single Braid
Hose that does not mark.
Rated at 4500 PSI
250° F

HOS-HW50B	HOS-HW50Y	HOS-HW150G	Insert color initial for color choice "()"
HOS-HW50(-)	3/8" X 50'		
HOS-HW100(-)	3/8" X 100'		
HOS-HW150(-)	3/8" X 150'		
HOS-HW200(-)	3/8" X 200'		
HOS-HWREEL650(-)	3/8" X 650		
HOS-HW25-14(-)	1/4" X 25'		
HOS-HW50-14(-)	1/4" X 50'		
HOS-HW100-14(-)	1/4" X 100'		

WET STEAM HOSE



Hoses used for wet steam.
Rated at 325° F

3/8" - 3000 PSI - 325° F	
HOS-STM50-38	3/8" X 50'
HOS-STM100-38	3/8" X 100'

1/2" - 350 PSI - 325° F	
HOS-STM50-12	1/2" X 50'
HOS-STM100-12	1/2" X 100'

STANDARD HOSE - 4000 PSI



Single Braid
Rated at 4000 PSI
250° F

3/8"		1/2"	
HOS-HW25	3/8" X 25'	HOS-HW50-12	1/2" X 50'
HOS-HW50	3/8" X 50'	HOS-HW100-12	1/2" X 100'
HOS-HW100	3/8" X 100'	HOS-HW150-12	1/2" X 150'
HOS-HW150	3/8" X 150'	HOS-HW200-12	1/2" X 200'
HOS-HW200	3/8" X 200'		

HOSE - 3/8"



HOS-HP100

Double Braided



HOS-XHP50-38

6000 PSI - 250° F		8000 PSI - 250° F	
HOS-HP50	3/8" X 50'	HOS-XHP50-38	3/8" X 50'
HOS-HP75	3/8" X 75'	HOS-XHP100-38	3/8" X 100'
HOS-HP100	3/8" X 100'	HOS-XHP200-38	3/8" X 200'
HOS-HP150	3/8" X 150'		
HOS-HP200	3/8" X 200'		

HOSE - 1/2"



Double Braided
Rated at 6000 PSI
250° F

6000 PSI - 250° F		10,000 PSI - 250° F	
HOS-HP50-12	1/2" X 50'	HOS-XHP50-12	1/2" X 50'
HOS-HP100-12	1/2" X 100'	HOS-XHP100-12	1/2" X 100'

MEGA-FLEX DRAIN CLEANING KIT



KIT-5110-100

Used for cleaning drains, culverts, downspouts, as well as thawing and unclogging pipes. Stainless steel drain nozzle included (NOZ-SWR).



KIT-5110-50-18	1/8" X 50', 4800 PSI , 160°F
KIT-5110-100-18	1/8" X 100', 4800 PSI , 160°F
KIT-5110-50-14	1/4" X 50', 4350 PSI , 212°F
KIT-5110-100-14	1/4" X 100', 4400 PSI , 212°F
SPECIFY PSI & GPM - SEE FIRST PAGE FOR CHART	

CLEAR CHEMICAL HOSE - 1/4"



CEM-HOSE3

Clear hose with suction filter.

CEM-HOSE3	3' ASSEMBLY COMPLETE WITH SUCTION FILTER, 55 PSI
-----------	--

LOW PRESSURE HOSE - 3/4"



Low pressure hose. Used between the water tank and the Pressure Washer to supply the Pressure Washer with water.

HOS-BYP38 K	3/8", LOW PRESSURE, BLACK
HOS-BYP12 K	1/2", LOW PRESSURE, BLACK
HOS-AIR12	1/2", 200 PSI, RED
HOS-AIR34	3/4", 200 PSI, RED
HOS-AIR38	3/8", 200 PSI, RED
HOS-AIR1	1", 200 PSI, RED
HOS-AIR112	1-1/2", 200 PSI, RED


HOSE REELS

Hoses are NOT included with Hose Reels, please see our Hoses section for purchasing.

A hose reel will extend the life of your high pressure cleaning hose considerably by providing safe tangle and kink free storage. It will also save you time when using and storing your high pressure cleaning equipment.

Every machine should have one!


12V OR 120V HOSE REEL - INDUSTRIAL



Capacity: 300' or 500', Industrial 12 or 120 Volt Hose Reel.

KIT-HR300HP-12V-BLK	ELECTRIC DRIVEN HOSE REEL KIT, C/W 12 VOLT MOTOR & ROLLER BRACKET, 300' CAPACITY
HOS-HR325HP-120V-B	120V, 300' CAPACITY
HOS-HR500HP-12V-BLK	12V, 500' CAPACITY
OTHER 120V MODELS AVAILABLE	

U-FRAME HOSE REEL



Capacity: 150' Commercial Hot Water unit mount on plate for easy installation. Rated at 5000 PSI, 3/8" Coupler

HOS-HR150HP-U-BLK	HIGH PRESSURE U FRAME HOSE REEL, 150 FOOT, MANUAL, BLACK
KIT-HR150HP-3-BLK	HOSE REEL KIT 150' CAPACITY & 3' JOINER HOSE (CAN BE FACTORY INSTALLED ON UNIT PER REQUEST)

HOSE REEL TROLLEY KITS



KIT-HR150WK




KIT-HR300WK

For the ability to move hose around easily. Hose and joiner hose not included.

KIT-HR150WK	150' CAPACITY HOSE REEL WITH WHEEL KIT
KIT-HR300WK	300' CAPACITY HOSE REEL WITH WHEEL KIT

A-FRAME HOSE REEL - INDUSTRIAL



HOS-HR300HP-A-BLK

Can be mounted on various units. Rated at 5000 PSI, 1/2" Coupler

HOS-HR150HP-A-BLK	150' CAPACITY
HOS-HR300HP-A-BLK	300' CAPACITY
HOS-HR450HP-A-BLK	450' CAPACITY

EASY-KLEEN - STAINLESS STEEL HOSE REEL



HOS-HR300HP-A-SS-IH

Constructed in-house. Ideal for corrosive or sanitary environments such as food and fish plants, offshore saltwater operations, mills, and mining. Rated at 5000 PSI

HOS-HR150HP-A-SS-IH	150' CAPACITY
HOS-HR300HP-A-SS-IH	300' CAPACITY

HOSE REELS

- CONTINUED

Hoses are **NOT** included with Hose Reels, please see our Hoses section for purchasing.

360° PIVOT HOSE REEL



Hose reel that swivels to allow directional change while unraveling. Rated at 5000 PSI and 194° F

HOS-PHR100	HOSE REEL - 360° PIVOT, 3/8" X 100' CAPACITY
HOS-PHR-MB	MOUNTING BRACKET FOR PIVOT HOSE REEL (Needed to Mount above Hose Reel)

SPRING DRIVEN HOSE REEL



Ideal for use in garage and wash-bay setups. Self winding. Rated at 3000 PSI 100' capacity. Optional Stainless Steel



HOS-TMPL-N-3100	100', BLUE, RETRACTABLE
HOS-HSP38	HOSE STOP 3/8"
HOS-HSP12	HOSE STOP 1/2"
HOS-TMPL-N-3100-SS	OPTIONAL STAINLESS STEEL

GREASEABLE SUPER SWIVELS



Upgraded swivel for hose reels. 90° stainless steel swivel with grease nipple, 5000 PSI, 400°F (Mount on any hose reel, except 360° pivot).

HOS-SSW38SS90F	3/8" FMPT X 3/8" FMPT, 5000 PSI
HOS-SSW12SS90F	1/2" FMPT X 1/2" FMPT, 5000 PSI
HOS-SSW34SS90F	3/4" FMPT X 3/4" FMPT, 5000 PSI
HOS-SSW1SS90F	1" FMPT X 1" FMPT, 5000 PSI
HOS-SSW38SS90MF	3/8" MNPT X 3/8" FMPT, 5000 PSI
HOS-SSW12SS90MF	1/2" MNPT X 1/2" FMPT, 5000 PSI

HOSE REEL STANDS (ONLY)



FRAME-HRSX1



FRAME-HRSX2

Elevates the hose reel, making it easier to use, store, and access.
Hose, hose reels, and tank not included.

FRAME-HRSX1	1-HOSE REEL
FRAME-HRSX2	2-HOSE REELS
FRAME-HRSX3	3-HOSE REELS
TAN-35GAL	C/W 35 GAL TANK OPTIONAL

PIVOTING HOSE GUARDS



Guides hose while in use, protecting the hose and extending its lifespan.

HOS-PHG18	18" DRUM, FOR HR325 REELS - 325' HOSE REELS
HOS-PHG28	28" DRUM, FOR HR500 REELS - 500' HOSE REELS


BALL VALVES



Full port steel ball valves. Carbon steel and Stainless Steel construction. Female NPT threads.

CARBON	
KIT-BVCS-C-HP-QD	WITH QC, 3/8", 7000 PSI @ 180°F
KIT-BVCS-D-HP-QD	WITH QC, 1/2", 7000 PSI @ 180°F
BAL-BVCS3W-C	3-WAY - 3/8" FNPT - 7250 PSI - CARBON STEEL
STAINLESS STEEL	
KIT-BVSS-C-HP-QC	WITH QC, 3/8", 5800 PSI
KIT-BVSS-D-HP-QC	WITH QC, 1/2", 5800 PSI

HOSE REEL - ROLLER BRACKET GUIDE

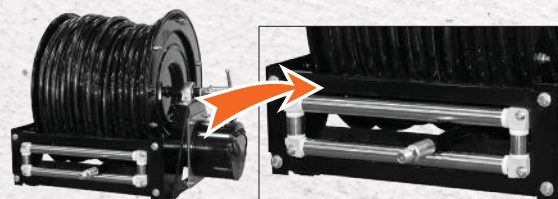

Easier to roll up hose, protecting and extending its life span.

HOS-RB-BTM12-BLK	BOTTOM, 12" DRUM, BLACK
------------------	-------------------------

HYDRAULIC HOSE REEL - HIGH PRESSURE



HOS-HR500HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 500' OF 1/2" HP HOSE / 300' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED
HOS-HR1000HP-HYD	180°, RIGHT & LEFT SWIVEL (HOLDS 1000' OF 1/2" HP HOSE / 600' OF 3/4" JETTER HOSE) HOSE NOT INCLUDED

DEMA INLINE HIGH PRESSURE CHEMICAL INJECTOR



Allows the chemical to go on at high pressure. Manual ON/OFF ball valve control. Also allows you to be able to meter the amount of chemical coming out.

KIT-CEM-DA203-B	KIT - 2 TO 3 GPM
KIT-CEM-DA204-B	KIT - 4 GPM
KIT-CEM-DA206-B	KIT - 5 TO 6 GPM

HIGH VOLUME FOAMER



ACC-LF916105G

Comes with gauges. Requires 35 - 125 PSI water and compressed air. 5 CFM - up to 142 Comes with metering tips, 50' hose, mounting bracket.

ACC-LF916105G	AIR AT HIGH PRESSURE FOAM INJECTION SYSTEM WITH BALL VALVE AND 50' HOSE AND NOZZLE ASSEMBLY
CALL FOR MODEL NUMBER	DOWNSTREAM CHEMICAL INJECTION AT 50% PRESSURE (AFTER COIL)

ACID PUMP



Great for acid application. Only to be wired to cord or 12V.

PMP-DP115-1460	1.4 GPM @ 60 PSI, 115V
PMP-DP12-1260	1.2 GPM @ 60 PSI, 12V
PMP-DP12-17100	1.7 GPM @ 100 PSI, 12V
PMP-DP12-3545	3.5 GPM @ 45 PSI, 12V

SOLENOID CONTROLS



CEM-RSS-2CD

Control chemical activation in wash bay ON/OFF wired to solenoid control.

CEM-RSS-1	SINGLE CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)
CEM-RSS-1CD	SINGLE CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH BAY UNITS) FLOAT TANK UNITS
CEM-RSS-2	DUAL CHEMICAL SOLENOID CONTROL (ON FLOAT TANK UNITS - NO CORD)
CEM-RSS-2CD	DUAL CHEMICAL SOLENOID CONTROL WITH 50' CORD (WASH BAY UNITS)

CHEMICAL SPRAYER



The chemical sprayer is great for acid or chemical application. ON/OFF control at wand. With painted or Stainless Steel (SS) enclosure.

KIT-ECS-120V	PUMP 120V
KIT-ECS-120VSS	PUMP 120V STAINLESS STEEL
KIT-ECS-12V	PUMP 12V
KIT-ECS-12VSS	PUMP 12V STAINLESS STEEL

CHEMICAL MIXER



CALL FOR MODEL NUMBER	HYDRO-MINDER WITH STAINLESS STEEL GALLON TANK FOR CHEMICAL MIXING
CAR-MM100	4.5 GPM @ 40 PSI, INLET CONNECTION 3/4" FEMALE GARDEN HOSE

OIL & GAS FIRED OPTIONS

HIGH LOW GAS VALVES WITH DUAL TEMPERATURE CONTROLS



PRO-NG-DSGU-940



PRO-VS820A1278

To regulate temperature on system when using a two gun operation.

PRO-NG-DSGU-940	UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, NATURAL GAS
PRO-LP-DSGU-940	UPGRADE HIGH / LOW GAS VALVE WITH DUAL TEMPERATURE CONTROLS - 560,000 TO 940,000 BTU, FOR TWO GUN OPERATION, PROPANE
PRO-EMGV5	UPGRADE ELECTRONIC MODULATING GAS VALVE SYSTEM (MODULATES FLAME OF HEATER)
PRO-VS820A1278	UPGRADE UNIVERSAL HONEYWELL GAS VALVE, LP/NAT GAS, SINGLE VALVE, STANDING PILOT
PRO-S8610U3009	UPGRADE PILOT IGNITION CONTROL MODULE

OIL & GAS FIRED OPTIONS

- CONTINUED

RAIN CAP



This option keeps rain and snow from entering your coil, which increases coil and burner life.

FRAME-WRC	RAIN CAP/SCOOP WELDED ON COIL EXHAUST
PLEASE SPECIFY COIL SIZE TO FIT (16", 18", 20", 24", 30")	

DRAFT HOOD



For natural gas and propane, used for proper air flow. Add 30" of pipe between the pressure washer unit and draft hood for the best efficiency.

PRO-DH8-EK	8", UP TO 390,000 BTU
PRO-DH10-EK	10", 510,000 TO 720,000 BTU
PRO-DH12-EK	12", 940,000 BTU

POWER DAMPERS - 24 VOLT - LP/NG



ACC-GPD-8	8" POWER DAMPER, 24 VOLT
ACC-GPD-10	10" POWER DAMPER, 24 VOLT
ACC-GPD-12	12" POWER DAMPER, 24 VOLT
ACC-GPD-WK	UNIVERSAL WIRING KIT (REQUIRED)

POWER DAMPER - 120 VOLT



ACC-OVD-8	VENT DAMPER, 8", 120 VOLT
-----------	---------------------------

POWER VENTER



Combines the motor blower, and vent hood in one complete, easy to install unit.
***Requires additional control kit and wiring kit, found below.**

ACC-PV-CK-OIL	120 VAC SYSTEM CONTROL KIT FOR OIL FIRED EQUIPMENT
ACC-PV5	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 1.85 GPH FOR OIL / UP TO 290,000 BTU/HR FOR GAS - 4" TO 6"
ACC-PV8	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 4.75 GPH FOR OIL / UP TO 740,000 BTU/HR FOR GAS - 7" TO 9"
ACC-PV6-SS	SIDEWALL POWER VENTER - OIL & GAS FIRED EQUIPMENT - UP TO 2.65 GPH FOR OIL / UP TO 416,000 BTU/HR FOR GAS - 5" TO 7" - STAINLESS STEEL

OIL FIRED DRAFT INDUCERS



A must for buildings with fans or negative pressure.

ACC-DI-2	120 VOLTS, RECOMMENDED SPECS (522,000 BTU/HR TO 835,000 BTU/HR) (8" TO 12" PIPE)
ACC-DI-4	120 VOLTS, RECOMMENDED SPECS (900,000 BTU/HR TO 1,800,000 BTU/HR) (10" TO 16" PIPE)

POWER VENTER - CONTROL KIT

ACC-PV-CK	CONTROL KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA
ACC-PV-CK24V	CONTROL KIT - POWER VENTER - PLUG IN - 24 VOLT ELECTRIC DAMPENER

POWER VENTER - WIRING KIT **Requires Power Venter Unit*

ACC-PV-WK	WIRING KIT - POWER VENTER - DRAFT HOOD SYSTEMS - CSA
-----------	--

ELECTRIC MOTOR CONTROLS

VFD FOR ELECTRIC MOTOR CONTROLS



Variable frequency drive - Controls RPM of electric motor for required GPM.

VFD-10HP575V-3-N1	575V, 10 HP
VFD-20HP575V-3-N1	575V, 20 HP
VFD-30HP575V-3-21	575V, 30 HP
VFD-40HP575V-3-N1	575V, 40 HP
VFD-10HP460V-3-N1	460V, 10 HP
VFD-20HP460V-3-N1	460V, 20 HP
VFD-30HP460V-3-N1	460V, 30 HP
VFD-40HP460V-3-N1	460V, 40 HP

NEMA BOX UPGRADE



All Nema 4 boxes available in Stainless Steel.

ELS-NEMA4X	UPGRADE STAINLESS STEEL, WATER PROOF ELECTRICAL BOX
------------	---

GROUND-FAULT CIRCUIT INTERRUPTERS




Ground fault interrupter kicks out power when surge happens.

ELS-GFCI-120/20	2 HP - SINGLE PHASE ONLY
ELS-GFCI-240/30	5 HP - SINGLE PHASE ONLY
ELS-GFCI-240/40	7.5 HP - SINGLE PHASE ONLY

HEAVY-DUTY AUTO STOP START WITH SHUTDOWN TIMERS

This option gives you the ability to start and stop your unit by squeezing and releasing the trigger gun. This prevents the machine from sitting in bypass mode which will extend the life of your unit over time. It will also save you money because your resources are not being used when the machine is not in use.

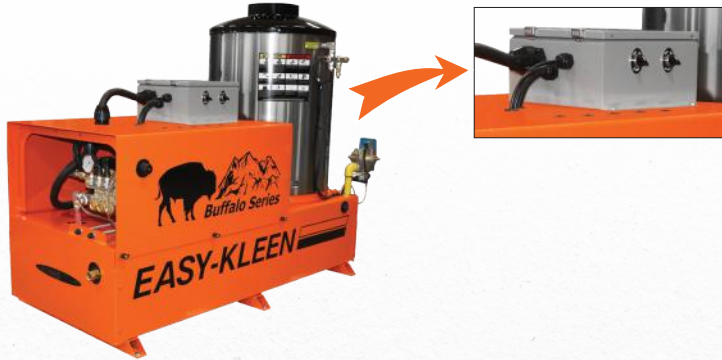

50HZ ELECTRIC MOTORS




Overseas voltage motors 50HZ.
Various HP.

ELS-CW380/50	UPGRADE 380V 50 HZ COLD WATER
ELS-HW380/50	UPGRADE 380V 50 HZ HOT WATER UPGRADE

COLD WATER UNITS

- FRAME OPTIONS & WHEEL KITS

FIREHOUSE DISPLAY BASE

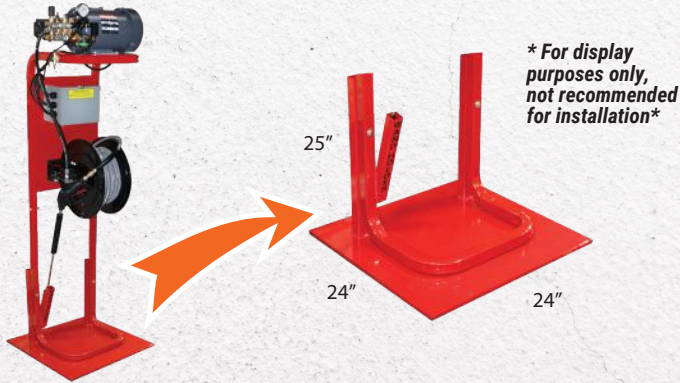

FRAME-FHF-DISPL	DISPLAY BASE FOR FIREHOUSE
-----------------	----------------------------

STAINLESS STEEL CASTERS



KIT-CASTER8-SS	8" CASTERS TWO SOLID, AND TWO SWIVEL W/LOCK, STAINLESS STEEL (AS SHOWN)
----------------	---

RECIPE TO ORDER

HDASS/HORSE POWER/VOLTAGE/PHASE

HDASS	HEAVY-DUTY AUTO STOP START - ALWAYS MUST BE AT START OF MODEL NUMBER
HORSE POWER	THE HORSE POWER OF THE UNIT - 2 HP, 5 HP, 7.5 HP, 10 HP, 15 HP, 20 HP, 25 HP, 30 HP, 50 HP
VOLTAGE	THE VOLTAGE OF THE UNIT - 110V, 208V, 220V, 230V, 460V, 575V
PHASE	THE PHASE OF THE UNIT - 1 PH OR 3 PH
NOTE	COMPONENT NUMBERS SHOULD NOT HAVE THE COMPONENT DESCRIPTION IN THE MODEL NUMBER

EXAMPLE

EZO2435E-GP	COMMERCIAL SERIES, HOT WATER PRESSURE CLEANING SYSTEM, OIL FIRED, 350,000 BTU. ELECTRIC, 5 HP, 230V-1PH , 3.5 GPM @ 2400 PSI, GENERAL PUMP
HDASS/5/230/1	5 HP, 230V, 1 PH

ELECTRICALLY HEATED TIMER

ACC-EHTMR	UPGRADE 24-HR TIMER FOR ELECTRICALLY HEATED UNITS, AUTOMATICALLY TURNS ON/OFF HEATER
-----------	--

EMERGENCY SHUT-OFFS

ELS-HTCO	UPGRADE HIGH TEMPERATURE SHUT DOWN (COLD WATER UNITS)
ELS-LWC	UPGRADE LOW INLET WATER SHUT DOWN

STAINLESS STEEL COLD WATER ROLL CAGES



All units can be ordered with aluminum or stainless steel frames. Stainless steel pumps and fittings are also available for food grade usage.

FRAME-CW57510BDERC-SS	ELECTRIC, BELT DRIVE, 5, 7.5, & 10 HP
FRAME-CW1520BDERC-SS	ELECTRIC, BELT DRIVE, 15 & 20 HP

COLD WATER CART



FRAME-ASCART-SM-AL	SMALL, FITS 6.5 HP GAS/2 HP ELECTRIC ACTION SERIES, ALUMINUM
FRAME-ASCART-LG-AL	LARGE, FITS 13 & 14 HP GAS/5 & 7 HP ELECTRIC ACTION SERIES, ALUMINUM
FRAME-ASCART-BD-AL	LARGE, ACTION SERIES ALUMINUM BELT DRIVE

COLD WATER UNITS

- FRAME OPTIONS & WHEEL KITS CONTINUED

COLD WATER SHROUD & FLAT BASE FRAMES



SHROUD



FLAT BASE

FRAME-CW57510DDFBWS	C/W SHROUD, ELECTRIC MOTOR FOR 5, 7.5, & 10 HP, 3 PH, DIRECT DRIVE
FRAME-CW57510BDFBWS	FOR ELECTRIC 5, 7.5, & 10 HP, 3 PH, BELT DRIVE
FRAME-CW101520BDFB	FLAT BASE OPEN FRAME - ELECTRIC MOTOR BELT DRIVE - 15 & 20 HP - 3 PH

COLD WATER LEG FRAME - FOR SHROUD & FLAT BASE UNITS



For cold water units with shroud and flat base.

FRAME-LS-3FT-ST575DDFB	36" FOR USE WITH FLAT BASE FRAME UNITS WITH 5/7.5/10 HP, 3 PH MOTORS
------------------------	--

WALL MOUNT FOR DIRECT DRIVE



Ideal for locations with limited floor space. This frame style allows your unit to be up and out of the way.

FRAME-WM25DD	COMMERCIAL DIRECT DRIVE PUMP, WALL MOUNTED FRAME 2/5/7 HP (ALTERNATIVE TO CART STYLE FRAME, NO ADDITIONAL COST)
FRAME-WMCW57510	INDUSTRIAL C/W FLAT BASE AND SHROUD, 5/7.5/10 HP

COLD WATER STACKED PUMP FRAMES



DOUBLE & TRIPLE STACKED PUMP FRAME (PRICE PER PUMP)	
FRAME-DS-2	DOUBLE STACK UP TO 10 HP
FRAME-TS-3	TRIPLE STACK UP TO 10 HP

INDUSTRIAL HOT WATER ELECTRIC UNITS

- FRAME OPTIONS & WHEEL KITS

INDUSTRIAL HOT WATER ELECTRIC WHEEL KITS

Mounted to **Hot Water Electric Frames**.



WHEEL KIT OPTIONS AVAILABLE

LEG FRAME



Regulations require gas fired machines must be a specified amount of distance away from combustible material. (Differs per region)

FRAME-LS-42"-GF2248	5/7.5/10 HP, 3 PH, 24"W X 42"H
CALL FOR MODEL NUMBER	10 HP, 1 PH, 27"W X 42"H
FRAME-LS-42"-GF2760	10/15/20 HP, 500,000 - 800,000 BTU, 29"W X 42"H
CALL FOR MODEL NUMBER	20 HP, 940,000 BTU GAS FIRED, 33"W X 42"H
CALL FOR MODEL NUMBER	50 HP, 42"W X 42"H

BRACKET OPTIONS



Ask about our propane engine and propane burner units.

STAINLESS STEEL FRAMES



Stainless steel frames are marine grade and ideal for use in fish and food applications.

STAINLESS STEEL OPTIONS AVAILABLE

PROPANE TANK BRACKET	
FRAME-LP-TB40	PROPANE TANK BRACKET, HOLDS 40 LB. TANK, C/W HOSE AND REGULATOR, FOR 290,000 BTU UNITS
FRAME-LP-TB100-B	PROPANE TANK BRACKET, 100 LB. C/W HOSE AND REGULATOR
CHEMICAL BUCKET BRACKET	
FRAME-CHEMBRKT	5 GAL.

RENTAL ROLL CAGE - WITH GRAB BAR



Rental Frame Option
with grab bar surround
for easy loading and
total protection.

EZO4035G-K-GP-12-RTL

UPGRADE

FRAME-MAG15-RTL	C/W BATTERY BOX, 13-15 HP, FOAM FILLED TIRES (FRAME UPGRADE) GRAB BAR SURROUND
-----------------	---

ALUMINUM & STAINLESS COMMERCIAL ROLL CAGE FRAME



Aluminum and Stainless Steel frames are ideal for corrosive or sanitary environments such as food and fish plants, salt water off shore operations, mills, and mining. Stainless Steel pumps and fittings are also available for food grade usage.

ALUMINUM

FRAME-MAG3RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC
FRAME-MAG4RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC
FRAME-MAG15RRC-AL	ALUMINUM COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS

STAINLESS STEEL

FRAME-MAG3RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 5 HP ELECTRIC
FRAME-MAG4RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 7.5 HP ELECTRIC
FRAME-MAG15RRC-SS	STAINLESS STEEL COMMERCIAL ROLL CAGE FRAME, 13-15 HP GAS

INDUSTRIAL WHEEL KIT



FRAME-GRIZZLY 1-WK	LIGHT - INDUSTRIAL HOT WATER GAS FRAME #2
FRAME-GRIZZLY 1-SUPERWHEELKIT	SUPER DUTY INDUSTRIAL HOT WATER GAS FRAME #2

COMMERCIAL WHEEL KIT - CRAB LEG EXTENSION



Upgrade to solid and sturdy caster wheels on crab leg extensions.

FRAME-WKIT-MAG	CASTER WHEEL KIT FOR ROLL CAGE FRAME 8" SWIVEL CASTERS / CRAB LEG EXTENSION
----------------	---

FOAM FILLED TIRES



Never have a flat tire again because of the sturdy, protective foam inside the tire.

RUB-TIRE13-FF	13", 3/4" AXLE - EACH
---------------	-----------------------

INDUSTRIAL FULLY ELECTRICALLY HEATED - FRAME OPTIONS & WHEEL KITS



FRAME-EHEATER-WK-2
Certified Lifting Eyes.
Double Coil



FRAME-EHEATER-WK-1
Certified Lifting Eyes.
Single Coil

STAINLESS STEEL EXTERIOR OPTIONS

FRAME-HTR1-SS	STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, SINGLE COIL UNIT, UP TO 48 KW
FRAME-HTR2-SS	STAINLESS STEEL EXTERIOR SHEET METAL FOR FULLY ELECTRICALLY HEATED, DOUBLE COIL UNIT, OVER 48 KW

STAINLESS STEEL TANK

FRAME-HTR1-SS-TANK	STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, SINGLE COIL UNIT, UP TO 48 KW
FRAME-HTR2-SS-TANK	STAINLESS STEEL HEAT EXCHANGER TANK FOR FULLY ELECTRICALLY HEATED, DOUBLE COIL UNIT, OVER 48 KW

WHEEL KIT

FRAME-EHEATER-WK-1	WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, SINGLE COIL , C/W HEAVY-DUTY CASTERS, LIFTING EYES
FRAME-EHEATER-WK-2	WHEEL KIT FOR A FULLY ELECTRICALLY HEATED UNIT, DOUBLE COIL , C/W HEAVY-DUTY CASTERS, LIFTING EYES

EXTRA CHARGE FOR NON MARKING CASTERS

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

DRY STEAM GENERATORS - FRAME OPTIONS & WHEEL KITS

DRY STEAM SKID - HORIZONTAL



Allows you to load and unload your complete dry steam package with ease.

SKID-STEAM-PU-225	MOBILE SKID FOR HORIZONTAL DRY STEAMER 225 GAL. TANK
SKID-STEAM-PU-325	MOBILE SKID FOR HORIZONTAL DRY STEAMER 325 GAL. TANK

DRY STEAM SKID - VERTICAL



Allows you to load and unload your complete dry steam package easily with the use of the forklift slots.

SKID-STEAM-PU-225-V	MOBILE SKID FOR VERTICAL STEAMER 225 GAL. TANK
SKID-STEAM-PU-325-V	MOBILE SKID FOR VERTICAL STEAMER 325 GAL. TANK

DRY STEAM WHEEL KIT - HORIZONTAL



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

FRAME-STM20-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO20ST-H
FRAME-STM30-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO30ST-H
FRAME-STM40-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO40ST-H
FRAME-STM50-WK	WHEEL KIT FOR HORIZONTAL DRY STEAM UNIT EZO50ST-H

DRY STEAM WHEEL KIT - VERTICAL



For easy portability on smooth surfaces. Easy turn casters with two locking brakes.

FRAME-STM20-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO20ST-V
FRAME-STM30-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO30ST-V
FRAME-STM40-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO40ST-V
FRAME-STM50-WK-V	WHEEL KIT FOR VERTICAL DRY STEAM UNIT EZO50ST-V

Machines, Hoses, and Hose Reels are NOT included. These items are FRAMES & TANKS only. Please see our other catalog sections for purchasing these options and accessories.

PICKUP SKID



Add any **Commercial Gas or Diesel Driven Cold Water** or 12 Volt **Hot Water** unit to this frame for 100% portable cleaning.

SKID-PU-225	COMMERCIAL SKID & TANK UNIT C/W 225 GAL. TANK AND PLUMBING
-------------	--

PROPANE PICKUP SKID



Add your **Commercial Propane Fired** unit to this frame.

SKID-PU-225-PRO	COMMERCIAL SKID & TANK UNIT FOR PROPANE MOBILE WASH UNIT C/W 225 GAL. TANK & PLUMBING, 2 - 100 LB BOTTLES (FOR FOOD WAREHOUSE CLEANING)
-----------------	---

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

FILL & PLAY 225G FRAME

INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



FILL&PLAY-GRIZ-225

◀ Add your **Industrial Hot Water Gasoline - Oil Fired** units to this frame. 225 gallon water tank.

FILL & PLAY-GRIZ-225-2R	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (INCLUDES 2 REEL CAPACITY)
FILL & PLAY-GRIZ-225	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-GRIZ-225SF	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 225 GAL. TANKS AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST) FITS IN 8' PICKUP TRUCK BOX

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

FILL & PLAY 325G FRAME

INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



Add your **Industrial Hot Water Gasoline - Oil Fired** unit to this frame. 325 gallon water tank included with purchase.

FILL & PLAY-GRIZ-325	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (HOSE REEL EXTRA)
CALL FOR MODEL NUMBER	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 325 GAL. TANK AND PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)

FILL & PLAY 525G FRAME

INDUSTRIAL HOT WATER GASOLINE - OIL FIRED



Add your **Industrial Hot Water Gasoline - Oil Fired** unit to this frame. Larger capacity 525 gallon water tank.

FILL & PLAY-GRIZ-525	FILL & PLAY SKID FOR INDUSTRIAL HOT WATER GASOLINE - OIL FIRED UNITS C/W 525 GAL. TANKS AND PLUMBING, (2 REEL CAPACITY - ADDITIONAL COST)
----------------------	---

OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)



FILL&PLAY-GRIZ-225SF

◀ Add your **Industrial Hot Water Gasoline - Oil Fired** units to this frame. 225 gallon water tank capacity. Designed to be transported in an 8' box truck.

PICKUP SKID, FILL & PLAY FRAME OPTIONS - CONTINUED

FILL & PLAY 325G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame, 325 gallon capacity. With optional relocation panel.

FILL & PLAY 525G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame. Larger capacity 525 gallon water tank.

FILL & PLAY-BM1-325	FRAME FOR BULL MOOSE 1, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM2-325	FRAME FOR BULL MOOSE 2, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM3-325	FRAME & SKID FOR BULL MOOSE 3, C/W 325 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	


FILL & PLAY-BM1-525	FILL & PLAY SKID FOR BULL MOOSE 1, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM2-525	FILL & PLAY SKID FOR BULL MOOSE 2, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM3-525	FILL & PLAY SKID FOR BULL MOOSE 3, C/W 525 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

FILL & PLAY 740G FRAME INDUSTRIAL HOT WATER DIESEL - OIL FIRED



Add your **Industrial Hot Water Diesel - Oil Fired** to this frame, largest capacity of 740 gallon. Ideal for mining/mill applications.

LIGHT KIT

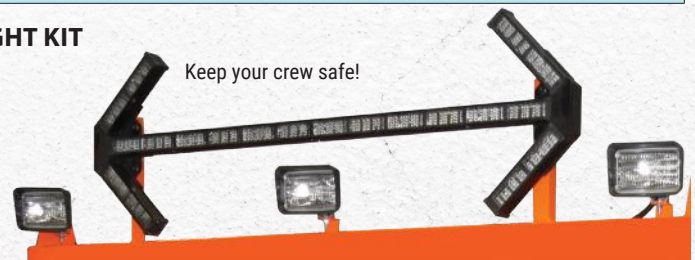


ACC-TRAF-DIRECT-KIT	MUNICIPAL FLASHING LIGHT / ARROW / 3 WORK LIGHTS - KIT MOUNTED ON ANY SKID FRAME (FACTORY INSTALL)
ACC-TRAF-DIRECT-SUPPORT	MOTORIZED ARROW BOARD SUPPORT FOR TRAFFIC DIRECTOR KIT

FILL & PLAY-BM1-740	FILL & PLAY SKID FOR BULL MOOSE 1, C/W 740 GAL. TANK & PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM2-740	FILL & PLAY SKID FOR BULL MOOSE 2, C/W 740 GAL. TANK & PLUMBING (2 REEL CAPACITY - ADDITIONAL COST)
FILL & PLAY-BM3-740	FILL & PLAY SKID FOR BULL MOOSE 3, C/W 740 GAL. TANK, PLUMBING AND HOSE REEL (2 REEL CAPACITY - ADDITIONAL COST)
CALL FOR MODEL NUMBER	OPTIONAL UPGRADE - RELOCATE INDUSTRIAL HOT WATER DIESEL - OIL FIRED CONTROL PANEL
OPTIONAL UPGRADE - CERTIFIED LIFTING EYES (FOR OIL FIELDS)	

CUSTOM ORDERS

We offer complete aluminum, stainless steel, galvanizing, powder coated, engineered frames, and systems to meet your specific needs. We utilize solid works 3D design software. Please do not hesitate to inquire about any special requests.


IF YOU CAN DREAM IT, WE CAN BUILD IT!
Call today!

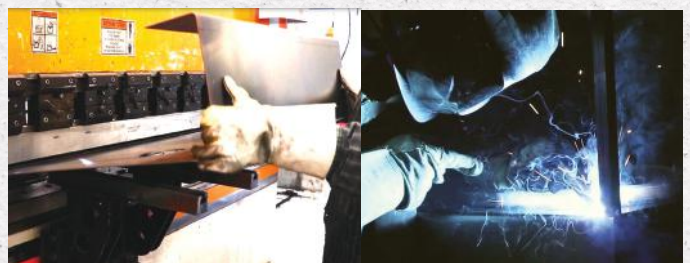

JETTER NOZZLE KITS




Selection of 4, so you are covered for any jetting application.



NOZ-KIT-JTR1130-38	KIT, 11 GPM @ 3000 PSI , 3/8" NPT, 4-PACK
NOZ-KIT-JTR1230-38	KIT, 12 GPM @ 3000 PSI , 3/8", 4 PACK
NOZ-KIT-JTR2040-38	KIT, 20 GPM @ 4000 PSI , 1/2" NPT, 4-PACK

JETTER HOSES

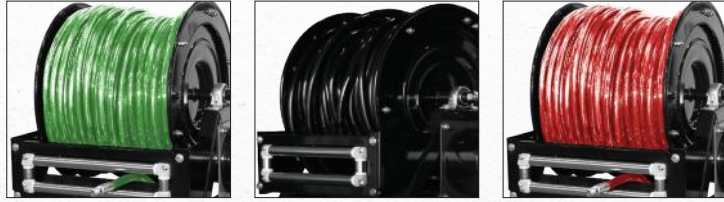

HOS-SFX18-50	1/8" X 50' C/W MALE ENDS, 4800 PSI , BLACK
HOS-SFX18-100	1/8" X 100' C/W MALE ENDS, 4800 PSI , BLACK
HOS-SFX14-50	1/4" X 50' C/W MALE ENDS, 4400 PSI , BLACK
HOS-SFX14-100	1/4" X 100' C/W MALE ENDS, 4400 PSI , BLACK
HOS-JTR100-14	1/4" X 100' C/W MALE ENDS, 4400 PSI , (GREEN OR RED)
HOS-JTR200-14	1/4" X 200' C/W MALE ENDS, 4400 PSI , (GREEN OR RED)
HOS-JTR300-14	1/4" X 300' C/W MALE ENDS, 4400 PSI , (GREEN OR RED)
HOS-JTR100-38	3/8" X 100' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR200-38	3/8" X 200' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR300-38	3/8" X 300' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR100-12	1/2" X 100' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR200-12	1/2" X 200' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR300-12	1/2" X 300' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR400-12	1/2" X 400' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR500-12	1/2" X 500' C/W MALE ENDS, 4000 PSI , (GREEN OR RED)
HOS-JTR500-340	3/4" X 500' C/W MALE ENDS, 2400 PSI , ORANGE
PIRANHA HOSE IS SPECIAL ORDER ONLY	

TANKS

WINTERIZATION KIT



Adapts to most models allowing you to quickly winterize your pressure washer in the cooler climates. Protect pump, coil, and hose. For hot water units.

KIT-WTZ	WINTERIZATION KIT
---------	-------------------

FUEL TANK OPTION



For larger fuel capacity. Adaptable to some of the **Industrial Hot Water Diesel - Oil Fired** units.

STE-TAN-100G	100 GAL. STEEL (FOR INDUSTRIAL HOT WATER DIESEL - OIL FIRED #3 FRAME)
--------------	--

SEWER / CULVERT NOZZLES



The reverse jets pull the hose through the pipe or sewer line and blast debris from line or pipe walls. Rated at 4200 PSI

NOZ-SWR18-5.5	1/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR14-5.5	1/4", 5.5 ORIFICE - 1 FORWARD & 3 BACK
NOZ-SWR38-5.5	3/8", 5.5 ORIFICE - 1 FORWARD & 3 BACK

JETTER WINTERIZATION KIT



Winterization Kit for jetter. Plumb into existing system to protect pump and hoses from freezing.

KIT-WTZ-(JTR)	WINTERIZATION KIT FOR EJ3512 JETTER
---------------	-------------------------------------

FOOT PEDAL INLINE



When operating sewer or jetter machine, this allows hands to be free.

SWT-FTSW-SNP-Y	FOOT SWITCH, SNAP ACTION CONTACTS, 24-240 VOLT - YELLOW
SWT-FV5012-IH	FOOT VALVE, 12 GPM @ 5000 PSI , 300°F, 3/8" INLET FNPT, 1/4" FNPT OUTLET
SWT-FV808-IH	FOOT VALVE, 8 GPM @ 8000 PSI , 300°F

JETTER HOSE REEL KIT



Electric Driven Hose Reel Kit. A great base set for your jetting needs. **Hose is not included.**

KIT-HR300HP-12V	JETTER HOSE REEL KIT, C/W 12V MOTOR, & ROLLER BRACKET - 300 FOOT CAPACITY
-----------------	---

FUEL TANKS, GAS CAPS, & TANK BRACKET



TAN-FUEL-10G	FUEL TANK - 10 GAL.
TAN-FUEL-20G	FUEL TANK - 20 GAL.
TAN-FC10G	GAS CAP WITHOUT GAUGE
TAN-FC10G-WG	GAS CAP WITH GAUGE
FRAME-TANKBRACKET-10G	TANK BRACKET

TANKS

- CONTINUED

FLOAT TANK

For water supply to pump systems.
Garden hose connection.

KIT-FLOAT TANK (CHW)	1 GALLON FLOAT TANK KIT FOR COMMERCIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP
KIT-FLOAT TANK (IHW)	18 GALLON FLOAT TANK KIT FOR INDUSTRIAL HOT WATER UNIT, COMES WITH BALL VALVE FOR HIGH PRESSURE SOAP


SMALL POLY WATER TANKS



TAN-35GAL	35 GAL. FRAME, FITTINGS, & STRAPS NOT INCLUDED
TAN-100GAL	100 GAL. FRAME, FITTINGS & STRAPS NOT INCLUDED

LARGE POLY WATER TANKS

Frame Not Included

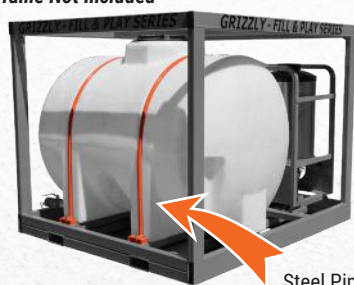

Steel Pipe Straps




TAN-225GAL	225 GAL. DIMENSIONS, 49" L X 38"W X 41"H
STEEL TANK STRAPS ADDITIONAL COST FOR 225 GAL. POLY WATER TANK	
TAN-325GAL	325 GAL. DIMENSIONS, 68" L X 38"W X 43"H
TAN-525GAL	525 GAL. DIMENSIONS, 72" L X 49"W X 54"H
STEEL TANK STRAPS ADDITIONAL COST FOR 325 & 525 GAL. POLY WATER TANK	
TAN-740GAL	740 GAL. W/ STEEL FRAME (OIL FIELD TANK) COMPLETE WITH PIPE FRAME

STEAM OPTIONS

- MACHINE OPTIONS & ACCESSORIES

STEAM OPTION KITS - *Must Be Ordered With A Pressure Washer Unit and Factory Installed*

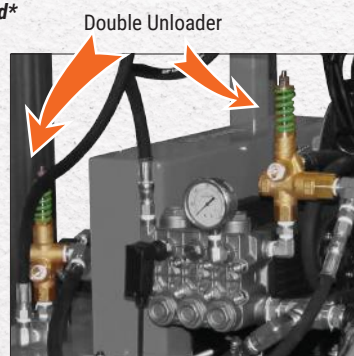

STANDARD KIT	
KIT-STM OPT-4.3	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
KIT-STM OPT-5-3.5	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
KIT-STM OPT-8-3	STEAM OPTION FOR COMMERCIAL HOT WATER MACHINES - VARIABLE FLOW VALVE, 305°F TEMP CONTROLLER, TEMP GAUGE, PRESSURE GAUGE
STEAM OPTION KITS - DOUBLE UNLOADER TYPE	
STEAM OPTION FOR INDUSTRIAL HOT WATER MACHINES - STEAM GAUGE, 3 WAY VALVE, FLOW SWITCH, STEAM HOSE, STEAM WAND - ADD "-STM" TO MODEL #	
DRY STEAM KIT	
KIT-DRYSTM	DRY STEAM KIT (COMPATIBLE WITH ALL INDUSTRIAL HOT WATER UNITS UP TO 1,000,000 BTU) (HOSE/WAND NOT INCLUDED)
PID CONTROL OPTION FOR ALL INDUSTRIAL STEAM MODELS	
THR-PID2362	PID CONTROLLER FOR INDUSTRIAL STEAM MACHINES - HIGH/LOW FIRE ON OIL BURNER

SOAP SWITCH CONTROL PANEL

***Cord not included**

To control units with one switch.

SWT-RMS	1 SWITCH, 24-250V 3A
SWT-RMS2	2 SWITCHES, 24-250V 3A
SWITCH FUNCTION MUST BE SPECIFIED ON ORDER	



REMOTE WASH BAY CONTROL PANEL

To control the functions of your pressure washer from the wash-bay location.



KIT-WB53	REMOTE WASH BAY CONTROL PANEL - START-STOP/SOAP/BURNER. LEAD WIRE NOT SUPPLIED
KIT-WB54	4 SWITCH REMOTE WASH BAY CONTROL PANEL - MOTOR START-STOP/SOAP ON-OFF/WAX ON-OFF/BURNER ON-OFF. LEAD WIRE NOT SUPPLIED. INCLUDES SOAP SOLENOID

WAND HOLDER

In bay stainless steel, keeps your gun wands up off the floor.



CAR-WH-17	17"
-----------	-----

MAT CLAMPS

Allows your customers to clamp their mats to the wall so they can easily be sprayed off.



CAR-MATCA10	STAINLESS STEEL
-------------	-----------------

STAINLESS STEEL VACUUM

Stainless steel construction for commercial use with 1\$ acceptor and heavy-duty lock box. Powered by twin 1-6 HP motors coupled with hose and claw nozzle.



CAR-VS0-CP	STAINLESS STEEL VACUUM, COIN ACCEPTOR INCLUDED
------------	--

STAINLESS STEEL COILS

- MACHINE OPTIONS & ACCESSORIES



Stainless Steel
(great for food grade usage)



STAINLESS STEEL COILS - OIL FIRED

COI-EK4232-SP40	16" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO200, EZO350)
COI-EK4105-SP80	18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO300)
COI-EK4426-SP80	18" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO400)
COI-EK4122-SP80	20" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO440)
COI-EK4465-SP80	20" COIL & TANK ASSEMBLY, OIL FIRED, (FOR EZO600, EZO700, EZO800, 1/2")
COI-EK4128-SP80	24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO700, EZO900 3/4")
COI-EK4455-SP80	24" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1000)
COI-EK4132-SP80	30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO1200)
COI-EK9600-1-SP80	30" COIL & TANK ASSEMBLY, OIL FIRED (FOR EZO 1800)

STAINLESS STEEL COILS - GAS FIRED

COI-EK4232-SP40	16" COIL & TANK ASSEMBLY, GAS FIRED 195,000 BTU
COI-EK4117-SP80 COI-EK4117-SP160	18" COIL & TANK ASSEMBLY, GAS FIRED, 295,000 BTU
COI-EK4118-SP80	20" COIL & TANK ASSEMBLY, GAS FIRED, 395,000 BTU
COI-EK4109-SP80	24" COIL & TANK ASSEMBLY, GAS FIRED, 510,000 / 600,000 / 720,000 BTU
COI-EK4132-SP80	30" COIL & TANK ASSEMBLY, GAS FIRED, 940,000 BTU

CERTIFIED CRN COILS - OIL OR GAS FIRED

ADD "-CRN" TO MODEL NUMBER	COIL WITH CANADIAN REGISTERED NUMBER - 3/4", 1/2", AND 1" COILS
----------------------------	---

COMPLETE FOAM BRUSH ASSEMBLY



The assembly comes with a soft bristle brush, as well as a single bay chemical mixer/injector kit for your foam option.

KIT-CAR-FBXS-1	COMPLETE ASSEMBLY, SINGLE BAY CAR WASH
KIT-CAR-FBXS-2	COMPLETE ASSEMBLY, DOUBLE BAY CAR WASH
CAR-FBHH	FOAM BRUSH HANDLE HOLDER


TRUCK WASH BRUSH



A stiff bristle brush to help remove stuck on grease, mud, dirt, and grime.

ACC-TWB10	TRUCK WASH BRUSH, 2 1/2" X 10", C/W BUMPER
-----------	--

OVERHEAD BOOM




CAR-OBO	OVERHEAD BOOM, 360° PIVOT, 3000 PSI, 5'5"
---------	---

FESTOON SYSTEM

To hold the hose off the floor.

TYPICAL SYSTEM LAYOUT

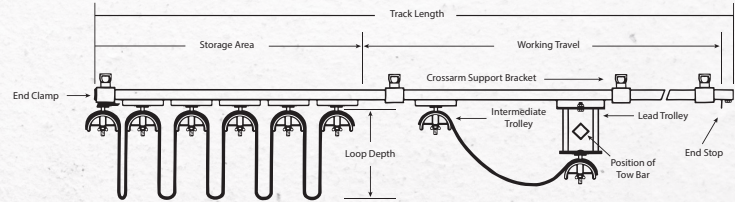

FST-T100C-10T	SYSTEM WITH 100' CABLE, WHEEL TROLLEY KIT
FST-T60N-9T	FESTOON SYSTEM, 60 FEET NYLON CABLE C/W 9 TROLLEYS

MISCELLANEOUS ITEMS

- UPGRADES & ADDITIONS

Ask about CAT, GIANT & PRAT Optional Pumps!

EMPEROR PUMP UPGRADE



High temperature pump. Rated @ 185° F. Nickel plated, forged brass manifold, run-dry seals.

PMP-G0915HTC	2 HP EMPEROR PUMP UPGRADE - UP TO 180°F WATER, 2.1 GPM, 1500 PSI, 1750 RPM
--------------	--

GENERAL PUMP UPGRADE



For all cold or hot water units with 2 HP electric or 6.5 HP gas motors.

PMP-G0915E17ET	PUMP UPGRADE FOR COLD OR HOT WATER 2 HP UNIT TO GENERAL PUMP, 2.1 GPM @ 2610 PSI
PMP-G0815G6ET	PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO GENERAL PUMP, 3.4 GPM @ 2610 PSI

AR PUMP UPGRADE



For all cold or hot water units with 6.5 HP gas motors.

PMP-ARRCV3G27D-F7	PUMP UPGRADE FOR COLD OR HOT WATER 6.5 HP UNIT TO AR PUMP, 3 GPM @ 2700 PSI
-------------------	---

HOURLY METER



Add to a pressure washer to easily track maintenance intervals.

ELS-HR-MTR-12/24V	12/24 HOUR METER
ELS-HR-MTR-120V	120 HOUR METER

OUTLET TEMPERATURE GAUGE



For metering boiler outlet temperature.

THR-T3X4B500	INLINE OUTLET TEMPERATURE GAUGE - 3" - 0° TO 500°F
--------------	--

PUMP KITS

PRK-EK-33-61	REPAIR KIT, UNLOADER ASSEMBLY, EK PUMPS
PRK-EK-21-28	PACKING KIT, EK3435H, EK440, EK215 FOR EK PUMP
PRK-EK-64-65	VALVE KIT, EK3435H, EK440, EK215 FOR EK PUMP
PRK-G001	VALVE KIT FOR GENERAL PUMP
PRK-G028	PACKING KIT WITH BRASS FOR GENERAL PUMP
PRK-G069	PACKING KIT WITHOUT BRASS FOR GENERAL PUMP
PRK-G123	VALVE KIT FOR GENERAL PUMP
PRK-G156	PACKING KIT FOR GENERAL PUMP

HOT WATER PACKING VALVE KIT GENERAL PUMP



Allows you to run hot water through your pump up to 185° F
Note: On new machines higher temp TPI will be required.

PRK-G220	HOT WATER PACKING KIT / VALVE KIT
PRK-G209	(TSF SERIES EXCEPT 2421)
PRK-G211	TSF2421 ONLY

INLINE FILTERS



Keeps debris from damaging pump.

FIL-CBF12-80	INLINE FILTER, CLEAR, 1/2" 80 MESH
FIL-CBF34-80	INLINE FILTER, CLEAR, 3/4" 80 MESH
FIL-CBF1-80	INLINE FILTER, CLEAR, 1" 80 MESH
FIL-CBF114-80	INLINE FILTER, CLEAR, 1-1/4" 80 MESH
FIL-CBF112-80	INLINE FILTER, CLEAR, 1-1/2" 80 MESH
FIL-GCF12	GREEN CAP INLINE FILTER, 1/2" FPT INLET/MPT OUTLET, TWO 1/4" SIDE PORTS, 6 GPM MAX FLOW 145 PSI MAX PRESSURE

UNLOADER - FLOW ACTIVATED



Flow Activated instead of Pressure activated (easier on piped in systems).

UNL-FA10835-K73	6.6-10.8 GPM @ 3500 PSI. 165°. 3/8" BSP-F. 3/8" BSP-F. 3/8" BSP-M
UNL-FA13258-K9	2.5-13.2 GPM @ 5800 PSI. 165°. 1/2" BSP-F. 1/2" BSP-F. 1/2" BSP-M

VOLT METER



To confirm voltage in 12 volt systems.

ELS-VOLT-MTR	FOR 12 VOLT SYSTEMS
--------------	---------------------

PRESSURE GAUGE



Shows operating PSI of machine, great for applications where PSI is changing frequently from job to job.

THR-PG1000	PRESSURE GAUGE 1000/2000/3000 PSI
THR-PG2000	PRESSURE GAUGE 2000 PSI
THR-PG3000	PRESSURE GAUGE 3000 PSI
THR-PG5000	PRESSURE GAUGE 5000 PSI
THR-PG6000	PRESSURE GAUGE 6000 PSI
THR-PG10000	PRESSURE GAUGE 10,000 PSI
THR-PG20000	PRESSURE GAUGE 20,000 PSI
SPECIFY APPROX. 60% OF OPERATING PRESSURE	
EXTRA CHARGE FOR MOUNTING	

GENERATORS



For pressure washers to run on 120 Volt burners. Replacement for built on generators.

GEN-MC300	GENERATOR - ELECTRIC/AC - 3000 WATT - 3600 RPM
PLEASE SPECIFY MODEL OF YOUR MACHINE WHEN ORDERING	

ELECTRIC CLUTCH UPGRADE - 12 VOLT BELT DRIVEN MACHINES



Work with hydraulic motor on boats to run the pump.

PMP-DGC-12-WP12	ELECTRIC CLUTCH UPGRADE (BELT/GASOLINE DRIVEN - OIL FIRED UNITS) UP TO 24HP
PMP-DGC12-WP7	DOUBLE GROOVE CLUTCH UPGRADE ADAPTER KIT C/W 7" PULLEY, 12V, FOR GENERAL PUMPS 47, ES & ESN SERIES PUMPS

ELECTRIC START UPGRADE KITS - COLD WATER



For use only on commercial gas units with same size engine. Turns your pull start (recoil) unit into an electric start.

ELECTRIC START UPGRADE KIT	
KOH-CH440-ES	GAS ENGINE, KOHLER, 14 HP
HON-GX390E18	GAS ENGINE, HONDA, 13 HP

SUCTION KIT



Allows you to pick up water from lake, bay, ocean, and wash out on your aquaculture site. For industrial cold water gas units.

KIT-SUCTION	SUCTION KIT - 6' 3/4" HOSE - INLINE WATER FILTER - FOOT VALVE - PRIMER VALVE (COLD WATER GAS DRIVEN)
-------------	--

HYDROSTATIC VALVE AND ASSEMBLY KIT

For pressure testing lines with your pressure washer.

KIT-HDT	HYDROSTATIC VALVE AND ASSEMBLY KIT (FACTORY INSTALL)
---------	--

FUEL FILTERS



FIL-FF14	FUEL FILTER ASSEMBLY, 1/4" (HO87099420)
FIL-FF14-AL	FUEL FILTER ASSEMBLY, 1/4", ALUMINUM
FIL-FFWS-CMP	FUEL FILTER/ WATER SEPARATOR, COMPLETE UNIT (87497700) (HO87497710)
FIL-FFWS-E	ELEMENT, FUEL FILTER/ WATER SEPARATOR (87497710) (HO87253070) (HO87497700)

PRIMARY CONTROL



Safety drive that turns off burner to prevent flooding.

OIL-7556A0000U	12V
OIL-7575A0000U	120V
OIL-7580A0000-U	230V
OIL-52082U	BECKETT GENESIS BURNER CONTRACTOR PRIMARY CONTROL DIAGNOSTIC TOOL

12 VOLT BURNER - PRIMARY CONTROL



A 12 VDC primary safety control for oil burners used on pressure washers. It can provide interrupted or intermittent duty ignition, and it has a 15 second lockout time.

KIT-BNR12-MSR-UPGRADE	12V BURNER PRIMARY CONTROL
-----------------------	----------------------------

MISCELLANEOUS ITEMS

- CONTINUED

REMOTE SWITCH - ELECTRIC DRIVEN ONLY



To control functions on pressure washers with electrical or mechanical controls.

SWT-RMS-50	REMOTE SWITCH C/W 50' OF CORD - ELECTRIC DRIVEN ONLY
------------	--

FITTINGS - STEEL



FIT-S1003-B	HEX COUPLING, 1/4" FNPT
FIT-S1022-C	HEX NIPPLE, 3/8", (WMM0003GS)
FIT-S1022-CB	HEX NIPPLE, REDUCING, 3/8" X 1/4", (WMM0302GS)
FIT-S1022-D	HEX NIPPLE, 1/2", (WMM0004GS)
FIT-S1022-DB	HEX NIPPLE, REDUCING, 1/2" X 1/4", (RCF0402SS)
FIT-S1022-DC	HEX NIPPLE, REDUCING, 1/2" X 3/8", (WMM0403GS)
FIT-S1022-EC	HEX NIPPLE, REDUCING, 3/4" X 3/8"

SPARK ARRESTOR

Reduces any sparks from engines.

KIT-ESA	ENGINE SPARK ARRESTOR FOR MINING OR OILFIELD APPLICATIONS
---------	---

COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNITS

Option for older propane with millivolt controls.

X PRO-KIT-LP400MV	COMPLETE MILLIVOLT KIT FOR PROPANE GAS UNIT, 400,000 BTU
-------------------	--

THERMOSTAT



THR-EK220	THERMOSTAT, 220°F, EK, 7000 PSI 802829352311 (HO87500950)
THR-EK302	THERMOSTAT, 302°F, EK, 7000 PSI
THR-BC200C	TEMPERATURE CONTROLLER, 200°F, BOX STYLE, 90-240 VAC INPUT, 5AMP/240 VAC OUTPUT

HIGH LIMITS

THR-HL12WL-230	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 230°F
THR-HL12WL-330	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 330°F
THR-HL12WL-375SS	HIGH LIMIT SWITCH, C/W WIRE LEAD, 1/2", 375°F, STAINLESS STEEL

BRASS FLOW SWITCH



Designed to operate in response to low volume, low pressure flow, and still allow for high pump output flow. Provides reliable ON/OFF for STOP/START systems.

SWT-FS1068	25 GPM @ 3000 PSI MAX, 1/2", 180°F MAX TEMP
SWT-FS329	0.75 - 16 GPM @ 5000 PSI MAX, 3/8", 165°F MAX TEMP
SWT-FS975	REEDLESS, 12 GPM @ 5000 PSI MAX, 3/8", 180°F MAX TEMP (100975)
SWT-FS011	01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP
SWT-FS879	01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP
SWT-FS1068	01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP

BATTERY



ELS-BATT-12V	12V BATTERY COMMERCIAL SERIES
ELS-BATT-12V-HD	12V HEAVY-DUTY BATTERY

BURNER PARTS



We have all Oil Burner Nozzle sizes in stock.

OIL-2.00X80B	OIL BURNER NOZZLE, 2.00X80B (HO900771)
OIL-31812-12	IGNITER KIT W/O TIMER, 12V, MSR. WAYNE - 802829352076 (HO91075070)

THERMAL RELIEF VALVES



UNL-TRV38	3/8" (100557) (HO921421)
UNL-TRV12	1/2" (100558) (HO921422)
UNL-TRV12HT	1/2", HIGH TEMPERATURE, 190°F

DELAY TIMER



Solid state timer delay on break timing module. For use on auto STOP/START systems.

ELS-TSB222	SOLID STATE TIMER
------------	-------------------

PRESSURE SWITCH



Used primarily for the burner system to ignite the burner, also used in Auto Start Systems.

SWT-PSW14	4000 PSI , 1/4" MNPT
SWT-PSW38SS	3/8", STAINLESS STEEL, 8700 PSI , 195°F

FLOW SWITCH



Designed to provide control on solenoids, timers, and indicator lights on cold and hot water systems.

SWT-FS05ST	1-7.8 GPM @ 8700 PSI MAX, 3/8" INCH, STAINLESS STEEL, 180°F MAX TEMP
SWT-FSI	01-8 GPM @ 4350 PSI MAX, 3/8", 165°F MAX TEMP

"HOW TO" ON SELECTING YOUR UNIT FRAME OPTIONS

HOW TO FIND THE RIGHT FRAME FOR YOUR MODEL

For all your needs, we can build what your job requires.
Follow the below guide to make the best frame for you!

RECIPE TO ORDER					
FRAME+UNIT TYPE + HORSE POWER + DRIVE + ADDITION					
FRAME	ALWAYS MUST BE AT START OF MODEL NUMBER				
UNIT TYPE	TYPE OF MACHINE				
	CW	COLD WATER			
	GF	GAS FIRED			
	OF	OIL FIRED			
HORSE POWER	THE HORSE POWER OF THE UNIT				
	2 HP	5 HP	7.5 HP	10 HP	15 HP
	20 HP	25 HP	30 HP	50 HP	
DRIVE	THE DRIVE OF THE UNIT				
	BD	BELT DRIVEN			
	DD	DIRECT DRIVE			
	FC	FLANGE COUPLER DRIVEN			
ADDITION	THE ADDITIONS YOU WANT TO ADD TO THE UNIT				
	ERC	ELECTRIC ROLL CAGE		AL	ALUMINIUM
	FBWS	FLAT BASE WITH SHROUD		SS	STAINLESS STEEL
	FFW	FOAM FILLED WHEELS		W	WHEELED
	FB	FLAT BASE		ST	STATIONARY
NOTE	COMPONENT NUMBERS SHOULD NOT HAVE THE COMPONENT DESCRIPTION IN THE MODEL NUMBER				

TURN THIS...



OR THIS...



INTO THIS





EXAMPLE		
OG	FRAME-CW57510DDERC	COLD WATER SERIES, 5, 7.5, OR 10 HP, DIRECT DRIVE, ELECTRIC ROLL CAGE
1	FRAME-CW57510DDFBWS-SS	COLD WATER SERIES, 5, 7.5, OR 10 HP, DIRECT DRIVE, FLAT BASE WITH SHROUD - STAINLESS STEEL
2	FRAME-LS-3FT-ST575DDFB	STATIONARY SERIES, 5 OR 7.5 HP, DIRECT DRIVE, FLAT BASE

CUSTOM ORDERS

We offer complete aluminum, stainless steel, galvanizing, powder coated, engineered frames, and systems to meet your specific needs. We utilize solid works 3D design software. Please do not hesitate to inquire about any special requests.

IF YOU CAN DREAM IT, WE CAN BUILD IT!
Call today!

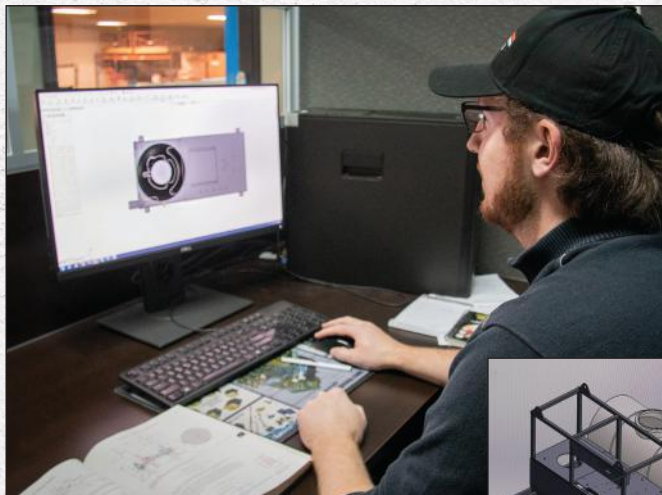

Modular Hot Water Heaters - Oil Fired

Salt Water 3,000,000 BTU Boiler System for Offshore Application.



Easy-Kleen built this custom machine for the aquaculture industry in the North Atlantic to quickly heat collected salt water to sanitize salmon nets.

Industrial Cold Water Diesel

40 GPM @ 1500 PSI
Used for Humidification to Cure Concrete During Bridge and Building Construction.



NOZZLE CHART

EXAMPLE: To help you size your Nozzle

- Pressure washer is 4000 PSI @ 3.5 GPM
- Tip size is 3.5


#1. START WITH YOUR
MACHINE'S PSI UP HERE

		POUNDS PER SQUARE INCH (PSI)																	
STANDARD NOZZLE SIZE	HOLE SIZE		500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	4500	5000
2.0	.034"/0.86mm		0.71	0.87	1.00	1.12	1.22	1.32	1.41	1.50	1.58	1.66	1.73	1.80	1.87	1.94	2.00	2.12	2.24
2.5	.042"/1.07mm		0.88	1.08	1.25	1.40	1.53	1.65	1.77	1.88	1.98	2.07	2.17	2.25	2.34	2.42	2.50	2.65	2.80
3.0	.043"/1.09mm		1.06	1.30	1.50	1.68	1.84	1.98	2.12	2.25	2.37	2.49	2.60	2.70	2.81	2.90	3.00	3.18	3.35
3.5	.048"/1.22mm		1.24	1.52	1.75	1.96	2.14	2.32	2.47	2.63	2.77	2.90	3.03	3.15	3.27	3.39	3.50	3.71	3.91
4.0	.052"/1.32mm		1.41	1.73	2.00	2.24	2.45	2.65	2.83	3.00	3.16	3.32	3.46	3.61	3.74	3.87	4.00	4.24	4.47
4.5	.055"/1.40mm		1.59	1.95	2.25	2.52	2.76	2.98	3.18	3.38	3.56	3.73	3.90	4.06	4.21	4.36	4.50	4.77	5.03
5.0	.057"/1.45mm		1.77	2.17	2.50	2.80	3.06	3.31	3.54	3.75	3.95	4.15	4.33	4.51	4.68	4.84	5.00	5.30	5.59
5.5	.060"/1.52mm		1.94	2.38	2.75	3.07	3.37	3.64	3.89	4.13	4.35	4.56	4.76	4.96	5.14	5.33	5.50	5.83	6.15
6.0	.062"/1.63mm		2.12	2.60	3.00	3.35	3.67	3.97	4.24	4.50	4.74	4.97	5.20	5.41	5.61	5.81	6.00	6.36	6.71
6.5	.064"/1.63mm		2.30	2.81	3.25	3.63	3.98	4.30	4.60	4.88	5.14	5.39	5.63	5.86	6.08	6.29	6.50	6.89	7.27
7.0	.067"/1.70mm		2.47	3.03	3.50	3.91	4.29	4.63	4.95	5.25	5.53	5.80	6.06	6.31	6.55	6.78	7.00	7.42	7.83
7.5	.070"/1.78mm	G P M	2.65	3.25	3.75	4.19	4.59	4.96	5.30	5.63	5.93	6.22	6.50	6.76	7.02	7.26	7.50	7.95	8.39
8.0	.072"/1.83mm		2.83	3.46	4.00	4.47	4.90	5.29	5.66	6.00	6.32	6.63	6.93	7.21	7.48	7.75	8.00	8.49	8.94
8.5	.074"/1.88mm		3.01	3.68	4.25	4.75	5.21	5.62	6.01	6.38	6.72	7.05	7.36	7.66	7.95	8.23	8.50	9.02	9.50
9.0	.076"/1.93mm		3.18	3.90	4.50	5.03	5.51	5.95	6.36	6.75	7.12	7.46	7.79	8.11	8.42	8.71	9.00	9.55	10.06
9.5	.078"/1.98mm		3.36	4.11	4.75	5.31	5.82	6.28	6.72	7.13	7.61	7.88	8.23	8.56	8.89	9.20	9.50	10.08	10.62
10.0	.080"/2.03mm		3.54	4.33	5.00	5.59	6.12	6.61	7.07	7.50	7.91	8.29	8.66	9.01	9.35	9.68	10.00	10.61	11.18
11.0	.083"/2.11mm		3.89	4.76	5.50	6.15	6.74	7.28	7.78	8.25	8.70	9.12	9.53	9.96	10.29	10.65	11.00	11.67	12.30
12.0	.087"/2.21mm		4.24	5.20	6.00	6.71	7.35	7.94	8.49	9.00	9.49	9.95	10.39	10.86	11.22	11.62	12.00	12.73	13.42
12.5	.098"/2.26mm		4.42	5.41	6.25	6.99	7.65	8.27	8.84	9.38	9.88	10.36	10.83	11.27	11.69	12.10	12.50	13.26	13.98
13.0	.091"/2.31mm		4.60	5.63	6.50	7.27	7.96	8.60	9.19	9.75	10.28	10.78	11.26	11.72	12.16	12.59	13.00	13.79	14.53
15.0	.096"/2.44mm		5.30	6.50	7.50	8.39	9.19	9.92	10.61	11.25	11.86	12.44	12.99	13.52	14.03	14.52	15.00	15.91	16.77
20.0	.109"/2.77mm		7.07	8.66	10.00	11.18	12.25	13.23	14.14	15.00	15.71	16.58	17.32	18.03	18.71	19.36	20.00	21.21	22.36
25.0	.125"/3.18mm	8.84	10.83	12.50	13.98	15.31	16.54	17.68	18.75	19.76	20.73	21.65	22.53	23.39	24.21	25.00	26.52	27.95	
30.0	.141"/3.58mm	10.61	12.99	15.00	16.77	18.37	19.84	21.21	22.50	23.72	24.87	25.98	27.04	28.06	29.05	30.00	31.82	33.54	
40.0	.156"/3.96mm	14.14	17.32	20.00	22.36	24.49	26.46	28.28	30.00	31.62	33.17	34.64	36.06	37.42	38.73	40.00	42.43	44.72	
50.0	.172"/4.37mm	17.68	21.65	25.00	27.95	30.62	33.07	35.36	37.50	39.53	41.46	43.30	45.07	46.77	48.41	50.00	53.03	55.90	
60.0	.188"/4.78mm	21.21	25.98	30.00	33.54	36.74	39.69	42.43	45.00	47.43	49.75	51.96	54.08	56.12	58.09	60.00	63.64	67.08	

#3. THEN FIND YOUR
ANSWER HERE!


#2. THEN FIND YOUR
GPM IN THESE ROWS

NOTE: Ensure correct orifice nozzle in machine to prevent overheating and pump cavitation




Red (Cutting Nozzle) - 0°
Uses - Powerful pinpoint for spot cleaning of hard, unpainted surfaces or for high reach areas
Surfaces - Unpainted metal or concrete; DO NOT use on wood

Delivers the most concentrated stream possible. Capable of cutting through some materials and cleaning off very stubborn stains on concrete and other hard surfaces. Can cause damage to home siding, wood, and other materials so use with caution.



Yellow (Intense Washing Nozzle) - 15°
Uses - Intense cleaning of unpainted hard surfaces
Surfaces - Grills, driveways, concrete or brick walkways, unpainted brick or stucco

Provides enough force to work like a scraper, stripping paint, grease, and other materials from hard surfaces.




Green (Washing Nozzle) - 25°
Uses - Standard cleaning nozzle for most applications
Surfaces - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco, gutters and eaves, concrete, brick surfaces

Perfect for cleaning dirt and grime from home siding, sidewalks, and metal furniture.



White (Rinsing Nozzle) - 40°
Uses - Cleaning of painted or delicate surfaces
Surfaces - Yard tools, sidewalks, lawn furniture, unpainted siding, stucco, gutters and eaves, concrete, brick surfaces

The wide spray allows you to wash a large area fast. Safe for most surfaces, excluding aluminum siding, windows, and vehicles.



Black (Detergent Application Nozzle) - Low Pressure
Uses - Applies cleaning solutions
Surfaces - Low pressure spray is safe on all surfaces. Always verify compatibility of cleaning solution prior to use

When using detergent or other chemicals in your pressure washer, the black nozzle will siphon it into the water spray evenly. Spray is wide and low pressure.

Great care and attention is taken at each of our pre-assembly stations to prepare the components for each of our three specialized assembly lines: cold water, hot water, and industrial. Each unit has a number of quality control checks throughout the production process with a final test to ensure peak performance. We appreciate your business and thank you for choosing the highest-quality, rugged equipment in the industry that lasts and is easy to service.



Symbols

12 Volt Burner - Primary Control	76
12V Or 120V Hose Reel - Industrial	62
50HZ Electric Motors	66
360° Pivot Hose Reel	63

A

Acid Pump	64
A-Frame Hose Reel - Industrial	62
Aluminum	
Aluminum & Stainless Commercial Roll Cage Frame	68
Aluminum & Stainless Steel Options	56
Cold Water Cart	66
Stainless Steel Cold Water Roll Cages	66
Aluminum & Stainless Commercial Roll Cage Frame	68
Aluminum & Stainless Steel Options	56
AR Pump Upgrade	75
Auto Stop/Start	
Delay Timer	77
Heavy Duty Auto Stop/Start With Shutdown Timers	66
Pressure Switch	77

B

Ball Valves	63
Barracuda Rotary Nozzle	58
Battery	77
Belt Driven	
Electric Clutch Upgrade - 12 Volt Belt Driven Machines	76
Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI	61
Bracket Options	67
Brass Flow Switch	77
Brass Quick Couplers	60
Burner Parts	77
Burners	
12 Volt Burner - Primary Control	76
Burner Parts	77
Pressure Switch	77
Primary Control	76

C

Cabinets	
Fully Enclosed Hot Water Heaters - Plug & Play Cabinets	35
Casters	
Industrial Hot Water Electric Wheel Kits	67
Stainless Steel Casters	66
Chemical Control & Injection Kits	64
Acid Pump	64
Chemical Mixer	64
Chemical Sprayer	64
Clear Chemical Hose - 1/4"	62
Dema Inline High Pressure Chemical Injector	64
High Volume Foamer	64
Solenoid Controls	64
Chemical Sprayer	64
Clear Chemical Hose - 1/4"	62
Clutch	
Electric Clutch Upgrade - 12 Volt Belt Driven Machines	76
Coils	
Aluminum & Stainless Steel Options	56
In-House Coil Manufacturing	4
Stainless Steel Coils - Machine Options & Accessories	74
Coin Operated Car Wash	53
Cold Water Cart	66
Cold Water Leg Frame - For Shroud & Flat Base Units	67
Cold Water Shroud & Flat Base Frames	67
Cold Water Stacked Pump Frames	67

Cold Water Units

Coin Operated Car Wash	53
Cold Water Cart	66
Commercial Cold Water Electric	8
Commercial Cold Water Gas	13
Commercial Cold Water Soft Wash	12
Dust Suppression Trailer	42
Easy-Kleen Demucker	56
Electric Start Upgrade Kits	76
Explosion Proof - Cold Water	11
Firehouse & Car Detailing Series	9
Flow Switch	77
Frame Options & Wheel Kits	66-67
Hydraulic Systems - Marine & Truck	36
Hydrostatic Testers	52
Industrial Cold Water Electric	10
Industrial Cold Water Gas & Diesel	14
In-Plant Systems	48-49
Jetters	40-41
RV & Car Lot Wash Trailer	43
Suction Kit	76
Cold Water Units - Frame Options & Wheel Kits	66-67
Cold Water Cart	66
Cold Water Leg Frame - For Shroud & Flat Base Units	67
Cold Water Shroud & Flat Base Frames	67
Cold Water Stacked Pump Frames	67
Firehouse Display Base	66
Stainless Steel Casters	66
Stainless Steel Cold Water Roll Cages	66
Wall Mount For Direct Drive	67
Commercial Cold Water Electric	8
Commercial Cold Water Gas	13
Commercial Cold Water Soft Wash	12
Commercial Hot Water Electric - Oil Fired	15
Commercial Hot Water Electric - Oil, Propane, Or Natural Gas Fired	16
Commercial Hot Water Gasoline & Diesel - Oil Fired	24
Commercial & Industrial Gas & Diesel - Frame Options & Wheel Kits	68
Aluminum & Stainless Commercial Roll Cage Frame	68
Commercial Wheel Kit - Crab Leg Extension	68
Foam Filled Tires	68
Industrial Wheel Kit	68
Rental Roll Cage - With Grab Bar	68
Commercial Wheel Kit - Crab Leg Extension	68
Complete Foam Brush Assembly	74
Complete Millivolt Kit For Propane Gas Units	77
Customized Units & Frame Options	54-55
Custom Orders	71

D

Delay Timer	77
Dema Inline High Pressure Chemical Injector	64
Diesel Engine Shutdown System	76
Draft Hood	65
Dry Steam Generators	38-39
Dry Steam Generators - Frame Options & Wheel Kits	69
Dry Steam Skid - Horizontal	69
Dry Steam Skid - Vertical	69
Dry Steam Wheel Kit - Horizontal	69
Dry Steam Wheel Kit - Vertical	69
Dual Lance Wands	60
Dust Suppression Trailer	42

E

Easy-Kleen Demucker	56
Easy-Kleen - Stainless Steel Hose Reel	62
Electrically Heated Timer	66
Electric Clutch Upgrade - 12 Volt Belt Driven Machines	76

Electric Motor Controls	65-66	Frame Fabrication	5
50HZ Electric Motors	66	Hose Reel Stands (Only)	63
Electrically Heated Timer	66	Industrial Fully Electrically Heated - Frame Options & Wheel Kits	69
Emergency Shut-Offs	66	Leg Frame	67
Ground-Fault Circuit Interrupters	65	Pickup Skid, Fill & Play Frame Options	70
Nema Box	65	Rental Roll Cage - With Grab Bar	68
VFD For Electric Motor Controls	65	Stainless Steel Frames	67
Electric Start Upgrade Kits - Cold Water	76	Wall Mount For Direct Drive	67
Emergency Shut-Offs	66	Fuel Filters	76
Enclosed Trailer Options		Fuel Tanks, Gas Caps, & Tank Bracket	72
7000lb Tandem Axes	47	Fully Enclosed Hot Water Heaters - Plug & Play Cabinets	35
Draft Hood	65		
Interior LED Light	47		
Power Venter	65		
Enclosed Trailers	46-47	Gauges	
8' Enclosed Trailer Package 225G		Outlet Temperature Gauge	75
& 14' Enclosed Trailer Package 525G	46	Pressure Gauge	76
16' Enclosed Trailer Package 525G & 740G	46	General Pump Upgrade	75
Engines		Generators	76
Diesel Engine Shutdown System	76	Giant Rotary Nozzles	58
Spark Arrestor	77	Greaseable Super Swivels	63
Explosion Proof - Cold Water - Standard & Off-Shore Series	11	Ground-Fault Circuit Interrupters	65
Explosion Proof - Hot Water - Standard & Off-Shore Series	21	Guns	
Extension Wands	60	Gun & Wand Combos	61
Harness	60	Gun/Wand/Quick Coupler Assembly	60
		Trigger Guns	59
		Gun & Wand Assemblies	59-61
F		Dual Lance Wands	60
Festoon System	74	Extension Wands	60
Fill & Play		Fittings	60
Industrial Hot Water Diesel - Oil Fired, 325G Frame	71	Flex Wands & Push Pull Lance	61
Industrial Hot Water Diesel - Oil Fired, 525G Frame	71	Gun & Wand Combos	61
Industrial Hot Water Diesel - Oil Fired, 740G Frame	71	Gun/Wand/Quick Coupler Assembly	60
Industrial Hot Water Gasoline - Oil Fired, 225G Frame	70	Harness	60
Industrial Hot Water Gasoline - Oil Fired, 325G Frame	70	O-Rings	60
Industrial Hot Water Gasoline - Oil Fired, 525G Frame	70	Stainless Steel Quick Couplers	60
Pickup Skid, Fill & Play Frame Options	70	Steam Wand	60
Fill & Play Equipment Series - Diesel & Gas Units	30	Trigger Guns	59
Filters		Wands	60
Fuel Filters	76	Gutter Cleaner	59
Inline Filters	75		
Firehouse & Car Detailing Series	9	H	
Fittings	60	Harness	60
Fittings - Steel	77	Heavy Duty Auto Stop/Start With Shutdown Timers	66
Flat Base Frame		High Low Gas Valves With Dual Temperature Controls	64
Cold Water Shroud & Flat Base Frames	67	High Volume Foamer	64
Wall Mount For Direct Drive	67	Hose - 1/2"	61
Flex Wands & Push Pull Lance	61	Hose - 1/2" 15,000 PSI	61
Float Tank	73	Hose - 3/8"	61
Flow Switch	77	Hose Reel - Roller Bracket Guide	63
Foam Cannons	59	Hose Reels	62-63
Foam Filled Tires	68	12V Or 120V Hose Reel - Industrial	62
Foot Pedal Inline	72	360° Pivot Hose Reel	63
Frames		A-Frame Hose Reel - Industrial	62
225G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired	70	Aluminum & Stainless Steel Options	56
325G Fill & Play Frame, Industrial Hot Water Diesel - Oil Fired	71	Ball Valves	63
325G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired	70	Easy-Kleen - Stainless Steel Hose Reel	62
525G Fill & Play Frame, Industrial Hot Water Diesel - Oil Fired	71	Greaseable Super Swivels	63
525G Fill & Play Frame, Industrial Hot Water Gasoline - Oil Fired	70	Hose Reel - Roller Bracket Guide	63
740G Fill & Play Frame,		Hose Reel Stands (Only)	63
Industrial Hot Water Diesel - Oil Fired	71	Hose Reel Trolley Kits	62
Aluminum & Stainless Commercial Roll Cage Frame	68	Hydraulic Hose Reel - High Pressure	63
Aluminum & Stainless Steel Options	56	Jetter Hose Reel Kit	72
Cold Water Leg Frame - For Shroud & Flat Base Units	67	Pivoting Hose Guards	63
Cold Water Shroud & Flat Base Frames	67	Spring Driven Hose Reel	63
Cold Water Stacked Pump Frames	67	U-Frame Hose Reel	62
Customized Units & Frame Options	54-55	Hose Reel Stands (Only)	63
Dry Steam Skid - Horizontal	69	Hose Reel Trolley Kits	62
Dry Steam Skid - Vertical	69		

Hoses	61-62
Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI	61
Clear Chemical Hose - 1/4"	62
Hose - 1/2"	61
Hose - 3/8"	61
Jetter Hoses	72
Joiner Hose - 4000 PSI	61
Low Pressure Hose - 3/4"	62
Mega-Flex Drain Cleaning Kit	62
Standard Hose - 4000 PSI	61
Swivel	61
Wet Steam Hose	61
Hot Water Packing Valve Kit General Pump	75
Hot Water Units	
Commercial Hot Water Electric - Oil Fired	15
Commercial Hot Water Electric - Oil, Propane, Or Natural Gas Fired	16
Commercial Hot Water Gasoline & Diesel - Oil Fired	24
Dry Steam Generators	38-39
Enclosed Trailers	46-47
Explosion Proof - Hot Water	21
Fill & Play Equipment Series - Diesel & Gas Units	30-31
Flow Switch	77
Fully Enclosed Hot Water Heaters - Plug & Play Cabinets	35
Industrial Hot Water Diesel - Oil Fired	27
Industrial Hot Water Electric - Natural Gas & Propane Fired	18-19
Industrial Hot Water Electric - Oil Fired	17
Industrial Hot Water Fully Electrically Heated	20
Industrial Hot Water Gasoline - Oil Fired	28-29
Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam	26
In-Plant Systems	48-49
Marine Mount Series	37
Modular Hot Water Heaters - Gas Fired Or Electric	32
On Demand Electrically Heated	23
Open Modular Hot Water Heaters - Oil Fired	33
Open Trailers	44-45
Parts Washer	50
Portable Pickup Truck Skid	25
Rocket Series - Industrial Hot Water Electrically Heated	22
Tote-Box Washer	51
Vac Truck Hot Water Heaters - Oil Fired	34
Hour Meter	75
"How To" On Selecting Your Unit Frame Options	78
Hydraulic Hose Reel - High Pressure	63
Hydraulic Systems - Marine & Truck	36
Hydro Excavation Nozzle	59
Hydrostatic Testers	52
Hydrostatic Valve And Assembly Kit	76
I	
Industrial Cold Water Electric	10
Industrial Cold Water Gas & Diesel	14
Industrial Fully Electrically Heated - Frame Options & Wheel Kits	69
Industrial Hot Water Diesel - Oil Fired	27
Industrial Hot Water Electric - Natural Gas & Propane Fired	18-19
Industrial Hot Water Electric - Oil Fired	17
Industrial Hot Water Electric Units - Frame Options & Wheel Kits	67
Bracket Options	67
Industrial Hot Water Electric Wheel Kits	67
Leg Frame	67
Stainless Steel Frames	67
Industrial Hot Water Fully Electrically Heated	20
Industrial Hot Water Gasoline - Oil Fired	28
Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam	26
Industrial Wheel Kit	68
Inline Filters	75
In-Plant Systems	48-49

J	
Jetter Accessories	72
Foot Pedal Inline	72
Heater Pack	41
Jetter Hose Reel Kit	72
Jetter Hoses	72
Jetter Nozzle Kits	72
Sewer / Culvert Nozzles	72
Winterization Kit	72
Jetter Hose Reel Kit	72
Jetter Hoses	72
Jetter Nozzle Kits	72
Jetters	40-41
Joiner Hose - 4000 PSI	61
L	
Large Poly Water Tanks	73
Leg Frame	67
Cold Water Leg Frame - For Shroud & Flat Base Units	67
Light Kit	71
Low Pressure Hose - 3/4"	62
M	
Marine	
Hydraulic Systems - Marine & Truck	36
Marine Mount Series	37
Marine Mount Series	37
Mat Clamps	74
Mega-Flex Drain Cleaning Kit	62
Meg Nozzle	58
Meters	
Hour Meter	75
Volt Meter	75
Miscellaneous Items - Upgrades & Additions	75-77
12 Volt Burner - Primary Control	76
AR Pump Upgrade	75
Battery	77
Brass Flow Switch	77
Burner Parts	77
Complete Millivolt Kit For Propane Gas Units	77
Delay Timer	77
Diesel Engine Shutdown System	76
Electric Clutch Upgrade - 12 Volt Belt Driven Machines	76
Electric Start Upgrade Kits - Cold Water	76
Emperor Pump Upgrade	75
Fittings - Steel	77
Flow Switch	77
Fuel Filters	76
General Pump Upgrade	75
Generators	76
High Limits Thermostat	77
Hot Water Packaging Valve Kit General Pump	75
Hour Meter	75
Hydrostatic Valve And Assembly Kit	76
Inline Filters	75
Outlet Temperature Gauge	75
Pressure Gauge	76
Pressure Switch	77
Primary Control	76
Pump Kits	75
Remote Switch - Electric Driven Only	77
Spark Arrestor	77
Suction Kit	76
Thermal Relief Valves	77
Thermostat	77
Unloader - Flow Activated	75
Volt Meter	75
Mobile & On-Site Service Repair	57

Modular Hot Water Heaters - Gas Fired Or Electric	32	P	
N		Parts Washer	50
Natural Gas		Pickup Skid, Fill & Play Frame Options	70-71
Commercial Hot Water Electric - Oil, Propane, Or Natural Gas Fired	16	Commercial Cold Water Pickup Skid and 225 Gallon Water Tank Options	13
Industrial Hot Water Electric - Natural Gas & Propane Fired	18	Fill & Play 225G Frame, Industrial Hot Water Gasoline - Oil Fired	70
Modular Hot Water Heaters - Natural Gas, Propane Fired, Or Electric	32	Fill & Play 325G Frame, Industrial Hot Water Diesel - Oil Fired	71
Nema Box	65	Fill & Play 325G Frame, Industrial Hot Water Gasoline - Oil Fired	70
Non-Marking Hose		Fill & Play 525G Frame, Industrial Hot Water Diesel - Oil Fired	71
Blue (B), Grey (G), & Yellow (Y) Non-Marking Hose - 4500 PSI	61	Fill & Play 525G Frame, Industrial Hot Water Gasoline - Oil Fired	70
Nozzle Chart	80	Fill & Play 740G Frame, Industrial Hot Water Diesel - Oil Fired	71
Nozzles	58	Light Kit	71
Barracuda Rotary Nozzle	58	Pickup Skid	70
Foam Cannons	59	Propane Pickup Skid	70
Giant Rotary Nozzles	58	Pit Boss	58
Hydro Excavation Nozzle	59	Pivoting Hose Guards	63
Jetter Nozzle Kits	72	Portable Pickup Truck Skid	25
Meg Nozzle	58	Power Damper - 120 Volt	65
Nozzle Chart	80	Power Dampers - 24 Volt - LP/NG	65
Quick Coupler Nozzles	58	Power Venter	65
Rotary Nozzles - Commercial Duty	58	Power Venter - Kits	65
Rotary Nozzles - Heavy Duty	58	Pressure Gauge	76
Rotary Sewer / Culvert Nozzles	58	Pressure Switch	77
Rotary Tip Filter	58	Primary Control	76
Sewer / Culvert Nozzles	58, 72	Production	
Steam Nozzles	59	Thank You For Choosing Easy-Kleen	80
Nozzles & Wand Accessories	58-59	Propane	
Foam Cannons	59	Complete Millivolt Kit For Propane Gas Units	77
Gutter Cleaner	59	Direct Drive Propane Fired Units	18
Hydro Excavation Nozzle	59	Industrial Hot Water Electric - Natural Gas & Propane Fired	18
Pit Boss	58	Modular Hot Water Heaters - Natural Gas, Propane Fired, Or Electric	32
Steam Nozzles	59	Pickup Skid Propane Fired Units Are Available	25
Surface Cleaner	59	Propane Pickup Skid	70
Undercarriage Cleaner	59	Propane Tank Bracket	67
Water Broom	59	Propane Pickup Skid	70
Wet Sandblast Kit	58	Propane Tank Bracket	67
O		Pump Kits	75
Oil Fired Draft Inducers	65	Pumps	
Oil & Gas Fired Options	64-65	AR Pump Upgrade	75
Draft Hood	65	Emperor Pump Upgrade	75
High Low Gas Valves With Dual Temperature Controls	64	General Pump Upgrade	75
Oil Fired Draft Inducers	65	Hot Water Packaging Valve Kit General Pump	75
Power Damper - 120 Volt	65	Miscellaneous Items - Upgrades & Additions	75
Power Dampers - 24 Volt - LP/NG	65	Pump Kits	75
Power Venter	65	Thermal Relief Valves	77
Power Venter - Kits	65	Q	
Rain Cap	65	Quick Coupler Nozzles	58
On Demand Electrically Heated	23	Quick Couplers	
Open Modular Hot Water Heaters - Oil Fired	33	Brass Quick Couplers	60
Open Trailer Options		Quick Coupler Nozzles	58
12V Or 120V Hose Reel - Industrial	45	Stainless Steel Quick Couplers	60
360° Pivot Hose Reel	45	R	
A-Frame Hose Reel - Industrial	45	Rain Cap	65
Easy-Kleen - Stainless Steel Hose Reel	12, 45	Remote	
Float Tank	45	Jetter Remote Option	41
Fuel Tanks, Gas Caps, Tank Bracket, & Winterization Kit	45	Remote Switch - Electric Driven Only	77
Hose Reel - Roller Bracket Guide	45	Remote Wash Bay Control Panel	74
Hydraulic Hose Reel - High Pressure	45	Remote Wash Bay Control Panel	74
Large Poly Water Tanks	45	Rental Roll Cage - With Grab Bar	68
Rain Cap	65	Rental Unit	
Small Poly Water Tanks	45	Rental Roll Cage - With Grab Bar	68
Open Trailers	44-45	Repairs	
8' Open Trailer Package	44	Mobile & On-Site Service Repair	57
14' Open Trailer Package	44	Rocket Series - Industrial Hot Water Electrically Heated	22
O-Rings	60		
Outlet Temperature Gauge	75		
Overhead Boom	74		

Roll Cage		Swivel	61
Aluminum & Stainless Commercial Roll Cage Frame	68		
Rental Roll Cage - With Grab Bar	68	T	
Stainless Steel Cold Water Roll Cages	66	Tanks	72-73
Rotary Nozzles - Commercial Duty	58	Float Tank	73
Rotary Nozzles - Heavy Duty	58	Fuel Tank Option	72
Rotary Sewer / Culvert Nozzles	58	Fuel Tanks, Gas Caps, & Tank Bracket	72
Rotary Tip Filter	58	Large Poly Water Tanks	73
RV & Car Lot Wash Trailer	43	Small Poly Water Tanks	73
		Winterization Kit	72
S		Thermal Relief Valves	77
Service		Thermostat	77
Mobile & On-Site Service Repair	57	Timers	
Sewer / Culvert Nozzles	58, 72	Electrically Heated Timer	66
Shroud		Flow Switch	77
Cold Water Shroud & Flat Base Frames	67	Heavy Duty Auto Stop/Start With Shutdown Timers	66
Industrial Hot Water Fully Electrically Heated		Tote-Box Washer	51
- 11 Gauge Bent Steel Tip Ahead Shroud	20	Trailer Options	
Tip Ahead Shroud with Integrated Belt Guard	19	12V Or 120V Hose Reel - Industrial	45
Wall Mount For Direct Drive	67	360° Pivot Hose Reel	45
Shut-Offs		A-Frame Hose Reel - Industrial	47
Emergency Shut-Offs	66	Easy-Kleen - Stainless Steel Hose Reel	12, 45
Skids		Float Tank	45
Dry Steam Skid - Horizontal	69	Hose Reel - Roller Bracket Guide	45
Dry Steam Skid - Vertical	69	Hose Reel Stands	47
Pickup Skid	70	Hydraulic Hose Reel - High Pressure	63
Pickup Skid, Fill & Play Frame Options	70	Large Poly Water Tanks	47
Propane Pickup Skid	70	Light Kit	47
Small Poly Water Tanks	73	Rain Cap	65
Soap Switch Control Panel	74	Trailers	
Solenoid Controls	64	8' Enclosed Trailer Package 225G	
Spark Arrestor	77	& 14' Enclosed Trailer Package 525G	46
Spring Driven Hose Reel	63	8' Open Trailer Package	44
Stainless Steel		14' Open Trailer Package	44
Aluminum & Stainless Commercial Roll Cage Frame	68	16' Enclosed Trailer Package 525G & 740G	46
Aluminum & Stainless Steel Options	56	Dust Suppression Trailer	42
Chemical Sprayer	64	Easy-Kleen Portable Skid Unit - DOT Bolt On Trailer Package	25
Easy-Kleen - Stainless Steel Hose Reel	62	Enclosed Trailers	46-47
Greaseable Super Swivels	63	Fill & Play Bull Moose With Trailer Kit	31
Gun & Wand Combos	61	Fuel Tanks, Gas Caps, Tank Bracket, & Winterization Kit	45
Mega-Flex Drain Cleaning Kit	62	Industrial Hot Water Gas Unit With Trailer Kit	29
Spring Driven Hose Reel	63	Jetter Trailers	41
Stainless Steel Casters	66	Large Poly Water Tanks	73
Stainless Steel Coils - Machine Options & Accessories	74	Light Kit	71
Stainless Steel Cold Water Roll Cages	66	Open Trailers	44-45
Stainless Steel Frames	67	RV & Car Lot Wash Trailer	43
Stainless Steel Quick Couplers	60	Small Poly Water Tanks	45
Stainless Steel Vacuum	74	Trigger Guns	59
Standard Hose - 4000 PSI	61	Truck Wash Brush	74
Steam		U	
Dry Steam Generators	38-39	U-Frame Hose Reel	62
Dry Steam Generators - Frame Options & Wheel Kits	69	Undercarriage Cleaner	59
Dry Steam Skid - Horizontal	69	Unloader - Flow Activated	75
Dry Steam Skid - Vertical	69	V	
Dry Steam Wheel Kit - Horizontal	69	Vac Truck Hot Water Heaters - Oil Fired	34
Dry Steam Wheel Kit - Vertical	69	Valves	
Industrial Hot Water Gasoline - Oil Fired, Portable Wet Steam	26	Hot Water Packaging Valve Kit General Pump	75
Steam Nozzles	59	Hydrostatic Valve And Assembly Kit	76
Steam Option Kits	73	Thermal Relief Valves	77
Steam Options - Machine Options & Accessories	73	VFD For Electric Motor Controls	65
Steam Wand	60	Volt Meter	75
Wet Steam Hose	61	W	
Steam Nozzles	59	Wall Mount For Direct Drive	67
Steam Options - Machine Options & Accessories	73	Wand Accessories	
Steam Wand	60	Gutter Cleaner	59
Suction Kit	76	Pit Boss	58
Surface Cleaner	59	Surface Cleaner	59

Undercarriage Cleaner	59
Water Broom	59
Wet Sandblast Kit	58
Wand Holder	74
Wands	60
Dual Lance Wands	60
Extension Wands	60
Flex Wands & Push Pull Lance	61
Gun & Wand Combos	61
Gun/Wand/Quick Coupler Assembly	60
Wash Bay	
Complete Foam Brush Assembly	74
Festoon System	74
Mat Clamps	74
Overhead Boom	74
Remote Wash Bay Control Panel	74
Soap Switch Control Panel	74
Stainless Steel Vacuum	74
Truck Wash Brush	74
Wand Holder	74
Wash Bay - Machine Options & Accessories	74
Water Broom	59
Wet Sandblast Kit	58
Wet Steam Hose	61
Wheel Kits	
Commercial Wheel Kit - Crab Leg Extension	68
Dry Steam Generators - Frame Options & Wheel Kits	69
Dry Steam Wheel Kit - Horizontal	69
Dry Steam Wheel Kit - Vertical	69
Foam Filled Tires	68
Industrial Fully Electrically Heated - Frame Options & Wheel Kits	69
Industrial Hot Water Electric Wheel Kits	67
Industrial Wheel Kit	68
Stainless Steel Caster	66
Winterization Kit	72

NOTES:


EASY-KLEEN 
PRESSURE SYSTEMS LTD.
MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

This image shows a single sheet of white, textured paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are approximately 20 lines visible. The paper has a slightly mottled appearance with some minor discoloration and small dark spots, suggesting it might be aged or recycled paper. There is no handwriting or other markings on the page.

EASY-KLEEN

PRESSURE SYSTEMS LTD.

MANUFACTURER OF HIGH PRESSURE CLEANING EQUIPMENT

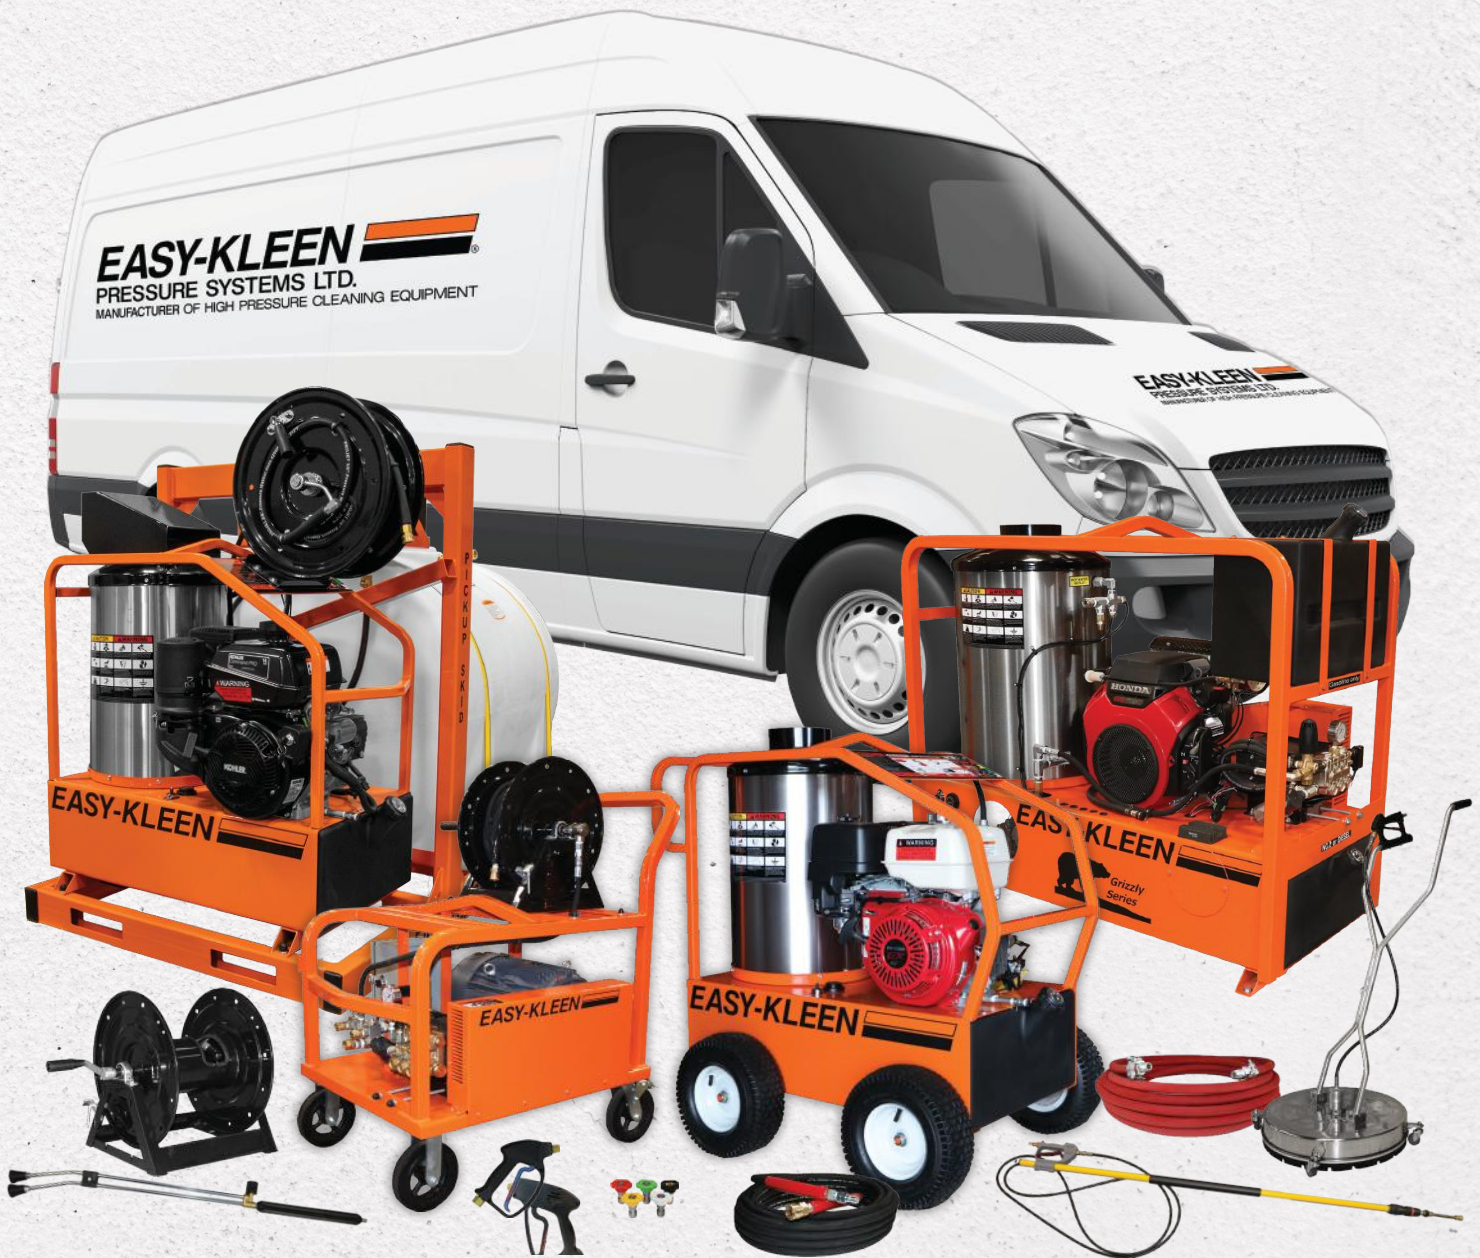

1-800-315-5533
easykleen.com

   
sales@easykleen.com

