МПОН

Award Winning Products and Service For Over 72 Years.





Starting in 1952 Yoshiro MUTOH founder of the MUTOH Scale Engraving Research Center in Mishuku, Setagaya was a company that manufactured measuring equipment. Measuring equipment such as disk-type slide rules for aerial navigation, calipers, and rotary protractors were produced and these products reflected the high technical capabilities required to engrave scales accurately and marked the beginning of the company's spirit of supporting monozukuri (the act of making things).

In March 1952, MUTOH Memori Chokoku (MUTOH Scale Engraving) LTD was established. With this came new products such as the Drafter and the Pen Plotter that printed product drawings. Over the years, MUTOH has continued to uphold the same spirit by supporting the many people involved in various aspects of monozukuri, especially when it comes to our Large Format Printers (LFP) products.

MUTOH's President, Yasuhiko Isobe stated "understanding the customer's needs, providing security and trust, and the excitement of our future to reach new milestones and breakthroughs is our commitment to achieving our target of celebrating our 100th anniversary."

With the world headquarters in Japan, and its affiliates in the US, Europe, and Australia, MUTOH has become a leading manufacturer of wide and small–format printers and plotting cutters. MUTOH printers are known for their Smart Printing Technologies, print speeds, and unbeatable quality and have introduced some of the most innovative products to the print industry.

"Seventy years is quite a milestone for MUTOH" says Brian Phipps, President of MUTOH America "It says a lot when a company can grow and adapt over the many decades and remain a leader in the markets they serve. I'm very proud to be part of this organization and to celebrate this giant achievement with MUTOH. "

MUTOH AMERICA LOCATIONS

MUTOH Western Regional Learning Facility

2291 W 205th Street Suite 105 Torrance, CA 90501 **Phone:** (310) 783-0281

MUTOH Corporate Offices

4405 E Baseline Rd #120 Phoenix, Arizona USA 85042 **Phone:** (480) 968-7772





www.MUTOH.com | 800.99MUTOH

000000

MUTOH AWARD WINNING TECHNOLOGY





ECO SOLVENT











DYE SUBLIMATION

Find a Dealer: Click Here



MUTOH ECO-SOLVENT PRINTER







The **ValueJet 628 24**" Eco-Solvent Printer from MUTOH is the perfect size and price to fit easily into any size print shop. It is powered by MUTOH's new genuine **VerteLith™ RIP Software**, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the VJ-628 has to offer and produces the best-possible gradients, skin tones and vivid colors. The VJ-628 features an automatic sheet-off function and CMYKx2 or CMYK Lc Lm ink set. These features are designed to increase user-friendly operation and maintenance while continuing to offer high production, high-quality output. The VJ-628 is paired with MUTOH's MS31 Eco-Solvent ink, which offers users a larger color gamut, outstanding durability, and improved dot gain at speeds up to 433 sqft/hr.



DECALS







POSTERS

SIGNAGE HEAT TRANSFER www.MUTOH.com

ΜυτοΗ

NEW VERTELITH RIP SOFTWARE

INTELLIGENT INTERWEAVE TECHNOLOGY

MS31 ECO-SOLVENT INK SET

AUTOMATIC SHEET-OFF FUNCTION

www.MUTOH.com | 1-800-99MUTOH

f 🎔 🖾 in 🕨



MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the ValueJet 628 through these key features:

- Auto-population of named Pantone coated/uncoated spot colors.
- MUTOH Clear Tone half tone technology.
- MUTOH CMYK, featuring a wide color gamut ICC input profile, optimizes performance to

Value Jet 628

POWERED BY VERTELITH[™] RIP SOFTWARE



MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21



enable output of more vivid colors.

- Automated layout processing and printing.
- Soft proof simulates printed colors accurately before media is output.
- "What-you-see-is-what-you-get" RIP preview.
- Tab customization.
- Color management function.
- Finishing bleed processing function.

Printing log function.

VJ-628 printer features include:

- Intelligent Interweave i² print technology reduces banding by arranging printed dots in a way that takes into account how they look, creating smoother print images.
- MUTOH Status Monitor checks the printer's operation status in real time.
- Automatic sheet-off function.

VALUEJET 628 SPECIFICATIONS

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Туре	MS31 Ink Eco-Solvent
Print head height	Low 1.2mm, High 2.5mm		Ink Set	CMYK x2 or CMYK Lc Lm
Print head	1	Ink	Volume	220 ml/1L bags with optional adapter
Max print resolution	1440dpi		No. of slots	8
Print modes	1440/1080/720/540/360dpi 12+modes			-
Media width	24.8"	Inter	face	Gigabit-Ethernet (1000BASE-T)
Media capacity	ø 5.9" dia / 2" & 3" cores / Roll media 66lbs or less	Pow	er Requiremen	ts AC 110-120V±10%, 50/60Hz±1Hz
Max media thickness	Low 0.3mm, High 1.3mm	Printable Environment		ent Temperature: 68-89.6°F Humidity: 40-60%RH
Max printable width	24.4 in			(non condensing) Rec. environment: Temperature: 71.6-86°F
Height adjustment	Manual	Pow	er Consumptio	n Main: Operation status 77W or less Standby: 52W or less
RIP software		Dimensions (WxDxH)		H) Printer including stand: 47"x23"x46" cover closed
	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21		ht	Body: 70lbs Stand: 19lbs



24" ECO-SOLVENT PRINTER/CUTTER COMBO



The ALL NEW **MUTOH XpertJet C641SR Pro** 24" Eco-Solvent Desktop Printer/Cutter Combo is perfect for a wide range of applications such as stickers, t-shirt transfers, vehicle decals, posters, banners and more. Print and cut a 24-inch roll of media while operating at speeds up to twice as fast as its closest competitors.

In addition to the built-in contour cut and perforated through-cutting capability, the XPJ-C641SR Pro also contains all of the functions and features of the full-size XpertJet Pro Series printers including the ultra-fast MUTOH AccuFine printhead, Dropmaster2 and FeedMaster automatic alignments, i-screen Intelligent Interweave technology, and Mediatracker.

The All-In-One Desktop XpertJet C641SR Pro benefits from MUTOH's renowned reliability and Made in Japan quality, making it the perfect choice for anyone looking to get into the print game.

The XPJ-C641SR Pro is powered by MUTOH's VerteLith™ Genuine RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.



STICKERS



APPAREL



DECALS



POSTERS





NEW PRINT & CUT CAPABILITY.

POWERED BY

EASY TO SET UP, SIMPLE TO USE.

BUILT-IN CUTTER WITH SPEEDS UP TO 150MM/S.

XPERTJET PRO SERIES FEATURES.

POWERED BY VERTELITH™ RIP SOFTWARE.

www.MUTOH.com | 1-800-99MUTOH

f 🔘 in 🕨



XPJ-C641SR Pro Printer/Cutter combo features include:

- MUTOH AccuFine printhead, providing outstanding speed and unrivaled quality even at lower resolutions.
- Dropmaster2 and FeedMaster automatic alignment systems for achieving high caliber, repeatable prints.
- i-screen Intelligent Interweave technology to prevent banding while printing.
- MediaTracker, barcode printing and scanning to track remaining media.
- 24-inch roll capacity for enhanced production output.

220ml CMYK Cartridges

- Built-in contour and perforated through-cut capability with speeds up to 150mm/s.
 - Optional stand and take-up unit for higher production needs.



XpertJet C641SR Pro

🕅 🕹 🐨 🖓 🕹 YerteLith +

MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21



VerteLith with FlexiDESIGNER software enhances the XPJ-C641SR Pro:

- Seamless setup of print & cut environments, with a continuous cut feature for true one-step job submission.
- Easily design cut lines using FlexiDESIGNER and send jobs directly to VerteLith.
- Soft Proof the printed image colors on screen before submitting to print.

XPERTJET C641SR PRO SPECIFICATIONS

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Ink -	Туре	MUTOH MS31 Eco-Solvent
Print head height	Two level adjustment: Low 1.2mm, High 2.5mm			Ink Set	СМҮК
Print heads	1			Volume	220ml cartridge
Max print resolution	1200x1200dpi			No. of slots	4
Max print speed	105 sqft/hr	Interface Power Requirements			
				ace	Gigabit-Ethernet (10BASE-T/100BASE-TX)
Media width	24.8 inches			acc	
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 19.8lbs or less			r Requiremen	ts AC 110-120V± 10%, 50/60Hz ± 1Hz
Max media thickness	Low 0.3mm, High 0.8mm			able Environm	ent Temperature: 68-89.6°F Humidity: 40-60%RH
Max printable width	23.6 inches				(non condensing) Rec. environment: Temperature: 71.6-86°F
Cutting Speed	20 - 150mm/s @ 30 - 300 gf			r Consumptio	n Main: Operation status 830W or less
RIP software	VerteLith™ Genuine RIP Software		Dime	nsions (WxDx	H) Printer including stand: 46.8"x17.2"x14.4" cover closed
			Weight		Body: 75lbs Stand: 19lbs

MUTOH ECO-SOLVENT PRINTER

XpertJet





The **MUTOH XpertJet 1341SR Pro** 54" Eco-Solvent printer, with it's small footprint and high-quality output, is ideally-suited for the production of vibrant graphics and signage. It is powered by MUTOH's new genuine **VerteLith™ RIP Software**, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the XPJ-1341SR Pro has to offer and produces the best-possible gradients, skin tones and vivid colors. This printer features MUTOH's new **AccuFine Print Head**, which achieves best-in-class dot placement accuracy and an increased nozzle row length for higher productivity. Also included with the XPJ-1341SR Pro is i-screen optimizing technology, which reduces banding to create smoother-looking images. Automated processes like Nozzle Area Select, Feed Master, DropMaster2 and Media Tracker make this printer an excellent choice when looking for an entry-level, roll-to-roll machine that balances performance and cost.



SIGNAGE







BANNERS WINDOW VINYL www.MUTOH.com DECALS

NEW VERTELITH

RIP SOFTWARE

MUTOH XpertJet 1341SR Pro

POWERED BY VERTELITH[™] RIP SOFTWARE



ECO SOLVENT

MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 22

ACCUFINE **PRINT HEAD**

AUTOMATIC ALIGNMENTS

MEDIA TRACKER

I-SCREEN OPTIMIZING

www.MUTOH.com | 1-800-99MUTOH

🖸 in 🕩



MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the XPJ-1341SR Pro through these key features:

- · Auto-population of named Pantone coated/uncoated spot colors.
- MUTOH Clear Tone half tone technology.
- MUTOH CMYK wide color gamut ICC profile.
- · Automated layout processing and printing.
- Soft proof.
- "What-you-see-is-what-you-get" RIP preview.



Multi-stage pressure rollers

- FlexiDESIGNER MUTOH Edition 21.
- Tab customization.
- Color management function.
- · Finishing bleed processing function.
- · Printing log function.

XPJ-1341SR Pro printer features include:

• New extra-long piezo Accufine print head increases productivity and improves the accuracy of dot placement by 20% over the previous print head.

Media Tracker

- · i-screen technology reduces banding.
- DropMaster2 automatically calibrates

XPERTJET 1341SR PRO SPECIFICATIONS

Optional Edge Holder

bi-directional alignments, saving time and reducing adjustment variations.

- Nozzle Area Select uses blocks of active nozzles to temporarily print if clogged nozzles fail to recover.
- · Feed Master sensor allows for automatic feed adjustments.
- Media Tracker prints a barcode prior to removing media and when media is loaded again, recognizes the amount remaining.

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Туре	MS31 Ink Eco-Solvent
Print head height	Three level adjustment: Low 1.5mm, Mid. 2.0mm, High 2.5mm		Ink Set	4 colors (C, M, Y, K)
Accufine print head	1	Ink	Volume	220 ml/1000ml
Max print resolution	1200x1200dpi		No. of slots	4
Print modes	1200/900/600/300dpi			
Media width	54"	Interface		Gigabit-Ethernet (1000BASE-T)
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 66lbs or less	Power Requirem		ts AC 100-120V± 10%, 50/60Hz ± 1Hz
Max media thickness	ow 0.3mm, Mid. 0.8mm, High 1.3mm		able Environm	ent Temperature: 68-89.6°F Humidity: 40-60%RH
Max printable width	53.5 in			(non condensing) Rec. environment: Temperature: 71.6-86°F
Height adjustment	Manual	Powe	er Consumptio	n Main: Operation status 77W or less Standby: 52W or less
RIP software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21		ensions (WxDx	H) Printer including stand: 75.4"x26.9"x47.9" cover closed
			ht	Body: 145lbs Stand: 44lbs

Accufine print head





The **MUTOH XpertJet 1641SR Pro** 64" Eco-Solvent single head, 4-color (CMYK) printer, builds upon MUTOH's made in Japan reputation and delivers superior print quality and outstanding speeds at an affordable price. It is powered by MUTOH's new genuine **VerteLith™ RIP Software**, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the XPJ-1641SR Pro has to offer and produces the best-possible gradients, skin tones and vivid colors. This printer features MUTOH's new **AccuFine Print Head**, which achieves best-in-class dot placement accuracy and an increased nozzle row length for 35% faster print speeds. The XPJ-1641SR Pro is paired with MUTOH's GREENGUARD Gold certified MS41 Eco-Solvent ink, suitable for use in sensitive environments such as hospitals, child care facilities and more, all while providing users a larger color gamut, outstanding durability, and improved dot gain.



WRAPS







SIGNAGE WINDOW VINYL www.MUTOH.com DECALS

ECO SOLVENT

Μυτομ

NEW VERTELITH **RIP SOFTWARE**

NEW MUTOH ACCUFINE PRINT HEAD

I-SCREEN OPTIMIZING

AUTOMATIC ALIGNMENTS

INTERNAL LED LIGHTING

www.MUTOH.com | 1-800-99MUTOH



MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the XPJ-1641SR Pro through these key features:

- · Auto-population of named Pantone coated/uncoated spot colors.
- MUTOH Clear Tone half tone technology.
- MUTOH CMYK wide color gamut ICC profile.
- . Automated layout processing and printing.
- Soft proof.
- "What-you-see-is-what-you-get" RIP preview.

XpertJet 1641SR Pro

POWERED BY VERTELITH ™ RIP SOFTWARE







Internal LED Lighting



AccuFine print head

- FlexiDESIGNER MUTOH Edition 21. •
- Tab customization.
- Color management function.
- Finishing bleed processing function. .
- · Printing log function.

XPJ-1641SR Pro printer features include:

- New extra-long piezo Accufine print head increases productivity and improves the accuracy of dot placement by 20% over the previous print head.
- i-screen technology reduces banding.
- DropMaster2 automatically calibrates



Multi-stage pressure mechanism

Media Flange for improved handling

bi-directional alignments, saving time and reducing adjustment variations.

- Nozzle Area Select uses blocks of active nozzles to temporarily print if clogged nozzles fail to recover.
- · Feed Master sensor allows for automatic feed adjustments.
- Media Tracker prints a barcode prior to removing media and when media is loaded again, recognizes the amount remaining.

XPERTJET 1641SR Pro SPECIFICATIONS

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Ink –	Туре	MS41 Eco-Solvent ink	
Print head height	Four-level adjustment: 1.5mm, 2.0mm, 2.5mm, 4.0mm			Ink Set	4 colors (C M Y K)	
Print head	1			Volume	1000ml Bags	
Max print resolution	1200x1200 dpi			No. of slots	4	
Print modes	1200/900/600/300 dpi					
Media width	64"	Interface		ace	Gigabit-Ethernet (1000BASE-T)	
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 66lbs or less	s or less		r Requiremen	AC 100-120V±10%, 50/60Hz±1Hz	
Max media thickness	nickness Low1 0.3mm, Low2 0.8mm, Mid. 1.3mm, High 2.8mm		Printable Environment		ent Temperature: 68-89.6°F Humidity: 40-60%RH	
Max printable width	64 in				(non condensing) Rec. environment: Temperature: 71.6-86°F	
Height adjustment	Automatic	Power Consumption		r Consumptio	Main: Operation status 77W or less Standby: 52W or less	
RIP software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21		Dime	nsions (WxDx	H) Printer including stand: 108.26"x35.23"x56.22" cover closed	
			Weigh	nt	Body: 313lb Stand: 70.54lb	

MUTOH ECO-SOLVENT PRINTER

VerteLith

ACCUFINE

MS41

Inks

Eco-Solvent

CMYKx2 | CMYKLcLmLLKOr



1682SR Pro

The **MUTOH XpertJet 1682SR Pro** 64-inch Eco-Solvent Printer is equipped with staggered dual AccuFine HD printheads that provide ultra-fast print speeds. It's capable of producing smooth gradations while delivering high-quality printing, even with reduced resolutions, thanks to the optional 8-color (CMYKLcLmLkOr) ink configuration.

XpertJet

-

Built for Professionals, the **XPJ-1682SR Pro** is packed with features such as *Dropmaster 2* (automatic bi-directional alignments), *Feed Master* (automatic PF adjustment), *Automatic Nozzle Checking Unit* option with *Nozzle Area Select* (continuous printing), *i-screen* print effects (banding mitigation), and *Media Tracker* (roll remainder tracking), among other cutting-edge improvements brought on by the original XpertJet line.

The **XPJ-1682SR Pro** includes *VerteLith Genuine RIP Software*, bundled with *FlexiDESIGNER MUTOH Edition 21* for the ultimate balance of speed and quality.



WRAPS







SIGNAGE WALL COVERINGS

BANNERS

www.mutoh.com

NEW ACCUFINE HD PRINTHEAD


IMPROVED DRYER SYSTEM

VerteLith GENUINE RIP SOFTWARE


AUTOMATIC ALIGNMENTS

INTERNAL LED LIGHTING

www.MUTOH.com | 1-800-99MUTOH



MUTOH XpertJet 1682SR Pro

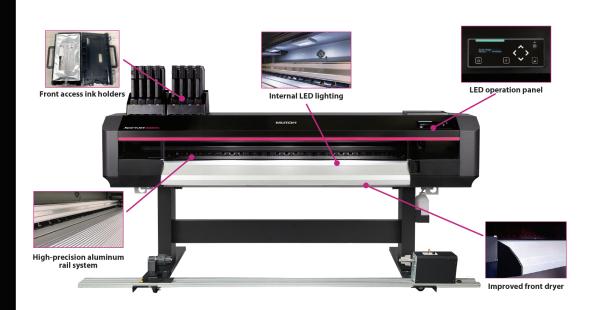

- High-precision aluminum rail system for high guality and stable printing.
- Ease-of-use with front access ink holders, side mounted LAN and power plugs, and LED operation panel.
- New AccuFine printheads provide faster speeds with exceptional quality.
- Built-in sensors for operator-driven automatic bi-directional and page feed alignments.
- Improved front dryer system for 20% faster ink dry times.
- Updated media flanges and media feeding mechanism allow for easy loading and page feed.
- Internal LED lighting for unobstructed print viewing and maintenance access.

• Includes the MUTOH Status Monitor (MSM) companion software for convenience and efficiency.











PRO SP IONS ECIFICA ER E Printing method Drop-on-demand Micro Piezo Inkjet Technology Туре MS41 Eco-Solvent ink Print head height Four-level adjustment: 1.5mm, 2.0mm, 2.5mm, 4.0mm Ink Set 4 color (CMYK) | 8 color (CMYKLcLmLkOr) Ink Print head 2 (staggered) Volume 1L ink bags (300mL bag for Or) Max print resolution 1200x1200 dpi No. of slots 8 Print modes 1200x1200 DPI (1200/900/600/300 DPI print modes) Interface Gigabit-Ethernet (1000BASE-T) Media width 64' Power Requirements AC 100-120V± 10%, 50/60Hz ± 1Hz Media capacity ø 5.9" dia / 2" & 3" cores /Roll media 66lbs or less Max media thickness Low1 0.3mm, Low2 0.8mm, Mid. 1.3mm, High 2.8mm Temperature: 68-89.6°F | Humidity: 40-60%RH Printable Environment (non condensing) Rec. environment: Temperature: 71.6-86°F Max printable width 64 in Power Consumption Main: Operation status 1100W or less | Standby: 30W or less Take-up system VJ16/19-TUP40 take-up included (options available) Dimensions (WxDxH) Printer including stand: 108.26"x35.23"x56.22" cover closed Max print speed 1.225 sqft/hr(300x600 DPI) **RIP** software VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21 Weight Body: 313lb | Stand: 70.54lb

MUTOH ECO-SOLVENT PRINTER

MS31

Inks

CMYKx2 CMYK LcLmLk

<u>2638X</u>

Eco-Solvent

Powered by

URBAN

VerteLith

CLOTHING

ST

BUILT FOR PROFESSIONALS

The **MUTOH ValueJet 2638X 104**" Eco-Solvent CMYKx2/CMYK LcLmLk printer, builds upon MUTOH's made in Japan reputation and delivers superior print quality and outstanding speeds at an affordable price. It is powered by MUTOH's new genuine **VerteLith™ RIP Software**, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the VJ-2638X has to offer and produces the best-possible gradients, skin tones and vivid colors. This super-wide printer produces billboards, banners, vehicle wraps and signage with ease using technologies such as Variable Dot, i² Intelligent Interweave and DropMaster. The VJ-2638X is paired with MUTOH's GREENGUARD Gold certified MS31 Eco-Solvent ink, suitable for use in sensitive environments like hospitals, child care facilities and more, all while providing users a larger color gamut, outstanding durability, and improved dot gain.

WORN



BILLBOARDS



BANNERS

WRAPS



SIGNAGE

TECHNOLOGY

www.MUTOH.com | 1-800-99MUTOH

DROPMASTER INK

NEW VERTELITH

RIP SOFTWARE

HEATER SYSTEM

USER FRIENDLY

CONTROL PANEL

i²INTELLIGENT

INTERWEAVE

PLACEMENT

MULTI-STAGE



MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the VJ-2638X through these key features:


- Auto-population of named Pantone coated/uncoated spot colors.
- Soft proof simulates the color of the printed image on screen before printing.
- MUTOH Clear Tone half tone technology.

MUTTOH ValueJet 2638X

POWERED BY VERTELITH™ RIP SOFTWARE

VerteLith

MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 23

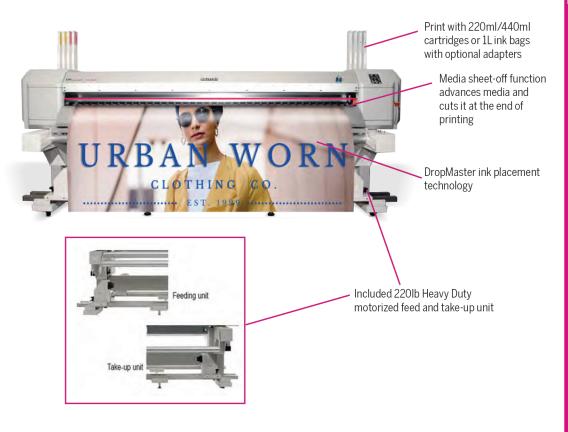

- MUTOH CMYK wide color gamut ICC profile.
- Automated layout processing and printing.
 "What-you-see-is-what-you-get" RIP preview.
- Tab customization.
- Color management function.
- Printing log function.

VJ-2638X printer features include:

• Staggered dual print heads.

- i² Intelligent Interweave technology reduces banding.
- DropMaster ink dot placement technology.
- MUTOH Status Monitor (MSM) checks printer status in real time.
- Multi-stage heater system for faster drying time.
- Heavy Duty 220lb motorized feed and takeup unit.

VALUEJET 2638X SPECIFICATIONS

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Туре	MS31 Ink Eco-Solvent
Print head height	Three level adjustment: Low 1.5mm, Mid. 2.5mm, High 4.0mm		Ink Set	CMYKx2, CYMK LcLmLk
Print heads	2	Ink	Volume	220ml/440ml cartridges/ 1L bags with optional adapters
Max print resolution	1440x1440dpi		No. of slots	8
Print modes	1440/1080/720/540/360dpi 29 modes			
Media width	104 inches	Inte	face	Gigabit-Ethernet (1000BASE-T)
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 220lbs or less	Pow	er Requiremen	ts AC 110-120V± 10%, 50/60Hz ± 1Hz
Max media thickness	Low 0.3mm, Mid. 1.3mm, High 2.8mm	Printable Environment		ent Temperature: 68-89.6°F Humidity: 40-60%RH
Max printable width	104 inches			(non condensing) Rec. environment: Temperature: 71.6-86°F
Height adjustment	Manual	Pow	er Consumptio	n Main: Operation status 77W or less Standby: 52W or less
	VerteLith™. bundled with FlexiDESIGNER MUTOH Edition 21. a	Dim	ensions (WxDx	H) Printer including stand: 146"x34.9"x49.65" cover closed
RIP software	\$2,199.00 value		ght	Body: 534lbs Stand: 91lbs

MUTOH **FLATBED UV-LED** PRINTER

XpertJet 461 UF



Powered by MUTOH's genuine VerteLith RIP Software bundled with FlexiDESIGNER MUTOH Edition 21 a \$2,199.00 value



The XpertJet 461UF, compact UV-LED flatbed printer offers many features including a larger printable surface area, a larger window for safe viewing, an updated touchscreen panel, an improved LED lamp, optional vacuum table providing the ability for increased printing depth and more. The XPJ-461UF is powered by MUTOH's new genuine VerteLith™ RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities of the XPJ-461UF, increasing productivity and profitability. The XPJ-461UF allows for finer texture layers which instantly adds value to any print. Tie that in with MUTOH's Local Dimming Control Technology, you now have the ability to add high glossy finishes easily in one pass.



GLOSS & MATTE VARNISH



MUTOH

XpertJet 4610F

RICH TEXTURES

VARIABLE PRINTING



BRAILLE

www.MUTOH.com

MUTOH



UV-LED Lamp Local Dimming **Control Technology**

Upgraded LED Touch Panel

Optional Vacuum Table

Removable Table

Expanded **Opening Space**

1-800-99MUTOH www.**MUTOH**.com

f 🎔 🖾 in 🕨

LED Touch Panel

LED touch panel provides high quality display and improves panel operation.

Print Resume Function

Ability to pause and resume print function.

Partial Nozzle Block Activation

Printing can be performed temporarily using only active nozzle blocks if nozzles are clogged.

Powered by VerteLith™



MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21


Mutoh's Unique UV-LED Lamp Local Dimming Control Technology

The LED-UV lamp Local Dimming Control technology produces various rich texture expression. It provides glossy, semi-glossy, and matte varnish printing simultaneously with colors and/or white printing with a single table movement.

LDC shortens print time, improves productivity, reduces grain, banding and layer printing misalignment.

UV-LED Lamp Local Dimming Control Technology



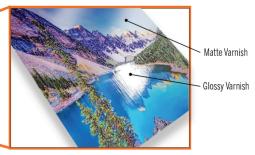

Even if varnish is simultaneously printed with colors and/or white with single table movement, glossy and matte varnish can be expressed.


Newly Designed Mechanism Ensures Excellent User Experience





Print onto objects up to 2.76" thick. Table removal allows printing onto objects up to 5.91" thick. Optional vacuum table available.


Improved Maintenance



Redesigned area around UV-LED Lamp makes for easier access for maintenance.

New removable/replaceable UV lamp filter makes for easier cleaning.

PRECISE RAIL MECHANISM



High precision rails on both sides keep the table horizontal and provide consistent print quality.

EXPANDED OPENING SPACE



Newly designed front cover with hydraulic damper ensures safety and improves ease of operation. Expanded opening space for ease of use and maintenance

		XPERTJET 461UF	SPECIFICA	TIONS	
Printing Systems		On-demand piezo drive system	Print Resolution	1440 / 1080 / 720 dpi (Total 6 modes)	
Size (WxD		20.5 in x 14.9 in	Interface	Ethernet (10BASE-T / 100 BASE-TX)	
	11-1-1-1	up to 2.76 in (with standard table) up to 5.9 in (w/o standard table)	Power Requirements	AC 100-120V ± 10%, 50/60Hz ± 1Hz	
Set Media Weight	Height	up to 2.76 in (with optional vacuum table)	Operation Naise	Standby: 51dB or less Printing with standard table: 63dB or le	
	\A/_:-!-!+	up to 11.02 lbs. (w/standard table) up to 17.64 lbs. (w/o standard table)	Operation Noise	Printing with optional vacuum table: 70dB or less	
	vveignt	up to 8.82 lbs. (with optional vacuum table)	Printable Environment	Temperature: 68-89.6 °F Humidity: 40-60%RH (non conden	
Max Printabl	e Size (WxD)	19.02 in x 12.95 in	Power Consumption	Sleep Mode: 20W or less Ready to Print: 40W or less Operation: 195W or less	
Height Adjus	stment	PG handle		46.77 in x 38.27 in x 23.50 in (cover closed) weight: 209.4	
	Туре	UV-LED Ink (UH21 ink / US 11 ink)	Dimensions (WxDxH) Weight	46.77 in x 38.27 in x 39.80 in (front cover opened)	
	Ink Set	4 colors (C, M, Y, K) 6 colors (C, M, Y, K, White, Varnish)	(46.77x 40.35x 23.50 in (PG handle cover opened)	
lnk	Capacity	220ml ink cartridge (CMYK, W, V), 800ml ink bag (CMYK, V) 500ml bag (W) *Bulk ink requires an additional adaptor.	Printer Driver	Bundled	
	No. of slots	6	RIP Software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 3	
Vacuum Tab	le	Optional		a \$2,199.00 value	

MUTOH FLATBED UV-LED PRINTER

XpertJet 661 UF



Powered by MUTOH's genuine VerteLith RIP Software bundled with FlexiDESIGNER MUTOH Edition 21 a \$2,199.00 value



The XpertJet 661UF, UV-LED flatbed printer includes a larger printable surface area, updated touchscreen panel, improved LED lamp, and more. The XPJ-661UF is powered by MUTOH's new genuine VerteLith™ RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities of the XPJ-661UF, increasing productivity and profitability. The MUTOH XPJ-661UF allows for layered printing to create fine textured prints and Braille, all of which will instantly add value to any print. Tie that in with MUTOH's Local Dimming Control Technology, and you now have the ability to add glossy finishes easily in one pass.

The MUTOH XPJ-661UF also includes the StartRight[™] Kit, an advanced training tool designed to quickly get the printer up and running. It includes project application guides, lessons, video instruction, sample output, blanks and, a sample JIG with inserts.



GLOSS & MATTE VARNISH



RICH TEXTURES

VARIABLE PRINTING

MUTOH

Xpertuet 6

BRAILLE

RESTROOM

.....

www.MUTOH.com





UV-LED lamp Local Dimming Control technology

Automatic table height control

Variable data printing

Partial nozzle block activation

1-800-99MUTOH www.**MUTOH**.com

f 🎔 🞯 in 🕒

display and improves panel operation.

LED Touch Panel

Print Resume Function Ability to pause and resume print function.

LED touch panel provides high quality

Partial Nozzle Block Activation

Printing can be performed temporarily using only active nozzle blocks if nozzles are clogged.


Powered by VerteLith™



MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21

Mutoh's Unique UV-LED Lamp Local Dimming Control Technology

The LED-UV lamp Local Dimming Control technology produces various rich texture expressions. It provides glossy, semi-glossy, and matte varnish printing simultaneously with colors and/or white printing with a single table movement. LDC shortens print time, improves productivity, reduces grain, banding, and layer printing misalignment.

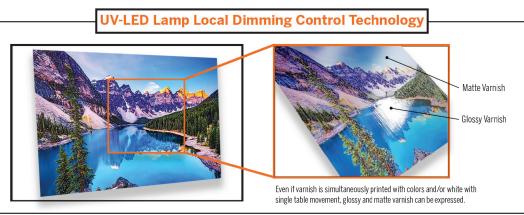

Five vacuum power control settings.

Newly Designed Mechanism Ensures Excellent User Experience

TABLE MECHANISM FOR USER FRIENDLINESS



Automatic table height control from 0"-5.90.

Improved Maintenance



Redesigned area around UV-LED Lamp makes for easier access for maintenance.

New removable/replaceable UV lamp filter makes for easier cleaning.

OPTIONAL ITEM



ROTARY UNIT Enables printing on cylindrical objects.

Enhanced Applications

VARIABLE DATA PRINTING

Allows data | text to be changed from one printed piece to the next without stopping the printing process. Example: Name Badges.

DENSITY TEST PATTERN

Varnish: Easily print matte and glossy varnish by selecting a certain density from the test patterns.

White: Reduced microstructure (mottling) by optimizing ink density.

XPERTJET 661UF SPECIFICATIONS

ems	On-demand piezo drive system		Print Resolution	1440 / 1080 / 720 dpi (Total 6 modes)
Size (WxD)	20.5 in x 24.5 in		Interface	Ethernet (10BASE-T / 100 BASE-TX)
Height	0-5.91 in		Power Requiremnts	AC 100-120V ± 10%, 50/60Hz ± 1Hz
Weight	13.23 lbs.		Operation Noise	Standby: 49dB or less Printing with vacuum table: 69dB or less
e Size (WxD)	19.02 in x 23.39 in		Printable Environment	Temperature: 68-89.6°F Humidity: 40-60%RH (non condensing)
. ,	Automatic		Power Consumption	Sleep Mode: 20W or less Ready to Print: 40W or less Operation: 300W or less
Туре	UV-LED Ink (UH21 ink / US 11 ink)		Dimensions (WxDxH) Weight	46.77 in x 64.06 in x 23.78 in (cover closed) weight: 286.60 lbs.
Ink Set	4 colors (C, M, Y, K) 6 colors (C, M, Y, K, White, Varnish)			46.77 in x 64.06 in x 47.01 in (front cover opened)
		Printer Driver	Bundled	
Capacity	500ml bag (W) *Bulk ink requires an additional adaptor.		RIP Software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21,
No. of slots	6			a \$2,199.00 value
	Included Working Height: 48.11 in		Rotary Unit	Optional
	Size (WxD) Height Weight e Size (WxD) tment Type Ink Set Capacity	Size (WxD) 20.5 in x 24.5 in Height 0-5.91 in Weight 13.23 lbs. a Size (WxD) 19.02 in x 23.39 in tment Automatic Type UV-LED lnk (UH21 ink / US 11 ink) Ink Set 4 colors (C, M, Y, K) 6 colors (C, M, Y, K, White, Varnish) Capacity 220ml ink cartridge (CMYK, W, V), 800ml ink bag (CMYK, V) s00ml bag (W) *Bulk ink requires an additional adaptor. No. of slots 6	Size (WxD)20.5 in x 24.5 inHeight0-5.91 inWeight13.23 lbs.a Size (WxD)19.02 in x 23.39 intmentAutomaticTypeUV-LED lnk (UH21 ink / US 11 ink)Ink Set4 colors (C, M, Y, K) 6 colors (C, M, Y, K, White, Varnish)Capacity220ml ink cartridge (CMYK, W, V), 800ml ink bag (CMYK, V) 500ml bag (W) *Bulk ink requires an additional adaptor.No. of slots6	Size (WxD)20.5 in x 24.5 inInterfaceHeight0-5.91 inPower RequiremntsWeight13.23 lbs.Operation Noisee Size (WxD)19.02 in x 23.39 inPrintable EnvironmenttmentAutomaticPower ConsumptionTypeUV-LED lnk (UH21 ink / US 11 ink)Dimensions (WxDxH) 6 colors (C, M, Y, K, White, Varnish)Capacity220ml ink cartridge (CMYK, W, V), 800ml ink bag (CMYK, V) 500ml bag (W) *Bulk ink requires an additional adaptor.Printer DriverNo. of slots6Dataset Usit

MLTOH 55" x 27" UV-LED Flatbed Printer





Powered by MUTOH's Award-Winning Genuine VerteLith™ RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.



The **MUTOH XpertJet 1462UF UV-LED flatbed printer** with a moving gantry features a large 55" x 27" printable surface area, two 4" UV-LED lamps, two piezo drop on demand dual print heads in a staggered configuration, and will print on objects up to 5.9" thick. Legally prints ADA compliant braille and 2.5D layered prints to create fine textured art to add value to any print job. Tie that in with MUTOH's Local Dimming Control Technology, and you now have the ability to add glossy finishes easily in one pass. With MUTOH's "Made in Japan Quality" and proprietary features such as the Automatic Nozzle Detection Unit and the Area Select function, the MUTOH XPJ-1462UF is the ideal printer for any print shop looking for reliability, high quality, and fast speeds. Powering the XpertJet 1462UF UV-LED flatbed printer is MUTOH's Award-Winning Genuine VerteLith™ RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.



TEXTURE & GLOSS VARNISH



ADA BRAILLE SIGNAGE





Printable Size

x 55.9" x 275

Media Thickness

VARIABLE DATA

SIGNAGE



55" x 27" Printable area with ability to print objects up to 5.9" thick

Two 4" UV Lamps with Dual **Staggered Print Heads**

Four Zone Vacuum Table

Rigid chassis and table bed

1-800-99MUTOH www.MUTOH.com

f 🔘 in 🕨



jigs.



Vacuum holes and screw holes

outside the markings can be used

as screw holes to secure custom

MUTOH'S XpertJet 1462UF UV-LED Printer Delivers Both **Unparalleled Productivity And High Image Quality.**

MUTOH'S GENUINE RIP SOFTWARE VERTELITH™



Powered by MUTOH's Award-Winning Genuine VerteLith™ RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.


4" LED LAMPS

Newly developed 4" wide UV-LED lamps are mounted on both sides of the print heads and enable fast curing for bi-directional printing.



DUAL PRINT HEADS

Print head 1 prints CMYK. Print head 2 prints white & varnish which allows for faster printing of 2-layers, 2.5D texture and ADA compliant braille signage.



RIGID CHASSIS

The highly rigid, precision built chassis and rail mechanism ensure accurate dot placement for reliable high-quality printing.



FULL RANGE OF OPERABILIT

Foot switch for remote on/off operation of the vacuum.

Signal tower light for checking printer status at a glance even from a distance.





PRINT A WIDE RANGE OF MATERIALS

The XPJ-1462UF offers a large table area capable of printing up to 55" x 27" and objects up to 5.9" thick while holding weight of 10lbs per sq ft. Cover a wide range of applications from large signage to small golf balls all with shorter print times resulting in improved productivity.



The print table has 4 individually controlled vacuum zones that can be adjusted from the dedicated control panel.


NOZZLE AREA SELECT

Auto-nozzle checking unit and Nozzle Area Select automatically detects missing nozzles and performs a nozzle cleaning. Nozzle Area Select temporarily prints using selected area of active nozzles when clogged nozzles may fail to recover.



NOZZLE CHECK AREA

Nozzle check can be performed at any time by setting the media in a dedicated area outside the print table. Even after the print media or print jig has been set. Print test can be performed smoothly without having to redo the height detection.



XPERTJET 1462UF SPECIFICATIONS

Printer Model		XPJ-1462UF			
Printing Syste	em	On-demand piezo drive system			
Print Head	Number	2 (staggered)			
	Туре	UH21 UV-LED ink			
Ink Ink Capacity		800ml bag / 500ml bag (UH21 white ink only)			
	Configuration	6 color (CMYK+W+V)			
Printable Area	a	55.9" x 27.5"			
Max. Media Thickness		5.9"			
Max. Media Weight		10.24 psf			

Height Adjustment	Automatic
Print Resolution	Up to 1440 x 1440 dpi
Interface	GB-Ethernet (1000BASE-T)
Weight	Approx. 1100lb
RIP Software	VerteLith
Optional	lonizer
Dimension	With gantry in the front position:
Dimension	109" x 63" x 52.7"

MUTOH 24" Wide Multi-Purpose Inkjet Printer



CMYK

CMYK LcLmLk

CMYK OrBIG CMYK

LcLmL &White

CMYK OrBIGr



Powered by MUTOH's Award-Winning Genuine VerteLith[™] RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. *Spot-color inks are not supported



The **MUTOH ValueJet 628MP Multi-Purpose Printer** is a user-friendly inkjet printer designed to support both 24" wide roll media and sheet media. With multi-purpose "MP31" ink, this printer reliably produces exceptional prints on a wide variety of substrates. MP31 ink is equivalent to eco-solvent ink in weather resistance, abrasion resistance, and color development while providing a smooth, natural finish that brings out the natural appearance of the substrates. Ideally used to produce small-lot gifts, novelty items, package prototypes, stickers, and more, this reliable printer delivers high-quality results. The ValueJet 628MP has an expanded color gamut, supporting up to 8 colors, including light inks or spot-color inks such as orange, blue, and green. More color variety allows for smoother gradation expression and improved gray balance and color adjustment. The MP31 ink has remarkable flexibility – it won't crack even when bent and can be printed and processed on vacuum-formed and shrink-wrapped materials. Whether your focus is on commercial printing, industrial applications, or sign and display projects, this 24" Inkjet Multi-Purpose printer is up to the task. Powering the ValueJet 628MP Multi-Purpose printer is MUTOH's Award-Winning Genuine VerteLith[™] RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.



METALLIZED FILM



PACKAGING PROTOTYPE

www.MUTOH.com





LABELS

SHRINK WRAP

MUTOH



Enhanced color gamut with up to 8 colors, including light inks or spot-colors

-Ease of use and operability

-Perfect for creating packaging prototypes

Blower Heater



MUTOH'S ValueJet 628MP Multi-Purpose Printer Delivers Exceptional Printing On A Wide Variety of Substrates

MUTOH'S GENUINE RIP SOFTWARE VERTELITH™



Powered by MUTOH's Award-Winning Genuine VerteLith™ RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value.

USER-FRIENDLY FUNCTIONAL CAPABILITY

A wider opening helps ease daily maintenance.



The blower heater and platen heater gently dry the entire printing surface of the media.




Space saving design with easy installation as standard equipme




MULTI-PURPOSE INK "MP31" ACHIEVES MEDIA FLEXIBILITY


MP31 lnk is resistant to heat, stretching, and bending. The ink doesn't crack easily, so it's ideal for packaging prototyping, vacuum/thermoforming, labels, and more.

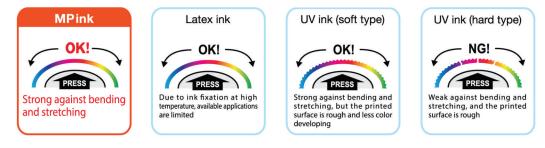


CHARACTERISTICS OF MP31 INK

By adding spot color inks (Or, Gr, Bl) you are able to significantly expand your color gamut to achieve a broader color range. This is exceptional for color reproduction, such as vivid orange, green, and deep blue, which could not be reproduced using process colors alone.











VALUEJET 628MP SPECIFICATIONS

Printer Model VJ-628MP		VJ-628MP
Printing System		On-demand piezo print head
Print Head Number		1
Finit Head	Height	Low: 1.2mm High: 2.5mm
Туре		Multi-Purpose Ink (MP31)
	Ink Capacity	220ml cartridge
Ink	Configuration	4 colors (C, M, Y, K), 5 colors (C, M, Y, K, Wh)
		7 colors (C, M, Y, K, Lc, Lm, Lk) or (C, M, Y, K, Or, Bl, Gr)
		8 colors (C,M,Y,K,Lc,Lm,Lk,Wh) or (C,M,Y,K,Or,Bl,Gr,Wh)
Max. Media Width		24.8"
Printable Area		24.4"
Max. Media Thickness		1mm

Height Adjustment	Manual 2 step system
Print Resolution	1440 / 1080 / 720 dpi (Total 6 modes)
Interface	Ethernet (10BASE-T, 100BASE-TX)
Weight	Body: 81.6lbs / Stand 19.2lbs
RIP Software	VerteLith
Optional RIP's	CGS ORIS or SAI Flexi for spot color inks
Optional Accs.	Take-up unit
Dimension	46.8" x 27" x 47.6"
Max. Print Speed	Up to 61.8 sq ft/hr

MUTOH VALUEJET 1628MH MULTI-PURPOSE PRINTER

The most versatile printer on the market



Powered by MUTOH's genuine VerteLith RIP Software bundled with FlexiDESIGNER MUTOH Edition 21 a \$2,199.00 value





PACKAGING/PROTOTYPING

The ValueJet 1628MH multi-purpose hybrid printer is ideally suited for the production of high-quality graphics. It is powered by MUTOH's new genuine VerteLith[™] RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the VJ-1628MH has to offer and produces the best possible gradients, skin tones and vivid colors.

0

This hybrid model is the most versatile printer on the market and is ideally-suited for use in packaging prototyping, signage, POP displays, specialty printing and more. With enhanced print quality supporting up to 8 colors (CMYKx2, CMYKWhWh) and a wide color gamut, the VJ-1628MH gives true-to-life skin tones and smooth gradations. MP31 multi-purpose inks give outstanding adhesion and color properties that bind to substrate surfaces giving a natural, vibrant finish to projects.



POP DISPLAYS



VEHICLE WRAPS



YARD SIGNAGE



THERMOFORMING PRINTS

www.MUTOH.com



Flexibility to print on roll/rigid materials Transport roller system Blower heater Automatic media height Includes 8 ink slots Standard 66lb take-up system



VJ-1628MH printer features include:

- · Flexibility to print on roll or rigid materials.
- Multi-purpose MP31 inks.
- Solvent-based ink with outstanding adhesion and color properties giving a natural, vibrant finish to projects.
- Enhanced print quality, supporting up to 8 colors with CMYKx2 and CMYKWhWh.
- · Wide color gamut and improved color stability.
- · Blower heater to speed drying time.

ValueJet 1628MH

Powered by VerteLith™

MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21







Automatic Media Height Adjustment Mechanism



Head Strike Prevention Sensor

- · New built-in circulation system for white & magenta inks assures color consistency and prevents clogging.
- Custom roller selection function allows each pressure roller to be set independently.

MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the VJ-1628MH through these key features:

• Auto-population of named Pantone

Transport Roller System



Media Retainer

coated/uncoated spot colors.


- MUTOH Clear Tone half tone technology.
- MUTOH CMYK wide color gamut ICC profile.
- Automated layout processing and printing.
- Soft proof.
- "What-you-see-is-what-you-get" RIP preview.
- Tab customization.
- Color management function.
- Finishing bleed processing function.
- · Printing log function.
- · Automated multi-layer printing.

VALUEJET 1628MH SPECIFICATIONS

Printing systems	On-demand Micro Piezo Inkjet Technology		Туре	MP31 multi-purpose
Print head height	Automatic		Ink Set	Up to 8 colors - CMYKx2 and CMYKWhWh
Print head	1 (1440dpi, 180 nozzles x 8 rows)	Ink) (ali una a	500I
Max print resolution	1440x1440dpi (16 pass)		Volume	500ml
Print modes	1440/1080/720/360dpi (total 6 modes)		No. of slots	8
Media width	64"	Inter	face	Gigabit-Ethernet (1000BASE-T)
Media capacity	ø 5.9" dia / 2" & 3" cores / Roll media 66lbs or less Rigid media max 33lbs or less	Powe	r Requirements	AC 100-120V± 10%, 50/60Hz ± 1Hz
Max media thickness	0.62 in	Print	able Environment	Temperature: 68-89.6°F Humidity: 40-60%RH (non condensing) Rec. environment: Temperature: 71.6-86°F
Max printable width	63.6 in	Powe	r Consumption	Main: Operation status 2300W or less Standby: 65W or less
Media drying system	Blower heater system: 1200Wx2	10000	i consumption	
		Dime	nsions (WxDxH)	Printer including stand: 106.2"x35.7"x51.26"
RIP software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21		ht	Body: 369.3lb Stand: 72.8lb

MUTOH VALUEJET 1638UH MARK II HYBRID UV-LED PRINTER



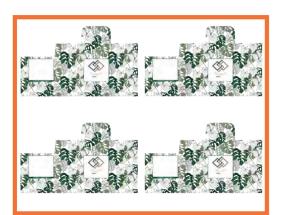

PACKAGING/PROTOTYPING

The ValueJet 1638UH Mark II UV-LED hybrid printer represents the next generation of UV-LED printers and is ideally-suited for the production of high-quality graphics. It is powered by MUTOH's new genuine VerteLith[™] RIP software, bundled with FlexiDESIGNER MUTOH Edition 21, a \$2,199.00 value. VerteLith RIP optimizes all of the capabilities the VJ-1638UH Mark II has to offer and produces the best possible gradients, skin tones and vivid colors.

Features of the ValueJet 1638UH Mark II includes staggered dual print heads with UV-LED lamps on both sides for greater productivity, the ability to print with MUTOH UV-LED flexible (US11) or rigid (UH21) inks and multi-layer capability. A Media Thickness Detection Sensor detects media automatically and media retainer guides automatically set the position of rigid media.



COUNTER DISPLAYS



POP DISPLAYS



YARD SIGNAGE



WALLCOVERINGS & HOME DECÓR

ΜυτοΗ

Flexibility to print on roll/rigid materials

Staggered dual print heads

Media Thickness Detection Sensor

Media retainer

Optional Economy 66lb take-up system



MUTOH's genuine VerteLith RIP software bundled with FlexiDESIGNER MUTOH Edition 21 optimizes the VJ-1638UH Mark II through these key features:

- Auto-generation of named Pantone coated/uncoated spot colors.
- MUTOH Clear Tone half tone technology.
- MUTOH CMYK wide color gamut ICC profile.
- Automated layout processing and printing.


ValueJet 1638UH Mark II

Powered by VerteLith™

MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21











Replaceable Print Wiper

• Soft proof.

- "What-you-see-is-what-you-get" RIP preview.
- Printing layers with auto-generation of spot colors/white/varnish.
- Automated multi-layer printing.
- Tab customization.
- Color management function.
- Finishing bleed processing function.
- Printing log function.



Staggered Dual Print Heads

Media Thickness Detection Sensor

VJ-1638UH Mark II Hybrid printer features include:

- Flexibility to print on roll/rigid materials.
- Media Thickness Detection Sensor automatically detects media thickness.
- Media retainer sets position of rigid media.
- MUTOH UV-LED inks
 - Rigid UH21.
 - Flexible US11.

VALUEJET 1638UH MARK II SPECIFICATIONS

Printing systems	Drop-on-demand Micro Piezo Inkjet Technology		Туре	UV-LED Ink (flexible US11 or rigid type UH21)
Print head height	Automatic		Ink Set	4 colors (C, M, Y, K), 5 colors (C, M, Y, K, Wh/Va), 6 colors (C, M, Y, K, Wh,Va)
Print head	2 (staggered set-up)	Ink	Volume	220ml (CMYK, Wh, Va) 500ml (White) 800ml (CMYK, Va)*
Max print resolution	1440x1440dpi (16 pass)		volume	*500/800ml ink bags require optional adapter
Print modes	1440/1080/720/360dpi 6 modes+		No. of slots	8
Media width	64"	Interface		Gigabit-Ethernet (1000BASE-T)
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 66lbs or less Rigid media max 33lbs or less	Power Requirements		AC 100-120V± 10%, 50/60Hz ± 1Hz
Max media thickness	.50 in	Printable Environment		Temperature: 68-89.6°F Humidity: 40-60%RH (non condensing) Rec. environment: Temperature: 71.6-86°F
Max printable width	63.6 in	-		
Height adjustment	Automatic	Powe	r Consumption	Main: Operation status 77W or less Standby: 52W or less
UV lamp	UV LED 2 pcs	Dime	nsions (WxDxH)	Printer including stand: 117.4"x32.2"x49.6" Printer w/media feed table: 117.4"x107"x49.6"
RIP software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21	Weight		Body: 352.7lb Stand: 81.57lb



The PerformanceJet 2508UF

Smart Printing Equals Value



4' x 8' Flatbed UV-LED Printer

The Mutoh PerformanceJet 2508UF 4'x8' UV-LED Flatbed printer excels in performance, quality and value. It's standard, staggered four printhead design - field upgradeable to six heads when adding white and varnish ink, provides high print speeds and the dual UV lamps on both sides of the carriage provide exceptional cure times allowing for higher production capacity. Print media up to 4" thick and use the CMYK x2 or CMYK x2 plus white & varnish to create stunning applications with outstanding durability and color gamut. The PJ 2508UF comes standard with an automatic media registration pin system with "blow back" feature for easier handling and positioning of media, an anti-static system and an automatic media thickness detector. The PerformanceJet 2508UF delivers outstanding output you expect and provides the reliability you need in a UV-LED flatbed making it the smart choice for any production shop.





Print method	Drop-On Demand, Piezo Drive Method
Variable dot	Yes
# of nozzles	1280 (4X320 Channels / 4 heads -default)
# of print heads	4 default - field upgradeable to 6 (when adding white and varnish ink)
Ink type	UV-LED
Curing system	UV-LED Lamp
Maximum print Area	100" X 49.2"
Print modes	600X300 / 600X600 / 600X900 / 600X1200 (dpi) *
Color options	CMYK x2 or CMYK x2, +White + Varnish
Maximum print speed / resolution	968 sqft/hr (600X300 / 2 pass / 4 color / 4 head)
Maximum Resolution	600 x 1200 dpi
Maximum Print Height	4 inches (101.6mm)
Maximum media weight	92.15 lbs. / sq yd. or 350lbs.

Media Handling System	4 Zone Vacuum Table Auto Media Registration Pin System
Media Handling System 2	"Blow Back" Feature to easily slide media across table.
Auto Media Thickness Detection	Included
Anti Static Elimination	Included
RIP software	Mutoh Edition Flexi Sign & Print
Power requirements	Main: 220 - 240 VAC, 50/60Hz +/-,1 Hz 25A Single Phase
Operating temperature	68°F - 86°F
Operating humidity range	40% - 80% (non condensing)
Dimensions (printer) WxDxH	186.6" x 78.7" x 58.8"
Dimensions (Shipped) WxDxH	196.9″ x 89" x 66.1
Printer weight	2,756 lbs (1,250 kg)
Shipped weight	3,616 lbs (1,640 kg)
Limited warranty	1 Year Onsite

*Actual print mode specifications are 605 X 300 / 605 X 600 / 605 X 900 / 605 X 1200 dpi



www.MUTOH.com

ГОН

Easily create large signs, custom packaging and print industrial applications and much more.

Use the blow back feature to easily handle heavier media across the table.

Print up to 4"(101.6mm) thick, perfect for doors, room dividers, back splashes and other large items.

Scale your ink configuration with your business. Field upgradeable from CMYKx2 to CMYKx2 +W+V.



in

MUTOH DYE-SUB PRINTER



Accu Fine

1642WR Pro

The **XpertJet 1642WR Pro** 64" is a high-speed dye-sublimation inkjet printer with a new platform that inherits the properties of the XpertJet series. The XPJ-1642WR Pro features new extra-wide MUTOH AccuFine print heads with best-in-class dot placement accuracy, enabling high print speeds and quality.

XpertJet

MUTOH's original DH21 dye-sublimation transfer ink provides optimum media transfer, achieving high density colors with less ink consumption. Fast ink-drying times enables printing on thinner and lighter transfer papers, while excellent jetting and color stability support prolonged print times. MUTOH DH21 ink is available in a CYMK configuration in 1,000ml or 2,200ml capacity ink bags.

The XPJ-1642WR Pro delivers high-quality graphics onto a wide range of materials such as trade show graphics, flags, banners, custom interior designs, apparel, sports uniforms and more.



APPAREL



HOME DECOR

SOFT SIGNAGE

AMIGOS

WALLCOVERINGS

www.mutoh.com

MUTOH

NEWLY DEVELOPED ACCUFINE PRINT HEADS

ENHANCED MEDIA HANDLING/FEED MASTER

MEDIA TRACKER

AUTOMATIC NOZZLE **AREA SELECT**

> 1-800-99MUTOH www.**MUTOH**.com

f 🎔 💿 in 🕞



XPJ-1642WR Pro key features:

- Unique multi-stage pressure mechanism feeds even thin paper roll media smoothly.
- New extra-wide piezo MUTOH AccuFine print heads achieve maximum production speeds up to 802 sqft/hr.
- Media Tracker prints a barcode before removing media. When media is loaded again, a built-in sensor reads the barcode and recognizes the amount of media remaining.



AccuFine Print Heads

• Internal LED lighting allows the operator to

Automatic Nozzle Checking

XpertJet 1642WR Pro

MUTOH DH21 Dye Sublimation Ink

MADE IN JAPAN QUALITY

All New Platform Ensures Easy Maintenance, Usability and Quality

- easily check print status. • MUTOH DH21 dye-sublimation ink provides superior media transfer, color rendition, excellent jetting and color stability.
- Automatic Bi-D alignments with built-in sensor automatically calibrates bi-directional alignments.
- · Four-stage head heights allow optimal height on print head to reduce the risk of print head contact.





Replaceable Print Wiper

Four-Stage Head Heights

• Precise ink dot placement provides higher print quality at high print speeds.

User-friendly Control Panel

- FeedMaster built-in sensor allows for automatic media feed adjustment.
- Nozzle Area Select uses blocks of active nozzles to temporarily print if clogged nozzles fail to recover.
- Optional available heavy-duty take-up system supports roll media weights up to 220 lbs.
- Front access panel for ink cartridge holders.

NEW! S		XPERTJET 1642WR	Ρ	RO SPECIF	ICATIONS	
митон	Print Method	On-demand piezo drive system		Print Resolution	Max 1200 dpi	
AccuFine Print	Head Height	Four-level adjustment of Low 1: 1.5mm, Low 2: 2.0mm, Mid: 2.5mm, High: 4.0mm	w 1: 1.5mm, Low 2: 2.0mm, Mid: 2.5mm, High: 4.0mm		Gb-Ethernet (1000BASE-T)	
Heads	Number	2 staggered	1	Interface	GD-Ethernet (1000BASE-1)	
	Max width	64 in		Power Requirements	AC 100-120V~ 10%/ AC 200V~240V~ 10% Frequency 50/60Hz~1Hz	
Media Max thickness			Power Consumption	Operation: AC100V~120V AC200V~240V, 180W or below		
	Max thickness	ness 0.04~1.0mm 0.0015-0.039in		Sleep Mode: AC100V~120V AC200V~240V, 30W or below		
	Measurements	ø7.9" or less 2 inches or 3 inches 66lbs or less		Printable Environment	Temperature: 68-89.6°F(20-32°C) Humidity: 40-60%RH (non condensing)	
Max Print Width		63.6 in			109 in x 35 in x 56 in (cover closed)	
Max Print Length		4,921 ft		Dimensions (WxDxH)		
Туре		DH21 Dye Sublimation Ink			109 in x 35 in x 68 in (with ink bag cases)	
Ink	Ink Set	4 colors (C, M, Y, K)	1	Weight	Main body: 302 lbs. Stand: 70 lbs.	
	Capacity	1000 ml 2200 ml ink bags	1	RIP Software	Wasatch SoftRIP	
					0001.1	

Media Tracker

Nozzle Area



MUTOH

The RJ-900X Dye-Sublimation Printer



Compact, Affordable, Versatile

The Mutoh 42" RJ-900X is a versatile printer with superior paper handling capabilities that is ideally suited to print dye-sublimation applications such as custom t-shirts, apparel, flags or even promotional and personalized items. The RJ-900X delivers superior line sharpness and photo quality images with continuous tones, smooth transitions and a wide color gamut. With various print resolutions available for different applications, and the ability to support a variety of ink sets, the RJ-900X is an ideal printer for shops looking to compete in the dye-sublimation market.








RJ-900X H	lighlights
	5 5

- Higher speeds with new print and effect modes
- Improved paper handling capability with new pressure roller control feature
- Remote printer management capability with VSM & VSM Mobile Support
- Supports aqueous, dye and pigmented ink types
- Intelligent Interweave (i²) technology eliminates banding

Print method	Variable drop-on demand piezo drive method	Media catch basket
# of nozzles	Black: (180 x 2 rows) Color: (180 x 6 rows) x 1 head	Heavy duty take-up system
Ink type	Aqueous / Pigment / Dye	Media auto cut
Variable dot	Yes	RIP software
Minimum droplet size	3.2pl	Power requirements
Print modes	2880 / 1440 / 720 / 360dpi 14 modes	Consumption Current
Number of print heads	1	Consumption Current
Maximum print speed / resolution	676 sqft/hr 360 x 360dpi (Draft mode)	Operating temperature
Maximum resolution	2880 dpi	Operating humidity range
Head height	Low: 1.2mm / High: 2.0mm	Dimensions (printer) WxD
Maximum media width	42.5 inches	Dimensions (shipping info
Maximum print width	42.3 inches	Weight (printer)
Maximum media roll weight	41.9 lbs	Weight (shipping info)
Media roll diameter / core	6" / 2" (3" optional)	Limited warranty

Media catch basket	Optional
Heavy duty take-up system	N/A
Media auto cut	Yes
RIP software	Wasatch SoftRIP
Power requirements	Rated Voltage: AC100 - 240V
Consumption Current	AC100 - 120V : 4.2A or less
Consumption Current	AC200 - 240V : 2.6A or less
Operating temperature	50 F - 95 F
Operating humidity range	20% - 80%
Dimensions (printer) WxDxH	69.8" x 26" x 38.7"
Dimensions (shipping info)	75"x 24.8"x 22.9" (59.5"x 17.1"x 10.2" stand)
Weight (printer)	Printer 109.1 lbs / Stand 34.2 lbs
Weight (shipping info)	Call for quote
Limited warranty	1 Year





MUTOH DYE-SUB PRINTER





The **XpertJet 1682WR** 64" is a high-speed water-based inkjet printer with a new platform that inherits the properties of the XpertJet series. The XPJ-1682WR provides improved usability and reduces operational workload which will ensure high-quality prints, high productivity outputs, and user-friendly operation. Newly developed Multi-stage pressurizing system enhances media feed stability for a wide range of media. The MUTOH original dye-sublimation transfer ink (DH21) provides optimum print quality and wide color gamut. The DH21 ink is available in a 4-color configuration CMYK. Large capacity ink bags (1,000mlor 2,200ml) with new front access ink cases support prolonged continuous printing. The XPJ-1682WR delivers high-quality graphics onto a wide range of materials such as trade show graphics, flags, banners, custom interior designs, apparel, sports uniforms and more.



APPAREL



HOME DECOR





FLAGS

SOFT SIGNAGE

www.mutoh.com

MUTOH

UPGRADED TOUCH PANEL

NEW MEDIA HANDLING

AUTOMATIC ALIGNMENTS

INTERNAL LED LIGHTING


1-800-99MUTOH www.MUTOH.com f У 🛈 in 🕞



- Successor model of ValueJet 1638WX
- · High Precision Aluminum Rail Mechanism for high quality and stable printing.
- Improved Media Feed Mechanism corresponding to a wide range of media.
- Mutoh DH21 Dye Sublimation Ink provides high image quality and high productivity.








MUTOH DH21 Dye Sublimation Ink







easy media loading.

convenience and response.

Internal LED lighting

* Automatic Bi-Directional and Page Feed Alignments with missing nozzle detection using built in sensor.

Newly Developed Media Flange allows for

MSM (MUTOH Status Monitor) improved

New Multi-Language intuitive LED display.

Multi-stage pressurizing mechanism

LED touch panel

· Front Access of Ink Cartridge Holders,

LAN cable and power cords.

- Internal LED Lighting enable operator to easily check print status.
- Excellent color jetting and color stability with MUTOH DH21 Dye-Sublimation Ink.

DYE SUBLIMATION

	Print Method	On-demand piezo drive system		Print Re	
Print Head	Head Height	Three-level adjustment of Low .06 in, Mid, .09 in, and High .16 in		Interfac	
Number		2 Staggered		Power I	
	Width	Maximum 63.98 in	Power (
Media	Max Thickness	0.01 in (the head height is set to Low) 0.05 in (the head height is set to Mid) 0.11 in (the head height is set to High)		Printab	
Media	Wax Theress				
Roll Capacity		5.9 in diameter 2 inches or 3 inches 66.14 lbs. or less		Optima	
Max Print Width		63.58 in			
Max Print Length		4921 ft		Dimens (WxDxł	
	Туре	DH21 Dye Sublimation		(WADAI	
Ink	Ink Set	СМҮК	$\left \right $	Weight	
Capacity		1000 ml 2200 ml ink bags	$\left \right $	RIP Sof	

Print Resolution	Max 1440 dpi
Interface	Gb-Ethernet (1000BASE-T)
Power Requirements	AC 100-120V± 10%/ AC 200V~240V± 10% Frequency 50/60Hz ± 1Hz
	Operation: AC100V~120V AC200V~240V, 180W or below
Power Consumption	Sleep Mode: AC100V~120V AC200V~240V, 30W or below
Printable Environment	Temperature: 68-89.6°F Humidity: 40-60%RH (non condensing)
Optimal	Temperature: 71.6-86°F Humidity: 40-60%RH (non condensing)
Dimensions	109 in x 35 in x 56 in (cover closed)
(WxDxH)	109 in x 35 in x 63 in (with ink bag cases)
Weight	Main body: 315 lbs. Stand: 71 lbs.
RIP Software	Wasatch SoftRIP

www.MUTOH.com



The ValueJet 1938WX

Smart Printing Equals Value



Dye-Sublimation Printer

The Mutoh ValueJet 1938WX is ideal for every day sublimation printing. Create shower curtains, trade show graphics, flags, banners, custom interior designs, apparel, scarves, blankets and more. Designed with advanced features like; a rear media feed lever for easy material handling, take-up system, an easy to navigate control panel and simple operation, the learning curve is short so you can focus on customers and profits. The VJ 1938WX provides outstanding performance at a competitive price, making it the smart printer choice for shops looking to expand applications, increase production and improve efficiency.





VJ 1938WX - High Production Dye-Sub Printer



Print method	Drop-On Demand, Piezo Drive Method
# of nozzles / # of heads	(180 x 8 rows) / 2 staggered heads
Ink type	Aqueous / Dye-Sublimation
Variable dot	Yes
Minimum droplet size	3.5 pl
Print modes	1440/1080/720/540/360dpi 29 modes
Color Options	CMYK x 2 or 8 color
Maximum print speed / resolution	1327sqf / 360 x 360
Maximum resolution	1440 dpi
Head height	Low: 1.5mm/Medium: 2.5mm/High: 4.0mm
Maximum media width	75.2 inches
Maximum print width	74.8 inches
Maximum media roll weight	66lbs (176lbs w/optional HD take-up)

Media roll diameter / core	6" maximum / Core 3" or 2"
Take-up system	Included
Heavy duty take-up system	N/A
Media auto cut	Standard
RIP software	Wasatch
Power requirements	240V / 20AMP
Operating temperature	68°F - 89.6°F
Operating humidity range	40% - 60%
Dimensions (printer) WxDxH	117.4" x 34.9" x 49.7"
Dimensions (shipping info)	Call
Weight (printer)	Printer 347lbs / Stand 82lbs
Weight (shipping info)	Call
Limited warranty	1 Year Limited

* Must purchase optional bulk ink adapter.



Print over 1000 sf/h with the revolutionary dual staggered print head design.

Create promotional items, trade show graphics, flags, banners, fabrics for custom dothing and more.
 CMYK x 2 up to 8 colors

✓ Utilize Mutoh's patented Intelligent Interweave i² print technology to virtually eliminate banding.

ValueJet Status Monitor (VSM) smart phone appavailable for mobile monitoring.





www.MUTOH.com

MUTOH

The ValueJet 1948WX

Smart Printing Equals Value




High Production Dye-Sublimation Printer

The Mutoh ValueJet 1948WX is ideal for everyday, and high-production, sublimation printing. With its staggered four-head design, the VJ1948WX prints at speeds up to 2,199 sqft/hr. Create trade show graphics, promotional items, flags, interior decor, apparel and much more. Designed with advanced features like: a rear media feed lever for easy material handling, heavy duty take-up system, an easy to navigate control panel and simple operation, the learning curve is short so you can focus on customers and profits. The VJ1948WX provides outstanding performance at a competitive price, making it the smart printer choice for increased dye-sublimation production.





VJ1948WX - High Production Dye-Sub Printer

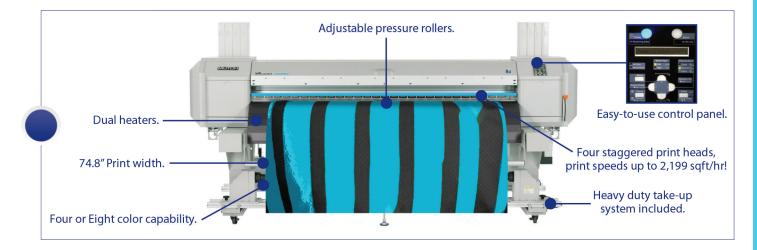

Print method	Drop-On Demand, Piezo Drive Method
# of nozzles / # of heads	(180 x 8 rows) / 4 staggered heads
Ink type	Dye-Sub Ink 1L or 2L*
Variable dot	Yes
Minimum droplet size	3.5 pl
Print modes	1440/1080/720/540/360dpi 29 mode
Color Options	4 or 8
Maximum print speed / resolution	2,199 sq/ft (360x360dpi)
Maximum resolution	1440 dpi
Head height	Low: 1.5mm/Medium: 2.5mm/High: 4.0mm
Maximum media width	75 inches
Maximum print width	74.8 inches
Maximum media roll weight	220lbs w/ HD take-up
* Must purchase optional bulk ink case.	


Media roll diameter / core	9.8" maximum / Core 3" or 2" w/ HD take-up	
Heating	Upper/Lower	
Heavy duty take-up system	Standard	
Media auto cut	Standard	
RIP software	Wasatch SoftRIP	
Power requirements	AC 100 - 120V AC 200 - 240V	
Operating temperature	68°F - 89.6°F	
Operating humidity range	40% - 60%	
Dimensions & HD Take-Up WxDxH	117.4"W x 52.5"D x 49.6H"	
Dimensions (shipping info)	Call for Information	
Weight (printer)	Printer 361.5lbs / Stand 82lbs HD Take-Up 196lbs	
Weight (shipping info)	Call for Information	
Limited warranty	1 Year Limited On-Site	



www.MUTOH.com


1-800-99MUTOH You

in



MUTOH

The ValueJet 2638WX Smart Printing Equals Value

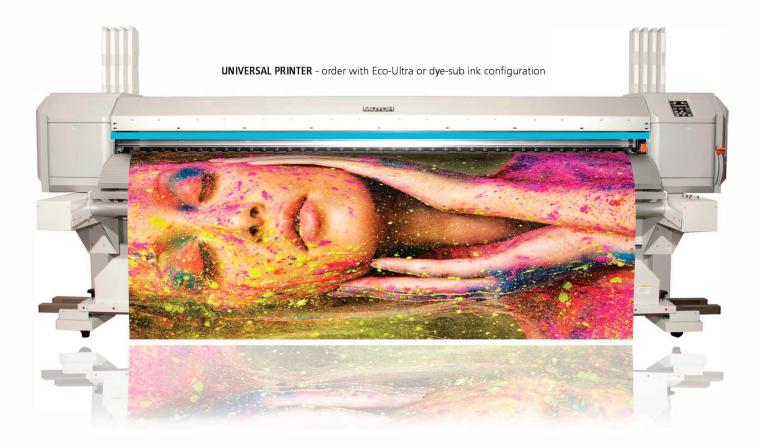

Dye-Sublimation Printer

Mutoh's ValueJet 2638WX – 104" grand format printer has a staggered dual-head design for faster production speeds to create super wide images with unmatched quality. With print speeds of 1,168sf/hr and print widths that are over eight feet wide, the VJ–2638WX not only saves you time and money but is also capable of producing high quality, super wide images for a number of popular applications like; designs and patterns for trade show graphics, flags, banners, custom clothing, interior design, point of purchase displays and more.





ANATOMY OF A VALUEJET 2638WX

Print method	Drop-On Demand, Piezo Drive Method	
# of nozzles	(180 x 8 rows) x 2 head	
Ink type	Aqueous / Dye-Sub can also be ordered as Eco-Ultra	
Variable dot	Yes	
Minimum droplet size	3.5 pl	
Print modes	1440/1080/540/720/360dpi 29 modes	
Number of print heads	2 staggered (up to 8 colors)	
Maximum print speed / resolution	1,168sf / hr / 360 x 360	
Maximum resolution	1440 dpi	
Head height	Low: 1.5mm / Medium: 2.5mm / High: 4.0mm	
Maximum media width	104 inches	
Maximum print width	103.6 inches	
Maximum media roll weight	220.5 lbs	

Media roll diameter / core	9.8" maximum / Core 3" or 2"	
Media support cradle	Standard	
Heavy duty take-up system	Standard	
Media auto cut	Standard	
RIP software	Wasatch SoftRIP	
Power requirements	2 x 100-120V or 200-240V / 20AMP	
Operating temperature	68°F - 89.6°F	
Operating humidity range	40% - 60%	
Dimensions (printer) WxDxH	146" x 34.9" x 49.65"	
Dimensions (shipping info)	Call for Quote	
Weight (printer)	Printer 534lbs / Stand 91lbs	
Weight (shipping info)	Call for Quote	
Limited warranty	1 Year on-site	

Decommission fee may apply, contact your reseller for details



Specifications Subject to Change

1-800-99MUTOH

www.MUTOH.com

MUTOH

MUTOH



High-Performance Cutting Plotters



Price, Performance, Quality

The ValueCut 2 line of cutting plotters are ideal for home, office and professional users providing the finest cutting quality with unsurpassed tracking capabilities. Choose from one of three models to suit your needs, VC-600 (24" cut width), VC-1300 (52" cut width) or VC-1800 (72" cut width). All models come standard with a roll support system for easy handling and perfect tracking and multi-segment registration for long run cut job accuracy. The VC-1300 and VC-1800 models also come with a floor stand and media catch basket, which are both options on the VC-600 model. For price, performance, quality and service the ValueCut 2 is the smart choice for cutting plotters.

Mutoh Makes It Possible.



www.MUTOH.com

New features paired with trusted technology from Mutoh Plotters.

Versatile roll support system

- Allows for easy handling and ensures perfect tracking.

- "AAS Copy Feature"
- Perform repeated contour cut jobs with one click from your RIP software.
- Media sensor disablement
 - Disable media sensor to cut transparent media with ease.
- Added Ethernet Port
- Run multiple cutters, over longer distances from the same computer.
- Catch basket included on VC-1300 and VC-1800
- Two year limited warranty





Standard Accessories:

Cutting Holder Spare Cutter Blade **Oil Ball Point Pen** SAi Flexi starter CD-ROM included Media Basket (Exclude VC-600) Media Cutter Cutter Pad x 1

Roll media mount system

		VC-600	VC-1300	VC-1800
Operation Method		Roller Type		
Max. Media Width		30.3" (770mm)	62.7" (1594mm)	78.3" (1900mm)
Max. Cutting Width		24" (610mm)	52" (1320mm)	72" (1830mm)
Min. Media Width		1.97" (50mm)	11.8" (300mm)
Max Cutting Length		164ft (50m) *1		
Number of Pinch Rollers		3	4	6
Acceptable Materia	l Thickness	0.03"(0.8mm)		
Driver Motor		DC Servo Control		
Cutting Force		5~600 g (5g/Step)		p)
Max Cutting Speed		60.2" (1530 mm) /sec (diagonal directrion)		directrion)
Max Acceleration		4.2 G		
Offset		0~1.0 mm (0.025mm/step)		
Memory		32 MB (16MB when using AAS)		
Interfaces		Ethernet, USB 2.0 (Full Speed), Serial (RS-232C)		
Type of Command		HP-GL, HP-GL/2 *2		
Mechanical Resolut	tion	0.006mm		
Software Resolution	า		0.025 mm	
Distance Accuracy		± 0.254 mm or $\pm 0.1\%$, (whichever is greater) *3		greater) <mark>*3</mark>
Repeatability		±0.1mm *3		
Control Panel		LCD (20 digits x 2 lines), 14 Keys		Ceys
Number of attachat	ible Pen		1	
Available Tool		Cutter, Oil Ball Point Pen		
Operation	Temperature	15℃~30℃ / 59 °F~86 °F		
Environment	Humidity	25% ~ 75%		
Power Supply		AC 100~240V, 50/60 Hz		
Power Consumption		Max. 110W		
Dimension (WxDxH) in *4		37.4" x 19.1" x 16.2"	69.8" x 25.6" x 43.7"	85.4" x 29.7" x 44.4"
Shipping Weight		68.3lbs / 31 kg	168.6lbs / 76.5 kg	209.4lbs / 95 kg
Stand, Media Basket		Optional	Star	ndard
Warranty		2 Year Limited Warranty		

*1 This does not assure the accuracy *2 HP-GL, HP-GL/2 are trademarks of Hewlett-Packard Company

*3 Effective only when operated with the cutting condition and the media certified by Mutoh *4 Exclude basket dimension



www.mutoh.com 1-800-99MUTOH


MUTOH VERTELITH™ GENUINE RIP SOFTWARE





VerteLith[™], MUTOH's new genuine RIP software is easy to use and designed to optimize the output of MUTOH brand printers. It's bundled with FlexiDESIGNER MUTOH Edition 21 software, a \$2,199.00 value, and includes advanced functions such as MUTOH Clear Tone, an original half-tone technology which achieves beautiful image quality and smoothness. VerteLith also features two enhanced preview functions. A soft proof function simulates the color of the printed output on the screen and the RIP preview function displays the actual printing dots on the screen prior to output. These new features allow users to enjoy a "what you see is what you get" RIP environment. In addition to autogeneration of PANTONE© coated/uncoated spot colors, VerteLith includes various tools and functions to create rich, textured prints without complicated steps.





PANTONE© COATED/UNCOATED LIBRARIES



MUTOH CLEAR TONE HALFTONE TECHNOLOGY



MUTOH CMYK WIDE GAMUT COLOR ICC PROFILE



ACCURATELY PROCESS PDF TRANSPARENCIES

www.MUTOH.com

митон

MUTOH CLEAR TONE HALF TONE TECHNOLOGY

TWO PREVIEW FUNCTIONS - SOFT PROOF - RIP PREVIEW

EFFICIENT LAYER PRINTING

PANTONE© COATED/ UNCOATED LIBRARIES

1-800-99MUTOH www.**MUTOH**.com

f 🍠 🞯 in 🕒



Key features of VerteLith, bundled with FlexiDESIGNER MUTOH Edition 21, include:

Pantone Coated/Uncoated Spot Color libraries are included, featuring:

• Auto-generation of named Pantone coated/ uncoated spot colors.


Vibrant image quality and smoothness achieved with:

• MUTOH Clear Tone half tone technology.



VerteLith

RIP Preview - preview the actual placement of the printing dots on-screen prior to output.

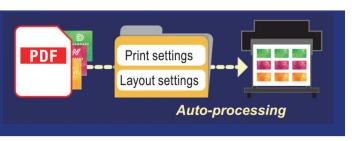

Simulate "the color" of the printed image on screen before printing

Soft Proof - simulate the color of the printed image on-screen prior to output.

Automated Layout Processing and Printing with a Multi-Page PDF File - Multi-page PDF automates complex tasks. Print and layout settings can also be set.

VerteLith automatically generates CMYK, white and varnish spot color information into separate layers for output .



• MUTOH CMYK wide color gamut ICC profile. Improve productivity and workflow processes using:

- Automated layout processing and printing
- Jig layout function.

• Simplified/enhanced jig production. Intuitive user-friendly controls, including:

• "What-you-see-is-what-you-get" RIP preview.

- Soft proof.
- Printing layers with auto-generation of spot colors/white/varnish.
- Automated multi-layer printing.
- Tab customization.
- Color management function.
- Finishing bleed processing function.
- Printing log function.

Key Differences	MUTOH Genuine VerteLith RIP Software	SAi Flexi MUTOH Edition 19 RIP Software
• Auto-generation of named Pantone coated/ uncoated spot colors.	\checkmark	
Automated layout processing and printing	\checkmark	
Grommet marks & bleed tool	\checkmark	\checkmark
• Fast 64-bit RIP	\checkmark	\checkmark
Enhanced jig layout function	\checkmark	
What-you-see-is-what-you-get RIP preview	\checkmark	
Automated job presets	\checkmark	\checkmark
 Soft proof simulate color of printed image on-screen prior to output 	\checkmark	
Spot color swatch tool	\checkmark	\checkmark
ICC Media Profiler	\checkmark	\checkmark
Printing layers with auto-generation of colors	\checkmark	
Automated multi-layer printing	\checkmark	

МИТОН

Scan To View Interactive Catalog



www.MUTOH.com

