



TRADITIONAL HYDRONIC RADIATORS

Quality, elegance and performance. Expect only the best from a DeLonghi traditional hydronic radiator panel installed by Arctic Melbourne, and enjoy the peace of mind that comes with a 30 YEAR manufacture warranty.



Traditional DeLonghi hydronic wall panels are the go-to for home heating. Hydronic panels are filled with water, and the heat output of your panel is dependent on the volume. This means we can cater to any space or aesthetic requirement by varying the height, width and depth of the panel.

DeLonghi radiators come in a white finish as standard, or can be custom powder coated to suit your decor. You can also choose to upgrade the look and colour of your valves.

Hydronic radiator panels emit radiant heat that does not circulate dust or other airborne irritants. Perfect for anyone with sensitivities, allergies or asthma. Hydronic radiator heating is the perfect home heating solution.

Traditional DeLonghi Radiator Heat Output & Dimensions


Type 11 Single							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.286	0.365	0.440	0.513	0.584	0.720
500	kW	0.357	0.456	0.551	0.642	0.730	0.900
600	kW	0.429	0.547	0.661	0.770	0.876	1.080
700	kW	0.500	0.638	0.771	0.898	1.022	1.260
800	kW	0.572	0.730	0.881	1.027	1.168	1.440
900	kW	0.643	0.821	0.991	1.155	1.314	1.620
1000	kW	0.715	0.912	1.101	1.283	1.460	1.800
1100	kW	0.786	1.003	1.211	1.412	1.606	1.980
1200	kW	0.857	1.094	1.321	1.540	1.752	2.160
1400	kW	1.000	1.277	1.541	1.798	2.044	2.520
1600	kW	1.143	1.459	1.762	2.053	2.336	2.880
1800	kW	1.286	1.642	1.982	2.310	2.628	3.240
2000	kW	1.429	1.824	2.202	2.566	2.920	3.600
2300	kW	1.644	2.098	2.532	2.951	3.358	4.139
2600	kW	1.858	2.371	2.863	3.336	3.796	4.679
3000	kW	2.144	2.736	3.303	3.850	4.380	2.881




Type 21 Compact							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.419	0.525	0.629	0.731	0.832	1.035
500	kW	0.523	0.657	0.786	0.918	1.040	1.294
600	kW	0.628	0.788	0.913	1.096	1.248	1.553
700	kW	0.733	0.919	1.100	1.278	1.456	1.812
800	kW	0.837	1.050	1.257	1.461	1.664	2.071
900	kW	0.943	1.182	1.415	1.644	1.872	2.330
1000	kW	1.046	1.313	1.572	1.828	2.080	2.589
1100	kW	1.151	1.444	1.729	2.009	2.288	2.847
1200	kW	1.256	1.576	1.886	2.192	2.496	3.106
1400	kW	1.465	1.838	2.200	2.557	2.912	3.624
1600	kW	1.674	2.101	2.515	2.922	3.328	4.142
1800	kW	1.884	2.364	2.829	3.287	3.744	4.659
2000	kW	2.093	2.626	3.144	3.653	4.160	5.177
2300	kW	2.407	3.020	3.615	4.200	4.784	5.954
2600	kW	2.721	3.414	4.087	4.748	5.408	6.730
3000	kW	3.139	3.939	4.715	5.479	6.240	7.766




Type 22 Double							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.505	0.646	0.778	0.901	1.016	1.226
500	kW	0.631	0.807	0.972	1.128	1.271	1.533
600	kW	0.757	0.969	1.166	1.351	1.525	1.839
700	kW	0.883	1.130	1.361	1.576	1.779	2.146
800	kW	1.009	1.292	1.555	1.802	2.033	2.453
900	kW	1.136	1.453	1.750	2.027	2.287	2.759
1000	kW	1.262	1.615	1.944	2.252	2.541	3.066
1100	kW	1.388	1.776	2.139	2.477	2.795	3.372
1200	kW	1.514	1.938	2.333	2.702	3.049	3.679
1400	kW	1.766	2.261	2.722	3.153	3.558	4.292
1600	kW	2.019	2.584	3.111	3.603	4.066	4.905
1800	kW	2.271	2.906	3.499	4.054	4.574	5.518
2000	kW	2.523	3.229	3.888	4.504	5.082	6.131
2300	kW	2.902	3.714	4.472	5.180	5.845	7.051
2600	kW	3.280	4.198	5.055	5.855	6.607	7.971
3000	kW	3.785	4.844	5.832	6.758	7.623	9.197



Type 33 Triple							
L-mm	H-mm	300	400	500	600	700	900
400	kW	0.712	0.907	1.091	1.264	1.425	1.723
500	kW	0.889	1.134	1.363	1.580	1.782	2.153
600	kW	1.067	1.361	1.636	1.895	2.138	2.584
700	kW	1.245	1.587	1.909	2.211	2.495	3.015
800	kW	1.423	1.814	2.181	2.527	2.851	3.445
900	kW	1.601	2.041	2.454	2.843	3.207	3.876
1000	kW	1.779	2.268	2.727	3.159	3.564	4.307
1100	kW	1.957	2.495	2.999	3.475	3.920	4.738
1200	kW	2.135	2.721	3.272	3.791	4.276	5.168
1400	kW	2.491	3.175	3.817	4.423	4.989	6.030
1600	kW	2.846	3.628	4.363	5.055	5.702	6.891
1800	kW	3.202	4.082	4.908	5.686	6.415	7.752
2000	kW	3.558	4.536	5.453	6.318	7.127	8.614
2300	kW	4.092	5.216	6.271	7.266	8.197	9.906
2600	kW	4.625	5.896	7.089	8.214	9.266	11.198
3000	kW	5.337	6.803	8.180	9.477	10.691	12.921



Standard bracket supplied with DeLonghi radiators

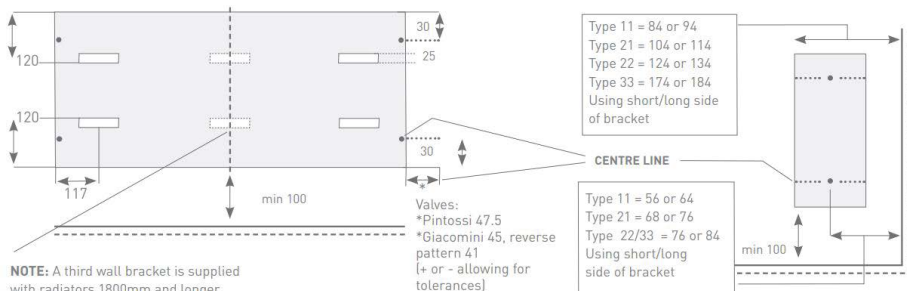

Please note the heat output chart reflects a system running off a Natural Gas boiler. Panels installed in high humidity areas such as bathrooms, drying room etc are limited to a 12 month warranty only.