


look inside



dtc range  
2025

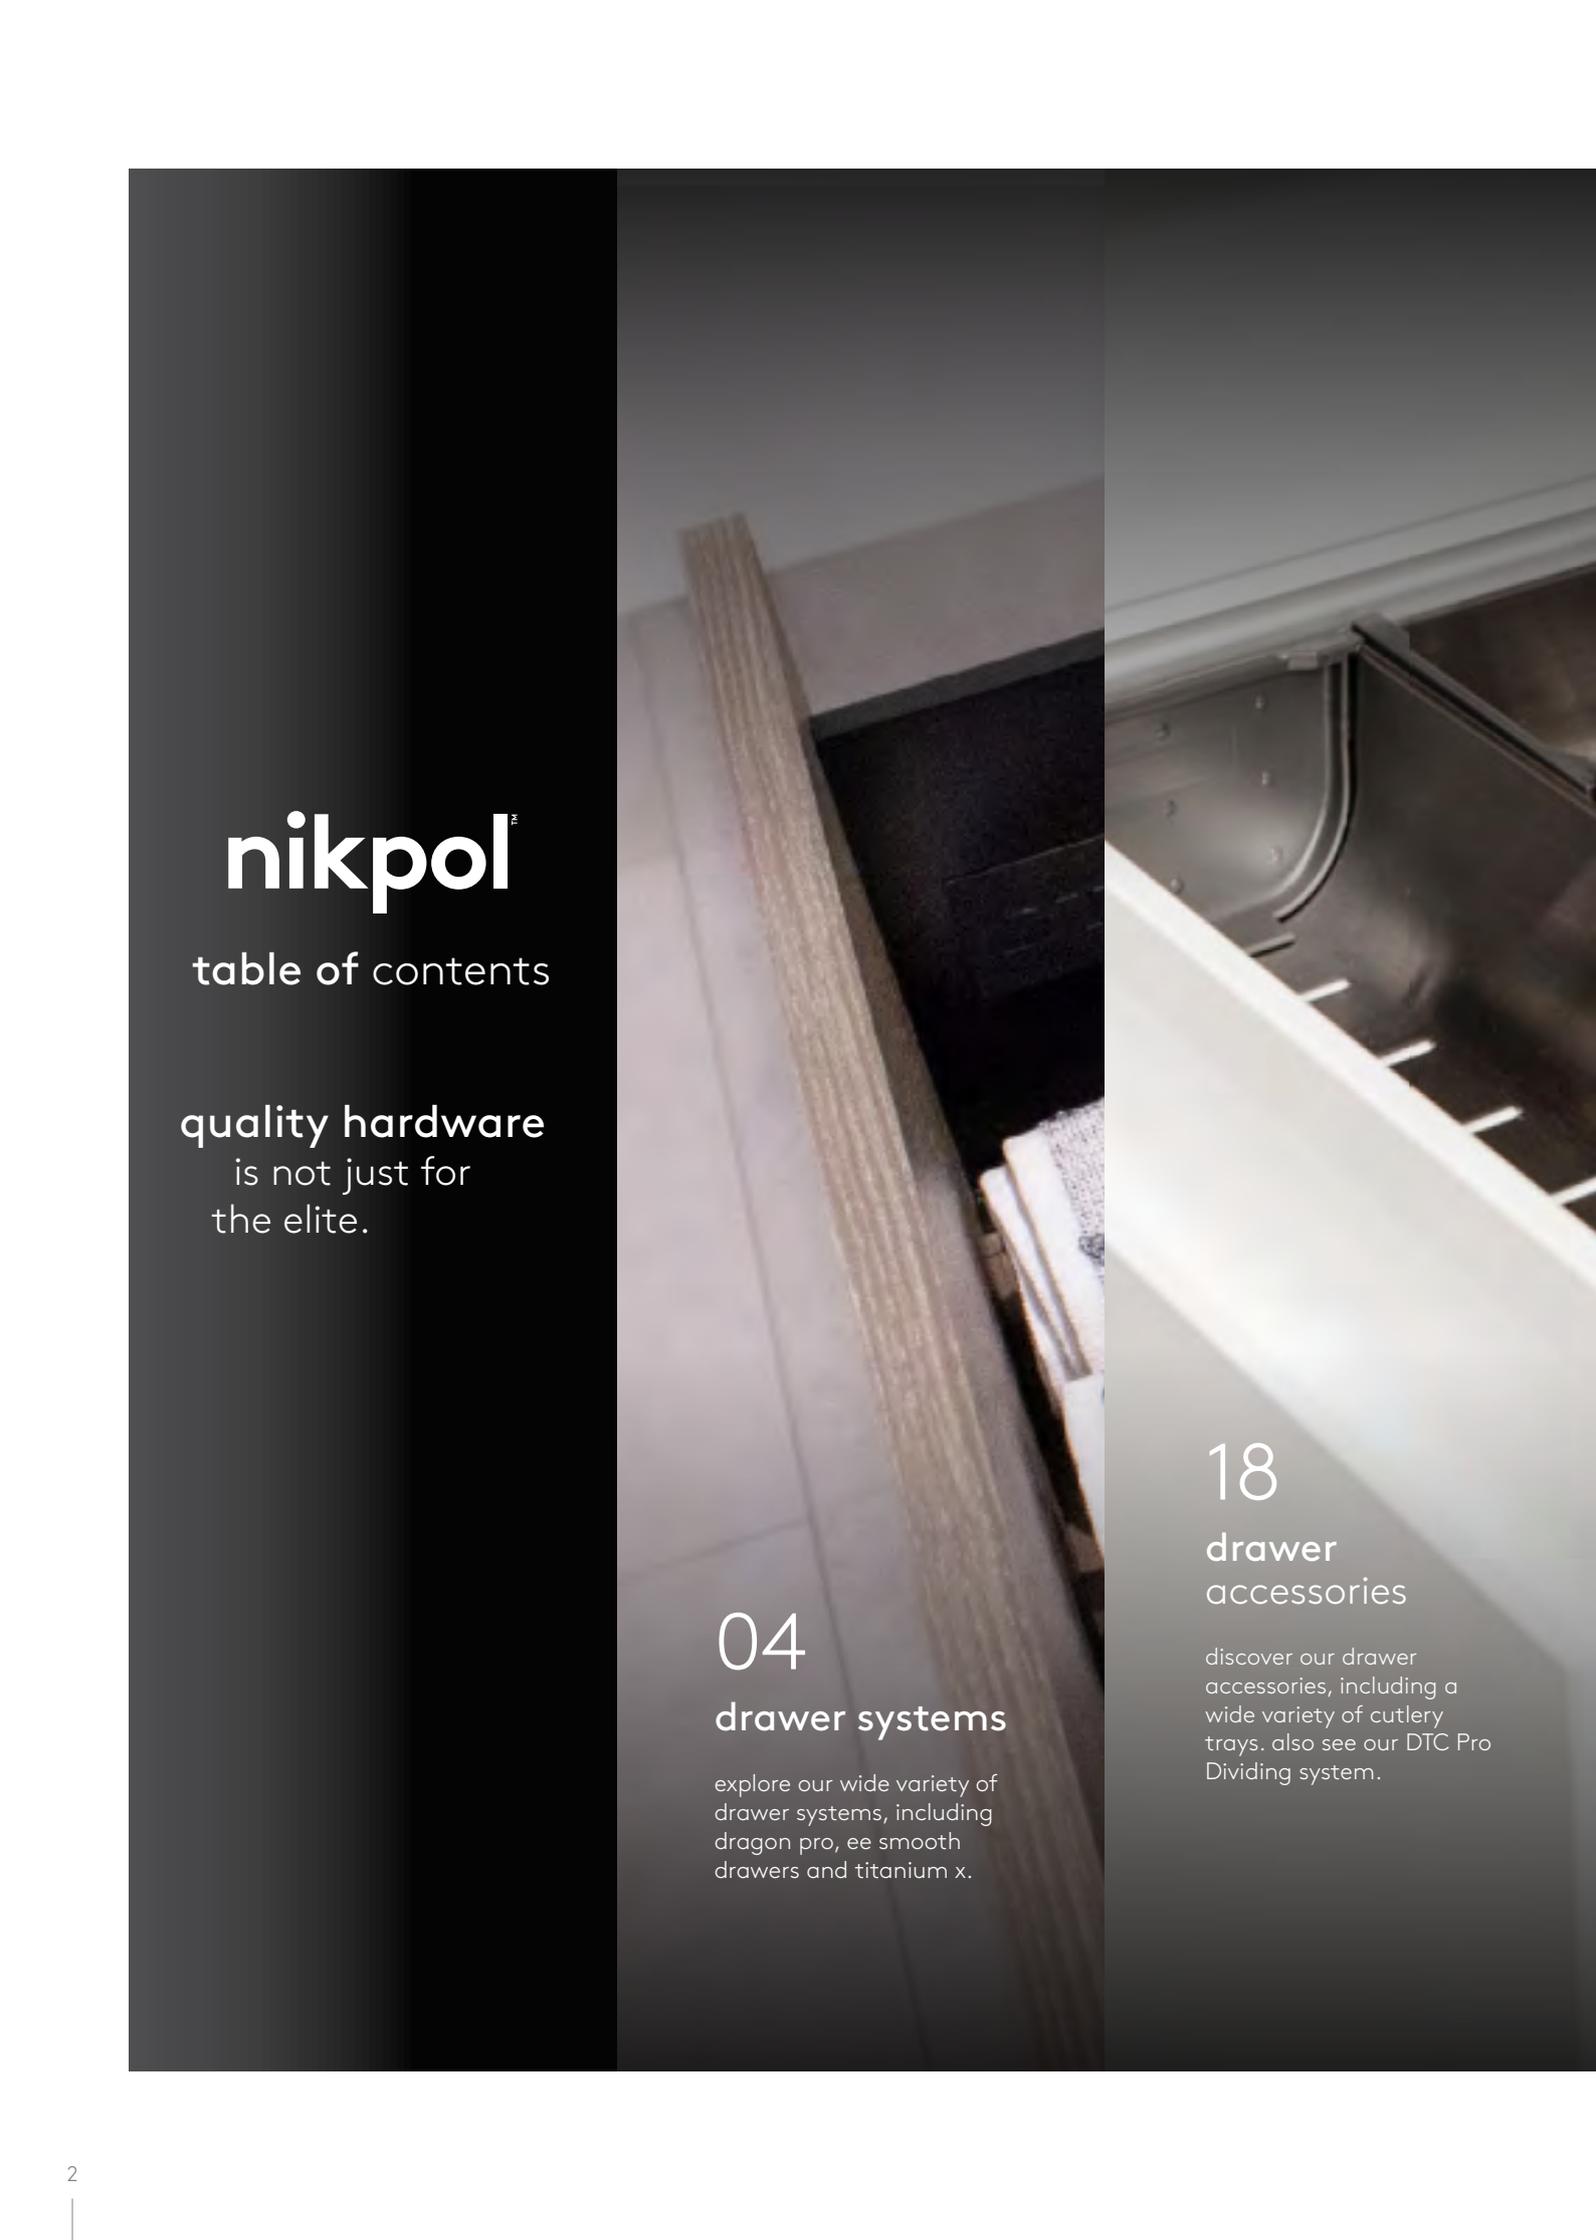

**nikpol™**

table of contents

**quality hardware**  
is not just for  
the elite.

04

**drawer systems**

explore our wide variety of drawer systems, including dragon pro, ee smooth drawers and titanium x.

18

**drawer accessories**

discover our drawer accessories, including a wide variety of cutlery trays. also see our DTC Pro Dividing system.



## 20 spice/bottle drawers

makes the most of the small space and optimises convenience and storage capacity.



## 22 pivot star hinges

see our huge variety of pivot star hinges, ranging from 45°, 90°, 95°, 110°, 135°, 160° and compatible wing or inline plates.



## 34 DTC stays

discover our DTC stays, including down stay, top stays and push latches.



# drawer systems

Welcome to our comprehensive collection of drawer systems, meticulously curated to elevate the functionality and aesthetics of your living spaces. Dive into a world of seamless organization and effortless functionality with our diverse array of drawer solutions. From the sleek precision of Dragon Pro drawer kits to the durability of runners, each system promises unmatched quality and performance.

Whether you're revamping your kitchen, optimizing your bathroom, refining your bedroom, or enhancing your office, our range offers the perfect solution. Explore our selection of smooth gliding, magic moving, and ball-bearing runner systems, including TitaniumX and Dragon Pro, designed to meet every need and exceed every expectation.

Discover innovation and efficiency at your fingertips as you browse our catalog of drawer systems, meticulously crafted to transform your space into a haven of order and sophistication.

## key:

### wall

 **DWD**  
Double wall drawer

 **SWD**  
Single wall drawer

 **Slide Only**

### runners

 **Side Mount**  
Mounted in a vertical position on the side of the drawer

 **Under Mount**  
Mounted in a horizontal position under the chassis of the drawer

### runners

 **Full Extension**  
Allows drawers to be opened completely

 **Single Extension**  
Only allows drawers to be opened partly — 3/4 opened

 **7/8 Extension**  
Allows drawers to be almost fully opened.

### runners

 **Soft-Closing**

 **Push-to-Open**

 **Self Close**

## drawer systems and runners:



### dragonpro

Designed with perfect unity and functionality.

**Wall/Slides:** DWD  
**Finish:** Silk White, Matt Black & Matt Grey  
**Runners:** Concealed Side Mount  
**Extension:** Full Extension  
**Mechanism:** Soft close/Push-to-open option  
**Height:** 80, 95, 127, 178, 209, 238  
**Length:** 300-600mm  
**Load Capacity:** 40kg



### ee smooth

A smooth, easy opening and a gentle closing action.

**Wall/Slides:** DWD  
**Finish:** Silk White  
**Runners:** Concealed Side Mount  
**Extension:** Full Extension  
**Mechanism:** Soft close/Push-to-open option  
**Height:** 68, 83  
**Length:** 270-600mm  
**Load Capacity:** 40kg



### titaniumx

Build drawers easier and quicker than ever before.

**Wall/Slides:** SWD  
**Finish:** White  
**Runners:** Side Mount  
**Extension:** Single Extension  
**Mechanism:** Self Close (Soft close option)  
**Height:** 86, 118, 150, 214  
**Length:** 250-550mm  
**Load Capacity:** 30kg



### magic move runners

Full extension, soft closing slides w/3D brackets

**Wall/Slides:** Slides only  
**Finish:** Zinc Plated  
**Runners:** Under Mount  
**Extension:** Full Extension  
**Mechanism:** Soft close  
**Length:** 250-600mm  
**Load Capacity:** 40kg



### D-motion runners

7/8 extension, soft closing slides w/1D brackets

**Wall/Slides:** Slides only  
**Finish:** Zinc Plated  
**Runners:** Under Mount  
**Extension:** 7/8 Extension  
**Mechanism:** Soft close  
**Length:** 400-500mm  
**Load Capacity:** 25kg



### economy runners

Single extension with roll out prevention

**Wall/Slides:** Slides only  
**Finish:** White  
**Runners:** Side Mount  
**Extension:** Single Extension  
**Mechanism:** Self close/ (Soft close option)  
**Length:** 250-500mm  
**Load Capacity:** 20kg



### ball bearing runners

Steel, ball bearing rollers

**Wall/Slides:** Slides only  
**Finish:** Zinc Plated  
**Runners:** Side Mount & Undermount  
**Extension:** Full Extension  
**Mechanism:** Soft Close/ Non-Soft close option  
**Length:** 250-600mm  
**Load Capacity:** 45kg



## dragon pro

The stunning DTC Dragon Pro, available in 6 heights and 3 finishes, silk white, matt black and matt grey is a slimline drawer system designed with perfect unity and functionality. The system, especially with the clean design on the double-wall profile and the dividing elements, creates space saving and practicality in your modern-day kitchen. A perfect mix of function and fashion.

This drawer system offers quick and easy assembly with tool-free removal of drawer from the runner. Its concealed runners and different profile heights, thereby removing the need for gallery rails, give it a sleek appearance. Internal side, height and tilt adjustments are provided, along with a built-in soft closing mechanism for added convenience. Available in stylish colors including silk white, matt black and matt grey, it combines practicality with modern design.

### specifications:

**Load capacity:** 40kg

**Colour:** Silk White, Matt Black & Matt Grey

**Extension:** Full extension synchronised drawer

**Benefits:** Available in set packs so it's easy for ordering

**Close:** Soft-close drawer system

**Adjustment (Up/Down):** ± 2 mm

**Adjustment (Left/Right):** ± 1.5 mm

**Adjustment (Tilt):** - 4 mm

**Ease-of-use:** Easy slide in and click back brackets

**No gallery rail:** Thin line 13mm profile looks modern and saves drawer space

**Option:** Push-to-open available



## options

### standard drawer matt black finish

Nominal Length	80mm	95mm	127mm	178mm	209mm	238mm
300mm		HB013004AXMB				HB043004AXMB
350mm		HB013504AXMB	HB023504AXMB	HB033504AXMB	HB053504AXMB	HB043504AXMB
400mm		HB014004AXMB	HB024004AXMB	HB034004AXMB	HB054004AXMB	HB044004AXMB
450mm		HB014504AXMB	HB024504AXMB	HB034504AXMB	HB054504AXMB	HB044504AXMB
500mm	HB005004AXMB	HB015004AXMB	HB025004AXMB	HB035004AXMB	HB055004AXMB	HB045004AXMB
550mm		HB015504AXMB	HB025504AXMB	HB035504AXMB	HB055504AXMB	HB045504AXMB

### standard drawer silk white finish

Nominal Length	80mm	95mm	127mm	178mm	209mm	238mm
300mm		HB013004AX	HB023004AX	HB033004AX	HB053004AX	HB043004AX
350mm		HB013504AX	HB023504AX	HB033504AX	HB053504AX	HB043504AX
400mm		HB014004AX	HB024004AX	HB034004AX	HB054004AX	HB044004AX
450mm		HB014504AX	HB024504AX	HB034504AX	HB054504AX	HB044504AX
500mm	HB005004AX	HB015004AX	HB025004AX	HB035004AX	HB055004AX	HB045004AX
550mm		HB015504AX	HB025504AX	HB035504AX	HB055504AX	HB045504AX
600mm		HB016004AX	HB026004AX	HB036004AX	HB056004AX	HB046004AX

### standard drawer matt grey finish

Nominal Length	80mm	95mm	127mm	178mm	209mm	238mm
300mm						
350mm						
400mm		HB014004AXMG	HB024004AXMG	HB034004AXMG	HB054004AXMG	
450mm		HB014504AXMG	HB024504AXMG	HB034504AXMG	HB054504AXMG	
500mm		HB015004AXMG	HB025004AXMG	HB035004AXMG	HB055004AXMG	
550mm						
600mm						

Nominal Length	PTO Tilt Adjust (Slides Only)
300mm	HB413004HX
350mm	HB413504HX
400mm	HB414004HX
450mm	HB414504HX
500mm	HB415004HX
550mm	HB415504HX
600mm	HB416004HX

Nominal Length	Soft-close slides only
300mm	
350mm	
400mm	
450mm	
500mm	HB015005H-1
550mm	HB015505H-1
600mm	HB016005H-1

\*Synchronisation Rod (B0FH02) is needed for drawers with width of 600mm or wider for Push-to-Open mechanism to work. Not applicable for 300mm drawer kits.


# dragon pro accessories

## inner drawer accessories:



**Front Panel 1100mm**

Code	Colour
B01021	White
B01021MB	Matt Black
B01021MG	Matt Grey



**Inner Drawer Front Rail 1100mm**

Code	Colour
M01078	White
M01078MB	Matt Black
M01078MG	Matt Grey



**Inner Drawer Front Bracket Set**


Code	Size/Colour
HB01012X	95mm White
HB02012X	127mm White
HB03012X	178mm White
HB05012X	209mm White
HB01012XMB	95mm Matt Black
HB02012XMB	127mm Matt Black
HB03012XMB	178mm Matt Black
HB05012XMB	209mm Matt Black
HB01012XMG	95mm Matt Grey
HB02012XMG	127mm Matt Grey
HB03012XMG	178mm Matt Grey
HB05012XMG	209mm Matt Grey

## front marking jigs & brackets:



**Marking Jig**

Code	Size
B0101A	80mm High
HBE1101AX	95mm High
HBE1201AX	127mm High
HBE1301AX	178/209/238mm High

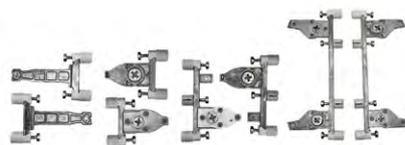

**Front Fix Expanding Dowel Set**

Code	Size
B0101B	80mm High
HBE1101BX	95mm High
HBE1201BX	127mm High
HBE1301BX	178/209/238mm High



## other accessories:



### Extra Cover Caps

Code	Size
HBEJS01X	Inside all drawers white
HBEJS01XMB	Inside all drawers black
HBEJS01XMG	Inside all drawers matt grey
HBJS02X	Outside all drawers white
HBJS02XMB	Outside all drawers black
HBJS02XMG	Outside all drawers matt grey



### Rear Stabilizer

Code	Colour
B01081	White



### PTO Synchronisation Rod

Code	Size
B0FH02	1100mm





# EE smooth drawer

Characterised by smooth movement, easy opening and a gentle closing action, the EE Smooth drawer system is reliable, high quality and value for money solution for soft close drawer applications.

This drawer system is available in silk white finish with sleek and modern profiles and matching square gallery rails for pot drawers. Incorporating a built-in soft closing mechanism in fully synchronised runners, it ensures a quiet closing experience, eliminating any knocking noise. The drawers offer 2D adjustment for standard models (side and height), and pot drawers provide 3D adjustment (side, height, and the tilt adjustment through the gallery rail), enhancing customization options.

## specifications:

**Finish:** White  
**Load capacity:** 40kg  
**Benefit:** Optimal soft closing operation  
**Extention:** Full extension synchronised drawer  
**Ease-of-use:** Tool-free removal of drawer from the runner

**Type:** Double wall drawer  
**Adjustment (Up/Down):** ± 2 mm  
**Adjustment (Left/Right):** ± 1.5 mm  
 Option: Push to open available

nominal length	soft closing				push-to-open runner only
	profile		medium	high pot drawer	must add to complete drawer
	68mm set A	83mm set A	135mm set B	199mm set D	
270mm		EE01270A			
300mm		EE01300A			
350mm		EE01350A	Use Set B components	Use Set D components	EE0513504H
400mm		EE01400A	Use Set B components	Use Set D components	EE0514004H
450mm		EE01450A	Use Set B components	Use Set D components	EE0514504H
500mm	EE005004A	EE01500A	EE01500BB	EE01500DD	EE0515004H
550mm		EE01550A	Use Set B components	Use Set D components	

**Set A** - Comes complete drawer with expanding dowel front brackets.  
**Set B** - Set A (83mm) plus knock-in square gallery rails & medium back brackets.  
**Set D** - Set A (83mm) plus knock-in square gallery rails & high back brackets.

\*Synchronisation Rod(M0FH02) is needed for Push-to-Open drawers with width of 600mm or wider for mechanism to work.

## accessories:



### White Knock-In Round Gallery Rail Set

Code	Size
EE01041350	350mm
EE01041400	400mm
EE01041450	450mm
EE01041500	500mm
EE01041550	550mm



### White Knock-In Square Gallery Rail Set

Code	Size
EE0104S350	350mm
EE0104S400	400mm
EE0104S450	450mm
EE0104S500	500mm
EE0104S550	550mm




### Rail Fixing Bracket Set

Code	Specification
MGH08	Screw-on fixing bracket. Suits knock-in gallery rails only.



### Front Fixing Bracket Set

Code	Specification
EE0101B	Expanding Dowel

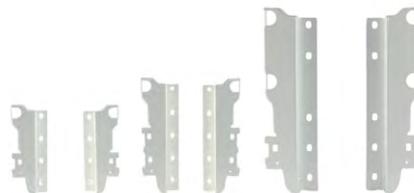

### Rear Bracket Set - White

Code	Specification
EE01031	H83 Std - A
EE01032	H135 Med Pot - B
EE01033	H199 High Pot 2x Rail-D
EE01039	H199 High Pot Rail-D



### Inset Front Bracket Set - White

Code	Specification
EE01012	H83 Std
EE01013	H135 Med Pot Round Rail
EE01015	H199 High Pot Round Rail
EE0101K	H135 Med Pot Square Rail
EE0101C	H199 High Pot SquareRail



### 1100mm White Front Panel

Code	Size
EE01021	83mm high



### Inset Drawer Handle

Code	Specification
M01022	For high inset drawer



### 1100mm White Front Rail

Code	Specification
EE01043	Round rail for high inset drawer
M01078	Square rail for high inset drawer

## accessories:



### Drawer Front Stabiliser

Code	Size
M01082	White



### Rear Stabiliser

Code	Colour
B01081	White



### Rear Variable Brackets

Code	Size
B0103J	White



### Synchronisation Rod

Code	Size
M0FH02	PTO rod 1100mm



### Front Universal Marking Jig

Code	Specification
DTC05	Front universal marking jig



### Cover caps

Code	Colour
MJS01	White



### Sinks/Vanity Drawer Wall

Code	Specification
M0103M	U-Shaped



Featured: EE Smooth inner drawers in different heights



# titanium x

DTC's smart range of TitaniumX drawer systems save you from having to construct drawer sides. This makes building a drawer easier and quicker than ever before. These single wall, single extension systems feature a load capacity of 30kg, double stop positions, 2D front panel adjustments, and self-closing runners. Soft close attachments are also available as an extra option.



This drawer system streamlines assembly by eliminating the need for constructing drawer sides, making the process quicker and easier. Its thin walls maximize storage space while maintaining structural integrity. Designed with an economical walled construction, it offers efficient storage solutions. Additionally, it includes universal front brackets, ensuring compatibility and ease of installation across various setups.

## specifications:

**Finish:** White  
**Load capacity:** 30kg  
**Close:** Self-closing  
**Positions:** Double stop positions  
**Adjustment:** 2-D front panel adjustment

**Up/down adjustment:** ±2mm  
**Left/right adjustment:** ±2mm  
**Benefit:** Quiet drawer system  
**Optional:** Soft close option available

nominal length	with pins				without pins			
	86mm	118mm	150mm	214mm	86mm	118mm	150mm	214mm
250mm	DTC86250WP					DTC118250W		
300mm	DTC86300WP					DTC118300W		
350mm	DTC86350WP	DTC118350WP	DTC150350WP	DTC214350WP	DTC86350W	DTC118350W	DTC150350W	DTC214350W
400mm	DTC86400WP	DTC118400WP	DTC150400WP	DTC214400WP	DTC86400W	DTC118400W	DTC150400W	DTC214400W
450mm	DTC86450WP	DTC118450WP	DTC150450WP	DTC214450WP	DTC86450W	DTC118450W	DTC150450W	DTC214450W
500mm	DTC86500WP	DTC118500WP	DTC150500WP	DTC214500WP	DTC118500W	DTC118500W	DTC150500W	DTC214500W
550mm	DTC86550WP	DTC118550WP					DTC150550W	



## accessories:



### Screw-on White Single Wall Rail Set

Code	Size
DTCRAIL35W	350mm
DTCRAIL40W	400mm
DTCRAIL45W	450mm
DTCRAIL50W	500mm
DTCRAIL55W	550mm



### Easy Fix White Single Wall Rail Set

Code	Size
DTCRAIL35WV	350mm
DTCRAIL40WV	400mm
DTCRAIL45WV	450mm
DTCRAIL50WV	500mm
DTCRAIL55WV	550mm



### Single Side Metal Bracket

Code	Type
DTCFBKTEPDL	Exp Dowel
DTCFBKTKI	Knock-In
DTCFBKTSO	Screw-On

Sold per each - Two per drawer required



### Soft Close Attachment

Code	Type
DTCSYLENTD	For single wall drawer

Suits 350mm and above lengths - Sold in pairs



### Soft Close Attachment


Code	Type
DTCSYLENTR	For single extension runner

Suits 350mm and above lengths - Sold in pairs



### Front Marking Jig

Code	Type
DTCDFMJIG	Single wall drawer

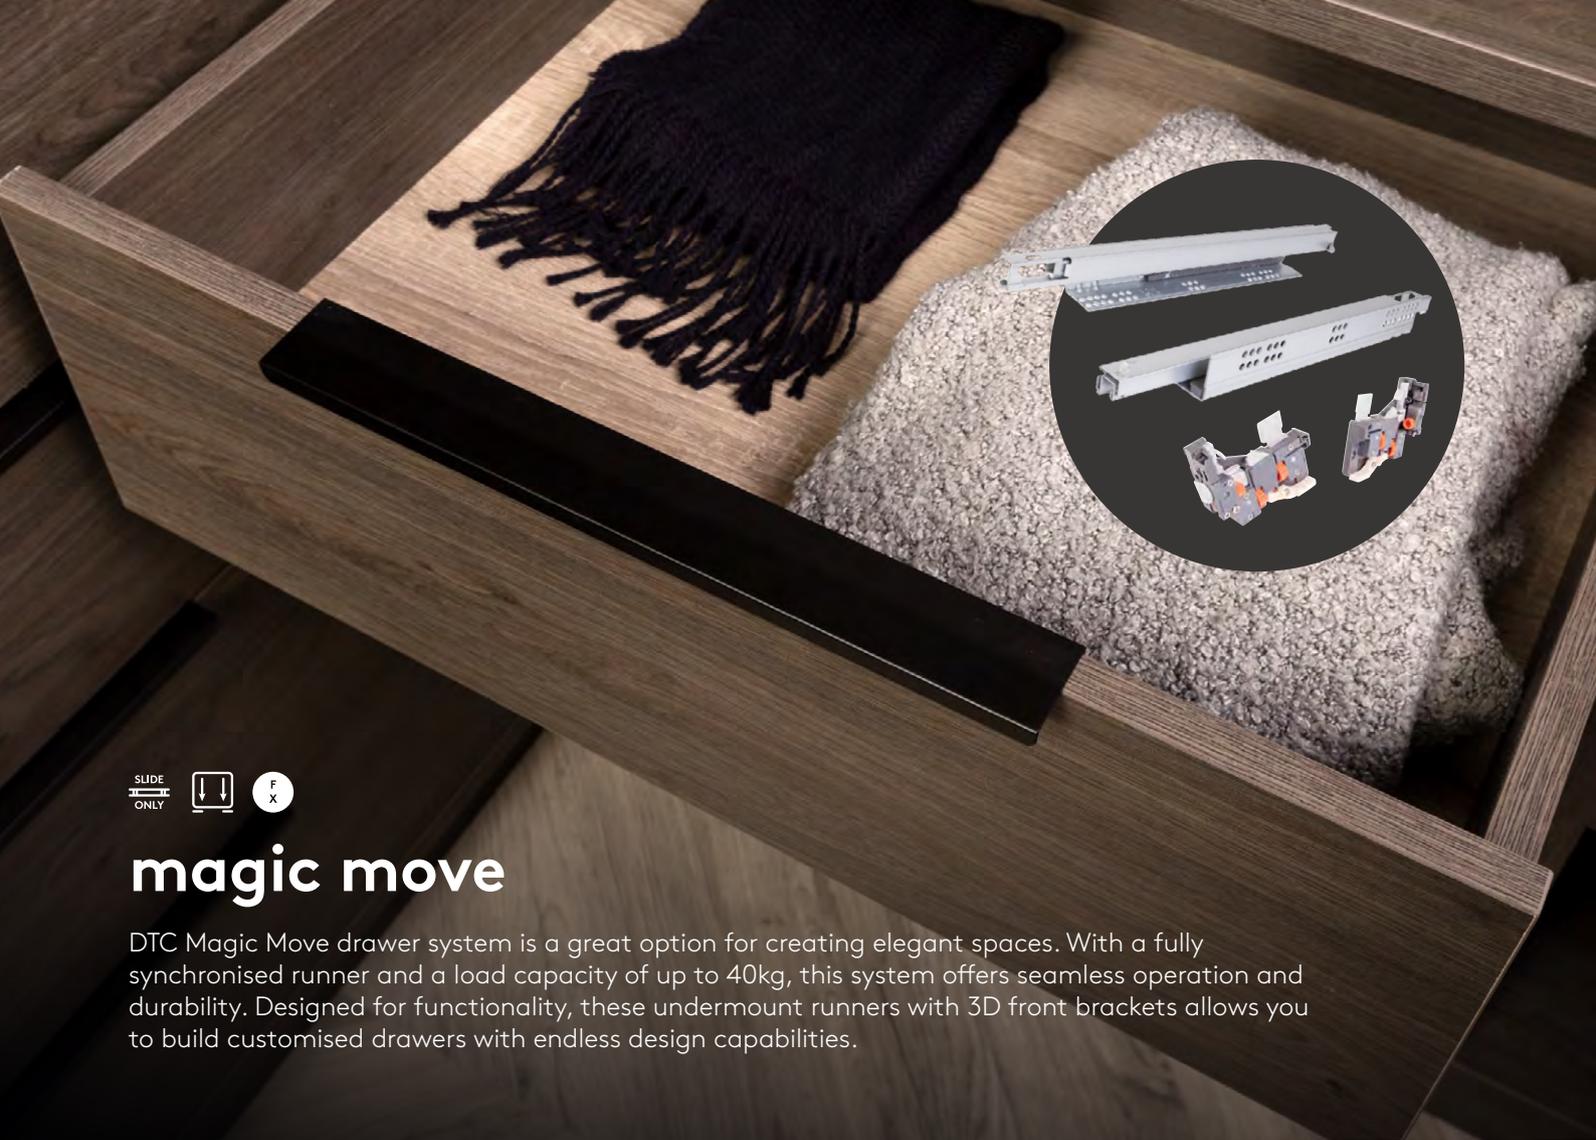

## magic move

DTC Magic Move drawer system is a great option for creating elegant spaces. With a fully synchronised runner and a load capacity of up to 40kg, this system offers seamless operation and durability. Designed for functionality, these undermount runners with 3D front brackets allows you to build customised drawers with endless design capabilities.

This drawer system offers 3D adjustability, enhancing its capability for retro-fitting drawers with precision. It incorporates soft closing functionality without the need for additional parts, ensuring smooth and quiet operation. The fully synchronised runners provides easy access to contents whilst maintaining a sleek appearance. Furthermore, it eliminates the need for rebates to accommodate the runner, simplifying installation and reducing complexity.

### specifications:

**Finish:** Zinc plated

**Capacity:** 40kg

**Mounting:** Bottom mounting

**Type:** Full extension, fully synchronised runner, soft closing

**Benefit:** Drawer system self locks once positioned on slide

**Up/down adjustment:** ± 2.5 mm

**Left/right adjustment:** ± 1.5 mm

**Depth adjustment:** ± 3mm

**Includes:** 3D front brackets with runners

**Maximum drawer side thickness:** 16mm

Nominal Length	250mm	300mm	350mm	400mm	450mm	500mm	550mm	600mm
Magic Move	DTCTS10250H	DTCTS10300H	DTCTS10350H	DTCTS10400H	DTCTS10450H	DTCTS10500H	DTCTS10550H	DTCTS10600H

# drawer runners

Browse our range of DTC single extension, 7/8 extension and ball bearing full extension runners. Available in side mount and under mount, with built-in soft close, non-soft close or optional soft close adapter.

## economy runners

Affordable and economically advantageous choice.



### Specifications:

**Extention:** Single  
**Capacity:** 20kg  
**Finish:** White  
**Other:** Roll out prevention  
**Mounting:** Bottom  
**Type:** Self-closing  
**Accessories:** DTC SYLENT R Soft closing adapter

## ball bearing b/m

High load carrying capacity, effortless removal from runner.



### Specifications:

**Extention:** Full  
**Capacity:** 45kg  
**Benefits:** Steel ball bearing rollers for longer roller life  
**Mounting:** Bottom  
**Drilling:** System32  
**Other:** Hold-in cushion positive out stop

## ball bearing s/m

High load carrying capacity, soft closing, easy removal from runner.




### Specifications:

**Extention:** Full  
**Capacity:** 45kg  
**Benefits:** Steel ball bearing rollers for longer roller life  
**Mounting:** Side  
**Drilling:** System32  
**Other:** Hold-in cushion positive out stop  
**Option:** Soft close / non-soft close

## d-motion runners

Fully synchronized, soft close runner with 1D bracket.



### Specifications:

**Extention:** 7/8  
**Capacity:** 25kg  
**Finish:** Zinc plated  
**Benefits:** 1D bracket included with runner  
**Mounting:** Bottom  
**Type:** Soft close  
**Other:** Fully synchronized

## specifications:

nominal length	economy runners		ball bearing		d-motion
	single extension		full extension		7/8 extension
	bottom mount	bottom mount	side mount		bottom mount
	-	-	-	soft closing	soft close
250mm	DRECO250		DRBB250MMN		
300mm	DRECO300	DRBB300MMBM	DRBB300MMN	DRBB300SCSM	
350mm	DRECO350	DRBB350MMBM	DRBB350MMN	DRBB350SCSM	
400mm	DRECO400	DRBB400MMBM	DRBB400MMN	DRBB400SCSM	DTCGG10C400
450mm	DRECO450	DRBB450MMBM	DRBB450MMN	DRBB450SCSM	DTCGG10C450
500mm	DRECO500	DRBB500MMBM	DRBB500MMN	DRBB500SCSM	DTCGG10C500
550mm		DRBB550MMBM	DRBB550MMN	DRBB550SCSM	
600mm		DRBB600MMBM	DRBB600MMN	DRBB600SCSM	

# drawer accessories

See our cutlery trays available in sleek grey and durable stainless steel options, these trays are designed to fit seamlessly into any kitchen decor while keeping your cutlery and utensils neatly organized. Also see our DTC Pro Dividing system.



**DTCCUTLERY500**  
**Modular Cutlery Tray Set**  
(Suits 500mm deep drawer)

<b>Specifications:</b>	<b>Configuration:</b>
<b>Finish:</b> Stainless Steel	3 x (85 x 310mm)
<b>Width:</b> 285mm	1x (85 x 170mm)
<b>Depth:</b> 480mm	1x (85 x 255mm)
<b>Height:</b> 65mm	1 x (85 x 85mm)
<small>*Keeps modules stable and adds another full length compartment where required.</small>	2 x spring loaded spacers*




**DTCCUTLERY600**  
**Modular Cutlery Tray Set**  
(Suits 500mm deep drawer)

<b>Specifications:</b>	<b>Configuration:</b>
<b>Finish:</b> Stainless Steel	4 x (85 x 310mm)
<b>Width:</b> 370mm	2 x (85 x 255mm)
<b>Depth:</b> 480mm	1 x (85 x 170mm)
<b>Height:</b> 65mm	2 x spring loaded spacers*
<small>*Keeps modules stable and adds another full length compartment where required.</small>	



**DTCCUTLERY700**  
**Modular Cutlery Tray Set**  
(Suits 500mm deep drawer)

<b>Specifications:</b>	<b>Configuration:</b>
<b>Finish:</b> Stainless Steel	5 x (85 x 310mm)
<b>Width:</b> 460mm	2 x (85 x 255mm)
<b>Depth:</b> 480mm	2 x (85 x 170mm)
<b>Height:</b> 65mm	2 x spring loaded spacers*
<small>*Keeps modules stable and adds another full length compartment where required.</small>	




**DTCCUTDP500A01**  
**4 Bay Cutlery Organiser**  
(Suits 500mm deep Dragon Pro drawer)

**Specifications:**  
**Width:** 356mm  
**Depth:** 473.5mm  
**Height:** 55m



**DTCCUTDP500A03**  
**7 Bay Cutlery Organiser**  
(Suits 500mm deep Dragon Pro drawer)

**Specifications:**  
**Width:** 356mm  
**Depth:** 473.5mm  
**Height:** 55m

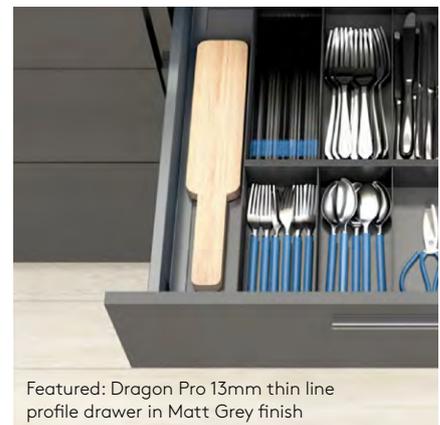

Featured: Dragon Pro 13mm thin line profile drawer in Matt Grey finish



HB01007B  
**Pro Low Cross Divider**

Specifications:  
Colour: White  
Length: 1100mm  
Width: 9mm  
Height: 55mm



HB01007A  
**Pro Low Cross Sectional Divider**

Specifications:  
Colour: White  
Depth: 36mm  
Width: 110mm  
Height: 58mm



HB010079  
**Pro Low Cross Divider Connector**

Specifications:  
Colour: White  
Depth: 143/175mm  
Width: 12mm  
Height: 56mm



HB01023  
**Pro High Cross Divider**

Specifications:  
Colour: White  
Length: 1100mm  
Width: 9mm  
Height: 115mm



HB01076  
**Pro High Cross Sectional Divider**

Specifications:  
Colour: White  
Depth: 45mm  
Width: 110mm  
Height: 120mm



HB01075  
**Pro High Cross Divider Connector**

Specifications:  
Colour: White  
Depth: 143/165mm  
Width: 12mm  
Height: 120mm





## spice/bottle drawer

When a kitchen design requires a narrow cabinet to be placed, a narrow spice drawer configuration makes the most of the small space and optimises convenience and storage capacity.

Spice/Bottle drawer features concealed, full-extension runners with a 40kg load capacity and soft closing for quiet operation. Its silent system ensures a smooth, noise-free run. With 3D adjustment capabilities for side (left/right adjustment of  $\pm 1.5\text{mm}$ ), height (up/down adjustment of  $\pm 2\text{mm}$ ), and tilt adjustment of  $+1.5\text{mm}$  to  $-2.5\text{mm}$ , it offers versatile customization. Finished in a sleek grey matte, it combines functionality with contemporary style.



**HQ450A150Z01**  
**150mm Pure Pro Spice/Bottle Drawer**

**Colour:** Grey Matt  
**Suits:** 150mm wide module by 450mm deep



**HQ10074450-85**  
**150mm Pure Pro Spice/Bottle Divider Low**

**Colour:** Grey Matt  
**Suits:** HQ450A150Z01 Top drawer  
**Size:** 85mmW x 420mmD x 52mmH  
**Other:** 4 Divider plus Base



**HQ10075450-85**  
**150mm Pure Pro Spice/Bottle Divider High**

**Colour:** Grey Matt  
**Suits:** HQ450A150Z01 Bottom drawer  
**Size:** 85mmW x 420mmD x 118mmH  
**Other:** 4 Divider plus Base

**HQ450A200Z01**  
**200mm Pure Pro Spice/Bottle Drawer**

**Colour:** Grey Matt  
**Suits:** 200mm wide module by 450mm deep

**HQ10074450-135**  
**200mm Pure Pro Spice/Bottle Divider Low**

**Colour:** Grey Matt  
**Suits:** HQ450A200Z01 Top drawer  
**Size:** 135mmW x 420mmD x 52mmH  
**Other:** 4 Divider plus Base

**HQ10075450-135**  
**200mm Pure Pro Spice/Bottle Divider High**

**Colour:** Grey Matt  
**Suits:** HQ450A200Z01 Bottom drawer  
**Size:** 135mmW x 420mmD x 118mmH  
**Other:** 4 Divider plus Base



## specifications:

**Finish:** Zinc plated runners  
**Capacity:** 40kg  
**Mounting:** Bottom mounting  
**Type:** Full extension, fully synchronised runner, soft closing  
**Benefit:** Drawer system self locks once (positioned on slide)

**3-dimensional adjustment**  
**Up/down adjustment:**  $\pm 2\text{ mm}$   
**Left/right adjustment:**  $\pm 1.5\text{ mm}$   
**Depth adjustment:**  $+ 1.5\text{ mm}, - 2.5\text{mm}$



# pivot star hinge anyway snap-on


The DTC PIVOT-STAR concealed hinges are the premier choice for function and style for top quality cabinets and furniture. Featuring the anyway snap-on design between hinge and plate, the connection is faster and easier. Perfect motion for every single space.

## type:

sprung hinge	overlay	mounting	drill pattern
110°	Full Overlay/Half Overlay/Inset	Screw-On/Knock-in/Q-turn	B-45/9.5/H-52/5.5
160°	Full Overlay	Screw-On/Knock-in/Q-turn	B-45/9.5/H-52/5.5
90° Blind panel	-	Knock-in	B-45/9.5/H-52/5.5
45° Corner door hinge	-	Knock-in	B-45/9.5/H-52/5.5
135° Bi-fold	-	Knock-in/Q-turn	B-45/9.5/H-52/5.5


integrated soft close hinge	overlay	mounting	drill pattern
110°	Full Overlay/Half Overlay/Inset	Screw-On/Knock-in/Q-turn	B-45/9.5/H-52/5.5
160°	Full Overlay	Screw-On/Knock-in/Q-turn	B-45/9.5/H-52/5.5
90° Blind panel	-	Knock-in/Q-turn	B-45/9.5/H-52/5.5
45° Corner door hinge	-	Knock-in/Q-turn	B-45/9.5/H-52/5.5
95° Thick hinge	Full Overlay	Q-turn	B-45/9.5/H-52/5.5

## overlay

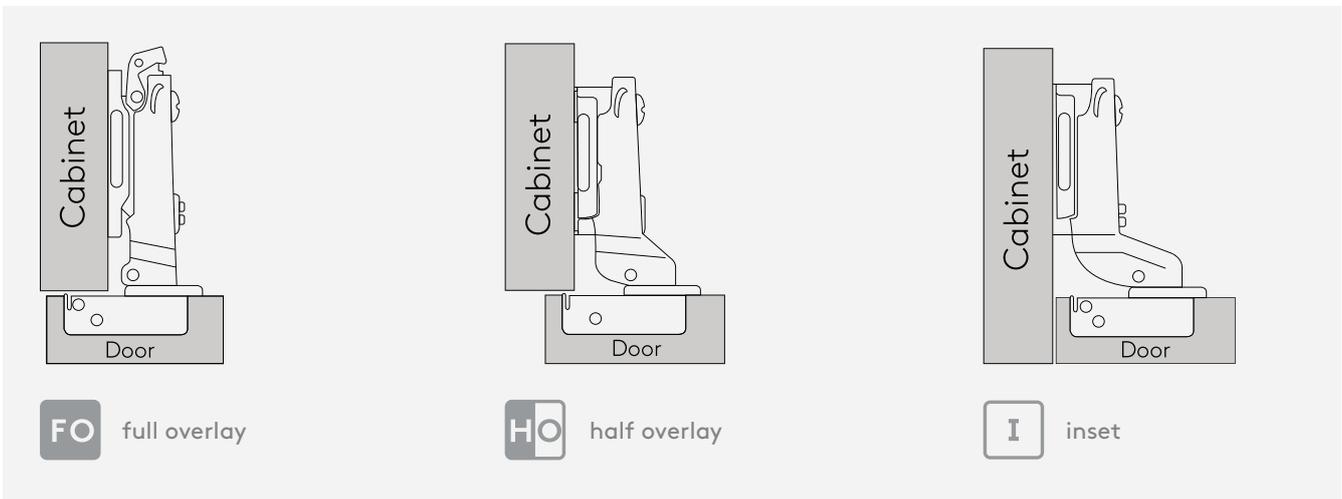


# specifications:


## mounting

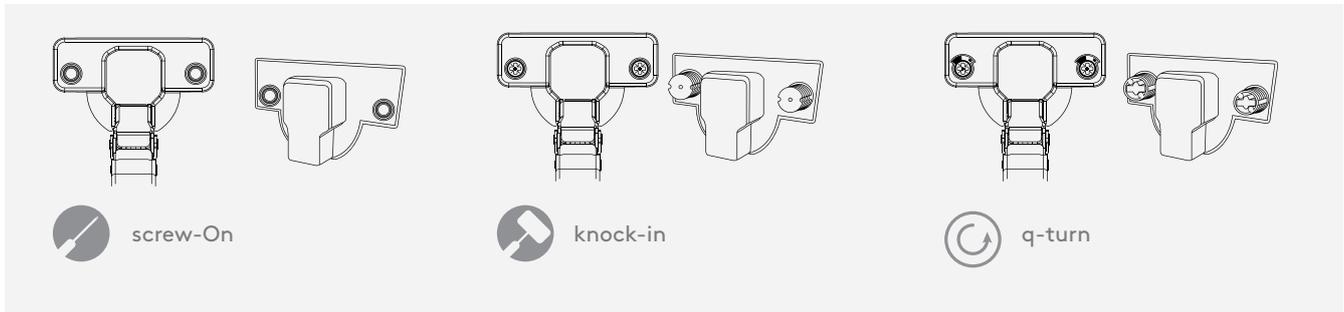


## drill pattern

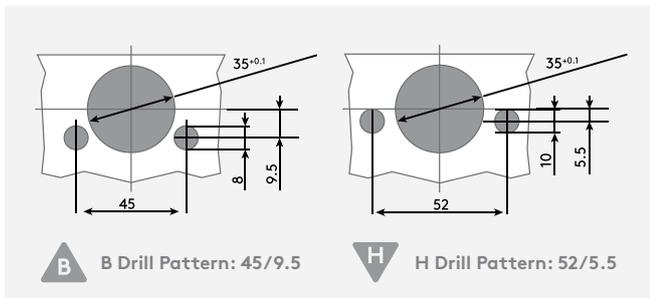

## anyway snap-on

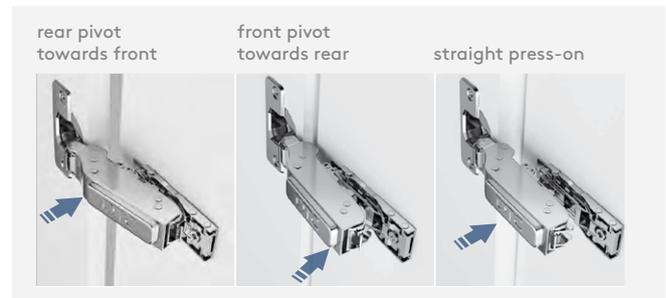

## number of hinges for each door

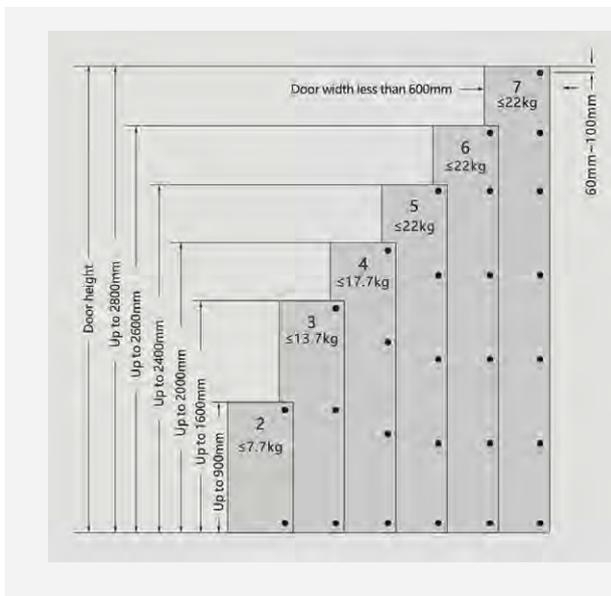

The number of hinges needed for each door depends on the width of the door, the height of the door, and the type of material the door is made of. It varies in particular practices. The hinge installation proposal listed here is only for your reference. An experiment is suggested in an uncertain situation. Performance is best when distance between hinges as far as possible.



Innovative Technology Silent and Effortless Closing Action  
Anyway Snap-on Soft-close Hinges with Spiral-cam





# pivot star - 110° hinge


Featuring a 110° opening angle and an 11.5mm hinge cup depth with a 35mm diameter, this hinge is ideal for doors ranging from 16mm to 26mm in thickness. With a drilling distance of 3mm to 6mm on the door, it offers versatility in installation.



## hinges



full overlay

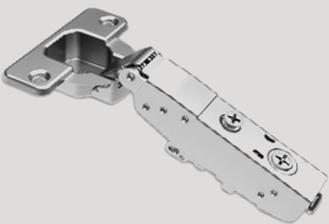

half overlay



inset

### sprung

#### DTC81A876A

Door Overlay: Full  
Type: Screw-on

#### DTC81A875NA

Door Overlay: Full  
Type: Knock-In  
Pattern: B 45/9.5

#### DTC81A877MA

Door Overlay: Full  
Type: Knock-In  
Pattern: H 52/5.5

#### DTC81A875T8A

Door Overlay: Full  
Type: Q-Turn  
Pattern: B 45/9.5

#### DTC81B875T8A

Door Overlay: Half  
Type: Q-Turn  
Pattern: B 45/9.5

#### DTC81B877MA

Door Overlay: Half  
Type: Knock-In  
Pattern: H 52/5.5

#### DTC81C875T8A

Door Overlay: Inset  
Type: Q-turn  
Pattern: B 45/9.5

#### DTC81C877MA

Door Overlay: Inset  
Type: Knock-In  
Pattern: H 52/5.5

### integrated soft close hinges

#### DTC81A876FA

Door Overlay: Full  
Type: Screw-on

#### DTC81A875NFA

Door Overlay: Full  
Type: Knock-In  
Pattern: B 45/9.5

#### DTC81A877MFA

Door Overlay: Full  
Type: Knock-in  
Pattern: H 52/5.5

#### DTC81A875T8FA

Door Overlay: Full  
Type: Q-Turn  
Pattern: B 45/9.5

#### DTC81A877T0FA

Door Overlay: Full  
Type: Q-Turn  
Pattern: H 52/5.5

#### DTC81B876FA

Door Overlay: Half  
Type: Screw-On

#### DTC81B875T8FA

Door Overlay: Half  
Type: Q-Turn  
Pattern: B 45/9.5

#### DTC81B877T0FA

Door Overlay: Half  
Type: Q-Turn  
Pattern: H 52/5.5

#### DTC81C876FA

Door Overlay: Inset  
Type: Screw-On

#### DTC81C875T8FA


Door Overlay: Inset  
Type: Q-Turn  
Pattern: B 45/9.5

#### DTC81C877T0FA


Door Overlay: Inset  
Type: Q-Turn  
Pattern: H 52/5.5

# specifications

## plate height calculation

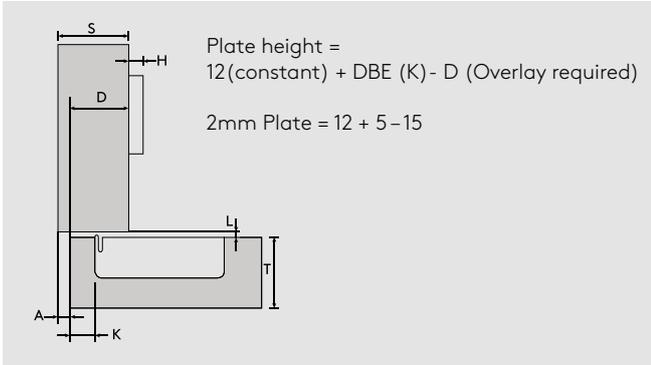

## projection of the door

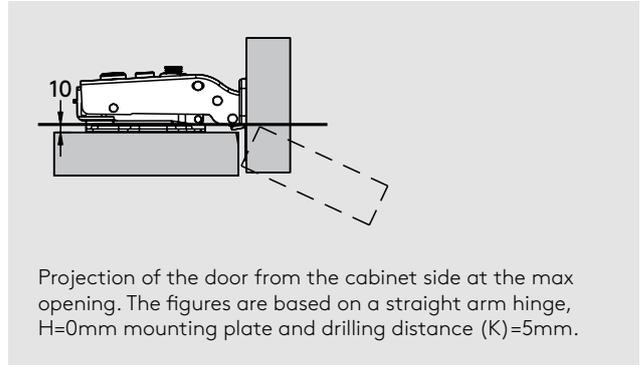

## space needed to open the door

T= Door thickness      K= Cup hole drilling distance from door edge

	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	A=	0.7	0.9	1.2	1.5	1.8	2.2	2.6	3.2	3.8	4.5	5.3
K=4	A=	0.7	0.9	1.1	1.4	1.8	2.1	2.5	3.0	3.5	4.4	4.9
K=5	A=	0.6	0.9	1.1	1.4	1.7	2.0	2.4	2.9	3.4	3.9	4.6
K=6	A=	0.6	0.8	1.1	1.3	1.6	2.0	2.4	2.8	3.2	3.8	4.4

	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.7	0.9	1.1
K=5	L=	0.0	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0
K=6	L=	0.9	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

## Ø 35mm hinge cup types

b drill pattern: 45/9.5

h drill pattern: 52/5.5

Use these formulas to determine the type of hinge arm, drilling distance (K=5mm), and the height of the mounting plate (H=2mm) for each door application.



# pivot star - 160° hinge

With a generous 160° opening angle, this hinge boasts an 12.4mm hinge cup depth and a 35mm diameter, making it suitable for doors ranging from 16mm to 28mm in thickness. The drilling distance on the door can vary from 3mm to 6mm, offering flexibility in installation.



## hinges



### sprung

**DTC81A806A**

Type: Screw-On

**DTC81A805T8A**

Type: Q-Turn

Pattern: B 45/9.5

**DTC81A807MA**

Type: Knock-In  
Pattern: H 52/5.5

### integrated soft close hinges

**DTC81A806FA**

Type: Screw-On

**DTC81A805T8FA**

Type: Q-Turn

Pattern: B 45/9.5

**DTC81A805NFA**

Type: Knock-In  
Pattern: B 45/9.5

**DTC81A807T0FA**

Type: Q-Turn


Pattern: H 52/5.5

**DTC81A807MFA**

Type: Knock-In  
Pattern: H 52/5.5

## specifications



### ∅ 35mm hinge cup types

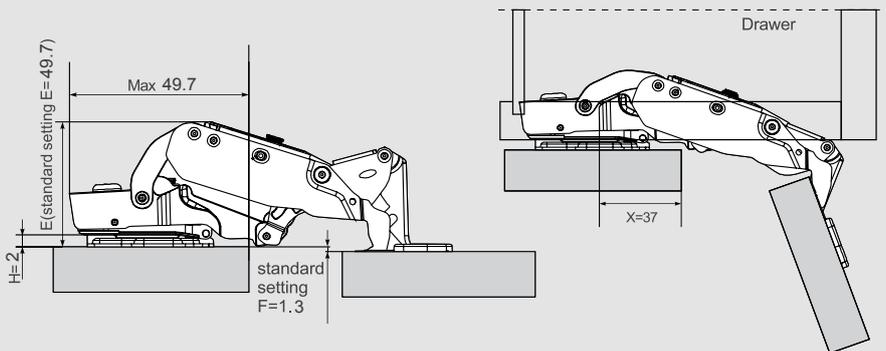

The door combined with a mounting plate H=2, opens at 90° with a 1.3mm protrusion allowing objects to move from inside of the cabinet.

b drill pattern: 45/9.5

h drill pattern: 52/5.5



Use these formulas to determine the type of hinge arm, drilling distance (K=5mm), and the height of the mounting plate (H=2mm) for each door application.





# pivot star - 45° angle door hinge

This hinge offers a 110° opening angle, along with an 11.5mm hinge cup depth and a 35mm diameter, making it compatible with doors ranging from 16mm to 26mm in thickness. The drilling distance on the door can vary from 3mm to 6mm, providing flexibility during installation. Its design ensures smooth operation and secure closure, catering to a variety of door thicknesses with ease.

## hinges



### sprung

**DTC81E875NA**

Type: Knock-In  
Pattern: B 45/9.5

**DTC81E877MA**

Type: Knock-In  
Pattern: H 52/5.5



### integrated soft close hinge

**DTC81E877MFA**

Type: Knock-In  
Pattern: H 52/5.5

**DTC81E875T8FA**

Type: Q-Turn  
Pattern: B 45/9.5

**DTC81E877T0FA**

Type: Q-Turn  
Pattern: 52/5.5


## specifications:

### space needed to open the door


T= Door thickness

K= Cup hole drilling distance from door edge

	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	A=	0.7	0.9	1.2	1.5	1.8	2.2	2.6	3.2	3.8	4.5	5.3
K=4	A=	0.7	0.9	1.1	1.4	1.8	2.1	2.5	3.0	3.5	4.4	4.9
K=5	A=	0.6	0.9	1.1	1.4	1.7	2.0	2.4	2.9	3.4	3.9	4.6
K=6	A=	0.6	0.8	1.1	1.3	1.6	2.0	2.4	2.8	3.2	3.8	4.4




	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.7	0.9	1.1
K=5	L=	0.0	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0
K=6	L=	0.9	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0




The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiused edges.


## Ø 35mm Hinge Cup Types

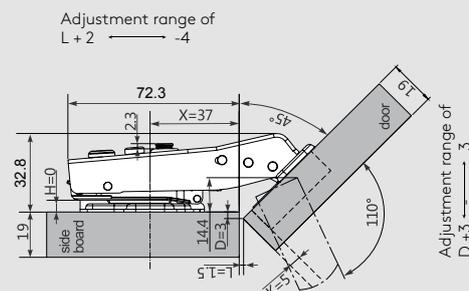

B Drill Pattern: 45/9.5



H Drill Pattern: 52/5.5



Use these formulas to determine the type of hinge arm, drilling distance (K=5mm), and the height of the mounting plate (H=2mm) for each door application.



# pivot star - 135° bi-fold corner hinge

Featuring a modest 55° opening angle, this hinge boasts an 11.5mm hinge cup depth and a 35mm diameter, accommodating doors ranging from 14mm to 26mm in thickness.



## hinges



### sprung

**DTC81H875T8A**

Type: Q-Turn  
Pattern: B 45/9.5

**DTC81H877MA**


Type: Knock-In  
Pattern: H 52/5.5

**DTC81H877T0A**


Type: Q-Turn  
Pattern: H 52/5.5

## ∅ 35mm hinge cup types

b drill pattern: 45/9.5




h drill pattern: 52/5.5



Use these formulas to determine the type of hinge arm, drilling distance (K) and the height of the mounting plate (H) for each door application.

## kitchen bi-fold door application

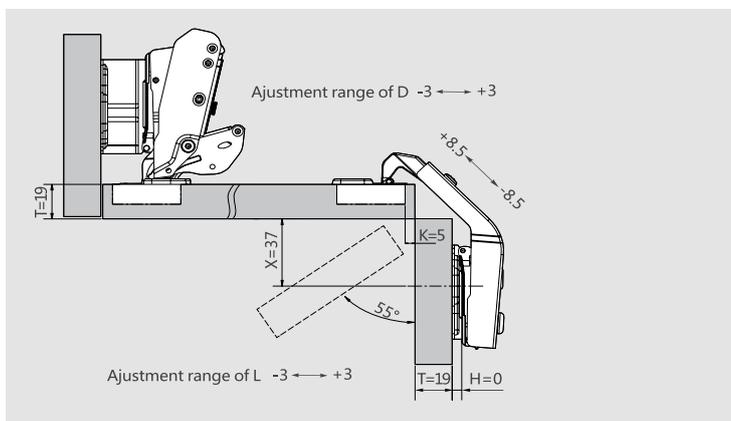



# pivot star - 95° thick door hinge

With a 95° opening angle, this hinge features an 11.5mm hinge cup depth and a 35mm diameter, fitting doors from 19mm to 35mm in thickness.



## hinges



### integrated soft close hinges

**DTC81A815T8FA**

**DTC81A817T0FA**

Type: Q-Turn  
Pattern: B 45/9.5

Type: Q-Turn  
Pattern: H 52/5.5

### space needed to open the door


T= Door thickness

K= Cup hole drilling distance from door edge


	T=	19	20	21	22	23	24	25	26	27	28	29	30	31	32-35
K=3	A=	0.1	0.2	0.3	0.4	0.5	0.7	0.9	1.3	2.2	3.2	4.1	5.0	6.0	7.0 - 10
K=4	A=	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.6	2.5	3.5	4.4	5.3	6.3 - 9.1
K=5	A=	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	2.0	2.9	3.7	4.7	5.6 - 8.4
K=6	A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.4	2.3	3.2	4.1	5.0 - 7.8
K=7	A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.4	1.8	2.7	3.6	4.4 - 7.0
K=8	A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.1	1.4	1.6	2.2	3.1	3.9 - 6.5
K=9	A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.6	3.4 - 6.0

	T=	19	20	21	22	23	24	25	26	27	28	29	30	31	32-35
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0 - 0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0 - 0.0
K=5	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.2	0.3	0.4	0.5 - 0.7
K=6	L=	0.3	0.4	0.5	0.6	0.7	0.7	0.8	0.9	1.0	1.2	1.2	1.3	1.4	1.5 - 1.7
K=7	L=	1.3	1.4	1.5	1.6	1.7	1.7	1.8	1.9	2.0	2.2	2.2	2.3	2.4	2.5 - 2.7
K=8	L=	2.3	2.4	2.5	2.6	2.7	2.7	2.8	2.9	3.0	3.2	3.2	3.3	3.4	3.5 - 3.7
K=9	L=	3.3	3.4	3.5	3.6	3.7	3.7	3.8	3.9	4.0	4.2	4.2	4.3	4.4	4.5 - 4.7

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

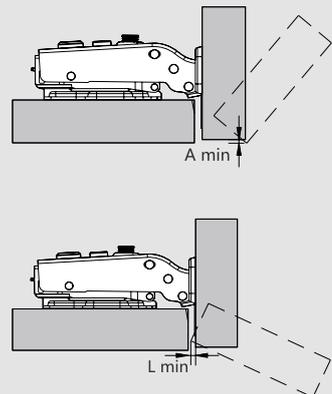


### Ø 35mm hinge cup types

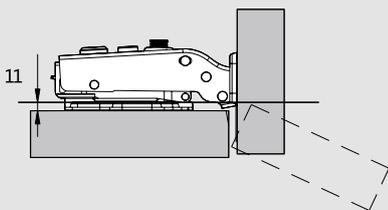


Projection of the door from the cabinet side at the max opening. The figures are based on a straight arm hinge, H=0mm mounting plate and drilling distance (K)=5mm.

b drill pattern: 45/9.5



h drill pattern: 52/5.5



Use these formulas to determine the type of hinge arm, drilling distance (K=5mm), and the height of the mounting plate (H=2mm) for each door application.



# pivot star hinge titanium black

Whether you want a hinge that blends in with the dark and moody interior of your cabinet or something that stands out, the DTC PIVOT-STAR titanium black will suit both. Featuring an adjustable soft close speed, this hinge allows you to customize the closing speed based on the door thickness of 16mm to 26mm. These hinges have an opening angle of 110° with an 11.5mm cup depth and 35mm diameter.

## hinges and plates

### integrated soft close hinges and plate

#### DTC81A876FAB

Door Overlay: Full  
Type: Screw-on



full overlay

#### DTC81B876FAB

Door Overlay: Half  
Type: Screw-on



half overlay

#### DTC81C876FAB

Door Overlay: Inset  
Type: Screw-on



inset

#### DTC81H00AQA

Plate height: 0mm  
Type: Screw-on non-cam



## other hinges



# pivot star - 110° stainless steel hinge

This screw-on hinge is suitable for outdoor and alfresco settings, offers a 110° full overlay with soft-closing functionality. Crafted from durable 304-grade stainless steel, it ensures longevity and resilience against outdoor elements. It has a small cup depth of 11.5mm and 35mm diameter.




#### DTCSS80A476F

Angle: 110°  
Overlay: Full  
Pattern: 48 hole centre  
\* incorporated hinge plate

# pivot star - wing hinge plate

These cam-adjustable plates enable height adjustment within a range of +2mm/-2mm and are offered in three different fixings: Screw-On, Euro Screw Fix, and Expanding Dowel. The plates come in standard sizes of 2mm and are also available in 0mm, 4mm, 9mm, and 18mm.

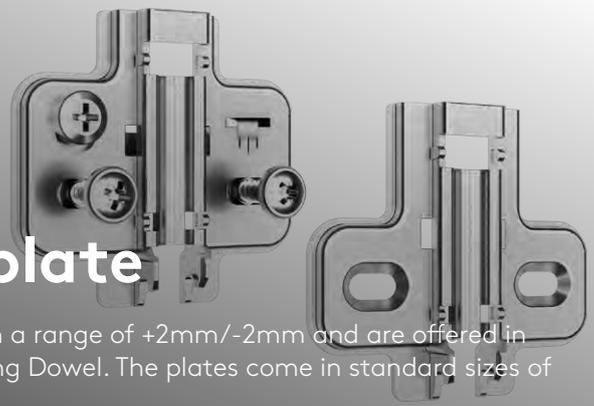

## hinges

### screw-on - cam hinge plate

<b>DTC81T00TQA</b>	<b>DTC81T20TQA</b>
Plate height: 0mm	Plate height: 2mm

### expanding dowel - cam hinge plate

<b>DTC81T01TQA</b>	<b>DTC81T21TQA</b>	<b>DTC81T41TQA</b>
Plate height: 0mm	Plate height: 2mm	Plate height: 4mm

### euro screw fix - cam hinge plate

<b>DTC81T02TQA</b>	<b>DTC81T22TQA</b>	<b>DTC81T42TQA</b>
Plate height: 0mm	Plate height: 2mm	Plate height: 4mm

### euro screw fix - non cam hinge plate

<b>DTC81H02AQA</b>	<b>DTC81H22AQA</b>	<b>DTC81H92AQA</b>	<b>DTC81H182AQA</b>
Plate height: 0mm	Plate height: 2mm	Plate height: 9mm	Plate height: 18mm

### screw-on - non cam hinge plate

<b>DTC81H00EQA</b>	<b>DTC81H20EQA</b>
Plate height: 0mm	Plate height: 2mm

# pivot star - inline hinge plate

The inline cam plate offers height adjustment within a range of +2mm/-2mm and is exclusively available in knock in style. These plates are supplied in a standard size of 2mm and are also offered in 0mm. Achieving a standard size of 2mm necessitates a 5mm DBE (Distance Before the Edge). These plates provide straightforward height adjustment solutions, ensuring precise fitting for a range of installation requirements.

## hinges


### knock-in cam hinge plate

**DTC81H0MYQA**

Plate height: 0mm

**DTC81H2MYQA**

Plate height: 2mm



### angle reduction clips



**DTC120S160**


Compatible: 160°  
reduce to 120°



**DTC86S80**

Compatible: 110°  
reduce to 85°

### plate height calculation



**Plate height:**

12(constant) + DBE (K)-D (Overlay required)

**2mm Plate:**

12 + 5 - 15

Unlock a universe of possibilities with our extensive selection of hinges and Nikpol products. From sleek modern designs to timeless classics, explore a diverse range that combines quality craftsmanship with unmatched versatility. Whether you're renovating, designing, or creating something entirely new, we have everything you need to bring your vision to life. Dive into our collection and discover why our offerings are the perfect choice for your next project!



# dtc down stays

Designed for cabinets ranging from 200mm to 480mm in height, this mechanism accommodates door weights of up to 14kg, offering both horizontal and vertical mounting options.




It provides adjustable opening speed and angle, along with a soft-opening feature for added convenience. With medium and strong power factor options available, it ensures reliable performance tailored to various needs. Available in white and black finishes, this mechanism offers versatility in design. It can be paired with either a flat hinge or a 110° euro hinge (sold separately), providing flexibility in installation and customization.

## down stay power factor options



code	power	colour
DTCDQ00AM02A	Medium Power	White
DTCDQ00AH02A	Strong Power	White
DTCDQ00AM02C	Medium Power	Black
DTCDQ00AH02C	Strong Power	Black

## kit includes

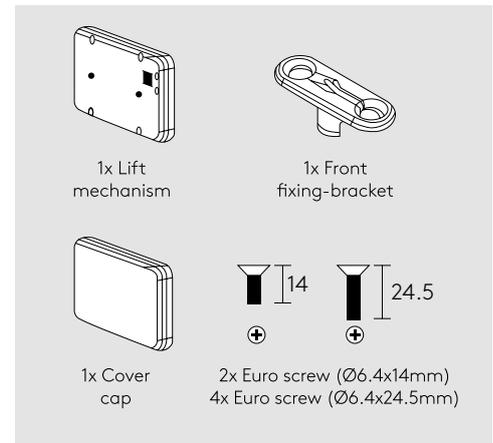

## specifications:

### door weight tables (KG)





- Horizontal installation
- Euro hinge

HP (MM)	medium		strong	
	Lift Mechanism Set x1	Lift Mechanism Set x2	Lift Mechanism Set x1	Lift Mechanism Set x2
200-230	4.3-5.8	-	4.9 - 6.9	-
230-270	3.7-5.6	6.8 - 9.2	4.4 - 6.2	-
270-330	3.8-5	7.4-9	4 - 5.2	8.6-11
330-380	3.3-4.9	7.2-8.8	3.7-5.1	8-11.2
380-430	2.9-3.9	6.1-8.7	3.3-4.5	7.5-11
430-460	2.9-3.7	5.9-8.3	3.3-4.5	7.5-10.5
460-480	2.9-3.7	5.5-7.5	3.4-4.1	7-9.5

# specifications:



## door weight tables (KG):

flat hinge	
DTCDQ00PB	Nickel, 18-20mm Board
F053139677	Black, 16-21mm Board



- Horizontal Installation  
- Flat Hinge



HP (MM)	medium		strong	
	Lift Mechanism Set x1	Lift Mechanism Set x2	Lift Mechanism Set x1	Lift Mechanism Set x2
200-230	4.2-6.2	-	4.8-6.8	-
230-270	3.6-5.2	6.8 - 9.6	4.4-6	-
270-330	3-4.6	6.4-8.8	3.6-5.2	7-10.2
330-380	3.2-4.3	6.5-8.5	3.7-4.9	6.9-10.1
380-430	3.1-3.9	5.7-7.3	3.7-4.5	6.9-8
430-460	2.7-3.9	5.9-8.3	3.7-4.7	7.1-9.5
460-480	2.8-3.8	5.3-7.7	3.6-4.4	6.8-8.9



- Vertical Installation  
- Euro Hinge

HP (MM)	medium		strong	
	Lift Mechanism Set x1	Lift Mechanism Set x2	Lift Mechanism Set x1	Lift Mechanism Set x2
200-230	6.3-8.5	-	7.5-9.3	-
230-270	4.5-5.6	9.2-12	6.8-8.6	-
270-330	3.7-5.1	7.7-10.1	5.4-7.1	10.5-13.7
330-380	3.2-4.3	6.6-9.3	4.6-6.1	9.1-11.3
380-430	3.0-4.0	6.6-8.2	4.4-5.4	8.4-10.2
430-460	2.8-3.6	5.4-7.6	4.2-5.2	7.4-9.4
460-480	2.8-3.6	5.4-7.6	4-5.2	7.2-9.4

flat hinge	
DTCDQ00PB	Nickel, 18-20mm Board
F053139677	Black, 16-21mm Board




- Vertical Installation  
- Flat Hinge

HP (MM)	medium		strong	
	Lift Mechanism Set x1	Lift Mechanism Set x2	Lift Mechanism Set x1	Lift Mechanism Set x2
200-230	5.3-7.3	-	8-11	-
230-270	4.2-6	9.6-12.8	6.6-8.6	-
270-330	3.8-5.1	7.9-11.1	5.7-7.3	11.3-14.5
330-380	3.3-4.5	7.3-8.5	4.9-6.3	9.7-11.7
380-430	3.2-4.2	6.2-8.2	4.4-5.4	8.6-10.6
430-460	3-3.8	6.2-7.8	4-5.2	7.8-10.2
460-480	2.8-4	5.6-7.8	3.8-5	7.6-10

# dtc top stays

Tailored for upper cabinets that opens door up and away, this mechanism features a 107° opening angle and is engineered to suit door thicknesses ranging from 16mm to 28mm.

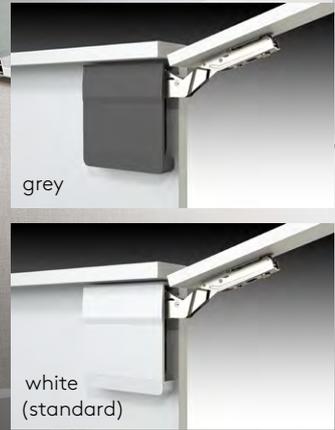

It's compatible with cabinet heights spanning 250mm to 700mm and widths up to 1200mm. Offering comprehensive 3D adjustments—height (+/-2mm), depth (+/-2mm), and side (+/-2mm)—it ensures precise door alignment. With easy opening and the ability to hold at any desired position, it enhances user convenience. Tool free assembly and removal of door streamlines the installation and maintenance processes. It has built-in soft closing mechanism and the push to open option includes push to open latch in the kit.

## DTCSQ02BL03A

**Power:** Light      **Height:** 250-400mm  
**Load:** 1.92-3.12kg      **LF:** 480-1250

## DTCSQ02BM03A

**Power:** Medium      **Height:** 250-500mm  
**Load:** 3.84-4.7kg      **LF:** 960-2350

## DTCSQ02BH03A

**Power:** Strong      **Height:** 250-500mm  
**Load:** 6.4-7.2kg      **LF:** 1600-3600

## DTCSF00AH02A

**Power:** Extra Strong      **Height:** 400-700mm  
**Load:** 8-12.85kg      **LF:** 3200-9000

## DTCSQ2FBM03A

**Power:** Medium PTO      **Height:** 250-500mm  
**Load:** 4.24-4.9kg      **LF:** 1060-2450

## DTCSQ2FBC03A

**Power:** Extra Strong PTO      **Height:** 350-600mm  
**Load:** 7.42-8.33kg      **LF:** 2600-5000


**Power Factor LF** = Cabinet height KH (mm) x door weight (kg)

## other:

### reducer (if required)

		
<b>DTCSQW100</b>	<b>DTCSQW75</b>	<b>DTCSFW75</b>
<b>Specs:</b> 100° reducer	<b>Specs:</b> 75° reducer	<b>Specs:</b> 75°reducer <b>Suit:</b> Extra strong DTCSF00AH02A only

### cover caps (optional)

	
<b>DTCSQJS03B</b>	<b>DTCSFJS01B</b>
<b>Colour:</b> Grey	<b>Colour:</b> Grey <b>Suit:</b> Extra strong DTCSF00AH02A only

# dtc bi-fold top stays

Designed to increase access to multiple upper cabinets simultaneously, this mechanism offers comprehensive 3D adjustments, allowing for precise alignment of doors. With upper adjustments of +/-2mm and lower adjustments of +/-1mm for height, side, and depth, it ensures a tailored fit.

Suitable for cabinet heights ranging from 650mm to 1040mm, it supports door weights of up to 19.8kg. Standardly supplied in white, it provides an adjustable soft-closing speed and the ability to hold doors at desired positions. Offering easy opening and tool-free installation, it simplifies maintenance with door clips that effortlessly attach and detach. Compatible with door thicknesses ranging from 16mm to 28mm, it combines functionality with userfriendly design for optimal performance.

## DTCST04AH02A

Load: 11.5-19.8kg  
Height: 650 - 729mm

## DTCST05AH02A

Load: 10.5-18.1kg  
Height: 730 - 799mm

## DTCST06AH02A

Load: 9.5-16.5kg  
Height: 800 - 879mm

## DTCST07AH02A

Load: 8.7-15.1kg  
Height: 880 - 959mm

## DTCST08AH02A

Load: 8.0-13.9kg  
Height: 960 - 1040mm

## other:




### DTCMS-A011A

Colour: Grey  
10mm Drill Hole  
Adjustable Head  
Magnetic



### DTCMS-MSB01F00

Colour: White  
10mm Drill Hole  
Adjustable Head





### DTCMS-B01A

Colour: Grey  
Inline Plate,  
Adjustable Head  
Magnetic



### DTCMS-MSB01F01

Colour: White  
Inline Plate,  
Adjustable Head





### DTCMS-B03A

Colour: Grey  
Cross Plate,  
Adjustable Head  
Magnetic



### DTCMS-MSB01F02

Colour: White  
Cross Plate,  
Adjustable Head





## **limited lifetime warranty on all dtc products**

To make a warranty claim, proof of purchase or equivalent documentation along with the defective product and a written explanation of the defect must be supplied for warranty claims to be considered. Warranty claims can be provided by pre-paid postage to our distributor in Australia.

**Nikpol PTY LTD 6-12 Fairchild Street, HEATHERTON VIC 3202**

Please allow up to 4 weeks for a response to any warranty claim.

Visit Nikpol's website for more information about warranty claims.

**[www.nikpol.com.au](http://www.nikpol.com.au)**





**nikpol**<sup>®</sup>

**Nikpol Pty. Ltd.**

**DTC Brochure 2025**

The colours shown in this flyer are an indication of the actual colour, for the most accurate colour-match sample, please visit the Nikpol website to order colour samples at [www.nikpol.com.au](http://www.nikpol.com.au)

Prices are subject to change after the promotions ends. Offer valid while stocks last.