


SS1230E MOBILE ELEVATING WORK PLATFORM

Offering an electric motor drive configuration, the Pettibone SS1230E mobile elevating work platform provides personnel with a reliable, reinforced lift for safely working indoors at heights up to 18.4 feet.



SPECIFICATIONS

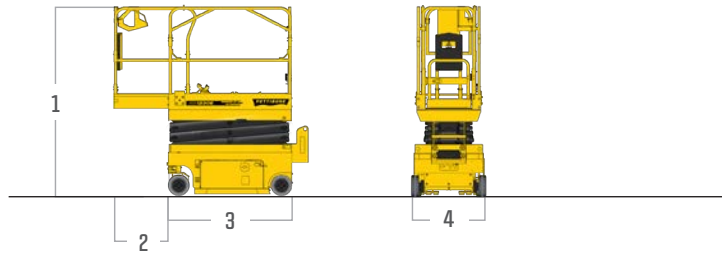

SS1230E

DIMENSIONS	
1	Overall Height 6' (183 cm) - rails down 6.8' (207 cm) - rails up
2	Platform Extension 2' (61 cm)
3	Overall Length 5' (152 cm)
4	Overall Width 2.5' (76 cm)
	Work Height 18.4' (561 cm)
	Machine Weight 1,940 lbs (880 kg)
PERFORMANCE	
	Platform Capacity 530 lbs (240 kg)
	On-Deck Extension Capacity 265 lbs (120 kg)
	Platform Occupants 2 - indoor 1 - outdoor
	Drive Speed Lowered: 2.2 ± 0.12 mph (3.5 ± 0.19 km/h) Elevated: 0.3 ± 0.06 mph (0.5 ± 0.1 km/h)
	Lift Time 25 ± 2 seconds
	Lower Time 20 ± 2 seconds
	Gradeability 25%
	Maximum Slope 1.5° / 3°
	Maximum Ground Pressure 172.3 psi
	Inside Turning Radius 8" (20 cm)
	Outside Turning Radius 4.9' (149 cm)
	Standards Compliance ANSI A92.20 CSA-B354.6

FEATURES & OPTIONS

FEATURES

Optimized electronic control system	Motion alarm
Universal drive control box	Flashing beacon/buzzer
Proportional control	Emergency descent
Quick disconnect for control box	Descent alarm and protection
Emergency stop device	Overload alarm
Platform power 120VAC (GFCI)	Horn/hour meter
Foot pedal control for platform extension	4x2 drive
Fold-in guard rails	Extra wide, non-marking tires
Self-closing, self-catching entry gate	Pothole guards
Lanyard anchor point	Two-wheel brake
Large scissor arms	Manual brake release
Pressure transducer	Advanced battery charger with voltage protection
Full-height drive	Slide-out component tray
Intelligent diagnostic system	Charging status indicator
Tilt sensor and alarm	Charging operation limit
Slope sensor	

* Specifications are subject to change.

PETTIBONE

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 800.467.3884
info@gopettibone.com
www.gopettibone.com



1 Year

Full machine and attachment

**2 Years
or 2,000 hrs**

Electric & hydraulic drive motors, lift cylinders, hydraulic valves, & hydraulic pumps

5 Years

Frame weldment, scissor stacks & platform weldment

WARRANTY

